

Förderverein für Elektrotechnische Normung (FEN) e. V.
Cenelec Electronic Components Committee

CECC

Système Harmonisé d'Assurance de la Qualité
des Composants Electroniques

SPECIFICATION PARTICULIERE:

CONDENSATEURS FIXES AU
TANTALE POUR MONTAGE EN
SURFACE A ELECTROLYTE
SOLIDE ET A ANODE POREUSE

Harmonized System of Quality Assessment for
Electronic Components

DETAIL SPECIFICATION:

FIXED TANTALUM SURFACE
MOUNTING CAPACITORS WITH
SOLID ELECTROLYTE,
POROUS ANODE

Harmonisiertes Gütebestätigungssystem für
Bauelemente der Elektronik

BAUARTSPEZIFIKATION:

OBERFLÄCHENMONTIERBARE
TANTAL-FESTKONDENSATOREN
MIT FESTEM ELEKTROLYT UND
SINTERANODE

2

Edition
Issue
Ausgabe

CECC 30 801-801

1992



Documents

Document Sharing Hub

Information about the System may be obtained from:



FEN e.V. Secretariat
and
CECC General Secretariat
Gartenstraße 179
D - 6000 Frankfurt am Main 70
Telephone: Int. + 49 69 639171
Telex: 4 032 175 cecc d
Telefax: Int. + 49 69 639427

or from the National Authorized Institutions
of the participating countries listed
who can supply copies of:

- 1 The Internal Regulations of the FEN e.V.
- 2 The Rules of Procedure of the System
- 3 CECC Specifications of the FEN and National Specifications for the System
- 4 CECC 00 200: Qualified Products List (QPL)
- 5 CECC 00 300: List of CECC European Standards (ENs), CECC Publications and related national documents
- 6 CECC 00 301: List of CECC Specifications and related Detail Specifications
- 7 Other CECC Publications and publicity documents

AUSTRIA
Österreichischer Verband für Elektrotechnik (ÖVE)
Eschenbachgasse 9
A-1010 VIENNA

BELGIUM
Comité Electrotechnique Belge
Galerie Ravenstein 28 (Boîte 2)
B-1000 BRUSSELS

DENMARK
Dansk Elektroteknisk Komite
Strandgade 36
DK-1401 COPENHAGEN K

FINLAND
Finnish Electrotechnical Standards Association (SESKO)
P.O. Box 134
SF-00211 HELSINKI 21

FRANCE
Union technique de l'Electricité
Participation française au CECC
F-92052 PARIS La Défense Cedex 64

GERMANY
Deutsche Elektrotechnische Kommission im DIN und VDE (DKE)
Stressemannallee 15
D-6000 FRANKFURT/Main 70

IRELAND
EOLAS - The Irish Science and Technology Agency
Glasnevin
IRL-DUBLIN 9

ITALY
Comitato Elettrotecnico Italiano (CEI)
Viale Monza, 259
I-20126 MILAN

NETHERLANDS
Nederlands Elektrotechnisch Comité (NEC)
Kalfjeslaan 2
P.O. Box 5059
NL-2600 GB DELFT

NORWAY
Norsk Elektroteknisk Komite (NEK)
P.O. Box 280
Skøyen
N-0212 OSLO 2

PORTUGAL
Instituto Português da Qualidade
Rua José Estevão, 83A
P-1199 LISBOA CODEX

SPAIN
New Spanish Member
to be determined.

SWEDEN
Svenska Elektriska Kommissionen (SEK)
Box 1284
S-16428 KISTA-STOCKHOLM

SWITZERLAND
Schweizerischer Elektrotechnischer Verein (SEV)
Postfach
CH-8034 ZÜRICH

UNITED KINGDOM
UK Electronic Components Policy Council
Electrical Department
British Standards Institution
2, Park Street
GB-LONDON W1A 2BS

FOREWORD

The CENELEC Electronic Components Committee (CECC) is composed of those member countries of the European Committee for Electrotechnical Standardization (CENELEC) who wish to take part in a harmonized System for electronic components of assessed quality.

The object of the System is to facilitate international trade by the harmonization of the specifications and quality assessment procedures for electronic components, and by the grant of an internationally recognized Mark, or Certificate, of Conformity. The components produced under the System are thereby acceptable in all member countries without further testing.

This specification should be read in conjunction with the current regulations for the CECC System.

At the date of printing of this specification, the member countries of the CECC are Austria, Belgium, Denmark, Finland, France, Germany, Ireland, Italy, the Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom, and copies of it can be obtained from the addresses shown on the blue fly sheet.

PREFACE

This specification was prepared by CECC WG 3: "Capacitors", and is a revised version of CECC 30 801-801, Issue 1.

It is based, wherever possible, on the Publications of the International Electrotechnical Commission.

The text of this specification was circulated to the members of CECC WG3 and was approved for publication under the accelerated procedure for the acceptance of detail specifications in accordance with Decisions 10, 11 and 12 of the minutes of the CECC CD meeting in document CECC(Sec)1838.

This second issue of CECC 30 801-801 shall become effective for all new qualification approvals on **1st November 1992**. Issue 1 will continue to remain effective to cover all past approvals.


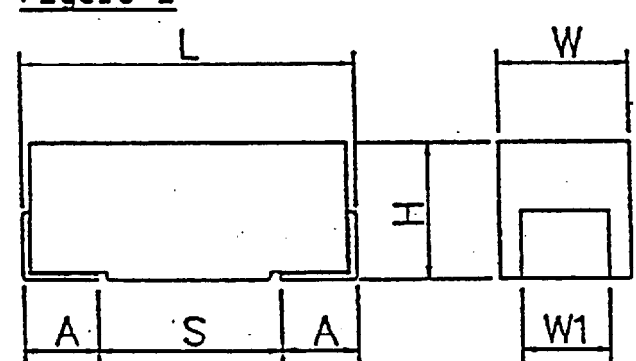
Secretariat Note:

The document was originally drafted by members of CECC WG3 and discussed as document

CECC(Heidecker)1A

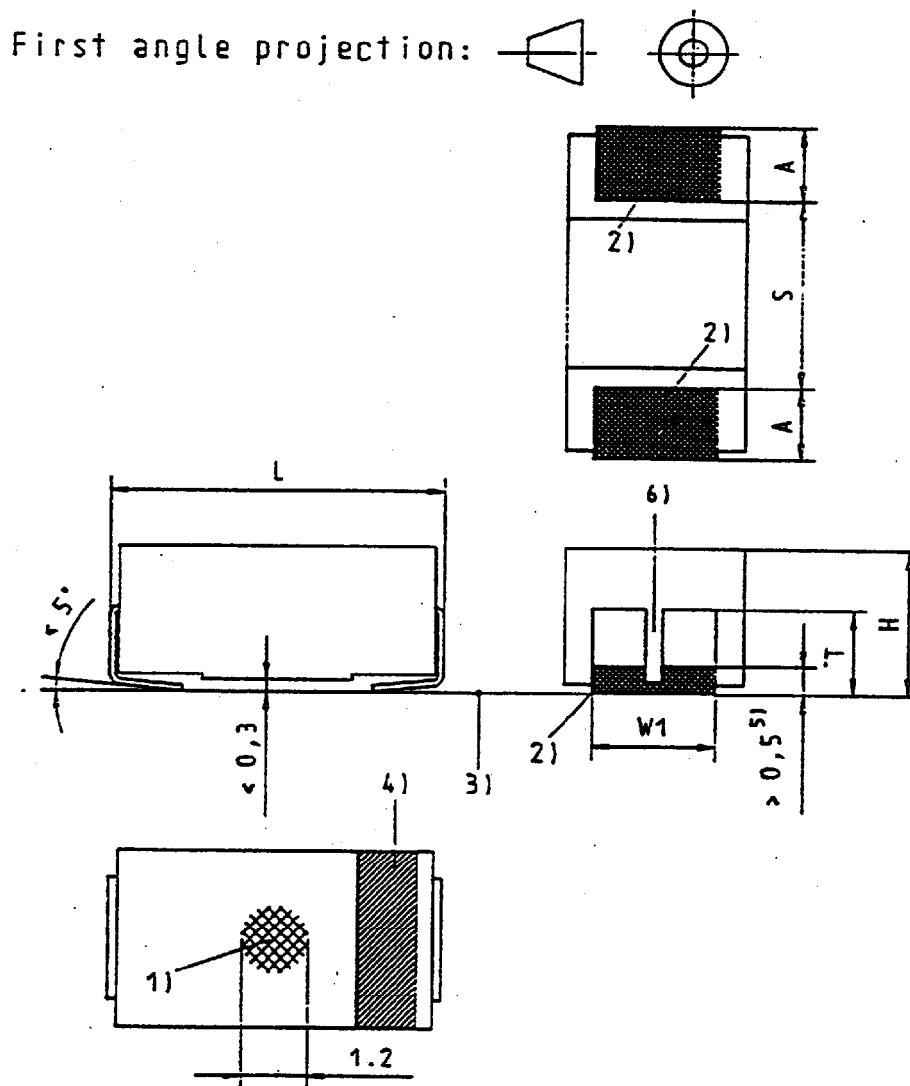
by WG3 at their meeting in Brussels with the decision to publish it without voting (Item 17.1).

To allow early publication, this detail specification is issued initially in English only. Corresponding versions in French and German will follow on request of ONHs.

HARMONISED DETAIL SPECIFICATION	CECC 30 801-801										
Specification available from: CECC General Secretariat	ISSUE 2 1992										
ELECTRONIC COMPONENTS OF ASSESSED QUALITY DETAIL SPECIFICATION IN ACCORDANCE WITH: CECC 30 000 Issue 3 1983 CECC 30 800 Issue 2 1990	MANUFACTURER'S TYPE NUMBERS See CECC 00 200 For ordering information see 1.6										
Outline and dimensions First angle projection  Figure 1  (Other shapes are permitted within the dimensions given) Marking information: See 1.5 For details see Figure 2 and Table 1	DETAIL SPECIFICATION FOR FIXED TANTALUM SURFACE MOUNTING CAPACITORS WITH SOLID ELECTROLYTE, POROUS ANODE POLAR SOLID ELECTROLYTE METALLIC TERMINATIONS STYLE I - PROTECTED FOR SURFACE MOUNTING ASSESSMENT LEVEL: E										
QUICK REFERENCE DATA: <table> <tbody> <tr> <td>Rated capacitance range</td><td>0,1 to 100 μF</td></tr> <tr> <td>Capacitance tolerance</td><td>$\pm 10\%$, $\pm 20\%$</td></tr> <tr> <td>Rated voltage range</td><td>4 to 50 V d.c.</td></tr> <tr> <td>Climatic category</td><td>55/125/56</td></tr> <tr> <td>Performance level</td><td>Long life</td></tr> </tbody> </table>		Rated capacitance range	0,1 to 100 μ F	Capacitance tolerance	$\pm 10\%$, $\pm 20\%$	Rated voltage range	4 to 50 V d.c.	Climatic category	55/125/56	Performance level	Long life
Rated capacitance range	0,1 to 100 μ F										
Capacitance tolerance	$\pm 10\%$, $\pm 20\%$										
Rated voltage range	4 to 50 V d.c.										
Climatic category	55/125/56										
Performance level	Long life										

Information about manufacturers who have components qualified to this detail specification is available in the current CECC 00 200: Register of Firms, Products, and Services Approved under the CECC System.

Figure 2



Notes:

- For detailed dimensions see Table 1
- Dimensions in mm

- 1) Area on upper surface of the capacitor to allow vacuum pick-up
- 2) Area to be examined after solderability test
- 3) Substrate
- 4) Area for polarity mark
- 5) Dimension W_1 applies to the shaded area only
- 6) This notch is an optional feature.

1 General data1.1 Methods of mounting

For normal use the capacitors may be mounted by hand soldering, infrared soldering, wave soldering or condensation soldering.

For tests carried out in accordance with Table 4B Group C3 the mounting shall be in accordance with 4.3 of CECC 30 800 using glass epoxy FR4 printed board 1,6 mm thick.

1.2 Dimensions

Table 1

Case Size	Dimensions (in mm)						
Reference	L	W	H	W ₁	A	S _{min.}	T _{min.}
A	3,2±0,2	1,6±0,2	1,6±0,2	1,2±0,1	0,8±0,3	1,1	0,7
B	3,5±0,2	2,8±0,2	1,9±0,2	2,2±0,1	0,8±0,3	1,4	0,7
C	6,0±0,3	3,2±0,3	2,5±0,3	2,2±0,1	1,3±0,3	2,9	1,0
D	7,3±0,3	4,3±0,3	2,8±0,3	2,4±0,1	1,3±0,3	4,1	1,0

Notes: Dimension W₁ applies over length T_{min.} and A.

The minimum value specified for S implies that the full ranges of tolerances for L and A may not be simultaneously available.

1.3 Ratings and characteristics

Capacitance range	See Table 2A
Tolerance on rated capacitance	± 10%, ± 20%
Rated voltage	See Table 2A
Category voltage	See Table 2A
Climatic category	55/125/56
Rated temperature	85°C
Variation of capacitance with temperature	See Table 2B
Tangent of loss angle	See Table 2B
Leakage current (µA) max.	See Table 2B
Impedance at 100 kHz and 20°C	See Table 2C
Surge voltage	1,3 U _R or 1,3 U _C as applicable