

BRITISH STANDARDS INSTITUTION

2 PARK STREET, LONDON. W1A 2BS

Specification available from:- AS SHOWN IN PD 9002
AND CECC 00 200 AND

CECC 90103 - 039

ISSUE 1

JUNE 1981



Page 1 of 19 pages


ELECTRONIC COMPONENTS OF ASSESSED QUALITY
DETAIL SPECIFICATION IN ACCORDANCE WITH:

BS CECC 90 000 : 1976
BS CECC 90 100 : 1977

MANUFACTURERS TYPE NUMBER

54LS85
64LS85
74LS85
84LS85

Outline not to scale: Isometric projection
Marking information see clause 1

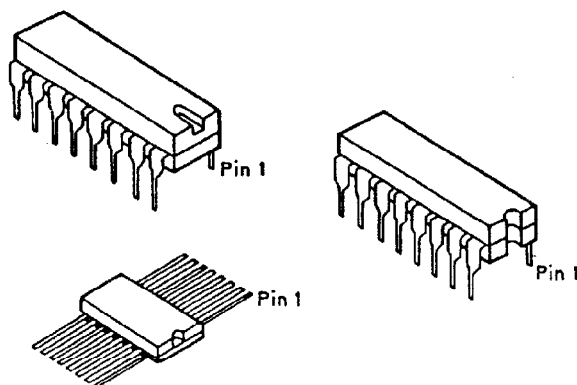

SEE PD 9002 AND CECC 00 200
For ordering information see
clause 1

4-BIT MAGNITUDE COMPARATORS

TYPICAL CONSTRUCTION
SILICON MONOLITHIC
BIPOLAR TTL-LOW-POWER
SCHOTTKY

ASSESSMENT LEVELS
R, S, T AND V

Refer to IEC 191-1-50a (type A50C)
Dual-in-Line (plastic or ceramic)
refer to Appendix A1.3
Flatpack (metal or ceramic)

1. Type description

1.1 Truth table (see page 2)

Refer to Qualified Products List PD 9002 and/or CECC 00 200
for details of manufacturers approved to this specification

1.1 Truth table (contd)

COMPARING INPUTS				CASCADE INPUTS			OUTPUTS		
A3, B3	A2, B2	A1, B1	A0, B0	A > B	A < B	A = B	A > B	A < B	A = B
A3 > B3	X	X	X	X	X	X	H	L	L
A3 < B3	X	X	X	X	X	X	L	H	L
A3 = B3	A2 > B2	X	X	X	X	X	H	L	L
A3 = B3	A2 < B2	X	X	X	X	X	L	H	L
A3 = B3	A2 = B2	A1 > B1	X	X	X	X	H	L	L
A3 = B3	A2 = B2	A1 < B1	X	X	X	X	L	H	L
A3 = B3	A2 = B2	A1 = B1	A0 > B0	X	X	X	H	L	L
A3 = B3	A2 = B2	A1 = B1	A0 < B0	X	X	X	L	H	L
A3 = B3	A2 = B2	A1 = B1	A0 = B0	H	L	L	H	L	L
A3 = B3	A2 = B2	A1 = B1	A0 = B0	L	H	L	L	H	L
A3 = B3	A2 = B2	A1 = B1	A0 = B0	X	X	H	L	L	H
A3 = B3	A2 = B2	A1 = B1	A0 = B0	H	H	L	L	L	L
A3 = B3	A2 = B2	A1 = B1	A0 = B0	L	L	L	H	H	L


H = High level

L = Low level

X = Logic level irrelevant

1.2 Terminal identification, type designation and marking

1.2.1 Terminal identification

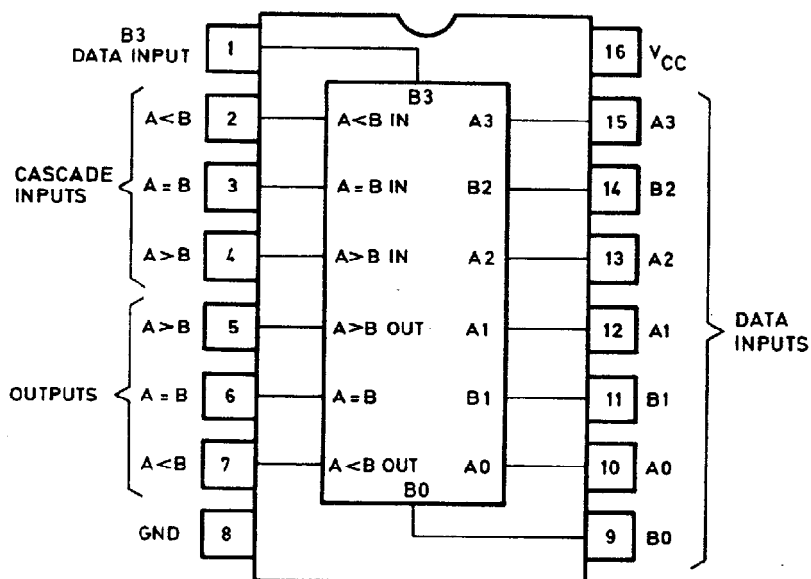

4-bit magnitude comparators

1.2.2 Type designation

TEMPERATURE RANGE	PACKAGE		
	Ceramic Dual-in-Line	Plastic Dual-in-Line	Ceramic Flatpack
0 + 70	74LS85J	N	W
-25 + 85	84LS85J		
-40 + 85	64LS85J		
-55 +125	54LS85J		

1.2.3 Marking

Each integrated circuit shall bear the following markings:

- (1) Terminal identification
- (2) Type designation
- (3) Date code
- (4) Factory identification code (unless derived from trademark)
- (5) Manufacturers trade name or mark
- (6) Mark of conformity (unless a certificate of conformity is used)

1.3 Ordering information

Orders for these integrated circuits shall contain the following minimum information:

Manufacturers integrated circuit type designation, screening procedures and assessment levels as detailed to this CECC specification number.

(For details of screening procedures see Appendix A1.1).

2. Limiting conditions of use (not for inspection purposes)

2.1	Maximum continuous supply voltage	V_{CC}						-0,5V +7,0V
2.2	Maximum input voltages							
2.2.1	Maximum input voltage	V_I						-0,5V +7,0V
2.2.2	Maximum input voltage between multiple emitter transistor inputs	V_{II}						+5,5V
					54LS	64LS	74LS	84LS
2.3	Minimum and maximum operating ambient temperatures	$T_{amb}(^{\circ}C)$	min. max.	-55 +125	-40 +85	0 +70	-25 +85	
2.4	Minimum and maximum storage temperatures	$T_{stg}(^{\circ}C)$	min. max.	-65 +150	(All types)			

3. Recommended operating conditions and associated characteristics (not for inspection purposes)

3.1 Recommended operating conditions

These apply over the operating ambient temperature range unless otherwise stated.

Description	Symbol	Type	Value	Unit
Positive supply voltage range	V_{CC}	54LS 64/74/84LS	4,5 - 5,5 4,75 - 5,25	V V
Minimum value of High level input voltage	V_{IHB}	All types	2,0	V
Maximum value of High level input voltage	V_{IHA}	All types	5,5	V
Minimum value of Low level input voltage	V_{ILB}	All types	-0,3	V
Maximum value of Low level input voltage	V_{ILA}	54LS 64/74/84LS	0,7 0,8	V V
Maximum value of Low level output current for each output	I_{OLA}	54LS 64/74/84LS	4,0 8,0	mA mA
Maximum value of output current for each output at V_{OH}	I_{OHA}	All types	-400,0	μA

3.2 Associated characteristics

3.2.1 Minimum or maximum values are given for the worst case operation over the ambient temperature range, except for those conditions marked with an asterisk (*)

	54LS	64LS	74LS	84LS	
T _{amb} min.	-55	-40	0	-25	°C
T _{amb} max.	+125	+85	+70	+85	
V _{CC} min.	4,5	4,75			V
V _{CC} max.	5,5	5,25			

3.2.2

Characteristics	Conditions	$V_{CC}(V)$	Symbol	Min.	Max.	Unit
Total supply current per package	$V_{IN} = 0V$ to input A=B, Other inputs 4,5V. Outputs open circuit.	$V_{CC} \text{ max.}$	I_{CC}	-	20,0	mA
High level input current A < B, A > B inputs All other inputs A < B, A > B inputs All other inputs	$V_{IN} = V_{IHA}$ $V_{IH} = V_{OHB}$	$V_{CC} \text{ max.}$	$I_{IH(1)}$ $I_{IH(1)}$ $I_{IH(2)}$ $I_{IH(2)}$	- - - -	0,1 0,3 20,0 60,0	mA mA μA μA
Low level input current A < B, A > B inputs All other inputs	$V_{IN} = V_{OLA}$	$V_{CC} \text{ max.}$	$-I_{IL}$ $-I_{IL}$	- -	0,4 1,2	mA mA
Input clamping voltage	$-I_{IC} = 18,0mA$	$V_{CC} \text{ min.}$		-	1,5	V
Output voltage 54LS 64/74/84LS All types 64/74/84LS	$I_{OH} = -400,0\mu A$ $I_{OH} = -400,0\mu A$ $I_{OL(1)} = 4,0mA$ (1) $I_{OL(2)} = 8,0mA$ (2)	$V_{CC} \text{ min.}$	V_{OH} V_{OH} $V_{OL(1)}$ $V_{OL(2)}$	2,5 2,7 - -	- - 0,4 0,5	V V V V
Output short circuit current	$V_O = 0V$ (3) $V_{IN} = 0V$ or 4,5V	$V_{CC} \text{ max.}$	$-I_{OS}$	15,0	130,0	mA
Propagation time All types From Any A or B data input To A < B, A > B From Any A or B data input To A = B From A < B or A = B To A > B From A = B To A = B From A > B or A = B To A < B	$T_{amb} = 25^\circ C^*$ test conditions as in Sub-group A5	5,0V	t_{PHL}	- - - - - -	30,0 45,0 17,0 26,0 17,0	ns ns ns ns ns


- (1) Fan out = 10, (2) Fan out = 20,
(3) Only one output at a time, duration $t \leq 1 \text{ sec}$
* See 3.2.1 of this specification

3.2.2 (contd)

Characteristics	Conditions	$V_{CC}(V)$	Symbol	Min.	Max.	Unit
From Any A or B data input To $A < B, A > B$			t_{PLH}	-	36,0	ns
From Any A or B data input To $A = B$				-	45,0	ns
From $A < B$ or $A = B$ To $A < B$				-	22,0	ns
From $A = B$ To $A = B$				-	20,0	ns
From $A > B$ or $A = B$ To $A < B$				-	22,0	ns

3.3 Supplementary information

3.3.1 Change of typical propagation time with output loading

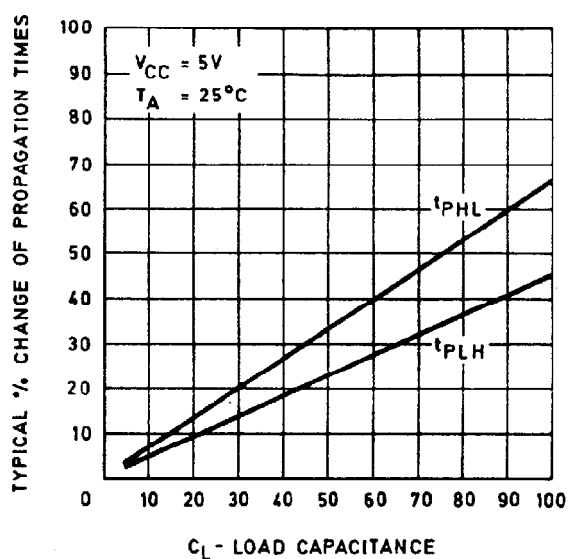

Propagation times Vs. load capacitance