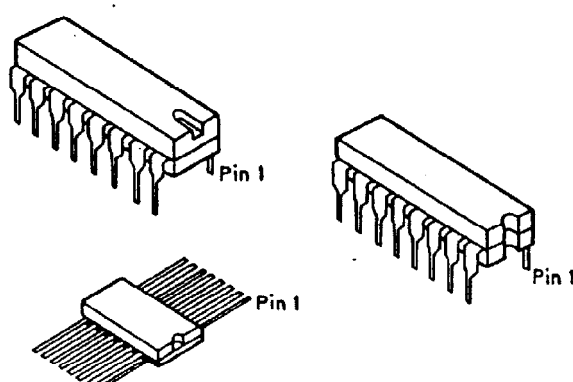


BRITISH STANDARDS INSTITUTION 2 PARK STREET, LONDON. W1A 2BS	CECC 90103 - 136 ISSUE 1 JULY 1981  Page 1 of 19 pages	MANUFACTURERS TYPE NUMBER 54LS155 64LS155 74LS155 84LS155 SEE PD 9002 AND CECC 00 200 For ordering information see clause 1
Specification available from:- AS SHOWN IN PD 9002 AND CECC 00 200 AND ELECTRONIC COMPONENTS OF ASSESSED QUALITY DETAIL SPECIFICATION IN ACCORDANCE WITH: BS CECC 90 000 : 1976 BS CECC 90 100 : 1977		
Outline not to scale: Isometric projection Marking information see clause 1  Refer to IEC 191-1-50a (type A50C) Dual-in-Line (plastic or ceramic) refer to Appendix A1.3 Flatpack (metal or ceramic)	DUAL 2-LINE TO 4-LINE DECODERS/DEMULPLEXERS WITH TOTEM POLE OUTPUTS	TYPICAL CONSTRUCTION SILICON MONOLITHIC BIPOLAR TTL-LOW-POWER SCHOTTKY
		ASSESSMENT LEVELS R, S, T AND V

1. Type description

1.1 Truth table (see page 2)

Refer to Qualified Products List PD 9002 and/or CECC 00 200
 for details of manufacturers approved to this specification

1.1 Truth table (contd)

2-Line to 4-Line decoder or
1-Line to 4-Line demultiplexer

INPUTS				OUTPUTS			
SELECT		STROBE	DATA	1Y0	1Y1	1Y2	1Y3
B	A	G1	C1				
X	X	H	X	H	H	H	H
L	L	L	H	L	H	H	H
L	H	L	H	H	L	H	H
H	L	L	H	H	H	L	H
H	H	L	H	H	H	H	L
X	X	X	L	H	H	H	H

2-Line to 4-Line decoder or
1-Line to 4-Line demultiplexer

INPUTS				OUTPUTS			
SELECT		STROBE	DATA	2Y0	2Y1	2Y2	2Y3
B	A	G2	C2				
X	X	H	X	H	H	H	H
L	L	L	L	L	H	H	H
L	H	L	L	H	L	H	H
H	L	L	L	H	H	L	H
H	H	L	L	H	H	H	L
X	X	X	H	H	H	H	H


3-Line to 8-Line decoder or
1-Line to 8-Line demultiplexer

INPUTS				OUTPUTS							
SELECT			STROBE OR DATA	(0)	(1)	(2)	(3)	(4)	(5)	(6)	(7)
C+	B	A	G+	2Y0	2Y1	2Y2	2Y3	1Y0	1Y1	1Y2	1Y3
X	X	X	H	H	H	H	H	H	H	H	H
L	L	L	L	L	H	H	H	H	H	H	H
L	L	H	L	H	L	H	H	H	H	H	H
L	H	L	L	H	H	L	H	H	H	H	H
L	H	H	L	H	H	H	L	H	H	H	H
H	L	L	L	H	H	H	H	L	H	H	H
H	L	H	L	H	H	H	H	H	L	H	H
H	H	L	L	H	H	H	H	H	H	L	H
H	H	H	L	H	H	H	H	H	H	H	L

$\dagger C$ = inputs 1C and 2C connected together
 $\dagger G$ = inputs 1G and 2G connected together
 H = High level
 L = Low level
 X = Logic level irrelevant

1.2 Terminal identification, type designation and marking

1.2.1 Terminal identification

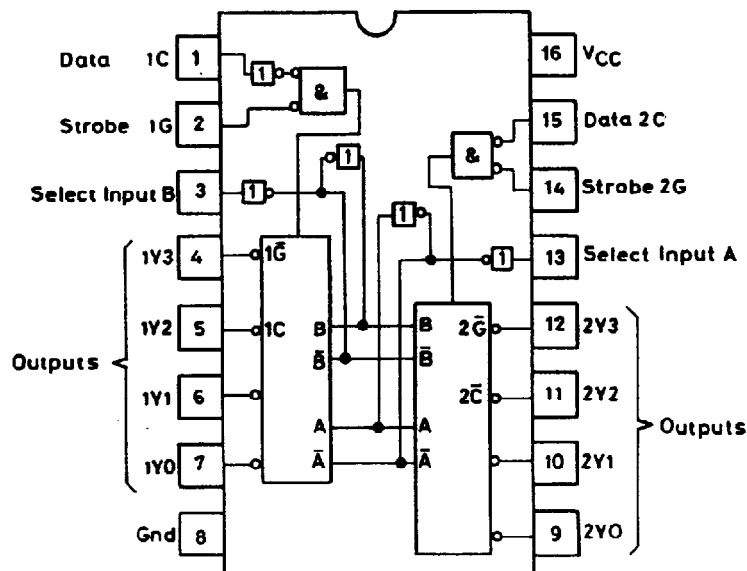

Dual 2-line to 4-line decoders/
demultiplexers with totem pole outputs

1.2.2 Type designation

TEMPERATURE RANGE	PACKAGE		
	Ceramic Dual-in-Line	Plastic Dual-in-Line	Ceramic Flatpack
0 + 70	74LS155J	N	W
-25 + 85	84LS155J		
-40 + 85	64LS155J		
-55 +125	54LS155J		

1.2.3 Marking

Each integrated circuit shall bear the following markings:

- (1) Terminal identification
- (2) Type designation
- (3) Date code
- (4) Factory identification code (unless derived from trademark)
- (5) Manufacturers trade name or mark
- (6) Mark of conformity (unless a certificate of conformity is used)

1.3 Ordering information

Orders for these integrated circuits shall contain the following minimum information:

Manufacturers integrated circuit type designation screening procedures and assessment levels as detailed to this CECC specification number.

(For details of screening procedures see Appendix A1.1)

2. Limiting conditions of use (not for inspection purposes)

2.1	Maximum continuous supply voltage	V_{CC}						-0,5V +7,0V
2.2	Maximum input voltages							
2.2.1	Maximum input voltage	V_I						-0,5V +7,0V
2.2.2	Maximum input voltage between multiple emitter transistor inputs	V_{II}						+5,5V
2.3	Minimum and maximum operating ambient temperatures	$T_{amb}(^{\circ}C)$	min.	54LS -55	64LS -40	74LS 0	84LS -25	
			max.	+125	+85	+70	+85	
2.4	Minimum and maximum storage temperatures	$T_{stg}(^{\circ}C)$	min.	-65	(All types)			
			max.	+150				

3. Recommended operating conditions and associated characteristics (not for inspection purposes)

3.1 Recommended operating conditions

These apply over the operating ambient temperature range unless otherwise stated.

3.1 (contd)

Description	Symbol	Type	Value	Unit
Positive supply voltage range	V_{CC}	54LS 64/74/84LS	4,5 - 5,5 4,75 - 5,25	V V
Minimum value of High level input voltage	V_{IHB}	All types	2,0	V
Maximum value of High level input voltage	V_{IHA}	All types	5,5	V
Minimum value of Low level input voltage	V_{ILB}	All types	-0,3	V
Maximum value of Low level input voltage	V_{ILA}	54LS 64/74/84LS	0,7 0,8	V V
Maximum value of Low level output current for each output	I_{OLA}	54LS 64/74/84LS	4,0 8,0	mA mA
Maximum value of output current for each output at V_{OH}	I_{OHA}	All types	-400,0	μ A

3.2 Associated characteristics

- 3.2.1 Minimum and maximum values are given for the worst case operation over the ambient temperature range, except for those conditions marked with an asterisk (*)

	54LS	64LS	74LS	84LS	
T _{amb} min.	-55	-40	0	-25	°C
T _{amb} max.	+125	+85	+70	+85	
V _{CC} min.	4,5	4,75			V
V _{CC} max.	5,5	5,25			

3.2.2

Characteristics	Conditions	$V_{CC}(V)$	Symbol	Min.	Max.	Unit
Total supply current per package	Outputs open circuit $V_{IN} = 4,5V$ to inputs A, B and 1C Other inputs 0V	V_{CC} max.	I_{CC}	-	10,0	mA
High level input current	$V_{IH(1)} = 7,0V$	V_{CC} max.	$I_{IH(1)}$	-	100,0	μA
	$V_{IH(2)} = 2,7V$	V_{CC} max.	$I_{IH(2)}$	-	20,0	μA
Low level input current	$V_{IL} = 0,4V$	V_{CC} max.	$-I_{IL}$	-	0,4	mA
Input clamping voltage	$-I_{IC} = 18,0mA$	V_{CC} min.	$-V_{ICA}$	-	1,5	V
Output voltage	54LS $I_{OH} = -400,0\mu A$	V_{CC} min.	V_{OH}	2,5	-	V
	64/74/84LS $I_{OH} = -400,0\mu A$		V_{OH}	2,7	-	V
	All types $I_{OL(1)} = 4,0mA$ (1)		$V_{OL(1)}$	-	0,4	V
	64/74/84LS $I_{OL(2)} = 8,0mA$ (2)		$V_{OL(2)}$	-	0,5	V
Output short circuit current	$V_O = 0V$ (3) $V_{IL} = 0V$ or 4,5V	V_{CC} max.	$-I_{OS}$	5,0	130,0	mA
Propagation time	$T_{amb} = 25^\circ C^*$ Test conditions as in Sub-group A5	5,0V				
Low to High level						
A, B, C2, G1 or G2 to Y	2 levels of logic		t_{PLH}	-	15,0	ns
Input select A or B to Y	3 levels of logic		t_{PLH}	-	26,0	ns
Data C1 to Y	3 levels of logic		t_{PLH}	-	27,0	ns
High to Low level						
A, B, C2, G1 or G2 to Y	2 levels of logic		t_{PHL}	-	30,0	ns
Input select A or B to Y	3 levels of logic		t_{PHL}	-	30,0	ns
Data C1 to Y	3 levels of logic		t_{PHL}	-	27,0	ns

- (1) Fan out = 10, (2) Fan out = 20,
 (3) Only one output at a time, duration $t \leq 1$ sec
 *See 3.2.1 of this specification