



STANDARDIZATION

**CAVO B.T. PIATTO
TIPO NGFLGÖU-J
L.V. FLAT CABLE
NGFLGÖU-J TYPE**

FOGLIO SHEET	1	DI OF	4	EDIZ. ISSUED	08/95
STANDARD N°			1.220.005		
REVIS.	1				
SOSTITUISCE REPLACES		Pari numero ed. 03/89			

INDICE:

Cavo Tripolare + T.....Pag. 2

Cavo Multipolare + T (Sez. 1,5 mm²).....Pag. 3

Cavo Multipolare + T (Sez. 2,5 mm²).....Pag. 4

INDEX:

3 Cores + G Cable.....	Pag. 2
Multicores + G Cable (Sect. 1,5 mm ²)	Pag. 3
Multicores + G Cable (Sect. 2,5 mm ²)	Pag. 4

[illegible]

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management




STANDARDIZATION

CAVO B.T. PIATTO TRIPOLARE + T
TIPO NGFLGÖU-J
3 CORES + G - L.V. FLAT CABLE
NGFLGÖU-J TYPE

FOGLIO SHEET	2	DI OF	4	EDIZ. ISSUED	08/95
STANDARD N°		1.220.005			
REVIS.	1				
SOSTITUISCE REPLACES	Pari numero ed. 03/89				

CLASSIFICAZIONE: 01811313

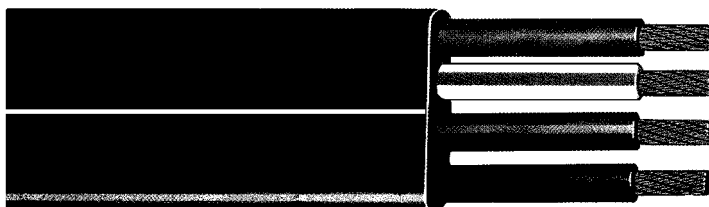

Es. di design.:
0.111225.Z Cavo BT Tripol.+T Piatto
NGFLGÖU-J 4x2,5 mm²
Colore anime: Giallo/Verde
Nere + numer. progressiva

Ex. of design.:
0.111225.Z 3 Cores+G LV Flat Cable
NGFLGÖU-J 4x2,5 mm²
Core Colours: Yellow/Green
Black + progressive numb.

Sezione Section mm ²	Ø sul conduttore di CU mm Ø on CU conduct. of mm	Dimensioni esterne A x B Ext. dimensions mm x mm		Massa Kg/Km	Resist. Elettr. Electrical res. max. 20°C ohm/Km	Codice Code
4x1,5	1,7	14,5x5,2	17x6,2	155	12,2	0.111224.X
4x2,5	2,5	19x6,6	21,5x7,8	255	7,20	0.111225.Z
4x4	3,2	23x8	26x9,4	380	4,50	0.111226.S
4x6	3,9	25,5x8,8	28,5x10	490	3,05	0.111227.T
4x10	5,2	31,5x10	35x12	750	1,85	0.111228.B
4x16	6,3	37x12	41x14	1080	1,15	0.111229.C
4x25	8,0	44,5x13,5	49x16	1590	0,780	0.111230.A
4x35	9,2	51,5x16	56,5x18	2110	0,520	0.111231.W
4x50	11,0	60x18,5	65,5x21	2950	0,395	0.111232.X
4x70	13,0	68,5x21	75,5x23,5	4020	0,275	0.111233.Z
4x95	15,2	78x23,5	85,5x26,5	5210	0,195	0.111234.S

Costruito secondo le norme: DIN 57250 - VDE 250
Tensione Nominale Uo/U: 300/500V.
Temperatura Nominale Esercizio: 90°C
Temperatura Mim. di Esercizio: - 35°C
Temperatura Max. di Corto Circuito: 200°C
Conduttore: Corda flessibilissima Rame Rosso o Stagnato.
Isolante: Gomma Etilenpropilenica (EPR).
Guaina: Policloroprene (PCP)
Colore anime: Un' anima Giallo/Verde le restanti Nere con numerazione progressiva.
Pezatura: 1000 m.

Complying with: DIN 57250 - VDE 250.
Voltage rating Uo/U: 300/500V.
Rated Working Temperature: 90°C
Min. Working Temperature: - 35°C
Max. Short-circuit Temperature: 200°C
Conductor: Very flexible untinned or tinned copper.
Insulating Material: Ethylene-propylene rubber (EPR).
Sheath: Polychloroprene (PCP).
Core Colours: 1 Yellow/Green cable; the others Black with progressive numbers.
Length of sections: 1000 m.