


CARTELLE DI APPOGGIO
COLLARS

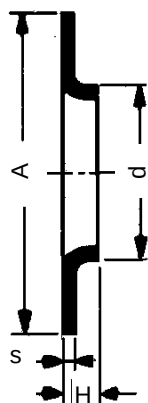

Materiale : X5CrNi1810 DIN 17440 - AISI304
X5CrNiMo1712 DIN 17440 - AISI 316

Estremità: smusso DIN 2559

Superf. di contatto: 3 rigature conc. profilo r = 1 mm

Attest. di controllo: EN 10204/2.2

Impiegare con flange libere N 2.000.405

Material : X5CrNi1810 DIN 17440 - AISI304


X5CrNiMo1712 DIN 17440 - AISI 316

Ends: bevel DIN 2559

Contact surface: 3 conc. scores profile r = 1 mm

Test report: EN 10204/2.2

Use in conjunction with lap-joint flanges N 2.000.405



Es di design.:
0.080818.C Cartella di appoggio
DN100 114,3x3
AISI 304 DIN2559
EN 10204/2.2

Ex of design.:
0.080818.C Collar
DN100 114,3x3
AISI 304 DIN2559
EN 10204/2.2

 Sconsigliato
Not recommended

Dimensioni in mm
Dimensions in mm

DN	d	s	A	H	Massa Kg	CODICE AISI 304	CODE AISI 316
15	21,3	2	45	6	0,05	0.080790.M	0.335821.X
20	26,9	2	58	6	0,06	0.080792.B	0.335822.Z
25	33,7	2	68	8	0,07	0.080795.E	0.335823.S
32	42,4	2	78	10	0,1	0.080798.Q	0.335824.T
40	48,4	2	88	10	0,1	0.080801.C	0.335825.R
50	60,3	2,6	102	12	0,2	0.080806.A	0.335826.V
65	76,1	2,6	122	12	0,15	0.080810.G	0.335827.W
80	88,9	3	138	12	0,24	0.080815.S	0.335828.E
100	114,3	3	158	12	0,2	0.080818.C	0.335829.F
125	139,7	3	188	14	0,28	0.080822.Z	0.335830.D
150	168,3	3,6	212	16	0,45	0.302608.G	0.335831.S
200	219,1	3,6	270	18	0,7	0.302609.A	0.335832.T
250	273	4	320	20	1	0.080835.W	0.335833.R
300	323,9	4	370	20	1,4	0.080840.N	0.335834.V
350	355,6	4,5	430	25	2,2	0.302610.W	0.335835.W
400	406,4	5	480	25	3	0.080849.K	0.335836.X
450	457	5	540	25	3,8	0.161515.W	0.335837.Z
500	508	5	600	25	3,8	0.080853.F	0.335838.G
600	609,4	5,6	715	30	3,5	0.302611.K	0.335839.A