

+


document details: DANIELI 2.000.451 0

Documents

CONTROLLO APPROVATO
CHECKED APPROVED


Document Sharing Hub

**GUARNIZIONI DIN 2691 PER FLANGE AD INCAMERATURA DOPPIA
GASKETS DIN 2691 FOR TONGUE AND GROOVE FACE FLANGES**

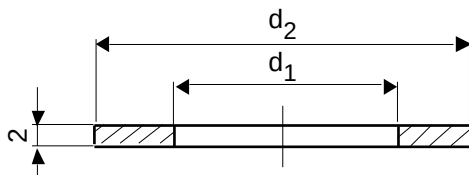

Dimensioni: DIN 2691
Materiale: PTFE
Accopp.: flange DIN 2512
Rating: PN 10÷PN 160
Certificazione: EN 10204/3.1B
Impieghi: acido solforico < 96%

Dimensions: DIN 2691
Material: PTFE
Coupling: flanges DIN 2512
Rating: PN 10÷PN 160
Insp. certif.: EN 10204/3.1B
Uses: sulphuric acid < 96%



Es. di design.:
0.322022.R Guarnizione DIN 2691
DN 100 (129x149x2) PTFE
EN 10204/3.1B

Ex. of design.:
0.322022.R Gasket DIN 2691
DN 100 (129x149x2) PTFE
EN 10204/3.1B

☐ Sconsigliato
Not recommended

DN	d ₁	d ₂	CODICE CODE
10	24	34	0.322013.T
15	29	39	0.322014.R
20	36	50	0.322015.V
25	43	57	0.322016.W
32	51	65	0.322017.X
40	61	75	0.322018.F
50	73	87	0.322019.G
65	95	109	0.322020.E
80	106	120	0.322021.T
100	129	149	0.322022.R
125	155	175	0.322023.V
150	183	203	0.322024.W
200	239	259	0.322025.X
250	292	312	0.322026.Z
300	343	363	0.322027.S
350	395	421	0.322276.P
400	447	473	0.322277.Q
500	549	575	0.322278.Z