




According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management

+


A termini di legge la DANIELI & C.S.p.A. considera questo documento come segreto aziendale con divieto per chiunque di riprodurlo o di renderlo comunque noto, in tutto o in parte, a terzi, o verosimilmente a ditte concorrenti, senza specifica autorizzazione scritta della Direzione DANIELI.

+

		ANELLI DI DRENAGGIO DRIP RINGS										STANDARD N° 2.000.702									
		REV. 03					PAGINA PAGE 1					DI OF 5									
		SOSTITUISCE REPLACES																			
																					
		Pag.																			
		Rev.																			
		Pag.																			
		Rev.																			
03	04/97	Ampl. range fino a DN 300 pag. 2: DN 200 pag. 4 Enl. range to DN 300 page 2; DN 200 page 4										 Zorzut DTN			 Barbante DE			 Dalla Franc. UGQ			
		Pag. 1 2 3 4 5																			
		Rev. 3 3 3 3 3																			
02	02/96	Ins. anelli incamer. doppia maschio Ins. tongue faced drip rings										Zorzut DTN			Musina DE			Dalla Franc. UGQ			
		Pag. 1 2 3 4 5																			
		Rev. 2 2 2 2 2																			
01	03/95	Nuova edizione First issue										Zorzut DTN			Musina DE			Dalla Franc. UGQ			
		Pag. 1 2 3																			
REV.	DATA DATE	DESCRIZIONE MODIFICA DESCRIPTION OF MODIFICATION										REDATTO COMPILED			CONTROLLATO CHECKED			APPROVATO APPROVED			

AVA Documents Document Sharing Hub

ANELLI DI DRENAGGIO PN 16 RF
DRIP RINGS PN 16 RF

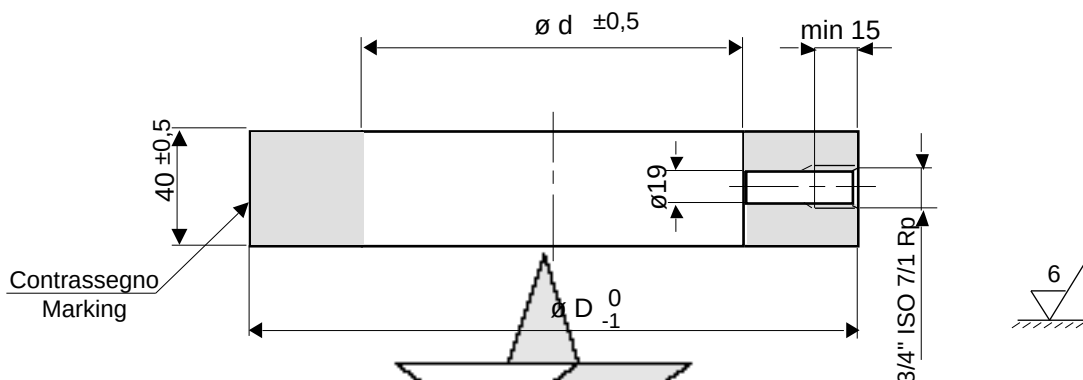

Accopp.: flange PN16 RF DIN 2501

Finitura: Forma C DIN 2526

Materiale: RSt 37 DIN 17100

X5CrNiMo17 12 DIN17440 - AISI 316

Certificazione: EN 10204/2.2

Coupling: flanges PN16 RF DIN 2501

Finishing: Form C DIN 2526

Material: RSt 37 DIN 17100

X5CrNiMo17 12 DIN17440 - AISI 316

Certificate: EN 10204/2.2

Es. di design.:

0.318164.K Anello di drenaggio
DN100 PN16 C DIN2526
3/4" ISO 7/1 RSt 37
Cert. EN 10204/2.2

Ex. of design.:

0.318164.K Drip ring
DN100 PN16 C DIN2526
3/4" ISO 7/1 RSt 37
Cert. EN 10204/2.2

Dimensioni in mm Masse indicative
Dimensions in mm Masses indicative

DN	d	D	Massa Kg	CODICE - CODE	
				RSt 37	AISI 316
40	Usare anelli PN 40 Use PN 40 rings				
50					
65					
80					
100	114	158	3,2	0.318164.K	0.318166.M
125	Usare anelli PN 40 Use PN 40 rings				
150	168	212	4,7	0.318165.L	0.318167.N
200	219	268	5,8	0.335937.V	0.335940.K
250	273	320	6,8	0.335938.D	0.335941.F
300	324	378	9,2	0.335939.E	0.335942.G

03	04/97	Enl. range to DN 300
02	02/96	Agg. n° pag
Rev.	Date	Descrizione - Description