

+

ANIELI
edi ripr



**FILTRI SFIATO - FILTRI ARIA
TAPPI DI RIEMPIMENTO
BREATHER FILTERS - AIR FILTERS
INLET PLUGS**

FOGLIO SHEET	1	DI OF	5	EDIZ. ISSUED	07/95
STANDARD N°			2.000.704		
REVIS.	1				
SOSTITUISCE REPLACES			2.100.031		

[illegible]

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management




STANDARDIZATION

FILTRI SFIATO - FILTRI ARIA
TAPPI DI RIEMPIMENTO
BREATHES FILTERS - AIR FILTERS
INLET PLUGS

FOGLIO SHEET	2	DI OF	5	EDIZ. ISSUED	07/95
STANDARD N°		2.000.704			
REVIS.	1				
SOSTITUISCE REPLACES	2.100.031				

FILTRO SFIATO - BREATHES FILTER

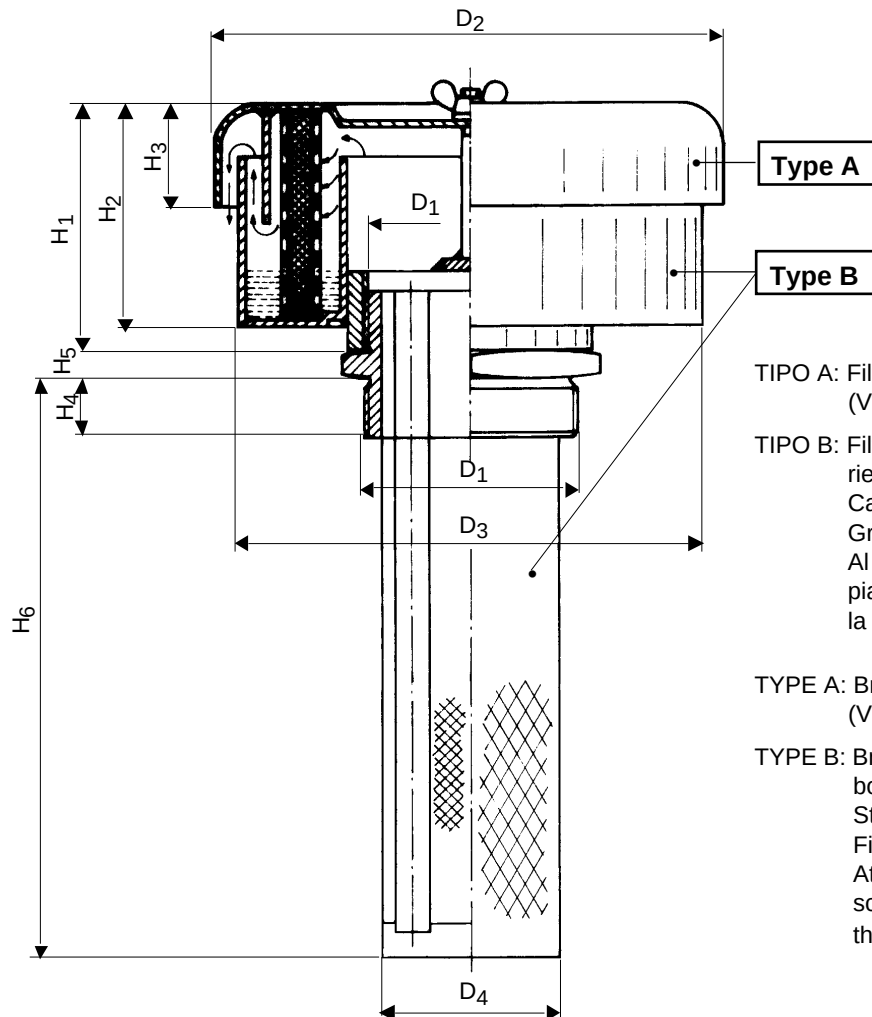

- TIPO A: Filtro sfiato con nipplo
(Versione EPE NLF II)
- TIPO B: Filtro sfiato con nipplo e corpo filtrante di riempimento (Versione EPE NLF II)
Cartuccia di sfiato standard
Grado di filtrazione: 25 µm in carta trattata
Al momento della messa in marcia dell'impianto, svitare il coperchio e riempire d'olio la coppa fino al segno rosso esterno
- TYPE A: Breather filter with nipple
(Version EPE NLF II)
- TYPE B: Breather filter with nipple and filling filtering body (Version EPE NLF II)
Standard breather cartridge
Filtration degree = 25µm in treated paper
At the time of starting the equipment, unscrew the cover and fill the cup with oil up to the outside red mark

Es. di design.:
0.059720.R Filtro sfiato con nipplo 2" ISO 228
N 2.000.704

Ex. of design.:
0.059720.R Breather filter with nipple 2" ISO 228
N 2.000.704

Es. di design.:
0.067016.T Filtro sfiato con nipplo e corpo filtrante
2" ISO 228 - Gr. filtraz. 25 µm
N 2.000.704

Ex. of design.:
0.067016.T Breather filter with nipple and filling filtering body
2" ISO 228 - Filtrat. degree 25 µm
N 2.000.704

☐ Sconsigliato
Not recommended

D1 ISO 228	D2	D3	D4	H1	H2	H3	H4	H5	H6	Ch	Massa Kg	Pass. aria flow l/1'	Sigla EPE Tag		CODICE - CODE	
													TYPE A	TYPE B	TYPE A	TYPE B
1	102	92	28	50	40	20	17	6	107	46	0,6	440	NLF-II-1	NLF-III-1	0.059343.V	0.067014.Z
1.1/4	102	92	34	60	40	20	19	6	131	55	0,8	720	NLF-II-2	NLF-III-2	0.065812.T	0.065817.Z
1.1/2	177	162	42	85	75	40	19	7	155	60	2,3	1125	NLF-II-3	NLF-III-3	0.061439.G	0.067015.S
2	177	162	53	85	75	40	22	7	187	75	2,5	1760	NLF-II-4	NLF-III-4	0.059720.R	0.067016.T
2.1/2	177	162	67	85	75	40	24	8	218	90	2,8	2970	NLF-II-5	NLF-III-5	0.014984.M	0.067017.R
3	212	192	82	90	75	40	26	9	256	105	3,2	4500	NLF-II-6	NLF-III-6	0.014985.N	0.067018.C