




FLANGE METALLICHE ASME B 16.5
FILETTATE ASME B 1.20.1 (NPT) CL. 150-300 Lb
METALLIC PIPE FLANGES ASME B 16.5
THREADED ASME B 1.20.1 (NPT) CL. 150-300 Lb

STANDARD N° 2.050.402

REV. 01 PAGINA 2 DI 3
SOSTITUISCE
REPLACES

FLANGE FILETTATE ASME B16.5 CLASSE 150 RF
THREADED FLANGES ASME B16.5 CLASS 150 RF

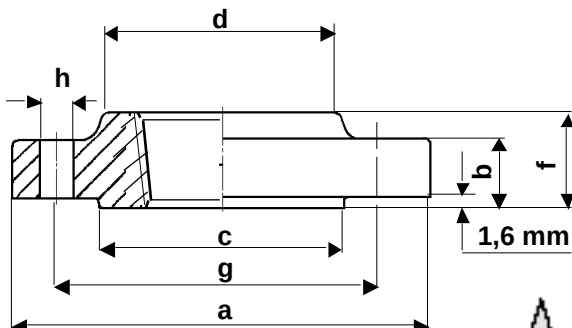

Dimensioni: ASME B 16.5 150 Lb

Materiale: ASTM A 105
ASTM A 182 Gr. F304
ASTM A 182 Gr. F316

Rating: Classe 150 RF

Finitura sup. tenuta: ASME B 16.5

Filettatura: NPT ASME B 1.20.1

Certificaz.: ASTM A105 p.to 16
ASTM A182 p.to 17.1

Finitura: ASTM A 105 grezza
ASTM A 105 zincata ASTM A153

Dimensions: ASME B 16.5 150 Lb

Material: ASTM A 105
ASTM A 182 Gr. F304
ASTM A 182 Gr. F316


Rating: Class 150 RF

Face facing: ASME B 16.5

Thread: NPT ASME B 1.20.1

Certificate: ASTM A105 point 16
ASTM A182 point 17.1

Finishing: ASTM A 105 blank
ASTM A 105 zinc coated ASTM A153



Es. di design.:
0.323735.D Flangia filett.ASME B16.5
2" NPT Cl.150RF
ASTM A105 Grezza
Certif.ASTM A105-16

Ex. of design.:
0.323735.D Thrd flange ASME B16.5
2" NPT Cl.150RF
ASTM A105 Blank
Certif.ASTM A105-16

Es. di design.:
0.334038.G Flangia filett.ASME B16.5
2" NPT Cl.150RF
ASTM A182Gr.F304
Certif.ASTM A182-17.1

Ex. of design.:
0.334038.G Thrd flange ASME B16.5
2" NPT Cl.150RF
ASTM A182Gr.F304
Certif.ASTM A182-17.1

☐ Sconsigliato
Not recommended

DN mm	NPS inch	a mm	b mm	c mm	d mm	f mm	g mm	N° holes	h mm	Mass Kg	CODICE CODE			
											ASTM A 105		ASTM A 182	
											Blank	Zinc coated	F 304	F 316
15	1/2"	89	11,2	34,9	30	16	60,3	4	15,9	0,8	0.323730.L	0.323741.H	0.334033.R	0.334044.E
20	3/4"	99	12,7	42,9	38	16	69,8	4	15,9	0,9	0.323731.G	0.323742.K	0.334034.V	0.334045.F
25	1"	108	14,3	50,8	49	17	79,4	4	15,9	1	0.323732.A	0.323743.L	0.334035.W	0.334046.G
32	1.1/4"	117	15,9	63,5	59	21	88,9	4	15,9	1,3	0.323733.B	0.323744.M	0.334036.X	0.334047.A
40	1.1/2"	127	17,5	73	65	22	98,4	4	15,9	1,4	0.323734.C	0.323745.N	0.334037.Z	0.334048.H
50	2"	152	19,1	92,1	78	25	120,6	4	19	2,3	0.323735.D	0.323746.P	0.334038.G	0.334049.K
65	2.1/2"	178	22,2	104,8	90	29	139,7	4	19	3,7	0.323736.E	0.323747.Q	0.334039.A	0.334050.Q
80	3"	190	23,9	127	108	30	152,4	4	19	4,2	0.323737.F	0.323748.Z	0.334040.N	0.334051.D
100	4"	229	23,9	157,2	135	33	190,5	8	19	5,9	0.323738.P	0.323749.S	0.334041.B	0.334052.E
125	5"	254	23,9	185,7	164	37	215,9	8	22,2	7	0.323739.Q	0.323750.X	0.334042.C	0.334053.F
150	6"	279	25,4	215,9	192	40	241,3	8	22,2	8,5	0.323740.V	0.323751.L	0.334043.D	0.334054.G

Ins. flanges AISI 304 and AISI 316

Descrizione - Description

02/97

Date

01

Rev.