

+



METALLIC LAPPED PIPE FLANGES
ASME B 16.5 CLASS 150 - 300 Lb

SOSTITUISCE
REPLACES

[illegible]

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management




FLANGE METALLICHE LIBERE PER TUBAZIONI
ASME B 16.5 CLASSE 150 - 300 Lb
METALLIC LAPPED PIPE FLANGES
ASME B 16.5 CLASS 150 - 300 Lb

STANDARD N° 2.050.405

REV. 00 PAGINA 2 DI 3

SOSTITUISCE
REPLACES

FLANGE LIBERE ASME B16.5 CLASSE 150 RF
LAPPED FLANGES ASME B16.5 CLASS 150 RF

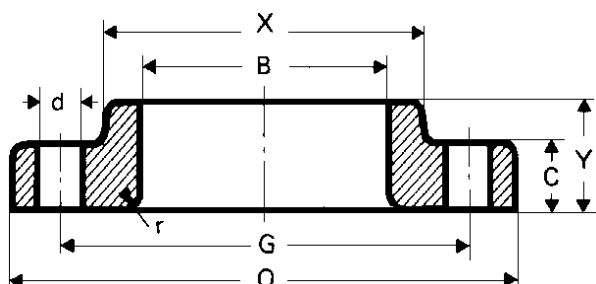

Dimensioni: ASME B 16.5 150 Lb
Materiale: ASTM A 105 grezzo
Rating: Classe 150 RF
Certificaz.: ASTM A105 p.to 16

Dimensions: ASME B 16.5 150 Lb
Material: ASTM A 105 rough
Rating: Class 150 RF
Certificate: ASTM A105 point 16



Es. di design.:

0.329414.G Flg. libera ASME B16.5
2" Cl. 150RF
ASTM A105 Grezza
Certif. ASTM A105-16

Ex. of design.:

0.329414.G Lapped flg. ASME B16.5
2" Cl. 150RF
ASTM A105 Rough
Certif. ASTM A105-16

☐ Sconsigliato
Not recommended

DN	NPS	O	B	C	Y	X	r	G	d	N°	Mass	CODICE
mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	holes	Kg	CODE
15	1/2	88,9	22,9	11,2	15,9	30,2	3,2	60,3	15,8	4	0,8	0.329409.R
20	3/4	98,4	28,2	12,7	15,9	38,1		69,8			0,9	0.329410.Q
25	1	107,9	35,1	14,3	17,5	49,2		79,4			1	0.329411.D
32	1.1/4	117,5	43,7	15,9	20,6	58,8	4,8	88,9			1,3	0.329412.E
40	1.1/2	127	50	17,5	22,2	65,1	6,4	98,4			1,5	0.329413.F
50	2	152,4	62,5	19,1	25,4	77,8	7,9	120,6	19	8	2,3	0.329414.G
65	2.1/2	177,8	75,4	22,3	28,6	90,5	9,5	139,7			3,7	0.329415.A
80	3	190,5	91,4	23,9	30,2	107,9		152,4			4,2	0.329416.B
100	4	228,6	116,8	23,9	33,3	134,9	11,1	190,5	22,2		5,9	0.329417.C
125	5	254	144,5	23,9	36,5	163,5	12,7	215,9			7	0.329418.L
150	6	279,4	171,4	25,4	39,7	192,1		241,3		8,5	0.329419.M	
200	8	342,9	222,2	28,6	44,4	246,1		298,4	13,5	0.329420.K		
250	10	406,4	277,4	30,2	49,2	304,8		362	25,4	19,5	0.329421.F	
300	12	482,6	328,2	31,8	55,6	365,1		431,8	28,5	29	0.329422.G	
350	14	533,4	360,2	35	79,4	400		476,2		39	0.329423.A	
400	16	597	411,2	36,6	87,3	457,2		539,8	31,8	47	0.329424.B	
450	18	635	462,3	39,7	96,8	504,8	577,8	54		0.329425.C		
500	20	698,5	514,4	42,9	103,2	558,8	635	70		0.329426.D		
600	24	813	616	47,7	111,1	663,6	749,3	34,9	95	0.329427.E		

Descrizione - Description

Date

Rev