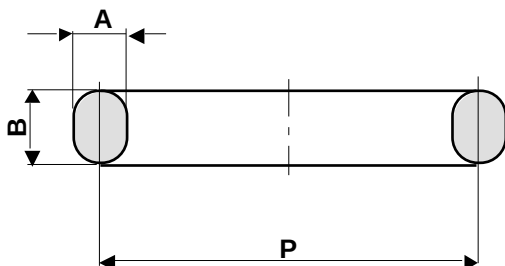


RING JOINT OVALE ASME B16.20 PER FLANGE ASME B 16.5 CLASSE 2500 RJ
OVAL RING JOINT ASME B16.20 FOR FLANGES ASME B 16.5 CLASS 2500 RJ


Dimensioni e tolleranze: ASME B 16.20
Materiale: ASTM A 182 Gr. F5
Durezza: max 130 Brinell
Accoppiamento: ASME B 16.5 cl. 2500 RJ
Certificazione: ASTM A 182 p.to 17.1

Dimensions and tolerances: ASME B 16.20
Material: ASTM A 182 Gr. F5
Hardness: max 130 Brinell
Coupling: ASME B 16.5 cl. 2500 RJ
Certificate: ASTM A 182 point 17.1

Es. di design.:

0.337673.M Ring joint ovale
R26 B16.20
ASTM A182 Gr.F5
Cert. ASTM A 182/17.1

Ex. of design.:

0.337673.M Oval ring joint
R26 B16.20
ASTM A182 Gr.F5
Cert. ASTM A 182/17.1

☐ Sconsigliato
Not recommended

Dimensioni in mm
Dimensions in mm

Masse indicative
Masses indicative

Flange DN mm	NPS inch	N° ident. Ident. N°	P	A	B	Mass Kg	CODICE CODE
15	1/2	R 13	42,88	7,99	14,29	0,11	0.337668.X
20	3/4	R 16	50,8	7,99	14,29	0,13	0.337669.Z
25	1	R 18	60,32	7,99	14,29	0,15	0.337670.W
32	1.1/4	R 21	72,24	11,11	17,46	0,30	0.337671.K
40	1.1/2	R 23	82,55	11,11	17,46	0,35	0.337672.L
50	2	R 26	101,6	11,11	17,46	0,43	0.337673.M
65	2.1/2	R 28	111,12	12,7	19,05	0,58	0.337674.N
80	3	R 32	127	12,7	19,05	0,66	0.337675.P
100	4	R 38	157,18	15,88	22,23	1,18	0.337676.Q
125	5	R 42	190,5	19,05	25,4	1,94	0.337677.H
150	6	R 47	228,6	19,05	25,4	2,33	0.337678.S
200	8	R 51	279,4	22,23	28,58	3,72	0.337679.T
250	10	R 55	342,9	28,58	36,51	7,48	0.337680.Q
300	12	R 60	406,4	31,75	39,69	10,66	0.337681.D