




GIUNTO DIELETTRICO IN ACCIAIO AL CARBONIO
FILETTATURA NPT ZINCATO 300 Lb ASME B 16.34

DIELECTRIC COUPLING CARBON STEEL
NPT THREADED GALVANIZED 300 Lb ASME B 16.34

STANDARD N° 2.050.600

REV. 03 PAGINA 2 DI 5

SOSTITUISCE
REPLACES

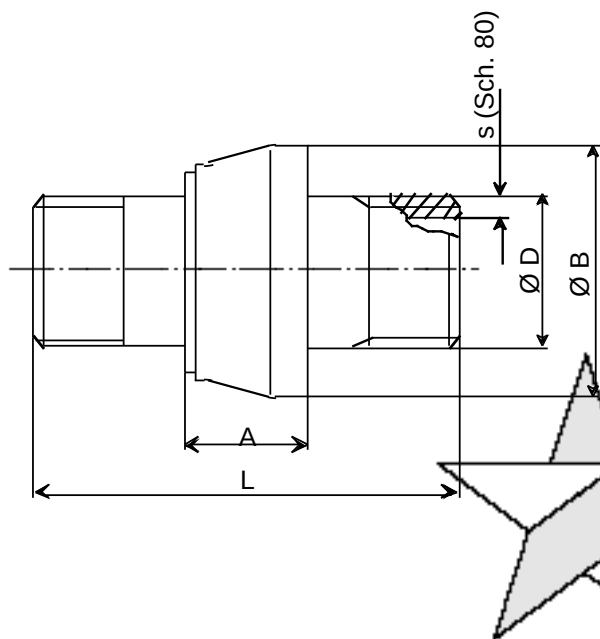

Pressione nominale: max 300 LB ASME B 16.34
Temp. di esercizio: max 65°C

Guarnizioni: Gomma butadiene/acrilonitrile
Isolanti: resine epossidiche di riempimento
Rivestimento interno con resine epossidiche

Materiale: ASTM A 105 zincato
Manicotti: ASTM A 106 Gr. B
Spessore: Sch. 80
Filettatura: NPT ASME B 1.20.1
Certificazione: ASTM A105 p.to 16
ASTM A 106 p.to 23.1

Impiego: acqua

Nominal pressure: max 300 LB ASME B 16.34
Operating temp.: max 65°C

Gaskets: Rubber butadiene/acrylonitrile
Insulators: filled epoxy resins
Internal lining with epoxy resins

Material: ASTM A 105 galvanized
Couplings: ASTM A 106 Gr. B
Thickness: Sch. 80
Thread: NPT ASME B 1.20.1
Certificate: ASTM A105 point 16
ASTM A 106 point 23.1

Use: water

Es. di design.:
0.331495.V Giunto dielettr.filett.
2" NPT 300Lb
ASTM A105 Gomma
Cert.A105-16/A106-23.1

Ex. of design.:
0.331495.V Scr.dielectric coupling
2" NPT 300Lb
ASTM A105 Rubber
Cert.A105-16/A106-23.1

☐ Sconsigliato
Not recommended

DN	NPS	D	A	B	L	Mass	CODICE
mm	inch	mm	mm	mm	mm	Kg	CODE
15	1/2	21,3	25	45	90	0,6	0.331490.C
20	3/4	26,7	30	50	90	1	0.331491.Z
25	1	33,4	30	60	95	1,3	0.331492.S
32	1.1/4	42,2	35	70	130	1,4	0.331493.T
40	1.1/2	48,3	35	75	135	2,3	0.331494.R
50	2	60,3	35	85	160	3,4	0.331495.V
65	2.1/2	73	45	100	160	5	0.331496.W
80	3	88,9	45	120	190	7	0.331497.X