




STANDARDIZATION

**BULLONI E TIRANTI PER FLANGE ANSI B 16.5
LUNGHEZZE STANDARD**

**BOLTS AND STUD BOLTS FOR ANSI B 16.5
FLANGES - STANDARD LENGTH**

FOGLIO SHEET	2	DI OF	4	EDIZ. ISSUED	10/93
STANDARD N° 2.050.900					
REVIS.	1				
SOSTITUISCE REPLACE	2.4.073				

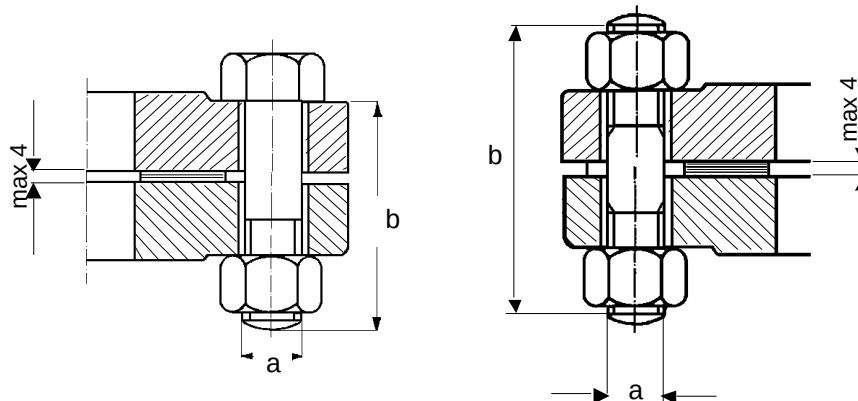

Flange Raised face

NPS	DN	N°	ANSI 150				N°	ANSI 300			
			a inch	a metr.	Bullone Bolt	Tirante Stud bolt		a inch	a metr.	Bullone Bolt	Tirante Stud bolt
1/2	15	4	1/2	14	45	64	4	1/2	14	55	70
3/4	20	4	1/2	14	50	64	4	5/8	18	60	83
1	25	4	1/2	14	55	70	4	5/8	18	65	83
1.1/4	32	4	1/2	14	55	70	4	5/8	18	65	89
1.1/2	40	4	1/2	14	60	76	4	3/4	20	75	95
2	50	4	5/8	18	65	89	8	5/8	18	75	95
2.1/2	65	4	5/8	18	75	95	8	3/4	20	85	108
3	80	4	5/8	18	75	95	8	3/4	20	90	115
4	100	8	5/8	18	75	95	8	3/4	20	95	121
5	125	8	3/4	20	80	102	8	3/4	20	100	127
6	150	8	3/4	20	85	108	12	3/4	20	105	127
8	200	8	3/4	20	90	115	12	7/8	24	110	146
10	250	12	7/8	24	95	127	16	1	27	130	158
12	300	12	7/8	24	100	127	16	1.1/8	30	145	181
14	350	12	1	27	110	143	20	1.1/8	30	150	188
16	400	16	1	27	115	150	20	1.1/4	33	160	204
18	450	16	1.1/8	30	125	162	24	1.1/4	33	170	210
20	500	20	1.1/8	30	135	168	24	1.1/4	33	180	222
24	600	20	1.1/4	33	145	191	24	1.1/2	39	195	248

Per tiranti UNC-8 UN vedere N 3.150.400
Per dadi ANSI B 18.2.2 vedere N 3.150.600

Per tiranti ISO vedere N 3.100.400
Per dadi esag. alti ISO vedere N 3.100.600

For stud bolts UNC-8 UN see Std 3.150.400
For heavy hex nuts ANSI B 18.2.2 see Std 3.150.600

For stud bolts ISO see Std 3.100.400
For heavy hex nuts ISO see Std 3.100.600