

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management



RACCORDI ASME B 16.11
FILETTATI ISO 7/1 - EN 10204/3.1B

FITTINGS ASME B 16.11
THREADED ISO 7/1 - EN 10204/3.1B

STANDARD N° 2.200.102

REV. 05

PAGINA
PAGE

1

DI
OF

16

SOSTITUISCE
REPLACES

Parz. 2.200.300



05	06/97	Mod. codici AISI 316 pag. 7 e 12 Rev. codes AISI 316 page 7 and 12										Zorzut DTN			Barbante DE			Pelizzo QE		
		Pag.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		
		Rev.	5	4	4	4	4	4	5	4	4	4	4	5	4	4	4	4		
04	02/97	Scorp. nippli in 2.200.108; elim. 1/8"; ins. raccordi acc. inox Del. nipples ins. in 2.200.108; del. 1/8"; ins. stainless fittings										Zorzut DTN			Musina DE			Dalla Franc. UGQ		
		Pag.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		
		Rev.	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4		
03	06/96	Revisione completa General updating										Zorzut DTN			Musina DE			Dalla Franc. UGQ		
		Pag.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
		Rev.	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
		Pag.	20	21																
		Rev.	3	3																
02	04/94	Ins. fittings 2000 Lb; curve 45°, tappi; nippli da tubo Ins. fittings 2000 Lb; 45° elbows, plugs; nipples from pipe										Zorzut DTN			Musina DE			Coassin UGQ		
		Pag.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	
		Rev.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
01	05/93	Nuova edizione First issue										Zorzut DTN			Musina DE			Coassin UGQ		
		Pag.	1	2	3	4	5	6	7	8	9	10	11							
REV.	DATA DATE	DESCRIZIONE MODIFICA DESCRIPTION OF MODIFICATION										REDATTO COMPILED			CONTROLLATO CHECKED			APPROVATO APPROVED		

A termini di legge la DANIELI & C. S.p.A. considera questo documento come segreto aziendale con divieto per chiunque di riprodurlo o di renderlo comunque noto, in tutto o in parte, a terzi, o verosimilmente concorrenti, senza specifica autorizzazione scritta della Direzione DANIELI.



RACCORDI ASME B 16.11
FILETTATI ISO 7/1 - EN 10204/3.1B


FITTINGS ASME B 16.11
THREADED ISO 7/1 - EN 10204/3.1B

STANDARD N° 2.200.102

REV. 04 PAGINA 2 DI 16

SOSTITUISCE
REPLACES Parz. 2.200.300

GOMITO A 45° FILETTATO ISO 7/1 ASME B 16.11 2000-3000-6000 Lb
45° THREADED ISO 7/1 ELBOW ASME B 16.11 2000-3000-6000 Lb



Dimensioni: ASME B 16.11

Mat.: ASTM A 105

ASTM A 182 Gr. F 304

ASTM A 182 Gr. F 316

Rating: 2000 - 3000 - 6000 Lb

Filettature: ISO 7/1-Rc

Certificaz.: EN 10204/3.1B

Finitura: A 105 grezzo

A 105 zincato ASTM A153

Dimensions: ASME B 16.11

Mat.: ASTM A105

ASTM A182 Gr. F 304

ASTM A182 Gr. F 316

Rating: 2000 - 3000 - 6000 Lb

Thread: ISO 7/1-Rc

Certificate: EN 10204/3.1B

Finishing: A 105 wrought

A 105 zinc coated ASTM A153

Es. di design.:

0.320932.C Gomito45°fil.ASME B16.11

1.1/2"ISO7/1-Rc 3000Lb

ASTM A105 grezzo

EN 10204/3.1B

Ex. of design.:

0.320932.C 45°scr.elbow ASME B16.11

1.1/2"ISO7/1-Rc 3000Lb

ASTM A105 wrought

EN 10204/3.1B

Es. di design.:

0.324345.N Gomito45°fil.ASME B16.11

1.1/2" ISO7/1-Rc 3000Lb

ASTM A182 Gr.F304

EN 10204/3.1B

Ex. of design.:

0.324345.N 45°scr.elbow ASME B16.11

1.1/2"ISO7/1-Rc 3000Lb

ASTM A182 Gr.F304

EN 10204/3.1B

☐ Sconsigliato
Not recommended

SERIE 2000 LB - SERIES 2000 LB	DN		c	h	s min.	Mass	CODICE		CODE	
	mm	inch	mm	mm	mm	Kg	A 105			
							wrought	Zinc coated	AISI 304	AISI 316
8	1/4	17,5	22,2	3,18	0,1	0,13	0.320914.A	0.334208.X	0.324327.D	0.313167.A
10	3/8	19	25,4	3,18	0,13	0,13	0.320915.B	0.334209.Z	0.324328.M	0.313168.H
15	1/2	22,3	33,3	3,18	0,25	0,25	0.320916.C	0.334210.M	0.324329.N	0.313169.K
20	3/4	25,4	38,1	3,18	0,31	0,31	0.320917.D	0.334211.A	0.324330.L	0.313170.Q
25	1	28,5	46	3,7	0,44	0,44	0.320918.M	0.334212.B	0.324331.G	0.313171.D
32	1.1/4	33,3	55,6	3,9	0,67	0,67	0.320919.N	0.334213.C	0.324332.A	0.313172.E
40	1.1/2	35	61,9	4	0,93	0,93	0.320920.L	0.334214.D	0.324333.B	0.313173.F
50	2	42,9	75,4	4,3	1,21	1,21	0.320921.G	0.334215.E	0.324334.C	0.313174.G
65	2.1/2	52,3	92	5,6	3,1	3,1	0.320922.A	0.334216.F	0.324335.D	0.313175.A
80	3	63,5	109,5	6	5,2	5,2	0.320923.B	0.334217.G	0.324336.E	0.313176.B
100	4	79,2	146	6,6	10,5	10,5	0.320924.C	0.334218.Q	0.324337.F	0.313177.C

SERIE 3000 LB - SERIES 3000 LB	DN		c	h	s min.	Mass	CODICE		CODE	
	mm	inch	mm	mm	mm	Kg	A 105			
							wrought	Zinc coated	AISI 304	AISI 316
8	1/4	19	25,4	3,3	0,15	0,15	0.320926.E	0.334219.H	0.324339.Q	0.313179.M
10	3/8	22,3	33,3	3,51	0,28	0,28	0.320927.F	0.334220.P	0.324340.V	0.313180.B
15	1/2	25,4	38,1	4,09	0,38	0,38	0.320928.P	0.334221.C	0.324341.H	0.313181.X
20	3/4	28,5	46	4,31	0,56	0,56	0.320929.Q	0.334222.D	0.324342.K	0.313182.Z
25	1	33,3	55,6	4,98	0,91	0,91	0.320930.N	0.334223.E	0.324343.L	0.313183.S
32	1.1/4	35	61,9	5,28	1,15	1,15	0.320931.B	0.334224.F	0.324344.M	0.313184.T
40	1.1/2	42,9	75,4	5,56	1,85	1,85	0.320932.C	0.334225.G	0.324345.N	0.313185.R
50	2	43,7	84,1	7,13	2,1	2,1	0.320933.D	0.334226.A	0.324346.P	0.313186.V
65	2.1/2	52,3	101,6	7,65	4,85	4,85	0.320934.E	0.334227.B	0.324347.Q	0.313187.W
80	3	63,5	120,6	8,84	6,65	6,65	0.320935.F	0.334228.K	0.324348.Z	0.313188.E
100	4	79,2	152,4	11,18	12,5	12,5	0.320936.G	0.334229.L	0.324349.S	0.313189.F

SERIE 6000 LB - SERIES 6000 LB	DN		c	h	s min.	Mass	CODICE CODE		
	mm	inch	mm	mm	mm	Kg	A 105 wrought		
							A 105 wrought	AISI 304	AISI 316
8	1/4	22,3	33,3	6,6	0,31	0,31	0.320938.H	0.324351.L	0.313191.S
10	3/8	25,4	38,1	6,98	0,42	0,42	0.320939.K	0.324352.M	0.313192.T
15	1/2	28,5	46	8,15	0,65	0,65	0.320940.X	0.324353.N	0.313193.R
20	3/4	33,3	55,6	8,53	1,05	1,05	0.320941.L	0.324354.P	0.313194.V
25	1	35	61,9	9,93	1,41	1,41	0.320942.M	0.324355.Q	0.313195.W
32	1.1/4	42,9	75,4	10,59	2,15	2,15	0.320943.N	0.324356.H	0.313196.X
40	1.1/2	43,7	84,1	11,07	2,75	2,75	0.320944.P	0.324357.K	0.313197.Z
50	2	52,3	101,6	12,09	6,15	6,15	0.320945.Q	0.324358.T	0.313198.G
65	2.1/2	63,5	120,6	15,29	8,6	8,6	0.320946.H	0.324359.R	0.313199.A
80	3	79,2	146	16,64	15	15	0.320947.K	0.324360.S	0.313200.V
100	4	79,2	152,4	18,67	18	18	0.320948.T	0.324361.N	0.313201.K

Rev.	Date	Ins. fittings AISI 304-316	Descrizione - Description
04	02/97		




RACCORDI ASME B 16.11
FILETTATI ISO 7/1 - EN 10204/3.1B
FITTINGS ASME B 16.11
THREADED ISO 7/1 - EN 10204/3.1B

STANDARD N° 2.200.102

REV. 04 PAGINA 3 DI 16

SOSTITUISCE
REPLACES Parz. 2.200.300

GOMITO A 90° FILETTATO ISO 7/1 ASME B 16.11 2000-3000-6000 Lb
90° THREADED ISO 7/1 ELBOW ASME B 16.11 2000-3000-6000 Lb



Dimensioni: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Filettatura: ISO 7/1-Rc
Certificaz.: EN 10204/3.1B
Finitura: A 105 grezzo
A 105 zincato ASTM A 153

Dimensions: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Thread: ISO 7/1-Rc
Certificate: EN 10204/3.1B
Finishing: A 105 wrought
A 105 zinc coated ASTM A153

Es. di design.:
0.320968.X Gomito 90°fil.ASME B16.11
1.1/2"ISO7/1-Rc 3000Lb
ASTM A105 grezzo
EN 10204/3.1B

Ex. of design.:
0.320968.X 90°scr.elbow ASME B16.11
1.1/2"ISO7/1-Rc 3000Lb
ASTM A105 wrought
EN 10204/3.1B

Es. di design.:
0.324381.B Gomito 90°fil.ASME B16.11
1.1/2"ISO7/1-Rc 3000Lb
ASTM A182 Gr F304
EN 10204/3.1B

Ex. of design.:
0.324381.B 90°scr.elbow ASME B16.11
1.1/2"ISO7/1-Rc 3000Lb
ASTM A182 Gr.F304
EN 10204/3.1B

Sconsigliato
Not recommended

SERIE 2000 LB - SERIES 2000 LB	DN		a	b	c min.	h	s min.	Mass	CODICE CODE			
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105			
									wrought	Zinc coated	AISI 304	AISI 316
8	1/4	20,6	8,1	10,2	22,2	3,18	0,12	0,320950.S	0.334230.H	0.324363.Q	0.313203.M	
10	3/8	24,6	9,1	10,4	25,4	3,18	0,14	0.320951.N	0.334231.E	0.324364.H	0.313204.N	
15	1/2	28,6	10,9	13,6	33,3	3,18	0,28	0.320952.P	0.334232.F	0.324365.K	0.313205.P	
20	3/4	33,3	12,7	13,9	38,1	3,18	0,38	0.320953.Q	0.334233.G	0.324366.L	0.313206.Q	
25	1	38,1	14,7	17,3	46	3,7	0,55	0.320954.H	0.334234.A	0.324367.M	0.313207.H	
32	1.1/4	44,4	17	18	55,6	3,9	0,76	0.320955.K	0.334235.B	0.324368.V	0.313208.S	
40	1.1/2	50,8	17,8	18,4	61,9	4	1	0.320956.L	0.334236.C	0.324369.W	0.313209.T	
50	2	60,3	19	19,2	75,4	4,3	1,5	0.320957.M	0.334237.D	0.324370.R	0.313210.P	
65	2.1/2	76,2	23,7	28,9	92	5,6	3,65	0.320958.V	0.334238.M	0.324371.Q	0.313211.C	
80	3	85,8	25,8	30,5	109,5	6	5,7	0.320959.W	0.334239.N	0.324372.H	0.313212.D	
100	4	106,4	27,8	33	146	6,6	11,5	0.320960.R	0.334240.T	0.324373.K	0.313213.E	

SERIE 3000 LB - SERIES 3000 LB	DN		a	b	c min.	h	s min.	Mass	CODICE CODE			
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105			
									wrought	Zinc coated	AISI 304	AISI 316
8	1/4	24,6	8,1	10,2	25,4	3,3	0,17	0.320962.H	0.334241.P	0.324375.M	0.303125.E	
10	3/8	28,6	9,1	10,4	33,3	3,51	0,33	0.320963.K	0.334242.Q	0.324376.N	0.303126.F	
15	1/2	33,3	10,9	13,6	38,1	4,09	0,46	0.320964.L	0.334243.H	0.324377.P	0.303127.G	
20	3/4	38,1	12,7	13,9	46	4,31	0,7	0.320965.M	0.334244.K	0.324378.X	0.303128.Q	
25	1	44,4	14,7	17,3	55,6	4,98	1,08	0.320966.N	0.334245.L	0.324379.Z	0.303129.H	
32	1.1/4	50,8	17	18	61,9	5,28	1,3	0.320967.P	0.334246.M	0.324380.N	0.303130.P	
40	1.1/2	60,3	17,8	18,4	75,4	5,56	2,36	0.320968.X	0.334247.N	0.324381.B	0.303131.C	
50	2	63,5	19	19,2	84,1	7,13	2,6	0.320969.Z	0.334248.W	0.324382.C	0.303132.D	
65	2.1/2	82,6	23,7	28,9	101,6	7,65	5,7	0.320970.W	0.334249.X	0.324383.D	0.303133.E	
80	3	95,2	25,8	30,5	120,6	8,84	8	0.320971.K	0.334250.V	0.324384.E	0.303134.F	
100	4	114,3	27,8	33	152,4	11,18	15,5	0.320972.L	0.334251.H	0.324385.F	0.303135.G	

SERIE 6000 LB - SERIES 6000 LB	DN		a	b	c min.	h	s min.	Mass	CODICE CODE		
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105 wrought		
									AISI 304	AISI 316	
8	1/4	28,6	8,1	10,2	33,3	6,6	0,36	0.320974.N	0.324387.A	0.303137.B	
10	3/8	33,3	9,1	10,4	38,1	6,98	0,51	0.320975.P	0.324388.H	0.303138.K	
15	1/2	38,1	10,9	13,6	46	8,15	0,82	0.320976.Q	0.324389.K	0.303139.L	
20	3/4	44,4	12,7	13,9	55,6	8,53	1,25	0.320977.H	0.324390.Q	0.303140.Z	
25	1	50,8	14,7	17,3	61,9	9,93	1,65	0.320978.S	0.324391.D	0.303141.M	
32	1.1/4	60,3	17	18	75,4	10,59	2,75	0.320979.T	0.324392.E	0.303142.N	
40	1.1/2	63,5	17,8	18,4	84,1	11,07	3,6	0.320980.Q	0.324393.F	0.303143.P	
50	2	82,6	19	19,2	101,6	12,09	7,1	0.320981.D	0.324394.G	0.303144.Q	
65	2.1/2	95,2	23,7	28,9	120,6	15,29	11	0.320982.E	0.324395.A	0.303145.H	
80	3	106,4	25,8	30,5	146	16,64	17	0.320983.F	0.324396.B	0.303146.K	
100	4	114,3	27,8	33	152,4	18,67	19	0.320984.G	0.324397.C	0.303147.L	

Rev.	Date	Descrizione - Description
04	02/97	Ins. fittings AISI 304-316




RACCORDI ASME B 16.11
FILETTATI ISO 7/1 - EN 10204/3.1B
FITTINGS ASME B 16.11
THREADED ISO 7/1 - EN 10204/3.1B

STANDARD N° 2.200.102

REV. 04 PAGINA 4 DI 16

SOSTITUISCE
REPLACES Parz. 2.200.300

Ti FILETTATO ISO 7/1 ASME B 16.11 2000-3000-6000 Lb
THREADED ISO 7/1 TEE ASME B 16.11 2000-3000-6000 Lb



Dimensioni: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Filettature: ISO 7/1-Rc
Certificaz.: EN 10204/3.1B
Finitura: A 105 grezzo
A 105 zinc. ASTM A 153

Dimensions: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Thread: ISO 7/1-Rc
Certificate: EN 10204/3.1B
Finishing: A 105 wrought
A 105 zinc coated ASTM A153

Es. di design.:
0.321004.A Ti filettato ASME B16.11
1.1/2"ISO7/1-Rc 3000Lb
ASTM A105 grezzo
EN 10204/3.1B

Ex. of design.:
0.321004.A Scr. tee ASME B16.11
1.1/2"ISO7/1-Rc 3000Lb
ASTM A105 wrought
EN 10204/3.1B

Es. di design.:
0.324417.X Ti filettato ASME B16.11
1.1/2"ISO7/1-Rc 3000Lb
ASTM A182 Gr. F304
EN 10204/3.1B

Ex. of design.:
0.324417.X Scr. tee ASME B16.11
1.1/2"ISO7/1-Rc 3000Lb
ASTM A182 Gr. F304
EN 10204/3.1B

Sconsigliato
Not recommended

SERIE 2000 LB - SERIES 2000 LB	DN		a	b	c min.	h	s min.	Mass	CODICE CODE			
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105		CODE	
									wrought	Zinc coated	AISI 304	AISI 316
8	1/4	20,6	8,1	10,2	22,2	3,18	0,16	0,320986.B	0.334252.K	0.324399.M	0.313215.G	
10	3/8	24,6	9,1	10,4	25,4	3,18	0,19	0.320987.C	0.334253.L	0.324400.K	0.313216.A	
15	1/2	28,6	10,9	13,6	33,3	3,18	0,4	0.320988.L	0.334254.M	0.324401.F	0.313217.B	
20	3/4	33,3	12,7	13,9	38,1	3,18	0,5	0.320989.M	0.334255.N	0.324402.G	0.313218.K	
25	1	38,1	14,7	17,3	46	3,7	0,7	0.320990.K	0.334256.P	0.324403.A	0.313219.L	
32	1.1/4	44,4	17	18	55,6	3,9	1	0.320991.F	0.334257.Q	0.324404.B	0.313220.H	
40	1.1/2	50,8	17,8	18,4	61,9	4	1,3	0.320992.G	0.334258.Z	0.324405.C	0.313221.E	
50	2	60,3	19	19,2	75,4	4,3	1,95	0.320993.A	0.334259.S	0.324406.D	0.313222.F	
65	2.1/2	76,2	23,7	28,9	92	5,6	4,8	0.320994.B	0.334260.X	0.324407.E	0.313223.G	
80	3	85,8	25,8	30,5	109,5	6	7,4	0.320995.C	0.334261.L	0.324408.N	0.313224.A	
100	4	106,4	27,8	33	146	6,6	15	0.320996.D	0.334262.M	0.324409.P	0.313225.B	

SERIE 3000 LB - SERIES 3000 LB	DN		a	b	c min.	h	s min.	Mass	CODICE CODE			
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105		CODE	
									wrought	Zinc coated	AISI 304	AISI 316
8	1/4	24,6	8,1	10,2	25,4	3,3	0,23	0.320998.N	0.334263.N	0.324411.Z	0.303149.V	
10	3/8	28,6	9,1	10,4	33,3	3,51	0,42	0.320999.P	0.334264.P	0.324412.S	0.303150.T	
15	1/2	33,3	10,9	13,6	38,1	4,09	0,6	0.321000.H	0.334265.Q	0.324413.T	0.303151.P	
20	3/4	38,1	12,7	13,9	46	4,31	0,91	0.321001.E	0.334266.H	0.324414.R	0.303152.Q	
25	1	44,4	14,7	17,3	55,6	4,98	1,4	0.321002.F	0.334267.K	0.324415.V	0.303153.H	
32	1.1/4	50,8	17	18	61,9	5,28	1,7	0.321003.G	0.334268.T	0.324416.W	0.303154.K	
40	1.1/2	60,3	17,8	18,4	75,4	5,56	3,1	0.321004.A	0.334269.R	0.324417.X	0.303155.L	
50	2	63,5	19	19,2	84,1	7,13	3,4	0.321005.B	0.334270.S	0.324418.F	0.303156.M	
65	2.1/2	82,6	23,7	28,9	101,6	7,65	7,4	0.321006.C	0.334271.N	0.324419.G	0.303157.N	
80	3	95,2	25,8	30,5	120,6	8,84	10,4	0.321007.D	0.334272.P	0.324420.E	0.303158.W	
100	4	114,3	27,8	33	152,4	11,18	20	0.321008.M	0.334273.Q	0.324421.T	0.303159.X	

SERIE 6000 LB - SERIES 6000 LB	DN		a	b	c min.	h	s min.	Mass	CODICE CODE		
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105 wrought	AISI 304	AISI 316
8	1/4	28,6	8,1	10,2	33,3	6,6	0,47	0.321010.B	0.324423.V	0.303161.H	
10	3/8	33,3	9,1	10,4	38,1	6,98	0,65	0.321011.X	0.324424.W	0.303162.K	
15	1/2	38,1	10,9	13,6	46	8,15	1	0.321012.Z	0.324425.X	0.303163.L	
20	3/4	44,4	12,7	13,9	55,6	8,53	1,6	0.321013.S	0.324426.Z	0.303164.M	
25	1	50,8	14,7	17,3	61,9	9,93	2,2	0.321014.T	0.324427.S	0.303165.N	
32	1.1/4	60,3	17	18	75,4	10,59	3,6	0.321015.R	0.324428.A	0.303166.P	
40	1.1/2	63,5	17,8	18,4	84,1	11,07	4,6	0.321016.V	0.324429.B	0.303167.Q	
50	2	82,6	19	19,2	101,6	12,09	9,2	0.321017.W	0.324430.G	0.303168.Z	
65	2.1/2	95,2	23,7	28,9	120,6	15,29	14,5	0.321018.E	0.324431.V	0.303169.S	
80	3	106,4	25,8	30,5	146	16,64	23	0.321019.F	0.324432.X	0.303170.Y	
100	4	114,3	27,8	33	152,4	18,67	25	0.321020.D	0.324433.Z	0.303171.L	

Ins. fittings AISI 304-316

Descrizione - Description


04

Rev.

02/97

Date

Ti RIDOTTO FILETTATO ISO 7/1 ASME B 16.11 2000-3000-6000 Lb
THREADED ISO 7/1 REDUCED TEE ASME B 16.11 2000-3000-6000 Lb

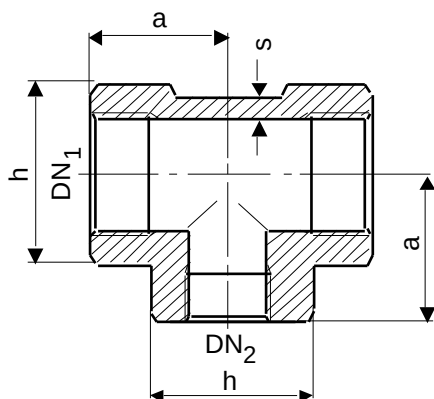

Dimensioni: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Filettature: ISO 7/1-Rc
Certificaz.: EN 10204/3.1B
Finitura: A 105 grezzo
A 105 zincato ASTM A 153

Dimensions: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Thread: ISO 7/1-Rc
Certificate: EN 10204/3.1B
Finishing: A 105 wrought
A 105 zinc coated ASTM A153

Es. di design.:
0.327446.F Ti rid.filett.ASME B16.11
1.1/2"x1"ISO7/1-Rc 3000Lb
ASTM A105 grezzo
EN 10204/3.1B

Ex. of design.:
0.327446.F Scr.red.tee ASME B16.11
1.1/2"x1"ISO7/1-Rc 3000Lb
ASTM A105 wrought
EN 10204/3.1B

Es. di design.:
0.327640.V Ti rid.filett.ASME B16.11
1.1/2"x1"ISO7/1-Rc 3000Lb
ASTM A182 Gr.F304
EN 10204/3.1B

Ex. of design.:
0.327640.V Scr.red.tee ASME B16.11
1.1/2"x1"ISO7/1-Rc 3000Lb
ASTM A182 Gr.F304
EN 10204/3.1B

☐ Sconsigliato
Not recommended

DN ₁ mm	DN ₂ mm	DN ₁ inch	DN ₂ inch	a mm	h mm	s min. mm	Mass Kg	CODICE			
								A 105 wrought	Zinc coated	AISI 304	AISI 316
8	6	1/4	1/8	20,6	22,2	3,18	0,16	0.327416.S	0.334274.H	0.327610.P	0.327670.R
10	8	3/8	1/4	24,6	25,4	3,18	0,19	0.327417.T	0.334275.K	0.327611.C	0.327671.Q
15	8	1/2	1/4	28,6	33,3	3,18	0,4	0.327418.B	0.334276.L	0.327612.D	0.327672.H
	10		3/8					0.327419.C	0.334277.M	0.327613.E	0.327673.K
20	10	3/4	3/8	33,3	38,1	3,18	0,5	0.327420.A	0.334278.V	0.327614.F	0.327674.L
	15		1/2					0.327421.W	0.334279.W	0.327615.G	0.327675.M
25	15	1	1/2	38,1	46	3,7	0,71	0.327422.X	0.334280.L	0.327616.A	0.327676.N
	20		3/4					0.327423.Z	0.334281.G	0.327617.B	0.327677.P
32	20	1.1/4	3/4	44,4	55,6	3,9	1	0.327424.S	0.334282.A	0.327618.K	0.327678.X
	25		1					0.327425.T	0.334283.B	0.327619.L	0.327679.Z
40	25	1.1/2	1	50,8	61,9	4	1,3	0.327426.R	0.334284.C	0.327620.H	0.327680.N
	32		1.1/4					0.327427.V	0.334285.D	0.327621.E	0.327681.B
50	32	2	1.1/4	60,3	75,4	4,3	1,95	0.327428.D	0.334286.E	0.327622.F	0.327682.C
	40		1.1/2					0.327429.E	0.334287.F	0.327623.G	0.327683.D
65	40	2.1/2	1.1/2	76,2	92	5,6	4,8	0.327430.C	0.334288.P	0.327624.A	0.327684.E
	50		2					0.327431.Z	0.334289.Q	0.327625.B	0.327685.F
80	50	3	2	85,8	109,5	6	7,4	0.327432.S	0.334290.N	0.327626.C	0.327686.G
	65		2.1/2					0.327433.T	0.334291.B	0.327627.D	0.327687.A
100	65	4	2.1/2	106,4	146	6,6	15	0.327434.R	0.334292.C	0.327628.M	0.327688.H
	80		3					0.327435.V	0.334293.D	0.327629.N	0.327689.K

SERIE 2000 LB - SERIES 2000 LB

Rev.	Date	Description - Description
04	02/97	Ins. fittings AISI 304-316