

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management



STANDARDIZATION

TUBI E RACCORDI SENZA SALDATURA A SALDARE DI TESTA - 3.1B


BUTT WELDING SEAMLESS PIPES AND FITTINGS - 3.1B

FOGLIO SHEET	2	DI OF	5	EDIZ. ISSUED	01/94
STANDARD N°		2.200.111			
REVIS.	1	2	3		
SOSTITUISCE REPLACES					

TUBI SENZA SALDATURA DI ACCIAIO NON LEGATO DIN 2448 DECAPATO, OLIATO E TAPPATO SEAMLESS UNALLOYED STEEL PIPES DIN 2448 PICKLED, OILED AND PLUGGED

Tabella Dimensionale
Dimensional Table
PS 1960

A= AREA DI PASSAGGIO
A= FLOW AREA

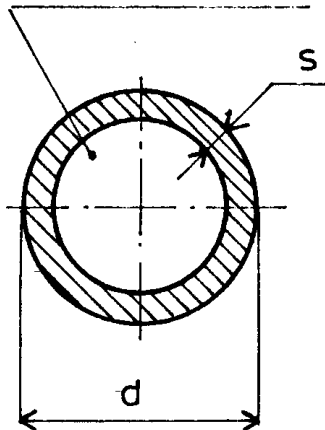

Dimensioni: DIN 2448
Materiale: St 44.0 N DIN 1629
Esecuzione: Senza saldatura
Tolleranze: DIN 1629
Estremità tubo: smusso DIN 2559
Stato fornitura: trafilato a freddo e normalizzato
Certificazione: DIN 50049/3.1B
Lunghezza tubi: ~6 m
Finitura: decapato, oliato e tappato

Dimensions: DIN 2448
Material: St 44.0 N DIN 1629
Manufacture: Seamless
Tolerances: DIN 1629
Pipe ends: bevel DIN 2559
Supply: cold drawn and normalizing
Inspection certif.: DIN 50049/3.1B
Pipe length: ~ 6 m
Finishing: pickled, oiled and plugged

Es. di design.:

0.309353.F Tubo S.S. PS 1960
DIN 2448 -60,3x6,3
St 44.0 N - DIN 1629/2559
Decapato, oliato e tappato - DIN 50049/3.1B

Ex. of design.:

0.309353.F Seamless pipe PS 1960
DIN 2448 -60,3x6,3
St 44.0 N - DIN 1629/2559
Pickled, oiled & plugged - DIN 50049/3.1B



Sconsigliato
Not recommended

• Gestione scorta Magazzino
Held in stock

DN	Ø inch	d mm	s mm	A cm ²	Massa Kg/m	CODICE CODE
25	1	33,7	4	5,19	2,93	0.309350.Q •
32	1.1/4	42,4	4,5	8,76	4,21	0.309351.D •
40	1.1/2	48,3	5	11,52	5,34	0.309352.E •
50	2	60,3	6,3	17,87	8,39	0.309353.F •
65	2.1/2	76,1	8	28,37	13,4	0.309354.G •
80	3	88,9	8,8	39,93	17,4	0.309355.A
100	4	114,3	12,5	62,63	31,4	0.309356.B
125	5	139,7	14,2	97,24	43,9	0.317823.X
150	6	168,3	16	145,83	60,1	0.317824.Y