

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management



RACCORDI ASME B 16.11
FILETTATI NPT ASME B1.20.1

FITTINGS ASME B 16.11
THREADED NPT ASME B1.20.1

STANDARD N° 2.250.101

REV. 05

PAGINA
PAGE

1

DI
OF

16

SOSTITUISCE
REPLACES



05	02/97	Scorp. nipple in 2.250.107; elim. 1/8"; ins. raccordi acc. inox Del. nipples ins. in 2.250.107; del. 1/8"; ins. stainless fittings										<i>Zorzut</i> Zorzut DTN			<i>Musina</i> Musina DE			<i>Dalla Franc.</i> Dalla Franc. UGQ			
		Pag.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16			
		Rev.	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5			
04	06/96	Agg. rif. Norme; agg. stato forn.; ins. racc. zinc. e Ti rid. Updated Std ref.; ins. zinc coat. fittings and red. tees																			
												Zorzut DTN			Musina DE			Dalla Franc. UGQ			
		Pag.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
		Rev.	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
		Pag.	20	21																	
Rev.	4	4																			
03	12/94	Inserito tappi testa quadra Inserted square head plugs																			
												Zorzut UGQ/NOR			Totis FLUIDTECH			Dalla Franc. DQS			
		Pag.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17		
Rev.	3	2	2	2	1	1	1	1	1	2	2	2	2	1	1	3	1				
02	04/94	Ins. fittings 2000 Lb; curve 45°, tappi; nipple da tubo Ins. fittings 2000 Lb; 45° elbows, plugs; nipples from pipe																			
												Zorzut UGQ/NOR			Musina DE			Coassin DQS			
		Pag.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17		
Rev.	2	2	2	2	1	1	1	1	1	2	2	2	2	1	1	2	1				
01	06/93	Nuova edizione First issue																			
												Zorzut UGQ/NOR			Musina DE			Coassin DQS			
		Pag.	1	2	3	4	5	6	7	8	9	10	11								
REV.	DATA DATE	DESCRIZIONE MODIFICA DESCRIPTION OF MODIFICATION										REDATTO COMPILED		CONTROLLATO CHECKED		APPROVATO APPROVED					

A termini di legge la DANIELI & C. S.p.A. considera questo documento come segreto aziendale con divieto per chiunque di riprodurlo o di renderlo comunque noto, in tutto o in parte, a terzi, o verosimilmente a ditte concorrenti, senza specifica autorizzazione scritta della Direzione DANIELI.



RACCORDI ASME B 16.11
FILETTATI NPT ASME B1.20.1


FITTINGS ASME B 16.11
THREADED NPT ASME B1.20.1

STANDARD N° 2.250.101

REV. 05 PAGINA 2 DI 16

SOSTITUISCE
REPLACES

GOMITO A 45° FILETTATO NPT ASME B 16.11 2000-3000-6000 Lb
45° NPT THREADED ELBOW ASME B 16.11 2000-3000-6000 Lb



Dimensioni: ASME B 16.11

Mat.: ASTM A 105

ASTM A 182 Gr. F 304

ASTM A 182 Gr. F 316

Rating: 2000 - 3000 - 6000 Lb

Filettature: NPT ASME B 1.20.1

Certificaz.: ASTM A 105 p.to 16

ASTM A182 p.to 17.1

Finitura: A 105 grezzo

A 105 zincato ASTM A153

Es. di design.:

0.312954.D Gomito45°fil.ASME B16.11

1.1/2"NPT 3000Lb

ASTM A105 grezzo

Cert.ASTM A105-16

Es. di design.:

0.331570.L Gomito45°fil.ASME B16.11

1.1/2"NPT 3000Lb

ASTM A182 Gr.F304

Cert.ASTM A182-17.1

Dimensions: ASME B 16.11

Mat.: ASTM A105

ASTM A182 Gr. F 304

ASTM A182 Gr. F 316

Rating: 2000 - 3000 - 6000 Lb

Thread: NPT ASME B 1.20.1

Certificate: ASTM A 105 point 16

ASTM A182 point 17.1

Finishing: A 105 wrought

A 105 zinc coated ASTM A153

Ex. of design.:

0.312954.D 45°scr.elbow ASME B16.11

1.1/2"NPT 3000Lb

ASTM A105 wrought

Cert.ASTM A105-16

Ex. of design.:

0.331570.L 45°scr.elbow ASME B16.11

1.1/2"NPT 3000Lb

ASTM A182 Gr.F304

Cert.ASTM A182-17.1

☐ Sconsigliato
Not recommended

SERIE 2000 LB - SERIES 2000 LB	DN	NPS	c	h	s min.	Mass	CODICE		CODE	
	mm	inch	mm	mm	mm	Kg	A 105 wrought	Zinc coated	AISI 304	AISI 316
	8	1/4	17,5	22,2	3,18	0,1	0.312936.R	0.323443.F	0.331553.E	0.331586.Z
	10	3/8	19	25,4	3,18	0,18	0.312937.V	0.323444.G	0.331554.F	0.331587.S
	15	1/2	22,3	33,3	3,18	0,25	0.312938.D	0.323445.A	0.331555.G	0.331588.A
	20	3/4	25,4	38,1	3,18	0,31	0.312939.E	0.323446.B	0.331556.A	0.331589.B
	25	1	28,5	46	3,7	0,44	0.312940.K	0.323447.C	0.331557.B	0.331590.G
	32	1.1/4	33,3	55,6	3,9	0,67	0.312941.F	0.323448.L	0.331558.K	0.331591.V
	40	1.1/2	35	61,9	4	0,93	0.312942.G	0.323449.M	0.331559.L	0.331592.W
	50	2	42,9	75,4	4,3	1,21	0.312943.A	0.323450.K	0.331560.H	0.331593.X
	65	2.1/2	52,3	92	5,6	3,1	0.312944.B	0.323451.F	0.331561.E	0.331594.Z
	80	3	63,5	109,5	6	5,2	0.312945.C	0.323452.G	0.331562.F	0.331595.S
	100	4	79,2	146	6,6	10,5	0.312946.D	0.323453.A	0.331563.G	0.331596.T

SERIE 3000 LB - SERIES 3000 LB	DN	NPS	c	h	s min.	Mass	CODICE		CODE	
	mm	inch	mm	mm	mm	Kg	A 105 wrought	Zinc coated	AISI 304	AISI 316
	8	1/4	19	25,4	3,3	0,15	0.312948.N	0.323455.C	0.331564.A	0.331597.R
	10	3/8	22,3	33,3	3,51	0,28	0.312949.P	0.323456.D	0.331565.B	0.331598.C
	15	1/2	25,4	38,1	4,09	0,38	0.312950.M	0.323457.E	0.331566.C	0.331599.D
	20	3/4	28,5	46	4,31	0,56	0.312951.A	0.323458.N	0.331567.D	0.331600.S
	25	1	33,3	55,6	4,98	0,91	0.312952.B	0.323459.P	0.331568.M	0.331601.N
	32	1.1/4	35	61,9	5,28	1,15	0.312953.C	0.323460.M	0.331569.N	0.331602.P
	40	1.1/2	42,9	75,4	5,56	1,85	0.312954.D	0.323461.A	0.331570.L	0.331603.Q
	50	2	43,7	84,1	7,13	2,1	0.312955.E	0.323462.B	0.331571.G	0.331604.H
	65	2.1/2	52,3	101,6	7,65	4,85	0.312956.F	0.323463.C	0.331572.A	0.331605.K
	80	3	63,5	120,6	8,84	6,65	0.312957.G	0.323464.D	0.331573.B	0.331606.L
	100	4	79,2	152,4	11,18	12,5	0.312958.Q	0.323465.E	0.331574.C	0.331607.M

SERIE 6000 LB - SERIES 6000 LB	DN	NPS	c	h	s min.	Mass	CODICE CODE		
	mm	inch	mm	mm	mm	Kg	A 105 wrought	AISI 304	AISI 316
	8	1/4	22,3	33,3	6,6	0,31	0.312960.P	0.331575.D	0.331608.V
	10	3/8	25,4	38,1	6,98	0,42	0.312961.C	0.331576.E	0.331609.W
	15	1/2	28,5	46	8,15	0,65	0.312962.D	0.331577.F	0.331610.K
	20	3/4	33,3	55,6	8,53	1,05	0.312963.E	0.331578.P	0.331611.F
	25	1	35	61,9	9,93	1,41	0.312964.F	0.331579.Q	0.331612.G
	32	1.1/4	42,9	75,4	10,59	2,15	0.312965.G	0.331580.E	0.331613.A
	40	1.1/2	43,7	84,1	11,07	2,75	0.312966.A	0.331581.T	0.331614.B
	50	2	52,3	101,6	12,09	6,15	0.312967.B	0.331582.R	0.331615.C
	65	2.1/2	63,5	120,6	15,29	8,6	0.312968.K	0.331583.V	0.331616.D
	80	3	79,2	146	16,64	15	0.312969.L	0.331584.W	0.331617.H
	100	4	79,2	152,4	18,67	18	0.312970.H	0.331585.X	0.331618.N




RACCORDI ASME B 16.11
FILETTATI NPT ASME B1.20.1
FITTINGS ASME B 16.11
THREADED NPT ASME B1.20.1

STANDARD N° 2.250.101

REV. 05 PAGINA 3 DI 16

SOSTITUISCE
REPLACES

GOMITO A 90° FILETTATO NPT ASME B 16.11 2000-3000-6000 Lb
90° NPT THREADED ELBOW ASME B 16.11 2000-3000-6000 Lb



Dimensioni: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Filettatura: NPT ASME B 1.20.1
Certificaz.: ASTM A 105 p.to 16
ASTM A182 p.to 17.1
Finitura: A 105 grezzo
A 105 zincato ASTM A 153
Es. di design.:
0.002382.D Gomito 90°fil.ASME B16.11
1.1/2NPT 3000Lb
ASTM A105 grezzo
Cert.ASTM A105-16

Dimensions: ASME B 16.11
Mat.: ASTM A105
ASTM A182 Gr. F 304
ASTM A182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Thread: NPT ASME B 1.20.1
Certificate: ASTM A 105 point 16
ASTM A182 point 17.1
Finishing: A 105 wrought
A 105 zinc coated ASTM A153
Ex. of design.:
0.002382.D 90°scr.elbow ASME B16.11
1.1/2NPT 3000Lb
ASTM A105 wrought
Cert.ASTM A105-16

Ex. of design.:
0.331636.A 90°scr.elbow ASME B16.11
1.1/2NPT 3000Lb
ASTM A182 Gr.F304
Cert.ASTM A182-17.1

Ex. of design.:
0.331636.A 90°scr.elbow ASME B16.11
1.1/2NPT 3000Lb
ASTM A182 Gr.F304
Cert.ASTM A182-17.1

Sconsigliato
Not recommended

SERIE 2000 LB - SERIES 2000 LB	DN	NPS	a	b	c min.	h	s min.	Mass	CODICE CODE			
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105			
									wrought	Zinc coated	AISI 304	AISI 316
	8	1/4	20,6	8,1	10,2	22,2	3,18	0,12	0.312749.W	0.323467.G	0.331619.P	0.331652.Q
	10	3/8	24,6	9,1	10,4	25,4	3,18	0,14	0.312750.R	0.323468.Q	0.331620.M	0.331653.H
	15	1/2	28,6	10,9	13,6	33,3	3,18	0,28	0.312751.Q	0.323469.H	0.331621.A	0.331654.K
	20	3/4	33,3	12,7	13,9	38,1	3,18	0,38	0.312752.H	0.323470.P	0.331622.B	0.331655.L
	25	1	38,1	14,7	17,3	46	3,7	0,55	0.312753.K	0.323471.C	0.331623.C	0.331656.M
	32	1.1/4	44,4	17	18	55,6	3,9	0,76	0.312754.L	0.323472.D	0.331624.D	0.331657.N
	40	1.1/2	50,8	17,8	18,4	61,9	4	1	0.312755.M	0.323473.E	0.331625.E	0.331658.W
	50	2	60,3	19	19,2	75,4	4,3	1,5	0.312756.N	0.323474.F	0.331626.F	0.331659.X
	65	2.1/2	76,2	23,7	28,9	92	5,6	3,65	0.312757.P	0.323475.G	0.331627.G	0.331660.V
	80	3	85,8	25,8	30,5	109,5	6	5,7	0.312758.X	0.323476.A	0.331628.Q	0.331661.H
	100	4	106,4	27,8	33	146	6,6	11,5	0.312759.Z	0.323477.B	0.331629.H	0.331662.K

SERIE 3000 LB - SERIES 3000 LB	DN	NPS	a	b	c min.	h	s min.	Mass	CODICE CODE			
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105			
									wrought	Zinc coated	AISI 304	AISI 316
	8	1/4	24,6	8,1	10,2	25,4	3,3	0,17	0.002376.P	0.323479.L	0.331630.P	0.331663.L
	10	3/8	28,6	9,1	10,4	33,3	3,51	0,33	0.002377.Q	0.323480.A	0.331631.C	0.331664.M
	15	1/2	33,3	10,9	13,6	38,1	4,09	0,46	0.002378.Z	0.323481.W	0.331632.D	0.331665.N
	20	3/4	38,1	12,7	13,9	46	4,31	0,7	0.002379.S	0.323482.X	0.331633.E	0.331666.P
	25	1	44,4	14,7	17,3	55,6	4,98	1,08	0.002380.P	0.323483.Z	0.331634.F	0.331667.Q
	32	1.1/4	50,8	17	18	61,9	5,28	1,3	0.002381.C	0.323484.S	0.331635.G	0.331668.Z
	40	1.1/2	60,3	17,8	18,4	75,4	5,56	2,36	0.002382.D	0.323485.T	0.331636.A	0.331669.S
	50	2	63,5	19	19,2	84,1	7,13	2,6	0.002383.E	0.323486.R	0.331637.B	0.331670.X
	65	2.1/2	82,6	23,7	28,9	101,6	7,65	5,7	0.002384.F	0.323487.V	0.331638.K	0.331671.L
	80	3	95,2	25,8	30,5	120,6	8,84	8	0.002385.G	0.323488.D	0.331639.L	0.331672.M
	100	4	114,3	27,8	33	152,4	11,18	15,5	0.002386.A	0.323489.E	0.331640.Z	0.331673.N

SERIE 6000 LB - SERIES 6000 LB	DN	NPS	a	b	c min.	h	s min.	Mass	CODICE CODE		
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105 wrought		
									AISI 304	AISI 316	
	8	1/4	28,6	8,1	10,2	33,3	6,6	0,36	0.002394.A	0.331641.M	0.331674.P
	10	3/8	33,3	9,1	10,4	38,1	6,98	0,51	0.002395.B	0.331642.N	0.331675.Q
	15	1/2	38,1	10,9	13,6	46	8,15	0,82	0.002396.C	0.331643.P	0.331676.H
	20	3/4	44,4	12,7	13,9	55,6	8,53	1,25	0.002397.D	0.331644.Q	0.331677.K
	25	1	50,8	14,7	17,3	61,9	9,93	1,65	0.002398.M	0.331645.H	0.331678.T
	32	1.1/4	60,3	17	18	75,4	10,59	2,75	0.002399.N	0.331646.K	0.331679.R
	40	1.1/2	63,5	17,8	18,4	84,1	11,07	3,6	0.002452.B	0.331647.L	0.331680.H
	50	2	82,6	19	19,2	101,6	12,09	7,1	0.002453.C	0.331648.R	0.331681.E
	65	2.1/2	95,2	23,7	28,9	120,6	15,29	11	0.002454.D	0.331649.V	0.331682.F
	80	3	106,4	25,8	30,5	146	16,64	17	0.002455.E	0.331650.T	0.331683.G
	100	4	114,3	27,8	33	152,4	18,67	19	0.002456.F	0.331651.V	0.331684.A

05 02/97 Ins. fittings AISI 304-316

Rev. Date Descrizione - Description



RACCORDI ASME B 16.11
FILETTATI NPT ASME B1.20.1


FITTINGS ASME B 16.11
THREADED NPT ASME B1.20.1

STANDARD N° 2.250.101

REV. 05 PAGINA 4 DI 16

SOSTITUISCE
REPLACES

Ti FILETTATO NPT ASME B 16.11 2000-3000-6000 Lb
NPT THREADED TEE ASME B 16.11 2000-3000-6000 Lb



Dimensioni: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Filettature: NPT ASME B 1.20.1
Certificaz.: ASTM A 105 p.to 16
ASTM A182 p.to 17.1
Finitura: A 105 grezzo
A 105 zincato ASTM A 153

Es. di design.:
0.002462.D Ti filettati ASME B16.11
1.1/2NPT 3000Lb
ASTM A105 grezzo
Cert.ASTM A105-16

Es. di design.:
0.331702.L Ti filettati ASME B16.11
1.1/2NPT 3000Lb
ASTM A182 Gr. F304
Cert.ASTM A182-17.1

Dimensions: ASME B 16.11
Mat.: ASTM A105
ASTM A182 Gr. F 304
ASTM A182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Thread: NPT ASME B 1.20.1
Certificate: ASTM A 105 point 16
ASTM A182 point 17.1
Finishing: A 105 wrought
A 105 zinc coated ASTM A153

Ex. of design.:
0.002462.D Scr. tee ASME B16.11
1.1/2NPT 3000Lb
ASTM A105 wrought
Cert.ASTM A105-16

Ex. of design.:
0.331702.L Scr. tee ASME B16.11
1.1/2NPT 3000Lb
ASTM A182 Gr. F304
Cert.ASTM A182-17.1

Sconsigliato
Not recommended

SERIE 2000 LB - SERIES 2000 LB	DN	NPS	a	b	c min.	h	s min.	Mass	CODICE CODE			
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105			
									wrought	Zinc coated	AISI 304	AISI 316
	8	1/4	20,6	8,1	10,2	22,2	3,18	0,16	0.312761.K	0.323491.Z	0.331685.B	0.331718.K
	10	3/8	24,6	9,1	10,4	25,4	3,18	0,19	0.312762.L	0.323492.S	0.331686.C	0.331719.L
	15	1/2	28,6	10,9	13,6	33,3	3,18	0,4	0.312763.M	0.323493.T	0.331687.D	0.331720.H
	20	3/4	33,3	12,7	13,9	38,1	3,18	0,5	0.312764.N	0.323494.R	0.331688.M	0.331721.E
	25	1	38,1	14,7	17,3	46	3,7	0,7	0.312765.P	0.323495.V	0.331689.N	0.331722.F
	32	1.1/4	44,4	17	18	55,6	3,9	1	0.312766.Q	0.323496.W	0.331690.L	0.331723.G
	40	1.1/2	50,8	17,8	18,4	61,9	4	1,3	0.312767.H	0.323497.X	0.331691.G	0.331724.A
	50	2	60,3	19	19,2	75,4	4,3	1,95	0.312768.S	0.323498.F	0.331692.A	0.331725.B
	65	2.1/2	76,2	23,7	28,9	92	5,6	4,8	0.312769.T	0.323499.G	0.331693.B	0.331726.C
	80	3	85,8	25,8	30,5	109,5	6	7,4	0.312770.Z	0.323500.N	0.331694.C	0.331727.D
	100	4	106,4	27,8	33	146	6,6	15	0.312771.M	0.323501.B	0.331695.D	0.331728.M


SERIE 3000 LB - SERIES 3000 LB	DN	NPS	a	b	c min.	h	s min.	Mass	CODICE CODE			
	mm	inch	mm	mm	mm	mm	mm	Kg	A 105			
									wrought	Zinc coated	AISI 304	AISI 316
	8	1/4	24,6	8,1	10,2	25,4	3,3	0,23	0.073866.A	0.323503.D	0.331696.E	0.331729.N
	10	3/8	28,6	9,1	10,4	33,3	3,51	0,42	0.064243.N	0.323504.E	0.331697.F	0.331730.L
	15	1/2	33,3	10,9	13,6	38,1	4,09	0,6	0.064242.M	0.323505.F	0.331698.P	0.331731.G
	20	3/4	38,1	12,7	13,9	46	4,31	0,91	0.064273.M	0.323506.G	0.331699.Q	0.331732.A
	25	1	44,4	14,7	17,3	55,6	4,98	1,4	0.002461.C	0.323507.A	0.331700.W	0.331733.B
	32	1.1/4	50,8	17	18	61,9	5,28	1,7	0.075875.D	0.323508.H	0.331701.K	0.331734.C
	40	1.1/2	60,3	17,8	18,4	75,4	5,56	3,1	0.002462.D	0.323509.K	0.331702.L	0.331735.D
	50	2	63,5	19	19,2	84,1	7,13	3,4	0.092650.P	0.323510.F	0.331703.M	0.331736.E
	65	2.1/2	82,6	23,7	28,9	101,6	7,65	7,4	0.002463.E	0.323511.R	0.331704.N	0.331737.F
	80	3	95,2	25,8	30,5	120,6	8,84	10,4	0.002464.F	0.323512.V	0.331705.P	0.331738.P
	100	4	114,3	27,8	33	152,4	11,18	20	0.002465.G	0.323513.W	0.331706.Q	0.331739.Q

SERIE 6000 LB - SERIES 6000 LB	DN	NPS	a	b	c min.	h	s min.	Mass	CODICE CODE		
	mm	inch	mm	mm	mm	mm	mm	Kg	A105 wrought		
									AISI 304	AISI 316	
	8	1/4	28,6	8,1	10,2	33,3	6,6	0,47	0.002559.N	0.331707.H	0.331740.V
	10	3/8	33,3	9,1	10,4	38,1	6,98	0,65	0.002560.L	0.331708.S	0.331741.H
	15	1/2	38,1	10,9	13,6	46	8,15	1	0.002561.G	0.331709.T	0.331742.K
	20	3/4	44,4	12,7	13,9	55,6	8,53	1,6	0.002562.A	0.331710.P	0.331743.L
	25	1	50,8	14,7	17,3	61,9	9,93	2,2	0.002563.B	0.331711.C	0.331744.M
	32	1.1/4	60,3	17	18	75,4	10,59	3,6	0.002564.C	0.331712.D	0.331745.N
	40	1.1/2	63,5	17,8	18,4	84,1	11,07	4,6	0.083576.S	0.331713.E	0.331746.P
	50	2	82,6	19	19,2	101,6	12,09	9,2	0.002565.D	0.331714.F	0.331747.Q
	65	2.1/2	95,2	23,7	28,9	120,6	15,29	14,5	0.002566.E	0.331715.G	0.331748.Z
	80	3	106,4	25,8	30,5	146	16,64	23	0.002567.F	0.331716.A	0.331749.B
	100	4	114,3	27,8	33	152,4	18,67	25	0.002568.P	0.331717.R	0.331750.X

05 02/97 Ins. fittings AISI 304-316

Rev. Date Descrizione - Description

Ti RIDOTTO FILETTATO NPT ASME B 16.11 2000-3000-6000 Lb
NPT THREADED REDUCED TEE ASME B 16.11 2000-3000-6000 Lb

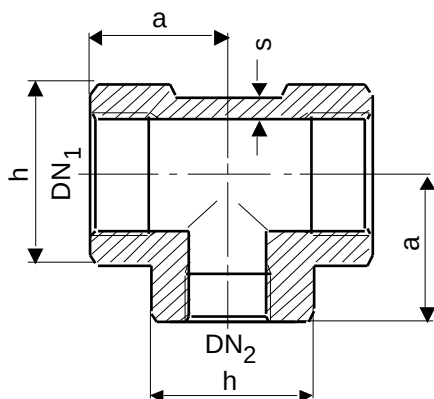

Dimensioni: ASME B 16.11
Mat.: ASTM A 105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Filettature: NPT ASME B 1.20.1
Certificaz.: ASTM A 105 p.to 16
ASTM A182 p.to 17.1
Finitura: A 105 grezzo
A 105 zincato ASTM A 153

Dimensions: ASME B 16.11
Mat.: ASTM A105
ASTM A182 Gr. F 304
ASTM A182 Gr. F 316
Rating: 2000 - 3000 - 6000 Lb
Thread: NPT ASME B 1.20.1
Certificate: ASTM A 105 point 16
ASTM A182 point 17.1
Finishing: A 105 wrought
A 105 zinc coated ASTM A153

Es. di design.:
0.327506.D Ti rid.filett.ASME B16.11
1.1/2x1NPT 3000Lb
ASTM A105 grezzo
Cert.ASTM A105-16

Ex. of design.:
0.327506.D Scr.red.tee ASME B16.11
1.1/2x1NPT 3000Lb
ASTM A105 wrought
Cert.ASTM A105-16

Es. di design.:
0.331779.Z Ti rid.filett.ASME B16.11
1.1/2x1NPT 3000Lb
ASTM A182 Gr.F304
Cert.ASTM A182-17.1

Ex. of design.:
0.331779.Z Scr.red.tee ASME B16.11
1.1/2x1NPT 3000Lb
ASTM A182 Gr.F304
Cert.ASTM A182-17.1

☐ Sconsigliato
Not recommended

DN ₁ mm	DN ₂ mm	NPS ₁ inch	NPS ₂ inch	a mm	h mm	s min. mm	Mass Kg	CODICE			
								A 105 wrought	Zinc coated	AISI 304	AISI 316
8	6	1/4	1/8	20,6	22,2	3,18	0,16	0.327476.E	0.327536.T	0.333961.A	0.333962.B
10	8	3/8	1/4	24,6	25,4	3,18	0,19	0.327477.F	0.327537.R	0.331751.L	0.331789.K
15	8	1/2	1/4	28,6	33,3	3,18	0,4	0.327478.P	0.327538.C	0.331752.M	0.331790.Q
			3/8					0.327479.Q	0.327539.D	0.331753.N	0.331791.D
20	10	3/4	3/8	33,3	38,1	3,18	0,5	0.327480.E	0.327540.H	0.331754.P	0.331792.E
			1/2					0.327481.T	0.327541.E	0.331755.Q	0.331793.F
25	15	1	1/2	38,1	46	3,7	0,71	0.327482.R	0.327542.F	0.331756.H	0.331794.G
			3/4					0.327483.V	0.327543.G	0.331757.K	0.331795.A
32	20	1.1/4	3/4	44,4	55,6	3,9	1	0.327484.W	0.327544.A	0.331758.T	0.331796.B
			1					0.327485.X	0.327545.B	0.331759.R	0.331797.C
40	25	1.1/2	1	50,8	61,9	4	1,3	0.327486.Z	0.327546.C	0.331760.S	0.331798.L
			1.1/4					0.327487.S	0.327547.D	0.331761.N	0.331799.M
50	32	2	1.1/4	60,3	75,4	4,3	1,95	0.327488.A	0.327548.M	0.331762.P	0.331800.K
			1.1/2					0.327489.B	0.327549.N	0.331763.Q	0.331801.F
65	40	2.1/2	1.1/2	76,2	92	5,6	4,8	0.327490.G	0.327550.L	0.331764.H	0.331802.G
			2					0.327491.V	0.327551.G	0.331765.K	0.331803.A
80	50	3	2	85,8	109,5	6	7,4	0.327492.W	0.327552.A	0.331766.L	0.331804.B
			2.1/2					0.327493.X	0.327553.B	0.331767.M	0.331805.C
100	65	4	2.1/2	106,4	146	6,6	15	0.327494.Z	0.327554.C	0.331768.V	0.331806.D
			3					0.327495.S	0.327555.D	0.331769.W	0.331807.E

SERIE 2000 LB - SERIES 2000 LB

Rev.	Date	Description - Description
05	02/97	Ins. fittings AISI 304-316