




NIPPLO CON DADO ESAGONALE BS 3799 3000-6000 Lb
HEX NUT NIPPLE BS 3799 3000-6000 Lb

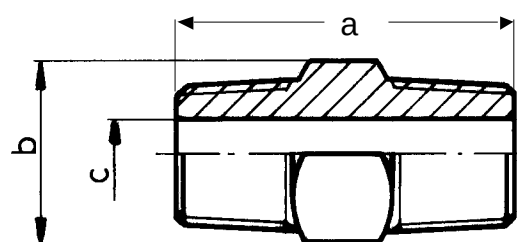

Dimensioni: BS 3799 ≤ 2"
Mat.: ASTM A105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 3000 - 6000 Lb
Filettature: NPT ASME B 1.20.1
Finitura: A105 grezzo
A105 zinc. ASTM A 153
Certificaz.: ASTM A 105 p.to 16
ASTM A182 p.to 17.1

Dimensions: BS 3799 ≤ 2"
Mat.: ASTM A105
ASTM A 182 Gr. F 304
ASTM A 182 Gr. F 316
Rating: 3000 - 6000 Lb
Thread: NPT ASME B 1.20.1
Finish.: A105 wrought
A105 zinc coat. ASTM A 153
Certificate: ASTM A 105 p.to 16
ASTM A182 p.to 17.1

Impiegare solo per impianti idraulici
Use for hydraulic systems only

Es. di design.: 0.003695.G Nipplo dado es. BS 3799 1.1/2 NPT 3000Lb
ASTM A105 grezzo
Cert.ASTM A105-16

Ex. of design.: 0.003695.G Hex nipple BS 3799 1.1/2 NPT 3000Lb
ASTM A105 wrought
Cert.ASTM A105-16

Es. di design.: 0.331999.E Nipplo dado es. BS 3799 1.1/2 NPT 3000Lb
ASTM A182 Gr. F304
Cert.ASTM A182-17.1

Ex. of design.: 0.331999.E Hex nipple BS 3799 1.1/2 NPT 3000Lb
ASTM A182 Gr. F304
Cert.ASTM A182-17.1

 Sconsigliato
Not recommended

SERIE 3000 LB - SERIES 3000 LB	DN	NPS	a	b	c	Mass	CODICE		CODE	
	mm	inch	mm	mm	mm	Kg	A 105		AISI 304	AISI 316
							wrought	Zinc coated		
	8	1/4	36	15	8	0,03	0.003691.C	0.323550.P	0.331993.Z	0.332012.R
	10	3/8	40	18	11	0,06	0.003692.D	0.323551.C	0.331994.S	0.332013.V
	15	1/2	48	22	14	0,06	0.003693.E	0.323552.D	0.331995.T	0.332014.W
	20	3/4	52	27	19	0,1	0.064272.L	0.323553.E	0.331996.R	0.332015.X
	25	1	60	35	24	0,18	0.003694.F	0.323554.F	0.331997.V	0.332016.Z
	32	1.1/4	66	44	32	0,29	0.075031.S	0.323555.G	0.331998.D	0.332017.S
	40	1.1/2	68	50	38	0,35	0.003695.G	0.323556.A	0.331999.E	0.332018.A
	50	2	71	62	49	0,53	0.003696.A	0.323557.B	0.332000.M	0.332019.B
	65	2.1/2	99	75	59	1,05	0.003697.B	0.323558.K	0.332001.A	0.332020.G
	80	3	104	90	73,7	1,65	0.003698.K	0.323559.L	0.332002.B	0.332021.V
	100	4	114	117	97,2	2,55	0.003699.L	0.323560.H	0.332003.C	0.332022.W

SERIE 6000 LB SERIES 6000 LB	DN	NPS	a	b	c	Mass	CODICE CODE		
	mm	inch	mm	mm	mm	Kg	A 105 wrought	AISI 304	AISI 316
	15	1/2	48	22	11	0,1	0.086115.N	0.332004.D	0.332023.X
	20	3/4	52	27	13	0,16	0.003725.E	0.332005.E	0.332024.Z
	25	1	60	35	17	0,28	0.003726.F	0.332006.F	0.332025.S
	32	1.1/4	66	44	23	0,45	0.003727.G	0.332007.G	0.332026.T
	40	1.1/2	68	50	30	0,56	0.003728.Q	0.332008.Q	0.332027.R
	50	2	71	62	39	0,87	0.003729.H	0.332009.H	0.332028.C
	65	2.1/2	99	75	45	1,63	0.003752.Q	0.332010.E	0.332029.D
	80	3	104	90	58,4	2,6	0.003753.H	0.332011.T	0.332030.B