

+

mini di
eto ne



FOGLIO SHEET	1	DI OF	5	EDIZ. ISSUED	05/94	
STANDARD N°			2.800.002			
REVIS.	1	2				
SOSTITUISCE REPLACES			2.000.032			

[illegible]



SISTEMI DI FISSAGGIO PER TUBAZIONI


PIPING FASTENING

STANDARDIZATION

FOGLIO SHEET	2	DI OF	5	EDIZ. ISSUED	05/94
STANDARD N°				2.800.002	
REVIS.	1	2			
SOSTITUISCE REPLACE	2.000.032				

FASCETTE STRINGITUBO A VITE SENZA FINE PN 16

Hose clips with endless screw PN 16

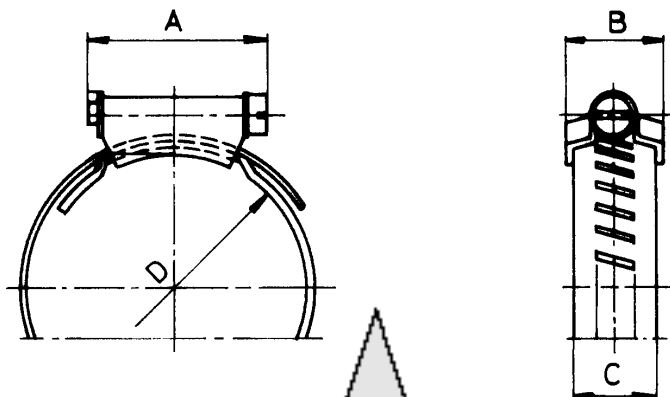

Es. di design.:

0.006815.R Fascetta stingitubo PN 16
D. 19÷28 acciaio zincato

Ex. of design.:

0.006815.R Hose clip PN 16
D. 19÷28 Steel galvan.

• Gestione scorta Magazzino
Held in stock

D		A	B	C	Massa Kg	CODICE Acc. zincato	CODICE Acc. inox
min	max						
8	14	16,5	13	9	0,005	0.006811.X •	0.006728.L
11	17				0,006	0.006812.Z •	0.006729.M
13	20	18,5			0,006	0.006813.S •	0.006809.N
15	24		16	12,2	0,006	0.006814.T •	0.006842.E
19	28				0,007	0.006815.R •	0.006843.F
22	32	22,5			0,007	0.006724.G	0.006844.G
26	38				0,008	0.006816.V •	0.006845.A
32	44	25,5			0,008	0.006817.W •	0.006846.B
38	50				0,009	0.006818.E •	0.006847.C
44	56				0,009	0.006819.F •	0.006848.L
50	65				0,01	0.006820.D •	0.006849.M
58	75				0,011	0.006821.S •	0.006859.P
68	85				0,012	0.006822.T •	0.006878.K
77	95		29,5		0,013	0.006823.R	0.006879.L
87	112				0,014	0.006824.V	0.007077.D
110	138				0,02	0.006825.W	0.007078.M
136	165				0,04	0.006826.X	0.007079.N
155	180				0,05	0.006827.Z	0.007080.C
180	205				0,07	0.006829.A	0.007081.Z
205	231				0,08	0.006830.F	0.007082.S
231	256				0,09	0.006725.A	0.007083.T
256	282				0,01	0.006726.B	0.007084.R
282	307				0,02	0.006727.C	0.007085.V

Fascetta con dispositivo di serraggio a vite esagonale ed a intaglio cremagliera esterna.
Interno liscio con bordi laterali rialzati ed arrotondati (senza intagli).

Materiale: $R_{min} \geq 70 \text{ daN/mm}^2$
Acciaio zincato o cromato
Acciaio inox AISI 304

APPLICAZIONI: tubazioni flessibili per acqua calda, acque industriali, lubrificanti, aria compressa, tubi di plastica.

Clamps with tightening device with slotted hexagonal head screw and external rack strip.
Smooth inside with raised and rounded edges (without sharp edges).

Material: $R_{min} \geq 70 \text{ daN/mm}^2$
Galvanized steel
Stainless steel AISI 304

APPLICATIONS: flexible hoses for hot water, industrial water, lubricants, compressed air, plastic pipes.