

+

document details: DANIELI 3.100.103 0


 CONTROLLATO
 CHECKED


 APPROVATO
 APPROVED

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management





STANDARDIZATION

VITI A TESTA SVASATA
CON ESAGONO INCASSATO

HEX SOCKETCOUNTERSUNK HEAD SCREWS

FOGLIO SHEET	2	DI OF	3	EDIZ. ISSUED	04/95
STANDARD N°		3.100.103			
REVIS.	1				
SOSTITUISCE REPLACES	3.300.012				

VITI A TESTA SVASATA PIANA ESAGONO INCASSATO - UNI 5933 - DIN 7991
HEXAGON SOCKET COUNTERSUNK HEAD SCREW - UNI 5933 - DIN 7991

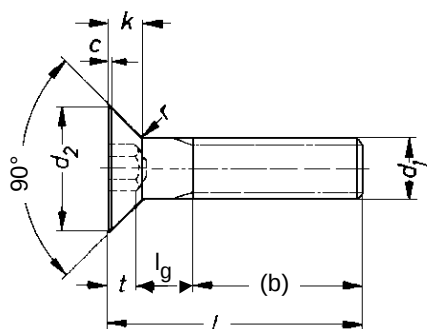

Dimensioni: UNI 5933 - DIN 7991

Categortia: A UNI-ISO 4759/1 - DIN-ISO 4759/1

Materiale: 10.9 UNI 3740/3 - DIN-ISO 898/1

A2-70 (AISI 304) UNI 7323/8 - DIN 267/11

Tolleranza: 6g UNI 5541 - DIN 13 - ISO 965/1

Stato fornitura: 10.9: fosfatate nere UNI 3740/6 - ISO 4042

A2-70: grezze

Filettatura metrica ISO a passo grosso

Dimensions: UNI 5933 - DIN 7991

Grade: A UNI-ISO 4759/1 - DIN-ISO 4759/1

Material: 10.9 UNI 3740/3 - DIN-ISO 898/1

A2-70 (AISI 304) UNI 7323/8 - DIN 267/11

Allowance: 6g UNI 5541 - DIN 13 - ISO 965/1

Manufacture: 10.9: phosphatized UNI 3740/6 - ISO 4042

A2-70: rough

ISO metric coarse pitch thread

Es. di design.:

0.000557.P Vite svasata piana esag. incassato
M 8 x 50 - 10.9 UNI 5933 - DIN 7991
Cat. A - Fosfatate nere

Ex. of design.:

0.000557.P Hex socket countersunkhead screw
M 8 x 50 - 10.9 UNI 5933 - DIN 7991
Gr. A - Phosphatized

Ø filettat. d Dia screw	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
b	14	16	18	22	26	30	38	46
c	0,3	0,3	0,3	0,4	0,5	0,5	0,5	0,5
d ₂	8	10	12	16	20	24	30	36
e	2,87	3,44	4,58	5,72	6,86	9,15	11,43	13,72
k max	2,3	2,8	3,3	4,4	5,5	6,5	7,5	8,5
s	2,5	3	4	5	6	8	10	12
t max	1,8	2,3	2,5	3,5	4,4	4,6	5,3	5,9
r min	0,2	0,2	0,3	0,5	0,5	1	1	1

Descrizione - Description

Date

Rev