

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management




STANDARDIZATION

SPINE CILINDRICHE DOWEL PINS

FOGLIO SHEET	2	DI OF	3	EDIZ. ISSUED	09/95
STANDARD N°		3.200.200			
REVIS.	1				
SOSTITUISCE REPLACES	3.800.011				

SPINE CILINDRICHE TEMPRATE - FORMA A EN 28734 HARDENED DOWEL PINS - FORM A EN 28734

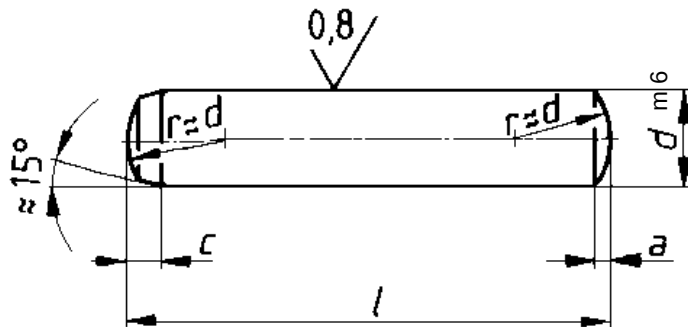

Materiale: Acc. temprato HV30 550÷650
Accoppiamento con foro passante D = H7

Material: Hard. steel HV30 550÷650
Fitting with through hole D = H7



Es. di design.:
0.002500.Q Spina cil. A - 8 x 40
EN 28734
HV30 550÷650

Ex. of design.:
0.002500.Q Dowel pin A - 8 x 40
EN 28734
HV30 550÷650

☐ Sconsigliato
Not recommended

d m6	3	4	6	8	10	12	16	20
a	0,4	0,5	0,8	1	1,2	1,6	2	2,5
c	1,2	1,4	2,1	2,6	3	3,8	4,6	6
r	3	4	6	8	10	12	16	20
Massa Kg / 100 mm	0,005	0,01	0,02	0,04	0,06	0,09	0,16	0,25
CODICE CODE								
Lunghezza - Length L	10	0.002471.E	0.002477.D	-	-	-	-	-
	14	0.002472.F	0.002478.M	0.002485.V	-	-	-	-
	20	0.002473.G	0.002479.N	0.002486.W	0.002495.X	-	-	-
	24	0.002474.A	0.002480.C	0.002487.X	0.002496.Z	0.002506.B	-	-
	28	0.002475.B	0.002481.Z	0.002488.F	0.002497.S	0.002507.C	0.002518.D	-
	32	0.002476.C	0.002482.S	0.002489.G	0.002498.A	0.002508.L	0.002519.E	-
	36	0.012680.D	0.002483.T	0.002490.E	0.002499.B	0.002509.M	0.002520.C	-
	40	0.012681.S	0.002484.R	0.002491.T	0.002500.Q	0.002510.A	0.002521.Z	0.002540.P
	45	-	-	0.002492.R	0.002501.D	0.002511.W	0.002522.S	0.002541.C
	50	-	-	0.002493.V	0.002502.E	0.002512.X	0.002523.T	0.002542.D
	60	-	-	0.002494.W	0.002503.F	0.002513.Z	0.002524.R	0.002543.E
	70	-	-	-	0.002504.G	0.002514.S	0.002525.V	0.002544.F
	80	-	-	-	0.002505.A	0.002515.T	0.002526.W	0.002545.G
	90	-	-	-	-	0.002516.R	0.002527.X	0.002546.A
	100	-	-	-	-	0.002517.V	0.002528.F	0.002547.B
	120	-	-	-	-	-	0.002529.G	0.002548.K