

+

A termini di **divieto pe**
ditte conca

FOGLIO SHEET	1	DI OF	2	EDIZ. ISSUED	09/95
STANDARD N°			3.200.202		
REVIS.	1				
SOSTITUISCE REPLACES			3.800.011		

[illegible]




STANDARDIZATION


SPINE CONICHE TAPER PINS

FOGLIO SHEET	2	DI OF	2	EDIZ. ISSUED	09/95
STANDARD N° 3.200.202					
REVIS.	1				
SOSTITUISCE REPLACES	3.800.011				

SPINE CONICHE NON TEMPRATE - TIPO A EN 22339 (UNI 7283) TAPER PINS, UNHARDENED - TYPE A EN 22339 (UNI 7283)

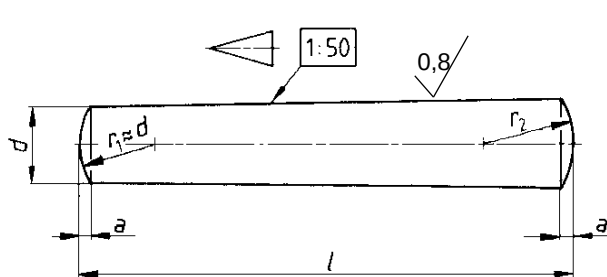

$$r_2 \approx \frac{a}{2} + d + \frac{(0,02 l)^2}{8a}$$

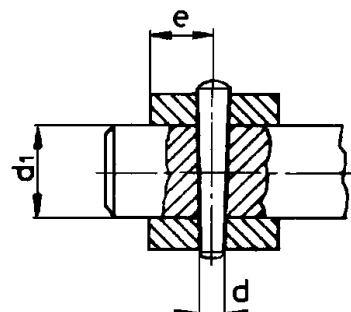

Materiale: Acciaio HV 125÷245
Material: Steel HV 125÷245



Es. di design.:
0.002729.Q Spina conica A - 8 x 40
EN 22339 - Acciaio

Ex. of design.:
0.002729.Q Taper pin A - 8 x 40
EN 22339 - Steel

☐ Sconsigliato
Not recommended

d h 10	3	4	6	8	10	12	16	20	25
a	0,4	0,5	0,8	1	1,2	1,6	2	2,5	3
d1 ≤	8	11	20	30	45	75	110	160	-
>	11	20	30	45	75	110	160	-	-
e min	5	7	9	11	13	15	18	-	-
Massa Kg / 100 mm	0,008	0,012	0,027	0,05	0,076	0,106	0,181	0,28	0,43

CODICE CODE

Lunghezza - Length l	14	0.002701.M	0.002707.L	-	-	-	-	-	-
	20	0.002702.N	0.002708.R	-	-	-	-	-	-
	25	0.002703.P	0.002709.V	0.002716.C	0.012691.R	-	-	-	-
	30	0.002704.Q	0.002710.H	0.002717.D	0.002727.F	0.012693.W	-	-	-
	35	0.002705.H	0.002711.E	0.002718.M	0.002728.P	0.012694.X	-	-	-
	40	0.002706.K	0.002712.F	0.002719.N	0.002729.Q	0.002737.A	0.012696.S	-	-
	45	-	0.002713.G	0.002720.L	0.002730.N	0.002738.H	0.002746.H	0.050697.M	-
	50	-	0.002714.A	0.002721.G	0.002731.B	0.002739.K	0.002747.K	0.002754.H	0.050701.Z
	60	-	0.002715.B	0.002722.A	0.002732.C	0.002740.X	0.002748.T	0.002755.K	0.050703.T
	70	-	-	0.002723.B	0.002733.D	0.002741.L	0.002749.R	0.002756.L	0.050704.R
	80	-	-	0.002724.C	0.002734.E	0.002742.M	0.002750.S	0.002757.M	0.002764.L
	90	-	-	0.002725.D	0.002735.F	0.002743.N	0.002751.N	0.002758.V	0.002765.M
	100	-	-	0.002726.E	0.002736.G	0.002744.P	0.002752.P	0.002759.W	0.002766.N
	120	-	-	-	0.012692.V	0.002745.Q	0.002753.Q	0.002760.R	0.002767.P
	140	-	-	-	-	0.012695.Z	0.012697.T	0.002761.Q	0.002768.X
	160	-	-	-	-	-	0.012698.B	0.002762.H	0.002769.Z
	180	-	-	-	-	-	-	0.002763.K	0.002770.W
	200	-	-	-	-	-	-	0.012700.H	0.012704.A
									0.002778.S