

+

document details: DANIELI 6.000.004 0



Ediz. 03/84

[illegible]

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management




DIME DI CONTROLLO CAVE A TREFOLO
DI MANICOTTI
CHECK TEMPLATES FOR STRANDED SLOTS
IN COLLAR SLEEVES

STANDARD N° 6.000.004

REV.	00	PAGINA	2	DI	3
		PAGE		OF	
SOSTITUISCE	Ediz. 03/84				
REPLACES					

La presente Norma definisce la serie di dime per controllo giunti snodati esistenti in officina.

This Standard defines the series of dimes on stock in the machine shop for checking articulated joints.

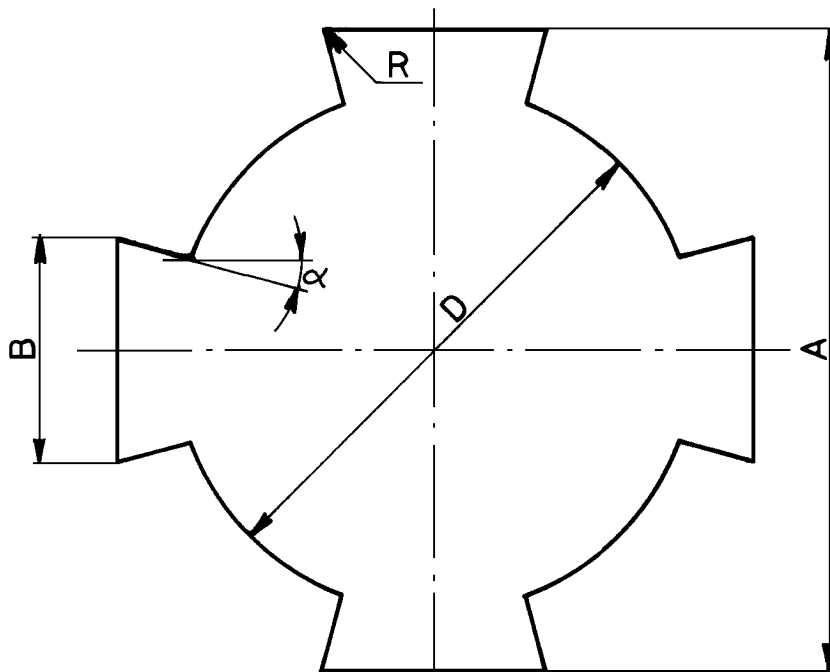


LEGENDA

D = Diametro foro.
A = Distanza max. tra le cave.
B = Larghezza max. cava coda di rondine.
R = Semiangolo coda di rondine
 α = Raggio cava.
Codice UTM = Codice della dima.

LEGEND

D = Hole diameter.
A = Max. distance between slots.
B = Max. width of swallowtail slot.
R = Half angle of swallow tail.
 α = Radius of slot.
UTM Code = Template code.



Descrizione - Description

Date

Rev.