

+

mini di
to per

According to law Danieli&C. considers this document to be a company secret and therefore prohibits any person to reproduce it or make it known in whole or in part to other parties or to competitors without specific written authorization of Danieli's Management




STANDARDIZATION

DISTANZIALI CROMATI CHROME PLATED SPACERS

FOGLIO SHEET	2	DI OF	2	EDIZ. ISSUED	05/95
STANDARD N° 7.000.101					
REVIS.	1				
SOSTITUISCE REPLACES	7.000.015				

DISTANZIALI CROMATI CHROME PLATED SPACERS

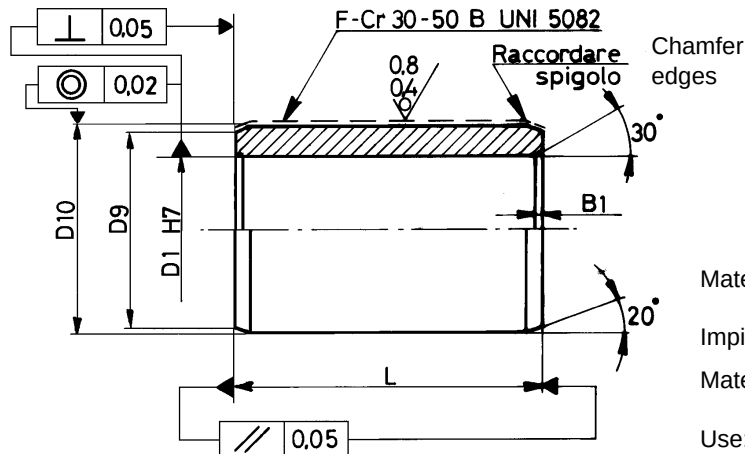

B ₁ (mm)	1,5	D ₁	≥28 ≤ 48
	2		>48 ≤95
	3		>95

Materiale: Fe 540 UNI 7729 - ISO 2937

C 40 UNI 10233 traf. h9

Impiego: flange porta anelli di tenuta N 7.000.111

Material: Fe 540 UNI 7729 - ISO 2937

C 40 UNI 10233 drawn h9

Use: ring-gasket flanges N 7.000.111

La designazione di lunghezze definite, deve essere espressa sulle distinte con U.M.(unità di misura) e dimensione unitaria

Es. di design.: 0.007490.C Distanziale cromato
72/90 L= 30 N 7.000.101

Designation of real length, must be defined on bill of materials by U.M.(measurement unit) and unitary dimension.

Ex. of design.: 0.007490.C Chrome plated spacer
72/90 L= 30 N 7.000.101

D ₁ H7	D ₉	D ₁₀ h9	Massa Kg (x 100 mm)	CODICE CODE
28	38	40	0,50	0.007481.W
32	45	48	0,79	0.007482.X
38	49	50	0,65	0.007483.Z
42	54	55	0,78	0.007484.S
48	61	63	1,03	0.007485.T
52	66	68	1,18	0.007486.R
58	72	75	1,39	0.007487.V
63	77	80	1,50	0.007488.D
68	83	85	1,60	0.007489.E
72	88	90	1,80	0.007490.C
78	93	95	1,81	0.007491.Z
80	101	105	2,85	0.007492.S
85	106	110	3,01	0.007493.T
90	109	110	2,47	0.007494.R
95	115	120	3,31	0.007495.V
105	124	130	3,62	0.007496.W
115	135	140	3,93	0.007497.X
125	148	150	4,24	0.007498.F
135	158	160	4,55	0.007499.G
145	169	180	7,01	0.007500.N
150	180	190	8,38	0.007501.B
160	188	190	6,47	0.007502.C
170	199	200	6,84	0.007503.D
180	209	210	7,21	0.007504.E
190	222	230	10,36	0.007505.F
210	242	250	11,34	0.007506.G



Documents

Document Sharing Hub