


PERNI CON SEDI PER ANELLI ELASTICI - LUNGHEZZA DEFINITA
GROOVED PINS FOR CIRCLIP - DEFINED LENGTH

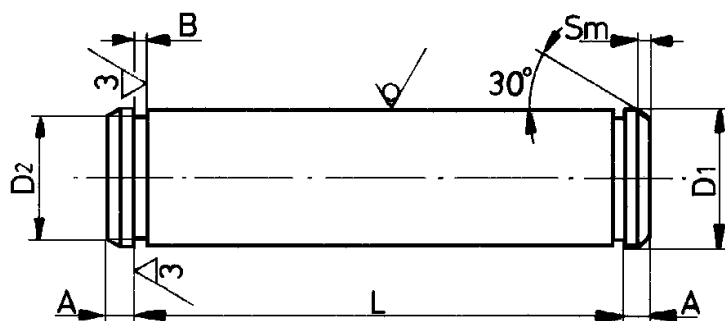

Mat.: Trafilato h9 UNI 10233
C 40 Normalizzato

Mat.: Drawn h9 UNI 10233
C 40 Normalized

Es. di design.:
0.004528.A Perno con sedi per anelli elast.
D = 40 h9; L = 100
C 40 Norm. - N 7.100.122

Ex. of design.:
0.004528.A Grooved pin for circlip
D = 40 h9; L = 100
C 40 Norm. - N 7.100.122

Toll. su L: ≤ 100 = +0,05
+0,15
> 100 = +0,1
+0,3

6/ [0/ 3/]

D ₁ h9	10	12	15	16	20	25	30	35	40	45	50	60	70	80	90	100
A	2	2,5	3	3	4	4	4	5	5	5	5	6	6	6	6	6
B H 13	1,1	1,1	1,1	1,1	1,3	1,3	1,6	1,6	1,85	1,85	2,15	2,15	2,65	2,65	3,15	3,15
D ₂	9,6	11,5	14,3	15,2	19	23,9	28,6	33	37,5	42,5	47	57	67	76,5	86,5	96,5
sm	1	1,6	2	2	2,5	2,5	2,5	3	3	3	3	4	4	4	4	4
Mass Kg/m	0,62	0,89	1,39	1,58	2,47	3,85	6,31	7,55	9,86	12,5	15,4	22,2	30,4	39,5	49,9	61,1

		CODICE CODE							
D h9		10	12	15	16	20	25	30	35
LUNGHEZZA LENGTH L	20	0.004451.C	0.004460.H						
	25	0.004452.D	0.004461.E						
	30	0.004453.E	0.004462.F	0.004470.L	0.004478.P				
	35	0.004454.F	0.004463.G	0.004471.G	0.004479.Q				
	40	0.004455.G	0.004464.A	0.004472.A	0.004480.E	0.004486.Z	0.004494.Z		
	45	0.004456.A	0.004465.B	0.004473.B	0.004481.T	0.004487.S	0.004495.S		
	50	0.004457.B	0.004466.C	0.004474.C	0.004482.R	0.004488.A	0.004496.T	0.004504.B	
	60	0.004458.K	0.004467.D	0.004475.D	0.004483.V	0.004489.B	0.004497.R	0.004505.C	0.004514.R
	70	0.004459.L	0.004468.M	0.004476.E	0.004484.W	0.004490.G	0.004498.C	0.004506.D	0.004515.V
	80	0.012081.L	0.004469.N	0.004477.F	0.004485.X	0.004491.V	0.004499.D	0.004507.E	0.004516.W
	90		0.012082.M	0.012084.P	0.012088.T	0.004492.W	0.004500.K	0.004508.N	0.004517.X
	100		0.012083.N	0.012085.Q	0.012089.R	0.004493.X	0.004501.F	0.004509.P	0.004518.F
	110			0.012086.H	0.012090.S	0.012093.Q	0.004502.G	0.004510.C	0.004519.G
	120			0.012087.K	0.012091.N	0.012094.H	0.004503.A	0.004511.Z	0.004520.E
	130				0.012092.P	0.012095.K	0.012099.W	0.004512.S	0.004521.T
	140					0.012096.L	0.012100.G	0.004513.T	0.004522.R
	150					0.012097.M	0.012101.V	0.012105.S	0.012110.S
	160					0.012098.V	0.012102.W	0.012106.T	0.004523.V
	180						0.012103.X	0.012107.R	0.012111.N
	200						0.012104.Z	0.012108.C	0.012112.P
	220							0.012109.D	0.012113.Q
	240								0.012114.H
	260								0.012115.K