

DIN EN 62553

ICS 33.170

**Messverfahren für digitale Netze –
Leistungskennndaten von terrestrischen digitalen
Multimedia-Sendernetzen
(IEC 62553:2012);
Englische Fassung EN 62553:2013**

Methods of measurement for digital network –
Performance characteristics of terrestrial digital multimedia transmission network
(IEC 62553:2012);
English version EN 62553:2013

Méthodes de mesure applicables aux réseaux numériques -Caractéristiques de
performance des réseaux de transmission numériques multimédia terrestres
(CEI 62553:2012);
Version anglaise EN 62553:2013

Gesamtumfang 59 Seiten

DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik im DIN und VDE

Anwendungsbeginn

Anwendungsbeginn für die von CENELEC am 2013-01-01 angenommene Europäische Norm als DIN-Norm ist 2013-08-01.

Nationales Vorwort

Vorausgegangener Norm-Entwurf: E DIN EN 62553:2012-10.

Für dieses Dokument ist das nationale Arbeitsgremium K 734 „Funksender und Umsetzer“ der DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik im DIN und VDE (www.dke.de) zuständig.

Die enthaltene IEC-Publikation wurde vom TC 103 „Transmitting equipment for radiocommunication“ erarbeitet.

Das IEC-Komitee hat entschieden, dass der Inhalt dieser Publikation bis zu dem Datum (stability date) unverändert bleiben soll, das auf der IEC-Website unter „<http://webstore.iec.ch>“ zu dieser Publikation angegeben ist. Zu diesem Zeitpunkt wird entsprechend der Entscheidung des Komitees die Publikation

- bestätigt,
- zurückgezogen,
- durch eine Folgeausgabe ersetzt oder
- geändert.

Für den Fall einer undatierten Verweisung im normativen Text (Verweisung auf eine Norm ohne Angabe des Ausgabedatums und ohne Hinweis auf eine Abschnittsnummer, eine Tabelle, ein Bild usw.) bezieht sich die Verweisung auf die jeweils neueste gültige Ausgabe der in Bezug genommenen Norm.

Für den Fall einer datierten Verweisung im normativen Text bezieht sich die Verweisung immer auf die in Bezug genommene Ausgabe der Norm.

Der Zusammenhang der zitierten Normen mit den entsprechenden Deutschen Normen ergibt sich, soweit ein Zusammenhang besteht, grundsätzlich über die Nummer der entsprechenden IEC-Publikation. Beispiel: IEC 60068 ist als EN 60068 als Europäische Norm durch CENELEC übernommen und als DIN EN 60068 ins Deutsche Normenwerk aufgenommen.

Das Präsidium des DIN hat mit Präsidialbeschluss 1/2004 festgelegt, dass DIN-Normen, deren Inhalt sich auf internationale Arbeitsergebnisse der Informationsverarbeitung gründet, unter bestimmten Bedingungen allein in englischer Sprache veröffentlicht werden dürfen. Diese Bedingungen sind für die vorliegende Norm erfüllt.

Da sich die Benutzer der vorliegenden Norm der englischen Sprache als Fachsprache bedienen, wird die englische Fassung der IEC 62553 veröffentlicht. Für die meisten der verwendeten Begriffe existieren keine gebräuchlichen deutschen Benennungen, da sich die deutschen Anwender in der Regel ebenfalls der englischen Benennungen bedienen. Diese Norm steht nicht in unmittelbarem Zusammenhang mit Rechtsvorschriften und ist nicht als Sicherheitsnorm anzusehen.

Nationaler Anhang NA (informativ)

Abkürzungen

Für die Anwendung dieses Dokuments gelten die folgenden Abkürzungen.

Die deutschen Übersetzungen haben Empfehlungscharakter und können nur die ungefähre Begrifflichkeit in Deutsch wiedergeben. Unter Experten wird empfohlen, ausschließlich die englischen Fachbegriffe zu verwenden, um die Gefahr von Missverständnissen zu reduzieren.

ADC	Analog/Digital-Umsetzer	(en: Analog to Digital Converter)
ARIB	Japanische Funk-Standardisierungsorganisation	(en: Association of Radio Industries and Businesses)
ASI	asynchrone serielle Schnittstelle	(en: Asynchronous Serial Interface)
ATM	asynchrones Übertragungsverfahren	(en: Asynchronous Transfer Mode)
BER	Bitfehlerrate	(en: Bit Error Ratio)
C/N	Träger-zu-Störsignal-Verhältnis	(en: Carrier to Noise rate)
CPU	zentrale Prozessoreinheit	(en: Central Processing Unit)
DTTB	digitaler terrestrischer Fernsehrundfunk	(en: Digital Terrestrial Television Broadcasting)
DVB	digitaler Fernsehrundfunk	(en: Digital Video Broadcasting)
DVB-H	digitale Fernsehübertragung für Handgeräte	(en: DVB Handheld)
DVB-T	digitaler terrestrischer Fernsehrundfunk	(en: DVB Terrestrial)
D/U	Signal-/Störverhältnis	(en: Desired to Undesired Signal Ratio)
END	äquivalente Störungsabnahme	(en: Equivalent Noise Degradation)
ETSI	Europäisches Institut für Telekommunikationsnormen	(en: European Telecommunication Standards Institute)
FFT	schnelle Fourier-Transformation	(en: Fast Fourier Transform)
GPS	globales System zur Positionsbestimmung	(en: Global Positioning System)
IF	Zwischenfrequenz	(en: Intermediate Frequency)
IFFT	inverse schnelle Fourier-Transformation	(en: Inverse Fast Fourier Transform)
IIP ISDB-T	Informationspaket der ISDB-T	(en: Information Packet)
IP	Internet-Protokoll	(en: Internet Protocol)

ISDB-T	terrestrischer diensteintegrierender digitaler Medienrundfunk	(en: Integrated Services Digital Broadcasting - Terrestrial)
ISI	Intersymbolinterferenz	(en: Inter Symbol Interference)
ISO	Internationale Organisation für Normung	(en: International Organization for Standardization)
ITU	Internationale Fernmeldeunion	(en: International Telecommunication Union)
JEITA	Verband der Japanischen Elektronik- und Informationstechnik-Industrie	(en: Japan Electronics and Information Technology Industries Association)
MER	Modulationsfehlerrate	(en: Modulation Error Ratio)
MFN	Mehrfrequenznetz	(en: Multi-Frequency Network)
MIP	Mega-Frame-Initialisierungs-Paket	(en: Mega-frame Initialization Packet)
MMSE	mittlere quadratische Abweichung	(en: Minimum Mean Square Error)
MPEG	Bewegtbild-Expertengruppe	(en: Moving Picture Experts Group)
OFDM	orthogonales Frequenzmultiplexverfahren	(en: Orthogonal Frequency Division Multiplex)
PCR	Programm-Referenztakt	(en: Program Clock Reference)
PCR_AC	Programm-Referenztakt-Genauigkeit	(en: AC PCR Accuracy)
PCR_FO	Programm-Referenztakt-Frequenzversatz	(en: FO PCR Offset)
PCR_OJ	Programm-Referenztakt-Jitterversatz	(en: OJ PCR Overall Jitter)
PDH	plesiochrone digitale Hierarchie	(en: Plesiochronous Digital Hierarchy)
PRBS	Pseudozufallsbinärfolge	(en: Pseudo Random Binary Sequence)
PID	Paket-Identifizierer	(en: Packet Identifier)
PLL	Phasenregelschleife	(en: Phased Locked Loop)
PN	Pseudozufallsrauschen	(en: Pseudo Random Noise)
QAM	Quadratur-Amplitudenmodulation	(en: Quadrature Amplitude Modulation)
RBW	Auflösebandbreite	(en: Resolution Bandwidth)
RF	Funkfrequenz	(en: Radio Frequency)
RS	Reed-Solomon	(en: Reed-Solomon)
SDH	synchrone digitale Hierarchie	(en: Synchronous Digital Hierarchy)
SFN	Einzelfrequenz-Netz	(en: Single Frequency Network)
SP	gestreutes Pilotsignal	(en: Scattered Pilot signal)

SPI	synchrone Parallelschnittstelle	(en: Synchronous Parallel Interface)
STL	Studio-zu-Sender-Übertragungsabschnitt	(en: Studio to Transmitter Link)
STS	Synchronisationszeit-Stempel	(en: Synchronization Time Stamp)
TMCC	Übertragungs- und Multiplexkonfiguration steuerungssignal	(en: Transmission and Multiplex Configuration Control signal)
TS	Transportstrom	(en: Transport Stream)
TTL	Sender-zu-Sender-Übertragungsabschnitt	(en: Transmitter to Transmitter Link)
TV	Fernsehen	(en: TeleVision)
UHF	Dezimeterwelle	(en: Ultra-High Frequency (300 MHz to 3 000 MHz))
UI	Einheitsschrittlänge	(en: Unit Interval)
VBW	Video-Bandbreite	(en: Video Bandwidth)
VHF	Ultrakurzwelle (30 MHz bis 300 MHz)	(en: Very High Frequency (30 MHz to 300 MHz))
VLAN	virtuelles lokales Netz	(en: Virtual Local Area Network)

– Leerseite –

**Methods of measurement for digital network -
Performance characteristics of terrestrial digital
multimedia transmission network
(IEC 62553:2012)**

Méthodes de mesure applicables
aux réseaux numériques -
Caractéristiques de performance
des réseaux de transmission
numériques multimédia terrestres
(CEI 62553:2012)

Messverfahren für digitale Netze -
Leistungskennndaten von terrestrischen
digitalen Multimedia-Sendernetzen
(IEC 62553:2012)

This European Standard was approved by CENELEC on 2013-01-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

Foreword

The text of document 103/89/CDV, future edition 1 of IEC 62553, prepared by IEC/TC 103 "Transmitting equipment for radiocommunication" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62553:2013.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2013-10-01
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2016-01-01

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62553:2012 was approved by CENELEC as a European Standard without any modification.

CONTENTS

1	Scope	5
2	Normative references	5
3	Terms and abbreviations	6
4	General conditions of measurement	7
4.1	Definitions and classifications of digital terrestrial TV transmission network	7
4.1.1	General	7
4.1.2	Network classification for transmitting frequencies	8
4.1.3	Network classification on useable contribution links for signal transport system between stations	9
4.2	Signal form	9
4.2.1	TS signal form	9
4.2.2	IF signal form	9
4.3	Test signals and auxiliary signals for measurement	9
4.3.1	Test signals	9
4.3.2	Auxiliary signals for measurement	10
5	Methods of measurement for signal delay time	10
5.1	Scope	10
5.2	Definition of signal delay time	11
5.2.1	Delay time	11
5.2.2	Relative delay time difference	11
5.3	Direct/indirect measurement	11
5.3.1	General	11
5.3.2	Direct measurement system	12
5.3.3	Indirect measurement system	12
5.4	Measurement place	12
5.5	Classification of measurement system	13
6	Methods of measurement for performances of radio wave relay station	15
6.1	Scope	15
6.2	Measurement diagram and measurement items	15
6.2.1	General	15
6.2.2	Measurement diagram	15
6.2.3	Measurement items	16
6.3	Methods of measurement	16
6.3.1	General	16
6.3.2	BER (case 2)	17
6.3.3	Equivalent noise degradation (END)	18
6.3.4	Amplitude frequency characteristics	19
6.3.5	Delay profile	20
6.3.6	Phase jitter	20
7	Methods of measurement for performances of signal quality improvement instrument used in radio wave relay station	22
7.1	General	22
7.2	Classification of signal quality improvement instrument	23
7.3	Measurement diagram and measurement condition	23
7.4	Common measurement items	23

7.5 Methods of measurement for each kind of compensator.....	24
Annex A (informative) Examples of measurement methods for signal delay	25
Annex B (informative) Examples of measurement methods for signal quality of relay stations	36
Annex C (normative) Principle and methods of measurement of compensators.....	43
Figure 1 – Example of transmission network.....	8
Figure 2 – Delay time and relative delay time difference definitions.....	11
Figure 3 – Direct and indirect measurement method	12
Figure 4 – Measurement diagram of received signal of relay station (case a))	15
Figure 5 – Measurement diagram of relay station (case b))	15
Figure 6 – BER- Measurement method	18
Figure 7 – Definition of END.....	19
Figure 8 – Measurement diagram of amplitude-frequency characteristics	20
Figure 9 – Measurement block diagram of delay profile.....	20
Figure 10 – Reference model	21
Figure 11 – Conceptual diagram of relay station using a compensator	23
Figure A.1 – General measurement system for cases 1 to 3.....	25
Figure A.2 – Example of frame sync signal extracting part	26
Figure A.3 – Example of OFDM demodulator for frame timing extraction	27
Figure A.4 – Block diagram of direct measurement methods for time delay of OFDM signal	28
Figure A.5 – Example of frequency characteristics of combined signal	29
Figure A.6 – Example of delay profile of combined signal.....	29
Figure A.7 – General measurement system for cases 5,6,13 and 14	30
Figure A.8 – Timing chart for signal delay measurement.....	30
Figure A.9 – Principle of measurement using 1 pps signal	31
Figure A.10 – General measurement system for cases 7, 8 and 15,16.....	32
Figure A.11 – Measurement system for delay time (time reference is 1pps signal of GPS)	33
Figure A.12 – Timing relation of each signals	34
Figure A.13 – Delay profile of OFDM signal	35
Figure B.1 – BER measurement conceptual diagram for Null Packet method.....	37
Figure B.2 – Examples of measurement result by Null Packet method.....	37
Figure B.3 – Method to compare the data before/after correction	38
Figure B.4 – Superimposed C/N measurement system.....	39
Figure B.5 – Inherent degradation of OFDM demodulator measurement system	41
Figure B.6 – Calculation process of delay profile	42
Figure C.1 – Example of measurement block diagram for performances of loop-back canceller	44
Figure C.2 – Example of measurement block diagram for performances of diversity reception equipment	46
Figure C.3 – Example of measurement block diagram for performances of co-channel interference canceller	48

Figure C.4 – Example of measurement block diagram for performances of C/N Reset equipment 50

Table 1 – Classification of contribution link.....	9
Table 2 – Parameter set of OFDM signal for test in ISDB-T system.....	9
Table 3 – Parameter set of OFDM signal for test in DVB-T/H system.....	10
Table 4 – Combination of signal type.....	11
Table 5 – Classification of measurement system for signal delay time.....	14
Table 6 – An example of measurement items for Relay station.....	16
Table 7 – Example of the parameter set of spectrum analyzer	20
Table 8 – Compensators used in digital terrestrial broadcasting relay network.....	23
Table 9 – Examples of measurement items for signal quality improvement instrument.....	24
Table A.1 – Signal format and timing extraction of each case.....	25
Table A.2 – Equipment list for measurement.....	28
Table A.3 – Equipment list for delay time measurement.....	33
Table B.1 – Definition of Null Packet (in case of ISDB-T).....	36
Table B.2 – Example of noise power measurement parameters (6 MHz ISDB-T).....	40
Table B.3 – Example of signal power measurement parameters (6 MHz ISDB-T).....	40

METHODS OF MEASUREMENT FOR DIGITAL NETWORK –

Performance characteristics of terrestrial digital multimedia transmission network

1 Scope

When a transmission network for digital terrestrial television broadcasting (DTTB) is being deployed, new networking technologies such as the Single Frequency Network (SFN) can be employed excelling the conventional analogue TV systems. However, new technical evaluation parameters are introduced for installing SFN systems. In addition new quality evaluation methods are also established in order to achieve stable and high-quality broadcasting services avoiding the cliff effect, which is one of the typical phenomena in the digital transmission that the signal quality is abruptly degraded when the received C/N becomes just lower than a specific value representing the system limit.

Given the background described above, this International Standard has the purposes of

- establishing measuring methods that enable the objective evaluation of the performance of transmission networks so as to make stable DTTB services a reality,
- establishing a technical baseline, such as a definition of technical terms, to standardize measuring methods.

The measurement methods described in this standard are intended for digital terrestrial television transmission network test and validation. The measurement methods for digital terrestrial transmitter are not included in this standard. These methods are described in IEC 62273-1.

This standard does not give any regulations and/or mandatory requirements. The specifications and requirements defined for each system have priority over this standard. However, there may be some cases where details are not specified in each individual specification or different systems should be evaluated under a common measurement method. The purpose of this standard is to provide a common technical baseline that makes measurement results comparable in all cases.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62273-1:2007, *Methods of measurement for radio transmitters – Performance characteristics of terrestrial digital television transmitters*

ISO/IEC 13818-1:2007, *Information technology – Generic coding of moving pictures and associated audio information: Systems*

Amendments 1 to 6

TR 101 190, *Digital video broadcasting (DVB); implementation guidelines for DVB Terrestrial services; Transmission aspects*

TS 101 191, *Digital video broadcasting (DVB); DVB mega-frame for Single Frequency Network (SFN) synchronization*

TR 102 377, *Digital Video Broadcasting (DVB); DVB-H Implementation Guidelines*

ARIB STD-B31, *Transmission system for digital terrestrial television broadcasting*

3 Terms and abbreviations

ADC	Analog to Digital Converter
ARIB	Association of Radio Industries and Businesses
ASI	Asynchronous Serial Interface
ATM	Asynchronous Transfer Mode
BER	Bit Error Ratio
C/N	Carrier to Noise rate
CPU	Central Processing Unit
DTTB	Digital Terrestrial Television Broadcasting
DVB	Digital Video Broadcasting
DVB-H	DVB Handheld
DVB-T	DVB Terrestrial
D/U	Desired to Undesired Signal Ratio
END	Equivalent Noise Degradation
ETSI	European Telecommunication Standards Institute
FFT	Fast Fourier Transform
GPS	Global Positioning System
IF	Intermediate Frequency
IFFT	Inverse Fast Fourier Transform
IIP	ISDB-T Information Packet
IP	Internet Protocol
ISDB-T	Integrated Services Digital Broadcasting – Terrestrial
ISI	Inter Symbol Interference
ISO	International Organization for Standardization
ITU	International Telecommunication Union
JEITA	Japan Electronics and Information Technology Industries Association
MER	Modulation Error Ratio
MFN	Multi-Frequency Network
MIP	Mega-frame Initialization Packet
MMSE	Minimum Mean Square Error
MPEG	Moving Picture Experts Group
OFDM	Orthogonal Frequency Division Multiplex
PCR	Program Clock Reference
PCR_AC	PCR Accuracy
PCR_FO	PCR Offset
PCR_OJ	PCR Overall Jitter
PDH	Plesiochronous Digital Hierarchy

PRBS	Pseudo Random Binary Sequence
PID	Packet Identifier
PLL	Phased Locked Loop
PN	Pseudo Random Noise
QAM	Quadrature Amplitude Modulation
RBW	Resolution Bandwidth
RF	Radio Frequency
RS	Reed-Solomon
SDH	Synchronous Digital Hierarchy
SFN	Single Frequency Network
SP	Scattered Pilot signal
SPI	Synchronous Parallel Interface
STL	Studio to Transmitter Link
STS	Synchronization Time Stamp
TMCC	Transmission and Multiplex Configuration Control signal
TS	Transport Stream
TTL	Transmitter to Transmitter Link
TV	TeleVision
UHF	Ultra-High Frequency (300 MHz to 3 000 MHz)
UI	Unit Interval
VBW	Video Bandwidth
VHF	Very High Frequency (30 MHz to 300 MHz)
VLAN	Virtual Local Area Network

4 General conditions of measurement


4.1 Definitions and classifications of digital terrestrial TV transmission network

4.1.1 General

The digital terrestrial broadcasting transmission networks defined in this standard consist of two or more Digital Tv transmitters, relay lines (SDH or PDH contribution link: e.g. satellite, ATM radio, ATM optical fibre, IP Ethernet VLAN), broadcast-wave relay stations (called Gap-Filler or Transposer) through which the same broadcasting program is transmitted. Figure 1 shows an example of the transmission network.

The network is classified in 4.1.2 and 4.1.3 according to the following conditions

- Assigned frequencies of each transmitter station which compose the network.
- Signal transmission method between transmitter stations.

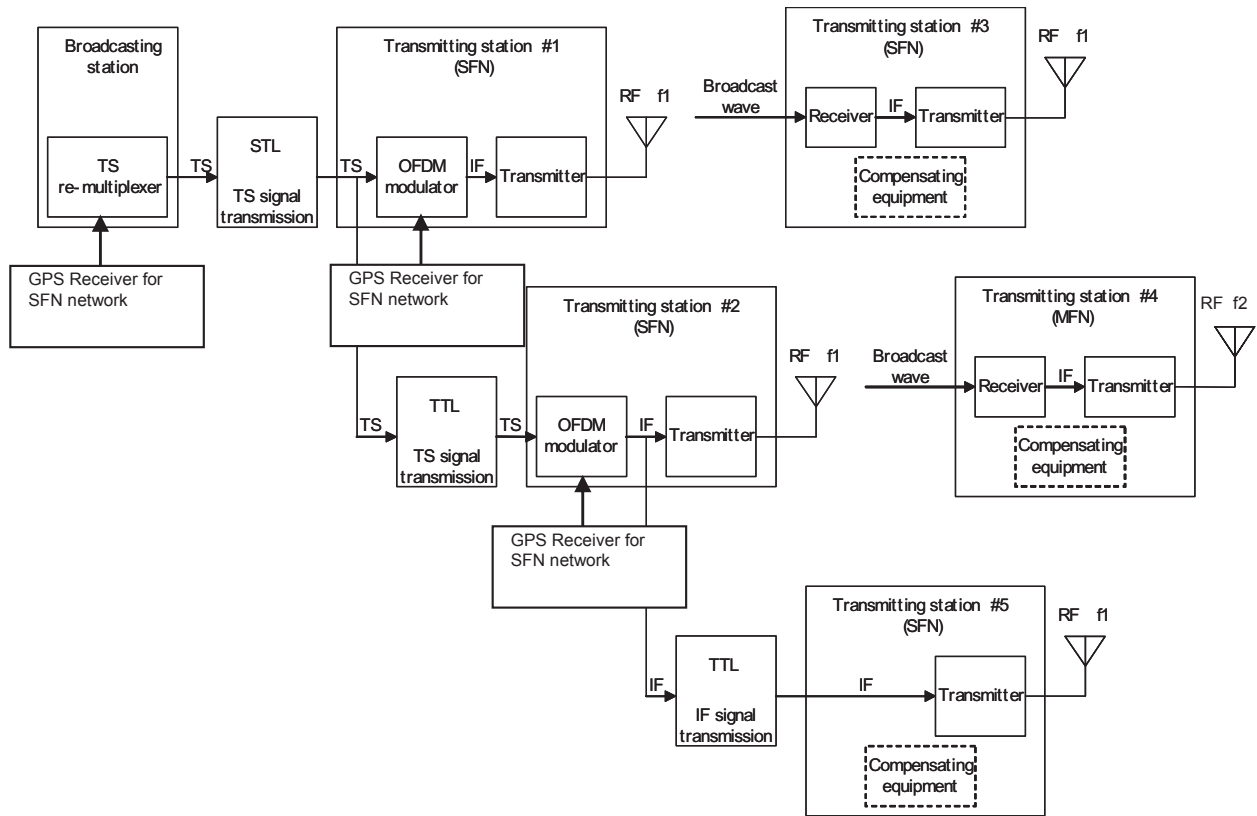

IEC 2134/12

Figure 1 – Example of transmission network

4.1.2 Network classification for transmitting frequencies

SFN: Transmission network which is composed by plural transmitter stations whose assigned frequencies are the same. In Figure 1, transmitter stations, which are marked #1, #2, #3, and #5 and use the same transmitting frequency f_1 , compose the SFN.

MFN: transmission network which is composed by plural transmitter stations whose assigned frequencies are different. In Figure 1, #2 transmitter stations whose assigned frequency is f_1 and #4 transmitter station whose assigned frequency is f_2 compose the MFN.

In case of SFN, transmission parameters of each transmitter station should satisfy the following conditions:

- The difference of transmitted frequency of each station should be within a specified range.
- If necessary, the difference of sampling frequency of transmitted OFDM signals of each station should be within a specified range.
- Waveform of transmitted signals means the channel modulation of each station should be the same. It means that the data contents of modulation of each station should be the same.
- The difference of transmission timing of each transmitter station should be within a specified range.
- The synchronized operation of each station shall be necessary. For synchronized operation, GPS time reference is used as a network reference signal or network should be locked to GPS time reference.

4.1.3 Network classification on useable contribution links for signal transport system between stations

Different contribution links for signal transport system between stations are investigated and mentioned in Table 1.

Table 1 – Classification of contribution link

Contribution link	Transmission system	Signal
STL(Studio to Transmitter Link)	Transport Stream transmission system	Digitalized Broadcast program and control information(note)
	IF transmission system	Modulated OFDM signal(note)
TTL(Transmitter to Transmitter Link)	Transport Stream transmission system	Digitalized Broadcast program and control information(note)
	IF transmission system	Modulated OFDM signal(note)
Broadcast wave relay	Broadcast wave relay system	Modulated OFDM signal(note)
NOTE Refer to 4.2.2 for signal form.		

4.2 Signal form

4.2.1 TS signal form

Signal form in which digitalized broadcast program contents and control information are multiplexed. For details of signal format, the following documents should be referred.

- DVB-T/H system: ETSI TR 101 190, ETSI TR 102 377
- ISDB-T system: ARIB STD-B31 Operational Guideline chapter 5.5

4.2.2 IF signal form

OFDM signal which is modulated by digitalized broadcast signal. For details of signal format, the following documents should be referred.

- DVB-T system: ETSI TR 101 190, ETSI TR 102 377
- ISDB-T system; ARIB STD-B31 Main body

4.3 Test signals and auxiliary signals for measurement

4.3.1 Test signals

As test signals for measurement, the following signals can be used. The broadcasting Transport Stream signal used for on-air services, or the equivalent broadcasting Transport Stream signal in it, or the OFDM signal used for on-air.

The specifications of the test signals should be specified for each system, but unless specified, for OFDM signal, the following transmission parameter set should apply, see Tables 2 and 3:

Table 2 – Parameter set of OFDM signal for test in ISDB-T system

Parameter	Value
Channel bandwidth	6 MHz
Number of carriers	8k
Guard interval ratio	1/8
Time interleave (see note)	I=2
Carrier modulation	64QAM
Coding rate of inner code	3/4 or 7/8
NOTE Apply for ISDB-T system.	

Table 3 – Parameter set of OFDM signal for test in DVB-T/H system

Parameter	Value
Channel bandwidth	6 MHz / 7 MHz / 8 MHz
Number of carriers	8k
Guard interval ratio	1/8
Time interleave(see note)	Native
Carrier modulation	64QAM
Coding rate of inner code	2/3
NOTE Apply for DVB-T/H system.	

4.3.2 Auxiliary signals for measurement

4.3.2.1 General

For measurement of signal delay, the auxiliary signals shown below are used.

4.3.2.2 Reference signal

- 10 MHz signal; 10 MHz reference signal which is synchronized to GPS.
- Sample clock pulse (see note); reference signal which is synchronized to Broadcast TS signal or sample clock signal of OFDM signal.

NOTE For 6 MHz ISDB-T system, its frequency is 512/63 MHz.

4.3.2.3 1 pps signal

Used for signal delay measurement within 1 s, unless specified, leading edge of 1 pps signal and up edge of 10 MHz sine wave signal should coincide.

1 pps signal and 10 MHz reference signal are obtained by making use of Reference signal generator with GPS synchronization.

4.3.2.4 Frame sync. Signal

Frame sync. Signal is extracted from frame synchronization information multiplexed in broadcast TS signal described in 4.2.1. In case of OFDM signal, frame sync. signal is regenerated from demodulator timing recovery circuit.

Frame sync. Signal may be used as a reference signal for signal delay measurement. The relationship between frame sync. Signal and sample clock should be specified for each system.

In addition, it is possible to widen the measurement range to more than 1 frame, by making use of the following information which is multiplexed in Transport stream.

- DVB-T system: mega-frame information, refer to ETSI TS 101 191.
- ISDB-T system: frame identification signal, refer to ARIB STD-B31.

5 Methods of measurement for signal delay time

5.1 Scope

Management of signal delay in transmission network is one important issue for SFN operation in Digital Terrestrial Broadcasting Network. In this clause, measurement methods for signal delay of transmission lines and equipments, and for relative delay time difference between different

transmission links are described. Signal delay of video and audio encoder/decoder is out of scope.

5.2 Definition of signal delay time

5.2.1 Delay time


As shown in Figure 2 a), delay time should be defined as the delay time between input signal and output signal of same transmission link.

Kinds of signal type of input/output are described in Table 4.

5.2.2 Relative delay time difference


As shown in Figure 2 b), relative delay time difference should be defined as the relative time difference between outputs of different transmission links.

Kinds of signal type of input/output are described in Table 4.

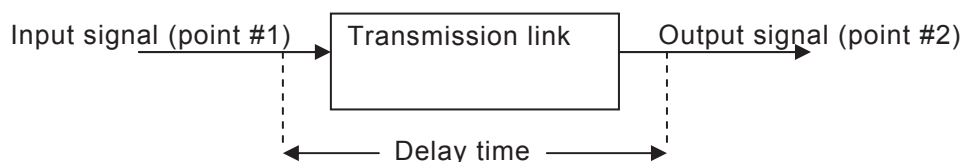

IEC 2136/12

Figure 2 a) – Delay time definition

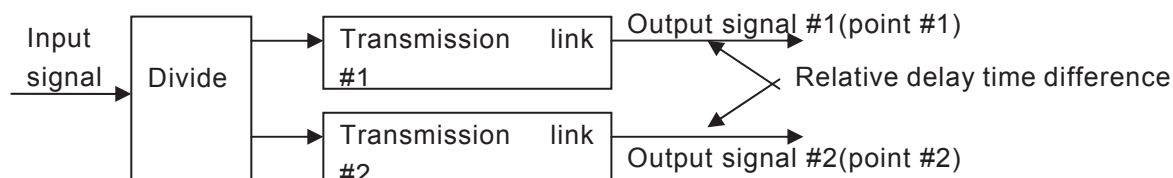

IEC 2136/12

Figure 2 b) – Definition of relative delay time difference

Figure 2 – Delay time and relative delay time difference definitions

Table 4 – Combination of signal type

Measurement item	Measurement point #1	Measurement point #2
Delay time	Broadcast TS signal	Broadcast TS signal
	Broadcast TS signal	OFDM signal
	OFDM signal	OFDM signal
Relative delay time difference	Broadcast TS signal	Broadcast TS signal
	OFDM signal	OFDM signal

NOTE See details for signal type in Clause 4.

5.3 Direct/indirect measurement

5.3.1 General

As defined in 5.2, both signal delay and relative delay time difference are given as the time difference between measurement point #1 and #2.