

DIN EN ISO 19115-2



ICS 35.240.70

Ersatz für
DIN EN ISO 19115-2:2010-05**Geoinformation –****Metadaten –****Teil 2: Erweiterungen für Erhebung und Verarbeitung (ISO 19115-2:2019);
Englische Fassung EN ISO 19115-2:2019**

Geographic information –

Metadata –

Part 2: Extensions for acquisition and processing (ISO 19115-2:2019);

English version EN ISO 19115-2:2019

Information géographique –

Métadonnées –

Partie 2: Extensions pour l'acquisition et le traitement (ISO 19115-2:2019);

Version anglaise EN ISO 19115-2:2019

Gesamtumfang 71 Seiten

DIN-Normenausschuss Bauwesen (NABau)

Nationales Vorwort

Dieses Dokument (EN ISO 19115-2:2019) wurde vom Technischen Komitee ISO/TC 211 „Geographic information/Geomatics“ in Zusammenarbeit mit dem Technischen Komitee CEN/TC 287 „Geoinformation“, dessen Sekretariat von BSI (Vereinigtes Königreich) gehalten wird, erarbeitet.

Der für die deutsche Mitarbeit zuständige Arbeitsausschuss ist der als Spiegelausschuss zum CEN/TC 287 und ISO/TC 211 eingesetzte Arbeitsausschuss NA 005-03-03 AA „Geoinformation“ des DIN-Normenausschusses Bauwesen (NABau).

Dieses Dokument enthält unter Berücksichtigung des Präsidialbeschlusses 1/2004 den englischen Originaltext von ISO 19115-2:2019.

Für die in diesem Dokument zitierten internationalen Dokumente wird im Folgenden auf die entsprechenden deutschen Dokumente hingewiesen:

ISO 19108:2002	siehe	DIN EN ISO 19108:2005-05
ISO 19109:2015	siehe	DIN EN ISO 19109:2016-05
ISO 19115-1:2014	siehe	DIN EN ISO 19115-1:2014-07
ISO 19123:2005	siehe	DIN EN ISO 19123:2007-06
ISO 19157:2013	siehe	DIN EN ISO 19157:2014-04

Änderungen

Gegenüber DIN EN ISO 19115-2:2010-05 wurden folgende Änderungen vorgenommen:

- a) Titel und Anwendungsbereich wurden geändert, um das Ziel des Dokuments besser zu beschreiben;
- b) QE_CoverageResult und QE_Usablilty wurden in ISO 19157 überführt;
- c) alle erweiterten Klassen erweitern nun die ISO 19115-1:2014;
- d) während die XML-Schema-Kodierung für ISO 19115-2:2009 in ISO/TS 19139-2 vorgesehen war, sind der Link und die Informationen über das XML-Schema für diese Überarbeitung im Anhang C dieses Dokuments wiederzufinden;
- e) eine näher angegebene Klasse von MI_Instrument - MI_Sensor wurde definiert;
- f) Aktualisierungen in den normativen Verweisungen.

Frühere Ausgaben

DIN EN ISO 19115-2: 2010-05

Nationaler Anhang NA (informativ)

Begriffe

Die Benennungen der folgenden Begriffe entsprechen den Benennungen in der Englischen Fassung.

3.1

Attribut

benannte Eigenschaft einer Entität

Anmerkung 1 zum Begriff: Beschreibt ein geometrisches, topologisches, thematisches oder sonstiges Merkmal einer Entität.

[QUELLE: ISO/IEC 2382:2015, 2121440, modifiziert — Anmerkung 1 zum Begriff ersetzt Anmerkung 1 und 2 zum Begriff.]

3.2

Band

Bereich der Wellenlängen elektromagnetischer Strahlung, die eine Reaktion eines Sensors hervorrufen

[QUELLE: ISO/TS 19101-2:2008, 4.1]

3.3

Klasse

Beschreibung einer Menge von Objekten mit einem gemeinsamen *Attribut* (3.1), gemeinsamen Operationen, Methoden, Verhältnissen und Semantiken

[QUELLE: ISO 19103:2015, 4.7]

3.4

Coverage

Feature, das als Funktion zur Rückgabe von *Werten* (3.29) aus seinem Wertebereich für jede direkte Position innerhalb seines räumlichen, zeitlichen oder räumlich-zeitlichen *Bereichs* (3.8) dient

BEISPIEL Rasterbild (3.18), Flächenverschneidung oder digitale Höhenmatrix.

[QUELLE: ISO 19123:2005, 4.1.7, modifiziert – Anmerkung gelöscht]

3.5

Datentyp

Festlegung eines *Wertebereichs* (3.30) mit auf den *Werten* (3.29) in diesem *Bereich* (3.8) zulässigen Operationen

[QUELLE: ISO 19103:2015, 4.14, modifiziert – Beispiel und Anmerkung 1 zum Begriff gelöscht]

3.6

Datensatz

identifizierbare Sammlung von Daten

[QUELLE: ISO 19115-1:2014, 4.3, modifiziert – Anmerkung 1 zum Begriff gelöscht]

3.7

Serie von Datensätzen

Sammlung von *Datensätzen* (3.6) mit gemeinsamer Produktspezifikation

[QUELLE: ISO 19115-1:2014, 4.4]

3.8

Bereich

Wertebereich

wohldefinierter Bereich

[QUELLE: ISO 19109:2015, 4.8, modifiziert – Anmerkung 1 zum Begriff gelöscht]

3.9

Ereignis

Aktion, die zu einem Zeitpunkt (en: instant) erfolgt

[QUELLE: ISO 19108:2002, 4.1.6]

3.10

Geolokalisierungsinformationen

Informationen zur Bestimmung der einem *Bildort* (3.18) entsprechenden geographischen Lage

3.11

georektifiziert

(en: georectified)

korrigiert im Hinblick auf die Positionsverschiebung in Bezug auf die Erdoberfläche

3.12

Georeferenzierung

Geopositionierung eines Objekts unter Verwendung eines Korrespondenzmodells, das aus einer Reihe von Punkten abgeleitet ist, für die sowohl Boden- als auch *Bildkoordinaten* (3.18) bekannt sind

[QUELLE: ISO/TS 19130:2010, 4.37]

3.13

Raster

Netz aus zwei oder mehr Kurvenscharen, wobei die Mitglieder einer Schar jeweils die Mitglieder der anderen Scharen auf algorithmische Weise schneiden

Anmerkung 1 zum Begriff: Die Kurven unterteilen einen Raum in Rasterzellen.

[QUELLE: ISO 19123:2005, 4.1.23]

3.14

Rasterkoordinatensystem

Koordinatensystem, in dem eine Position in Bezug auf den Schnittpunkt von Kurven angegeben ist

3.15

Rasterkoordinaten

Folge von zwei oder mehr Zahlen, die eine Position in Bezug auf deren Lage in einem *Raster* (3.13) angeben

3.16

Rasterdaten

Daten, bei denen die *Werte* (3.29) ihrer *Attribute* (3.1) mit Positionen in einem *Rasterkoordinatensystem* (3.14) assoziiert sind

3.17**Passpunkt**

Punkt auf der Erde mit einer genau bekannten geographischen Lage

3.18**Bild**

Raster-*Coverage* (3.4), dessen *Attributwerte* (3.1) (3.29) eine numerische Darstellung eines physikalischen Parameters sind

Anmerkung 1 zum Begriff: Die physikalischen Parameter sind das Ergebnis einer Messung durch einen *Sensor* (3.27) oder eine Vorhersage anhand eines Modells.

3.19**Bilddarstellung**

Darstellung eines Phänomens als *Bilder* (3.18), erzeugt mittels elektronischer und/oder optischer Verfahren

Anmerkung 1 zum Begriff: In diesem Dokument wird davon ausgegangen, dass die Objekte und Phänomene von Radar, Kameras, Photometern und Infrarot- und Multispektralscannern oder ähnlichen Geräten ertastet oder erfasst wurden.

[QUELLE: ISO 19101-2:2008, 4.14]

3.20**Metadaten**

Informationen über eine Ressource

[QUELLE: ISO 19115-1:2014, 4.10]

3.21**Passiervorgang**

einmaliges Vorbeiziehen eines mobilen Fernmesssystems an einem betreffenden Ziel

Anmerkung 1 zum Begriff: In diesem Dokument ist das Messsystem üblicherweise eine *Fernerkundungsplattform* (3.25) (3.23). Im Zusammenhang mit Navigation könnte das Messsystem ein GPS-Satellit sein.

3.22**Pixel**

kleinstes Element eines digitalen *Bilds* (3.18), dem *Attribute* (3.1) zugewiesen sind

Anmerkung 1 zum Begriff: Ein Pixel ist die kleinste Anzeigeeinheit für ein sichtbares Bild.

[QUELLE: ISO/TS 19101-2:2008, 4.2, modifiziert – Anmerkung 1 zum Begriff ersetzt Anmerkung 1 und 2.]

3.23**Plattform**

Struktur, die einen *Sensor* (3.27) bzw. Sensoren trägt

3.24**Polarisation**

Beschränkung von Strahlungsschwingungen, vor allem von Licht, auf eine einzelne Ebene

3.25**Fernerkundung**

Erfassen und Interpretieren von Informationen zu einem Objekt, ohne mit dem Objekt in physischem Kontakt zu stehen

[QUELLE: ISO/TS 19101-2:2008, 4.33]

3.26

Auflösung (eines Sensors)

kleinster Unterschied zwischen den Anzeigen eines *Sensors* (3.27), der sinnvoll unterschieden werden kann

Anmerkung 1 zum Begriff: Im Hinblick auf die *Bilddarstellung* (3.19) bezieht sich Auflösung auf die radiometrische, spektrale, räumliche und zeitliche Auflösung.

[QUELLE: ISO/TS 19101-2:2008, 4.34]

3.27

Sensor

Element eines Messsystems, das unmittelbar von einem Phänomen, einem Körper oder einer Substanz beeinflusst wird, das/der/die eine zu messende Größe trägt

[QUELLE: ISO/IEC GUIDE 99:2007, 3.8, modifiziert – Beispiele und Anmerkung gelöscht.]

3.28

spektrale Breite

spezifisches Wellenlängenintervall im elektromagnetischen Spektrum

BEISPIEL *Band* (3.2) 1 von Landsat TM liegt zwischen 0,45 µm und 0,52 µm im sichtbaren Teil des Spektrums.

3.29

Wert

Element eines *Typ-Bereichs* (3.8)

[QUELLE: ISO/IEC 19501:2005, 0000_5]

3.30

Wertebereich

Menge zulässiger *Werte* (3.29)

BEISPIEL Der Bereich 3 bis 28, alle ganzen Zahlen, jedes beliebige ASCII-Zeichen, Aufzählung aller zulässigen Werte (Grün, Blau, Weiß).

[QUELLE: ISO 19103:2015, 4.37]

Nationaler Anhang NB (informativ)

Literaturhinweise

DIN EN ISO 19108:2005-05, *Geoinformation — Zeitliches Schema (ISO 19108:2002); Englische Fassung EN ISO 19108:2005*

DIN EN ISO 19109:2016-05, *Geoinformation — Regeln zur Erstellung von Anwendungsschemata (ISO 19109:2015); Englische Fassung EN ISO 19109:2015*

DIN EN ISO 19115-1:2014-07, *Geoinformation — Metadaten — Teil 1: Grundsätze (ISO 19115-1:2014); Englische Fassung EN ISO 19115-1:2014*

DIN EN ISO 19123:2007-06, *Geoinformation — Coverage Geometrie- und Funktionsschema (ISO 19123:2005); Englische Fassung EN ISO 19123:2007*

DIN EN ISO 19157:2014-04, *Geoinformation — Datenqualität (ISO 19157:2013); Englische Fassung EN ISO 19157:2013*

— Leerseite —

English Version

Geographic information - Metadata - Part 2: Extensions for acquisition and processing (ISO 19115-2:2019)

Information géographique - Métadonnées - Partie 2:
Extensions pour l'acquisition et le traitement
(ISO 19115-2:2019)

Geoinformation - Metadaten - Teil 2: Erweiterungen
für Erhebung und Verarbeitung (ISO 19115-2:2019)

This European Standard was approved by CEN on 24 February 2018.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

This document (EN ISO 19115-2:2019) has been prepared by Technical Committee ISO/TC 211 "Geographic information/Geomatics" in collaboration with Technical Committee CEN/TC 287 "Geographic Information" the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2019, and conflicting national standards shall be withdrawn at the latest by August 2019.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 19115-2:2010.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 19115-2:2019 has been approved by CEN as EN ISO 19115-2:2019 without any modification.

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviated terms	4
4.1 Abbreviated terms	4
5 Conformance	5
5.1 Conformance requirements	5
5.2 Metadata profiles	5
6 Acquisition and processing metadata	5
6.1 Metadata for acquisition and processing requirements	5
6.2 Acquisition and processing metadata packages and dependencies	5
6.3 Acquisition and processing metadata class diagrams by package	6
6.3.1 Introduction	6
6.3.2 Acquisition Information	7
6.3.3 Extended Lineage information	10
6.3.4 Extended spatial representation information — Geolocation information	11
6.3.5 Extended Content information — Imagery	13
Annex A (normative) Conformance	15
Annex B (normative) Acquisition and processing metadata data dictionary	18
Annex C (informative) XML schema implementation	56
Bibliography	57

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by ISO/TC 211, *Geographic information/Geomatics*.

This second edition cancels and replaces the first edition (ISO 19115-2:2009), which has been technically revised.

The following is a summary of major changes to this document during the revision process:

- The name and scope were changed to better describe the purpose of the document;
- QE_CoverageResult and QE_Useability were moved to ISO 19157;
- All extended classes now extend ISO 19115-1:2014;
- Whereas the XML Schema encoding for ISO 19115-2:2009 was provided in ISO/TS 19139-2; the link and information about the XML schema for this revision is provided in Annex C of this document;
- A specified class of MI_Instrument – MI_Sensor was defined. A list of all the parts in the ISO 19115 series, can be found on the ISO website.

Introduction

This document replaces the previous edition (ISO 19115-2:2009) *Geographic information — Metadata — Extension for imagery and gridded data*, which focused on metadata for imagery and gridded data as they are important information sources and products used within a geospatial environment by geographic information systems. During the revision process it was noted that this metadata applied to the acquisition and processing of geographic information from all sources not just imagery and gridded data. Hence, the new title *Geographic information — Metadata — Extensions for acquisition and processing*. The production of all geographic information, including imagery and gridded data, follows one or more process chains that begins with remote sensing data, scanned maps, field data collection or other sensing methods and ends with the creation of the end data products. The production process needs to be documented to maintain quality control over the end products. In addition, metadata about the geometry of the measuring process and the properties of the measuring equipment need to be retained with the raw data to support the production process.

The object of this document is to provide the additional structure needed to more extensively describe the acquisition and processing of geographic information from all sources. This structure is intended to augment ISO 19115-1. This document also provides an XML schema for implementing this document using ISO/TS 19115-3.

— This page is intentionally blank —

Geographic information — Metadata —

Part 2: Extensions for acquisition and processing

1 Scope

This document extends ISO 19115-1:2014 by defining the schema required for an enhanced description of the acquisition and processing of geographic information, including imagery. Included are the properties of measuring systems and the numerical methods and computational procedures used to derive geographic information from the data acquired by them. This document also provides the XML encoding for acquisition and processing metadata thereby extending the XML schemas defined in ISO/TS 19115-3.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19103:2015, *Geographic information — Conceptual schema language*

ISO 19115-1:2014, *Geographic information — Metadata — Part 1: Fundamentals*

ISO 19157:2013, *Geographic information — Data quality*

ISO/IEC 19501:2005, *Information technology — Open Distributed Processing — Unified Modeling Language (UML) Version 1.4.2*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 19115-1:2014 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

attribute

named property of an entity

Note 1 to entry: Describes a geometrical, topological, thematic, or other characteristic of an entity.

[SOURCE: ISO/IEC 2382:2015, 2121440, modified — Note 1 to entry replaces Notes 1 and 2 to entry.]

3.2

band

range of wavelengths of electromagnetic radiation that produce a single response by a sensing device

[SOURCE: ISO/TS 19101-2:2008, 4.1]

3.3

class

description of a set of objects that share the same *attributes* (3.1), operations, methods, relationships, and semantics

[SOURCE: ISO 19103:2015, 4.7]

3.4

coverage

feature that acts as a function to return *values* (3.29) from its range for any direct position within its spatial, temporal or spatiotemporal *domain* (3.8)

EXAMPLE Raster *image* (3.18), polygon overlay, or digital elevation matrix.

[SOURCE: ISO 19123:2005, 4.1.7, modified — NOTE deleted.]

3.5

data type

specification of a *value domain* (3.30) with operations allowed on *values* (3.29) in this *domain* (3.8)

[SOURCE: ISO 19103:2015, 4.14, modified — EXAMPLE and Note 1 to entry deleted.]

3.6

dataset

identifiable collection of data

[SOURCE: ISO 19115-1:2014, 4.3, modified — Note 1 to entry deleted.]

3.7

dataset series

collection of *datasets* (3.6) sharing common characteristics

[SOURCE: ISO 19115-1:2014, 4.4]

3.8

domain

well-defined set

[SOURCE: ISO 19109:2015, 4.8, modified — Note 1 to entry deleted.]

3.9

event

action which occurs at an instant

[SOURCE: ISO 19108:2002, 4.1.6]

3.10

geolocation information

information used to determine geographic location corresponding to *image* (3.18) location

3.11

georectified

corrected for positional displacement with respect to the surface of the Earth

3.12

georeferencing

geopositioning an object using a Correspondence Model derived from a set of points for which both ground and *image* (3.18) coordinates are known

[SOURCE: ISO/TS 19130:2010, 4.37]

3.13

grid

network composed of two or more sets of curves in which the members of each set intersect the members of the other sets in an algorithmic way

Note 1 to entry: The curves partition a space into grid cells.

[SOURCE: ISO 19123:2005, 4.1.23]

3.14

grid coordinate system

coordinate system in which a position is specified relative to the intersection of curves

3.15

grid coordinates

sequence of two or more numbers specifying a position with respect to its location on a *grid* (3.13)

3.16

gridded data

data whose *attribute* (3.1) *values* (3.29) are associated with positions on a *grid coordinate system* (3.14)

3.17

ground control point

point on the earth that has an accurately known geographic position

3.18

image

gridded *coverage* (3.4) whose *attribute* (3.1) *values* (3.29) are a numerical representation of a physical parameter

Note 1 to entry: The physical parameters are the result of measurement by a *sensor* (3.27) or a prediction from a model.

3.19

imagery

representation of phenomena as *images* (3.18) produced by electronic and/or optical techniques

Note 1 to entry: In this document, it is assumed that the objects and phenomena have been sensed or detected by radar, cameras, photometers, and infrared and multispectral scanners, or similar devices.

[SOURCE: ISO 19101-2:2008, 4.14]

3.20

metadata

information about a resource

[SOURCE: ISO 19115-1:2014, 4.10]

3.21

pass

single instance of a remote, mobile measuring system going by a target of interest

Note 1 to entry: In this document, the measuring system will usually be a *remote sensing* (3.25) *platform* (3.23). In a navigation context, the measuring system might be a GPS satellite.

3.22

pixel

smallest element of a digital *image* (3.18) to which *attributes* (3.1) are assigned

Note 1 to entry: It is the smallest unit of display for a visible image.

[SOURCE: ISO/TS 19101-2:2008, 4.28, modified — Note 1 to entry replaces NOTES 1 and 2.]

3.23

platform

structure which supports a *sensor* (3.27) or sensors

3.24

polarization

restricting radiation, especially light, vibrations to a single plane

3.25

remote sensing

collection and interpretation of information about an object without being in physical contact with the object

[SOURCE: ISO/TS 19101-2:2008, 4.33]

3.26

resolution (of a sensor)

smallest difference between indications of a *sensor* (3.27) that can be meaningfully distinguished

Note 1 to entry: For *imagery* (3.19), resolution refers to radiometric, spectral, spatial and temporal resolutions.

[SOURCE: ISO/TS 19101-2:2008, 4.34]

3.27

sensor

element of a measuring system that is directly affected by a phenomenon, body, or substance carrying a quantity to be measured

[SOURCE: ISO/IEC Guide 99:2007, 3.8, modified — EXAMPLES and NOTE deleted.]

3.28

spectral width

specific wavelength interval within the electromagnetic spectrum

EXAMPLE *Band* (3.2) 1 of Landsat TM lies between 0,45 µm and 0,52 µm in the visible part of the spectrum.

3.29

value

element of a type *domain* (3.8)

[SOURCE: ISO/IEC 19501:2005, 0000_5]

3.30

value domain

set of accepted *values* (3.29)

EXAMPLE The range 3-28, all integers, any ASCII character, enumeration of all accepted values (green, blue, white).

[SOURCE: ISO 19103:2015, 4.37]

4 Symbols and abbreviated terms

4.1 Abbreviated terms

IDL Interface Definition Language

OCL Object Constraint Language

UML Unified Modelling Language

5 Conformance

5.1 Conformance requirements

Metadata shall be provided as specified in Clause 6 and Annex B of this document and ISO 19115-1:2014, Clause 6 and Annex B.

User-defined metadata extensions to this document shall be defined and provided as specified in ISO 19115-1:2014, Annex C.

Any metadata claiming conformance with this document shall pass the requirements described in Annex A of this document and the abstract test suite presented in ISO 19115-1:2014, Annex A.

5.2 Metadata profiles

Any profile conforming to this document shall conform to the rules for creating a profile given in ISO 19115-1:2014, C.6.

6 Acquisition and processing metadata

6.1 Metadata for acquisition and processing requirements

ISO 19115-1 identifies the metadata required to describe digital geographic resources. This document extends the metadata identified in ISO 19115-1 and identifies additional metadata required to describe the acquisition and processing of geographic resources.

6.2 Acquisition and processing metadata packages and dependencies

The ISO geographic information series of standards are defined using one or more UML packages and are maintained in a single integrated UML model. This document utilizes and extends concepts defined in several of these other standards' packages. Figure 1 illustrates the UML packages upon which this document is dependent. Dependencies between packages not defined in this document are not displayed. Metadata for acquisition and processing are defined and provided by one or more packages; each package provides a separate component of metadata information. There are four packages that are used to define and provide the metadata that is defined in this document: Acquisition information, Extended lineage information, Extended spatial representation information, and Extended content information.

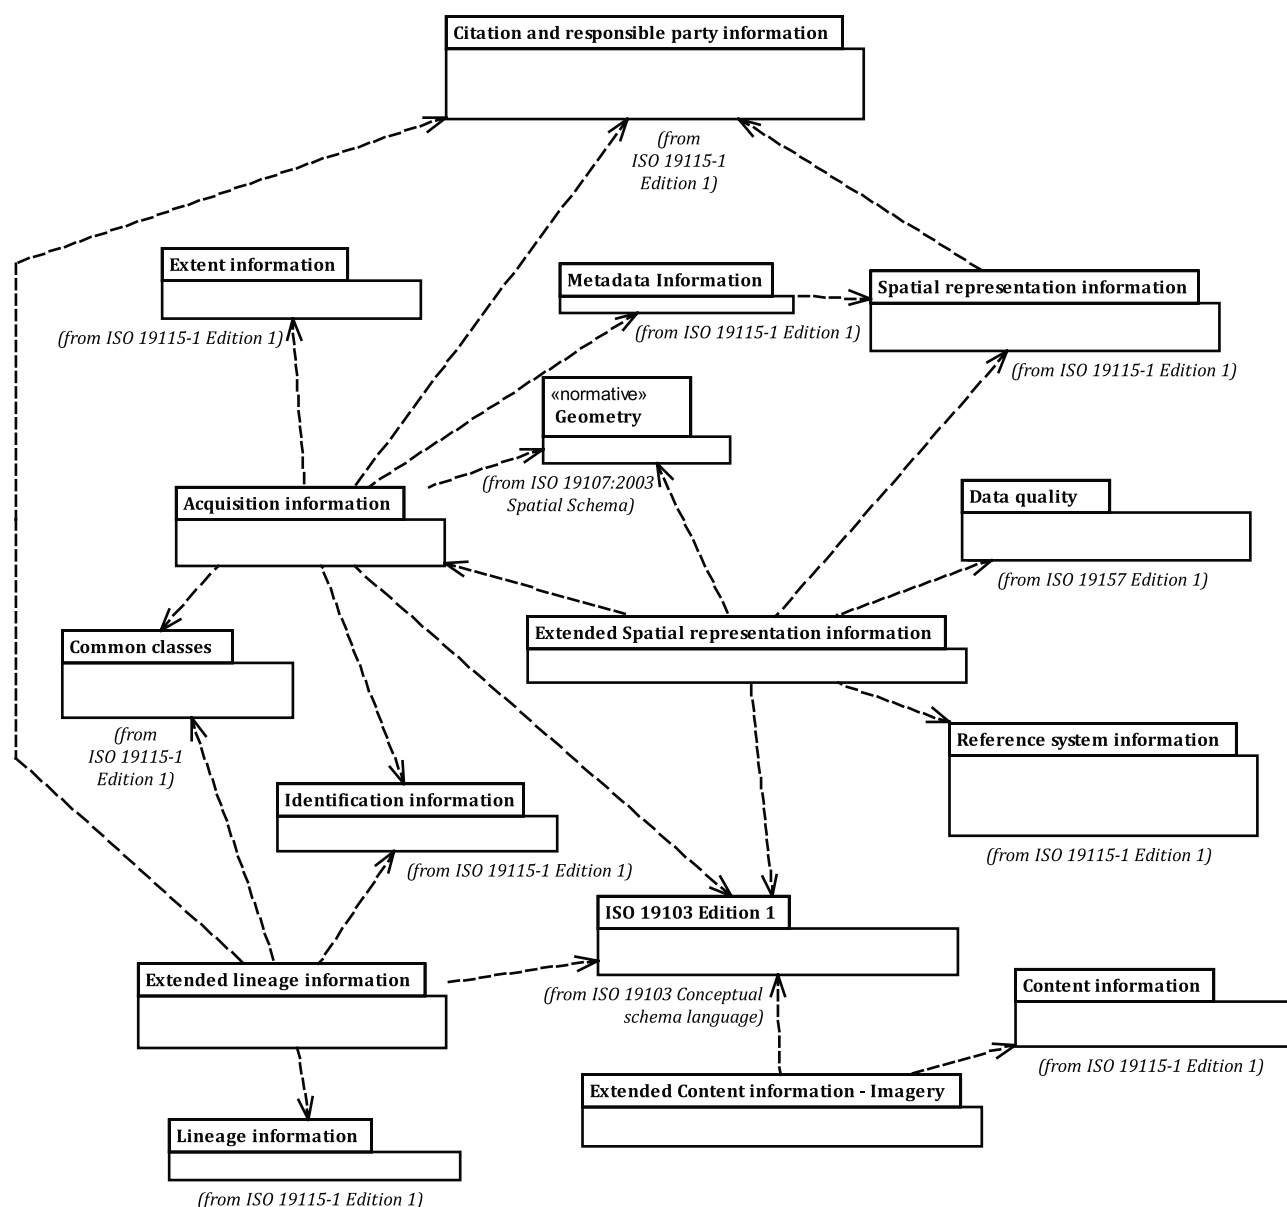


Figure 1 — Metadata packages

6.3 Acquisition and processing metadata class diagrams by package

6.3.1 Introduction

Metadata are composed of one or more metadata packages containing one or more metadata classes containing attributes. The relationships between metadata packages and between metadata classes are specified by composition and aggregation relationship symbols. Class attributes and relationships are referred to collectively as metadata elements. The diagrams in 6.3.2 through 6.3.5 provide “views”, which are portions of the total abstract model for metadata. Each diagram defines a metadata UML package of related classes, elements, data types, and code lists. Related external classes are shown with attributes relevant for this document and the package where they are fully specified identified by the package name proceeding a double colon (::). In some cases, this package may be from another standard identified by a labelled boxed outline. Since the classes in ISO 19115-1 being extended cannot be modified the class being modified is redefined in this document using a similar name. To differentiate between ISO 19115-1 and entities of this document, this part uses different prefixes. The prefixes used are MI (to denote an extended MD class), LE (LI extended) and CE (CI Extended).

The classes from ISO 19115-1, being extended, are contained in a box labelled as such. The metadata are fully specified by the UML model diagrams and an associated data dictionary for each package in Annex B. Abstract classes (which are classes that are defined for schematic organization purposes, i.e. only their subclasses are implemented) are identified with their names in *italic*. Codelists and their values provided in this document are normative. User extensions to codelists shall follow the rules as described in ISO 19115-1:2014, Annex C.

NOTE In some cases, optional classes can have mandatory elements; those elements become mandatory only if the optional element is used.

6.3.2 Acquisition Information

6.3.2.1 Acquisition overview

This package extends MD_Metadata in ISO 19115-1 and provides details specific to the acquisition of geospatial data using imagery, sensors, and other acquisition methods. MI_AcquisitionInformation is an aggregate of the following entities:

- MI_Instrument, designations of the measuring instruments used to acquire the data;
- MI_Sensor, a specific type of MI_Instrument;
- MI_Operation, designations of the overall data gathering program to which the data contribute;
- MI_Platform, designations of the platform from which the data were taken;
- MI_InstrumentEventList, which lists events affecting MI_Platform and MI_Instrument;
- MI_InstrumentEvent which identifies events affecting MI_Platform and MI_Instrument;
- MI_Revision which identifies the revision history of events;
- MI_Objective, the characteristics and geometry of the intended object to be observed;
- MI_Requirement, the user requirements used to derive the acquisition plan;
- MI_Plan, the acquisition plan that was implemented to acquire the data.

Two additional classes are required to provide information on the acquisition of the data. These are:

- MI_Event, describes a significant event that occurred during data acquisition. An event can be associated with an operation, objective, or platform pass, and
- MI_PlatformPass, identifies a particular pass made by the platform during data acquisition. A platform pass is used to provide supporting identifying information for an event and for data acquisition of a particular objective.

Figure 2 defines an overview of the metadata classes required to define the acquisition of data. The data dictionary for this diagram is provided in B.2.1.

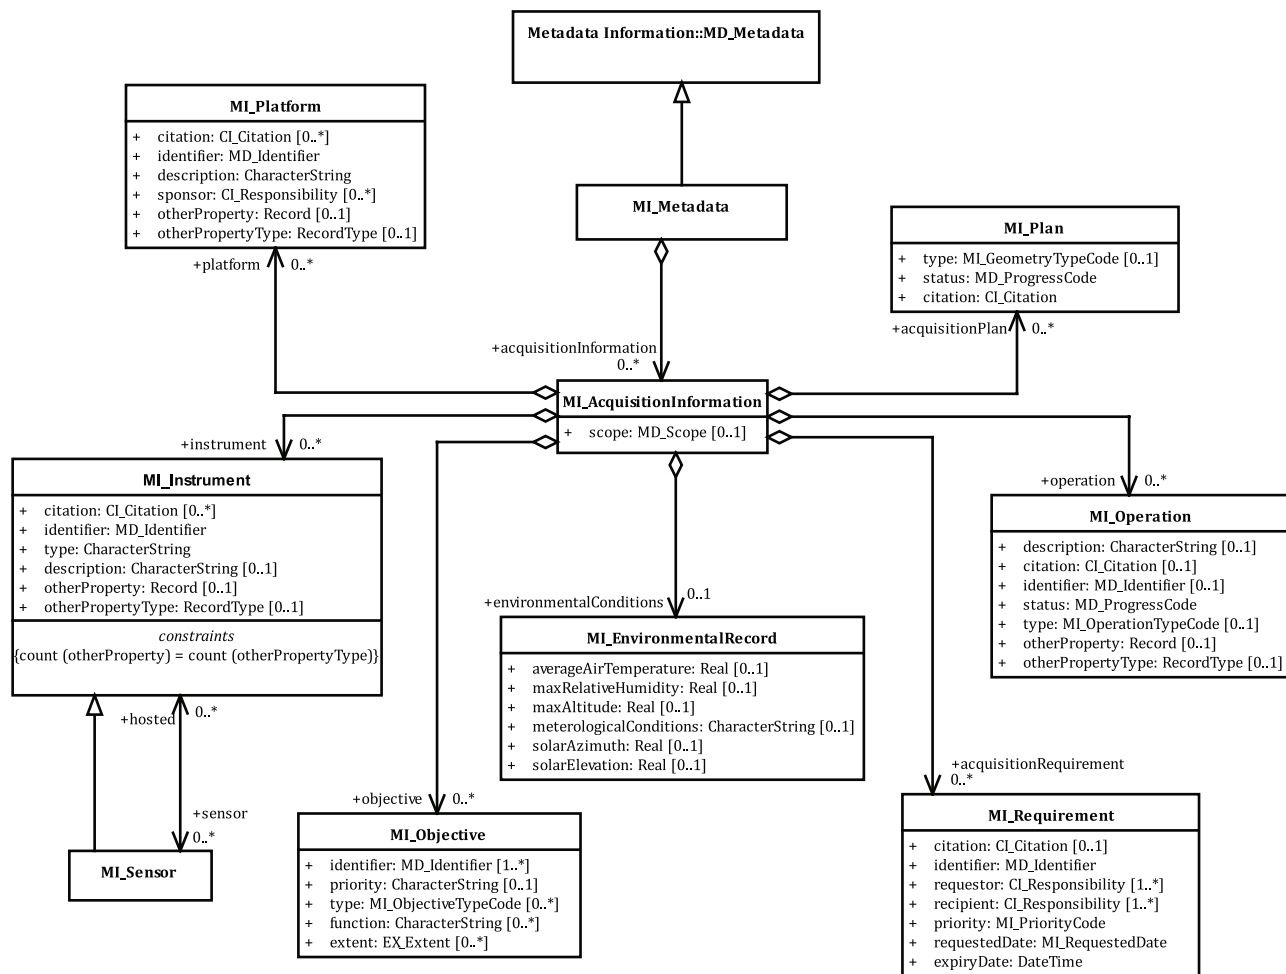


Figure 2 — Acquisition Overview

6.3.2.2 Acquisition Details

Figure 3 defines, in additional detail, the metadata classes necessary to define the acquisition of data. The data dictionary for this diagram is provided in B.2.1.