DIN EN ISO 19123-3

ICS 35.240.70

Geoinformation – Coverage Geometrie- und Funktionsschema – Teil 3: Grundlagen der Verarbeitung (ISO 19123-3:2023, korrigierte Fassung 2023-11); Englische Fassung EN ISO 19123-3:2023

Geographic information –
Schema for coverage geometry and functions –
Part 3: Processing fundamentals (ISO 19123-3:2023, Corrected version 2023-11);
English version EN ISO 19123-3:2023

Information géographique –
Schéma de la géométrie et des fonctions de couverture –
Partie 3: Principes de base du traitement (ISO 19123-3:2023, Version corrigée 2023-11);
Version anglaise EN ISO 19123-3:2023

Gesamtumfang 87 Seiten

DIN-Normenausschuss Bauwesen (NABau)

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

Nationales Vorwort

Dieses Dokument (EN ISO 19123-3:2023) wurde vom Technischen Komitee ISO/TC 211 „Geographic information/Geomatics“ in Zusammenarbeit mit dem Technischen Komitee CEN/TC 287 „Geoinformation“ erarbeitet, dessen Sekretariat von BSI (Vereinigtes Königreich) gehalten wird.

Für Deutschland hat hieran der Arbeitsausschuss NA 005-03-03 AA „Geoinformation (SpA zu CEN/TC 287+ISO/TC 211)“ im DIN-Normenausschuss Bauwesen (NABau) mitgearbeitet.

Dieses Dokument enthält unter Berücksichtigung des DIN-Präsidialbeschlusses 1/2004 nur die Englische Fassung von EN ISO 19123-3:2023.

Für die in diesem Dokument zitierten Dokumente wird im Folgenden auf die entsprechenden deutschen Dokumente hingewiesen:

ISO 19111	siehe	DIN EN ISO 19111
ISO 19123-1	siehe	DIN EN ISO 19123-1

Aktuelle Informationen zu diesem Dokument können über die Internetseiten von DIN (www.din.de) durch eine Suche nach der Dokumentennummer aufgerufen werden.

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Nationaler Anhang NA
(informativ)

Begriffe

Reihenfolge und Inhalt der folgenden Begriffe sind identisch mit denen im Abschnitt Begriffe der Englischen Fassung.

Für die Anwendung dieses Dokuments gelten die Begriffe nach ISO 19123-1 und die folgenden Begriffe.

ISO und IEC stellen terminologische Datenbanken für die Verwendung in der Normung unter den folgenden Adressen bereit:

— ISO Online Browsing Platform: verfügbar unter https://www.iso.org/obp

— IEC Electropedia: verfügbar unter https://www.electropedia.org/

3.1
Abtastfunktion
en **probing function**
<Coverage> Funktion zur Extraktion von Informationen aus dem Coverage

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

Nationaler Anhang NB
(informativ)

Literaturhinweise

DIN EN ISO 19111, *Geoinformation — Koordinatenreferenzsysteme*

DIN EN ISO 19123-1, *Geoinformation — Coverage Geometrie- und Funktionsschema — Teil 1: Grundlagen*

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

EUROPEAN STANDARD

NORME EUROPÉENNE

EUROPÄISCHE NORM

EN ISO 19123-3

July 2023

ICS 35.240.70

English Version

Geographic information - Schema for coverage geometry and functions - Part 3: Processing fundamentals (ISO 19123-3:2023, Corrected version 2023-11)

Information géographique - Schéma de la géométrie et des fonctions de couverture - Partie 3: Principes de base du traitement (ISO 19123-3:2023, Version corrigée 2023-11)

Geoinformation - Coverage Geometrie- und Funktionsschema - Teil 3: Grundlagen der Verarbeitung (ISO 19123-3:2023, korrigierte Fassung 2023-11)

This European Standard was approved by CEN on 20 May 2023.

This European Standard was corrected and reissued by the CEN-CENELEC Management Centre on 15 November 2023.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.

EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

European foreword

This document (EN ISO 19123-3:2023) has been prepared by Technical Committee ISO/TC 211 "Geographic information/Geomatics" in collaboration with Technical Committee CEN/TC 287 “Geographic Information” the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by January 2024, and conflicting national standards shall be withdrawn at the latest by January 2024.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users’ national standards body/national committee. A complete listing of these bodies can be found on the CEN website.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

Endorsement notice

The text of ISO 19123-3:2023, Corrected version 2023-11 has been approved by CEN as EN ISO 19123-3:2023 without any modification.

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Contents

Foreword v

Introduction vi

1 Scope 1

2 Normative references 1

3 Terms and definitions 1

4 Conformance 2
4.1 Notation 2
4.2 Interoperability and conformance testing 2
4.3 Organization 2

5 Coverage model 2
5.1 Overview 2
5.2 Coverage model 2
5.3 Coverage identifier 3
5.4 Domain 4
5.4.1 Direct position 4
5.4.2 Grid 4
5.5 Interpolation 6
5.6 Range values 7
5.7 Range type 7
5.8 Coverage probing functions synopsis 7

6 Coverage processing language 9
6.1 Syntax and Semantics Definition Style 9
6.1.1 Expression Syntax 9
6.1.2 Expression Semantics 10
6.2 Coverage Processing Expressions 10
6.2.1 processCoveragesExpr 10
6.2.2 processingExpr 12
6.2.3 coverageExpr 12
6.2.4 coverageIdExpr 12
6.3 Coverage-Generating Expressions 13
6.3.1 coverageConstructorExpr 13
6.3.2 Examples 16
6.4 Coverage Extraction Expressions 18
6.4.1 scalarExpr 18
6.4.2 getComponentExpr 18
6.4.3 booleanScalarExpr 19
6.4.4 numericScalarExpr 19
6.4.5 stringScalarExpr 20
6.5 Coverage range value-changing expressions 20
6.5.1 inducedExpr 20
6.5.2 unaryInducedExpr 20
6.5.3 trigonometricExpr 23
6.5.4 binaryInducedExpr 28
6.5.5 N-ary Induced operations 30
6.5.6 Coverage Domain-Changing Expressions 33
6.5.7 scaleExpr 37
6.6 Coverage Derivation Expressions 38
6.6.1 crsTransformExpr 38

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

6.7 Coverage Aggregation Expressions 39
6.7.1 condenseExpr 39
6.7.2 generalCondenseExpr 39
6.7.3 reduceExpr 42
6.8 Coverage Encode/Decode Expressions 43
6.8.1 encodeCoverageExpr 43
6.8.2 decodeCoverageExpr 44
6.9 Expression evaluation 45
6.9.1 Evaluation sequence 45
6.9.2 Nesting 45
6.9.3 Parentheses 45
6.9.4 Operator precedence rules 45
6.9.5 Range type compatibility and extension 46
6.10 Evaluation response 46
Annex A (normative) Conformance Tests 48
Annex B (normative) Expression Syntax 49
Annex C (informative) Syntax diagrams 57
Annex D (informative) Sample service descriptions 74
Bibliography 77

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 211, *Geographic information/Geomatics,* in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 287, *Geographic Information,* in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement), in collaboration with the Open Geospatial Consortium (OGC), and in collaboration with the IEEE GRSS Earth Science Informatics Technical Committee.

A list of all parts in the ISO 19123 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user’s national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

AVA Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

Introduction

This document defines, at a high level, implementation-independent operations on coverages, i.e. digital representations of space-time varying geographic phenomena, as defined in ISO 19123-1. Specifically, regular and irregular grid coverages are addressed. The operations can be applied through an expression language allowing composition of unlimited complexity and combining an unlimited number of coverages for data fusion.

The language is functionally defined and free of any side effects. Its conceptual foundation relies on only two constructs: A "coverage constructor" builds a coverage, either from scratch or by deriving it from one or more other coverages. A "coverage condenser" derives summary information from a coverage by performing an aggregation such as count, sum, minimum, maximum and average.

The coverage processing language is independent from any request and response encoding, as no concrete request/response protocol is assumed. Hence, this document does not define a concrete service, but acts as the foundation for defining service standards functionality. One such standardization target is the OGC Web Coverage Service (WCS).[3]

Throughout this document, the following formatting conventions apply.

— Bold-Face in the text, such as **processCoveragesExpr**, represents syntax elements, normatively defined in Annex B.
— Text in italics, such as *succ*(), represents mathematical functions and variables.
— Courier font, such as **`return`** and `encode`(), is used for code in the sense of the coverage processing language.

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Geographic information — Schema for coverage geometry and functions —

Part 3:
Processing fundamentals

1 Scope

This document defines a coverage processing language for server-side extraction, filtering, processing, analytics, and fusion of multi-dimensional geospatial coverages representing, for example, spatio-temporal sensor, image, simulation, or statistics datacubes. Services implementing this language provide access to original or derived sets of coverage information, in forms that are useful for client-side consumption.

This document relies on the ISO 19123-1 abstract coverage model. In this edition, regular and irregular multi-dimensional grids are supported for axes that can carry spatial, temporal or any other semantics. Future editions will additionally support further axis types as well as further coverage types from ISO 19123-1, specifically, point clouds and meshes.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19111, *Geographic information — Referencing by coordinates*

ISO 19123-1, *Geographic information — Schema for coverage geometry and functions — Part 1: Fundamentals*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 19123-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at https://www.electropedia.org/

3.1
probing function
<coverage> nction extracting information from the coverage

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

4 Conformance

4.1 Notation

Table 1 lists the other International Standards and packages in which UML classes used in this document have been defined.

Table 1 — Sources of externally defined UML classes

Prefix	International Standard	Package
	ISO 19123-1	Coverage Core, Grid Coverage

4.2 Interoperability and conformance testing

As an abstract standard, this document allows for multiple different implementations and does not define a standardized interoperable implementation. Rather, standardization targets are specifications of coverage operations and services which may use this language to describe the semantics of their operations.

Conformance testing shall be accomplished by validating a candidate concretization against all requirements by exercising the tests set out in Annex A. As a prerequisite, a candidate shall also pass all conformance tests of ISO 19123-1 Coverage Core and Grid Coverage.

4.3 Organization

Table 2 provides details of the conformance classes described in this document. The name and contact information of the maintenance agency for this document can be found at www.iso.org/maintenance_agencies.

Table 2 — Conformance classes

Conformance class	Clause	Identifying URL
Coverage Processing	6	https://standards.isotc211.org/19123/-3/1/conf/coverage-processing

5 Coverage model

5.1 Overview

This document defines a language whose expressions accept any number of input coverages (together with further common inputs like numbers and strings) to generate any number of output coverages or non-coverage results. Coverages are defined in ISO 19123-1.

5.2 Coverage model

Following the mathematical notion of a function that maps elements of a domain (such as spatio-temporal coordinates) to a range (such as values of a “pixel”, “voxel”, etc.), a coverage consists of (Figure 1):

— an *identifier* which uniquely identifies a coverage in some context (here, the context of an expression);

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

— a *domain* of coordinate points (expressed in a common Coordinate Reference System, CRS): "*where in the multi-dimensional space can I find values?*";

— a probing function which answers for each coverage coordinate in the domain ("*direct position*"): "*what is the value here?*";

— a *range type*: "*what do those values mean?*".

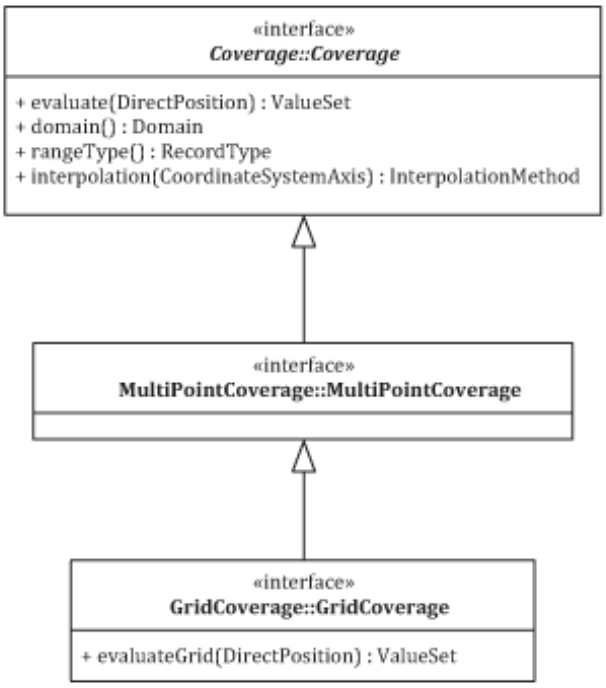

Figure 1 — Coverage and GridCoverage (ISO 19123-1)

NOTE 1 Coverage in ISO 19123-1 defines an interface which describes such an object's behaviour, but does not yet assume any particular data structure. One interoperable concretization of it is the implementation standard ISO 19123-2.

"Probing functions" are introduced below. Probing functions extract components from a given coverage. For every component of a coverage a corresponding probing function exists so that altogether all properties of a coverage can be retrieved. They serve to define this document's language semantics.

NOTE 2 In the processing definition of this document, further probing functions, beyond the ISO 19123-1 probing function *evaluate*(), are used as a concise means to describe all aspects of coverage-valued function results.

5.3 Coverage identifier

Coverages in this document have an identifier which is used in a query to address a coverage to derive from. Therefore, it is necessary for this identifier to be unique within some context (here: a query). No assumptions are made on the realization of this identifier. In particular, when the context of the coverage object changes (such as during delivery to a client) uniqueness is not necessarily guaranteed any longer. Therefore querying the object in the new context is potentially no longer possible.

NOTE In a concrete service, coverages available would typically be those which are stored on this server, where access control allows addressing the coverage according to the user sending the request, etc. All these aspects are out of scope of this document.

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

The corresponding probing function for a coverage C is:

$id(C)$

5.4 Domain

5.4.1 Direct position

A coverage offers values for positions in its domain. These are called “direct positions”. Further values can be derived through interpolation, depending on whether and what type of interpolation a coverage allows.

For some direct position $p = (p_1,..,p_d)$ from a domain whose d-dimensional CRS contains axes $(a_1,..,a_d)$, $p[a_i]$ is written for accessing the coordinate tuple component corresponding with axis a_i:

$p[a_i] = p_i$

5.4.2 Grid

The domain contains the coordinate tuples describing the coverage’s direct positions, which for the purpose of this document are on a multi-dimensional grid. Informally, this means that every direct position inside the grid has exactly one next neighbour in both directions of every axis, except for the rim, where obviously fewer neighbours are available. Figure 2 shows some regular and irregular grid examples.

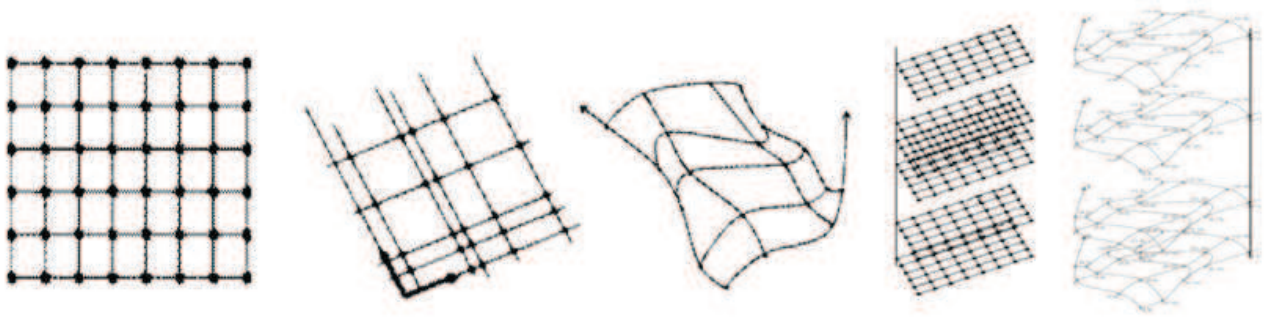

Figure 2 — Sample regular and irregular grid structures (ISO 19123-1)

The grid description depends on the complexity of the grid. As a grid is composed from an ordered sequence of axes, the resulting complexity is determined by the types of axes (such as integer versus Latitude versus time) as well as the rules determining the direct positions along these axes. The following axis types defined in ISO 19123-1 are currently supported by this document:

— a **Cartesian** (“index”) axis, which just requires lower and upper bound (which are of type integer);

— a **regular** axis, which can be described by lower and upper bounds together with a constant distance, the resolution;

— an **irregular** axis, which has individual distances, described by a sequence of coordinates.

As per ISO 19123-1, the coverage domain with its axes has a single CRS which can serve for geo-referencing. The definition and interpretation of CRSs is in accordance with ISO 19111.

The CRS of a domain is obtained through function $crs(C)$.

$crs(C)$

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Auxiliary probing function *axisList*()extracts the ordered list of axes (a_1,...,a_d) from a *d*-dimensional CRS:

axisList(*crs*)

NOTE In accordance with ISO 19123-1, all axis names in such a list are pairwise disjoint so that the names can act as a unique identifier within their CRS.

Each axis contributes coordinates from a nonempty, totally ordered set of values which can be numeric or, in the general case, strings (such as “2020-08-05T”).

For a given coverage *C*, probing function *domain*() delivers the coverage domain in its CRS:

domain(*C*)

The domain information describes the coverage’s grid and its extent for each axis:

— the lower and upper bound of the direct positions;

— additionally, the following information:

  — for index axes: nothing further;

  — for regular axes: the resolution, expressed in the unit of measure (uom) of the axis;

  — for irregular axes: the sequence of points.

This information is accessible through extended variants of the abovementioned functions. For some coverage domain *D* with axis *a*, the following expressions return lower and upper bounds, respectively:

domain(*C*, *a*).lo
domain(*C*, *a*).hi

For convenience, a function pair identical in effect but based on the domain is defined:

D[*a*].*lo* = *domain*(*C*, *a*).*lo*
D[*a*].*hi* = *domain*(*C*, *a*).*hi*

The grid of the coverage domain is represented implicitly through functions “walking” the grid from one direct position to one of its neighbours. This is based on the topological structure of a grid where each direct position has exactly one lower and one higher neighbour along each axis, with the exception of the domain rims where no such neighbour is available. Therefore, at the rim, these functions are partial.

Let *D* be given as the domain of coverage *C*, so that *D* = *domain*(*C*). Let further *a* be some axis from the CRS of *D*. Then, functions *pred*() and *succ*() each return a neighbouring direct position for some given position. Function *pred*() returns the immediate preceding direct position along axis *a*, function *succ*() returns the immediate succeeding direct position along *a*. Where there is no such direct position (because the input position is sitting at the rim of the domain extent) the value is undefined, written as ⊥.

pred(*D*, *a*, *p*) = *x* where
  if *p*[*a*] = *D*[*a*].*lo domain*(*C*,*a*).*lo* then *x* = ⊥
  else *x* is given by: *x*[a_x] = *p*[a_x] for all $a_x \in$ *domain*(*C*) \ {*a*}, and *x*[*a*] = max(*x*’ | *x*’ ∈ *domain*(*C*, *a*) and *x*’ < *p*[*a*])

succ(*D*, *a*, *p*) = *x* where
  if *p*[*a*] = *D*[*a*].*hi domain*(*C*,*a*).*hi* then *x* = ⊥

AVA Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

else x is given by: $x[a_x] = p[a_x]$ for all $a_x \in domain(C) \setminus \{a\}$, and $x[a] = \min(x' \mid x' \in domain(C, a)$ and $x' > p[a])$

EXAMPLE In Figure 3, neighbours of p in coverage domain D with axes x and y can be reached as follows:
a = $succ(D, y, pred(D, x, p)) = pred(D, x, succ(D, y, p))$
b = $succ(D, y, p)$
c = $succ(D, y, succ(D, x, p)) = succ(D, x, succ(D, y, p))$
d = $pred(D, x, p)$
e = $succ(D, x, p)$
f = $pred(D, x, pred(D, y, p)) = pred(D, y, pred(D, x, p))$
g = $pred(D, y, p)$
h = $succ(D, x, pred(D, y, p)) = \text{pred}(D, y, succ(D, x, p))$

In this document, for the user's convenience, basic arithmetic functions are assumed on this grid navigation:

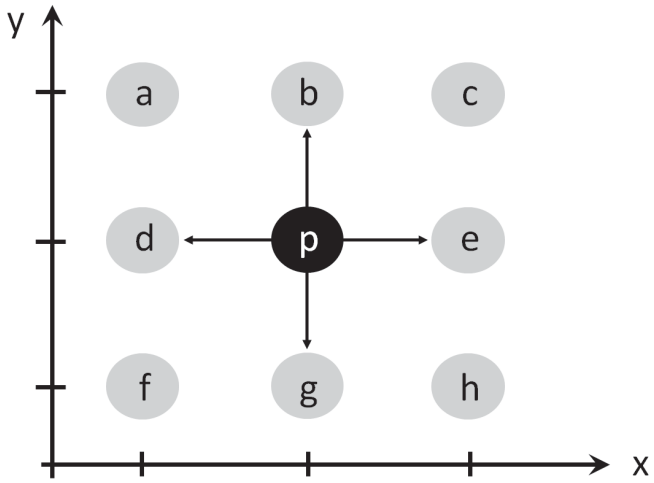

Figure 3 — Sample grid neighbourhood

5.5 Interpolation

In ISO 19123-1 a coverage contains an indication on possible interpolation between direct positions. Such interpolation can be set for all axes in a coverages simultaneously or, following a more fine-grain approach, individually per axis.

NOTE 1 In ISO 19123-1 every coverage has exactly one associated interpolation method (for all axes or per axis). In practice, coverages can allow users to pick one of several interpolation methods, such as with imagery where linear, quadratic and cubic interpolation are applicable on principle, and users can choose any one of those. Conceptually, however, two coverages differing only in the interpolation methods are distinct as they will deliver identical range values on their direct positions, but differing values inbetween those. At the abstract level of ISO 19123-1 and ISO 19123-3, this ambiguity is not desirable.

For the purpose of this document a special interpolation method `none` is assumed as defined, for example, in ISO 19123-1:2023, Annex B. `None` indicates that no interpolation is possible along the axis under consideration.

NOTE 2 The interpolation method `none` is different from `nearest-neighbor`: An interpolation of `nearest-neighbor` provides values inbetween direct positions which are derived from the closest direct position. Interpolation `none` means that no values are provided between direct positions. In other words: the evaluation function is undefined on any non-direct position and will in practice result in an exception.

Function *interpolation*(C,a) returns the interpolation method applicable on each axis of coverage C, in order of the CRS axis sequence. For *dimension*(C)=d the probing function delivers interpolation method list (m_1,...,m_d) with interpolation method m_i applying to axis number i:

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

interpolation(*C*)

This function is overloaded to extract the interpolation method associated with axis *a* of *C*:

interpolation(*C*, *a*)

NOTE 3 Interpolation is particularly relevant with functions *scale*() and *project*().

5.6 Range values

The range value at a direct position *p* can be obtained with function $evaluate_C(p)$ which, for a given coverage *C*, returns the value associated with $p \in domain(C)$ expressed in the coverage's CRS.

The corresponding probing function is:

$value(C, p) = evaluate_C(p)$ for some direct position $p \in domain(C)$

Interpolation guides whether the *value*() function is defined on coordinates outside the set of direct positions, and how this value is determined from the values available at the direct positions.

NOTE The range value set can contain one or more null values, as determined by the range type. This document does not make any assumption on this.

5.7 Range type

A coverage's range type description can be obtained through probing function *rangeType*() which delivers a set of tuples containing at least field names and field type:

rangeType(*C*)

This function gets overloaded to obtain the coverage range type of a particular range field component *f*:

rangeType(*C*, *f*)

For the purpose of this document, only the common programming language data types are considered, and only on a high, abstract level. These are Boolean, integer, float and complex, as well as records over those assumed to be available. However, an implementation specification based on this document may add its own data types as long as these are coherent with this document overall.

NOTE The concrete range types available in coverage processing are determined by concretizations of this document. Typically, the standard programming language data types will be available, such as (unsigned) short, int, and long, as well as float and double. For example, the range type (aka pixel) of an 8-bit RGB image normally is given by the triple < red: unsigned char; green: unsigned char; blue: unsigned char>. Further, a concretization can add more information such as null values, accuracy, etc.

5.8 Coverage probing functions synopsis

Requirement 1 https://standards.isotc211.org/19123/-3/1/req/core/probingFunctions
The semantics of the probing functions used for the ISO 19123-1 language semantics definition **shall** be given by Table 3.

Table 3 —Coverage probing functions synopsis

AVA Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

Coverage characteristic	Probing function for a coverage *C*, based on ISO 19123-1	Comment
Coverage identifier	*id*(*C*)	Identifier of the coverage.
Coverage CRS	*crs*(*C*) = *crs* (*domain*(*C*)) as per ISO 19123-1	CRS of the coverage.
CRS axis list	*axisList*(*c*) = (a_1,...,a_d) for some *d*-dimensional CRS *c* establishing this axis sequence	List of all axis names of the CRS, in proper sequence.
Domain extent of coverage	*domain*(*C*) *domain*(*C*, *a*) = domain extent along axis *a* *domain*(*C*, *a*).lo = lower bound of domain extent along axis *a* *domain*(*C*, *a*).hi = upper bound of domain extent along axis *a*	Extent of the coverage in CRS coordinates.
Grid neighbour	*pred*(*C*, *a*, *p*) *succ*(*C*, *a*, *p*) as defined in 5.4.2	These functions allow to traverse a grid in steps relative to some given position, such as for convolution operations and, generally, Tomlin's non-local operations.
Range type	*rangeType*(*C*) *rangeType*(*C*, *f*) = *t* where (*f*:*t*,...) ∈*rangeType*(*C*)	The range type record is described by a list describing its components in sequence; for the purpose of this document only component name and its data type are considered.
Range field name list	*rangeFieldNames*(*C*) = f_1, ..., f_n) where *rangeType*(*C*) = ((f_1;t_1,...), ..., (f_n:t_n,...)), with field names f_i and types t_i	Ordered list of all the coverage's range fields names and their data types; possible further constituents in a record component are ignored in this document, their values are to be defined elsewhere (e.g. implementation dependent).
Range values	*value*(*C*,*p*) = *evaluate*$_C$(*p*),*p*∈*domain*(*C*) with *evaluate*() as per 19123-1	Range values of the coverage at a direct position (or some position inbetween, interpolation permitting).

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Coverage characteristic	Probing function for a coverage *C*, based on ISO 19123-1	Comment
Interpolation	*interpolation*(*C*) as per ISO 19123-1 *interpolation*(*C, a*) = interpolation method of axis *a*	List of the interpolation method allowed per axis, in axis order; in case the coverage has only one interpolation defined for all axes, this method is multiplied into all positions of the output list. Interpolation associated with a particular axis.

6 Coverage processing language

This clause establishes the conformance class *Coverage Processing*.

This coverage processing language defines expressions on coverages which evaluate to ordered lists of either coverages or scalars (whereby "scalar" here is used as a summary term of all data structures that are not coverages). In the remainder of this document, the terms *processing expression* and *query* are used interchangeably.

A coverage processing expression consists of a **processCoveragesExpr** (see 6.2). Each International Standard claiming to support this document shall provide the coverage processing operations as specified in the following subclauses. A sample application is provided in Annex D.

NOTE 1 This language has been designed to be "safe in evaluation", i.e. implementations are possible where any valid request can be evaluated in a finite number of steps, based on the operation primitives. Hence, services based on the language constructs can be built in a way that no single request can render the service permanently unavailable. This notwithstanding, it still is possible to send requests that will impose high workload on a server.

NOTE 2 Data items within a query result list can be heterogeneous in size and structure. In particular, the coverages within an evaluation result list can have different dimensions, domains, range types, etc. However, a result list always consists of either coverages or scalar values, not a mix of both.

6.1 Syntax and Semantics Definition Style

6.1.1 Expression Syntax

The language primitives plus the nesting capabilities form an expression language which is independent from any specific encoding and service protocol. Collectively it is referred to as the **coverage processing language**. In the following subclauses, the language elements are detailed. The complete syntax is listed in Annex B.

A coverage processing expression is called **admissible** if and only if it adheres to the syntax of the language definition of this document.

Requirement 2 https://standards.isotc211.org/19123/-3/1/req/core/syntax
Coverage processing expressions **shall** adhere to the syntax definition of Annex B.

NOTE A railroad diagram of the syntax in Annex B is provided in Annex C for visualization of the grammar.

EXAMPLE The coverage expression fragment `$c * 2`is admissible as it adheres to language syntax whereas `abc` seen as a coverage expression violates the syntax and, hence, is not admissible.

AVA Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

6.1.2 Expression Semantics

The semantics of a coverage processing expression is defined recursively by indicating, for all admissible expressions, the semantics. An expression is **valid** if and only if it is admissible and complies with all rules imposed by the language semantics.

Requirement 3 https://standards.isotc211.org/19123/-3/1/req/core/semantics
Coverage processing expressions **shall** adhere to all semantics rules of this document.

EXAMPLE The following coverage expression is valid if and only if the coverage bound to variable `$c` has a numeric range component named `red`.

```
$c.red * 2.5
```

NOTE In the remainder of this clause, tables are used to describe the effect of an operation on each coverage constituent.

The semantics of coverage processing expressions is defined via so-called *probing functions* which extract information from a coverage.

6.2 Coverage Processing Expressions

6.2.1 processCoveragesExpr

A **processCoveragesExpr** element processes a list of coverages in turn. Each coverage is optionally checked first for fulfilling some predicate, and gets selected, i.e. contributes to an element of the result list, only if the predicate evaluates to *true*. Each coverage selected will be processed, and the result will be appended to the result list. This result list, finally, is returned as the *ProcessCoverages* response unless any exception was generated.

Requirement 4 https://standards.isotc211.org/19123/-3/1/req/core/processCoveragesExpr
A **processCoveragesExpr shall** be defined as follows.

Let

v_1, ... v_n be n pairwise different **iteratorVar**s ($n \geq 1$),
L_1, ... L_n be n **coverageList**s ($n \geq 1$),
b be a **booleanScalarExpr** possibly containing occurrences of one or more v_i ($1 \leq i \leq n$),
P be a **processingExpr** possibly containing occurrences of v_i ($1 \leq i \leq n$).

Then,

$m, n \geq 1$ be natural numbers,
v_1, ... c_n, be n **iteratorVar**s,
c_1, ... c_m, be n pairwise different **variableName**s,
e_1, ... e_m, be $n+m$ optional **coverageExpr**s or **scalarExpr**s or bracket-enclosed **intervalExpr**s, which may contain occurrences of v_1, ... c_n and c_1, ... c_m,
c be a **coverageExpr** or **scalarExpr**,
where every c_i is defined before used in an expression.

Then,

for any **processCoveragesExpr** E
where
E = **for** v_1 **in** (L_1),

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

```
        v2 in ( L2),
         … ,
        vn in ( Ln)
        [letc1 := e1,…, cm := em ]
        [where b ]
        return P
```

the result *R* of evaluating **processCoveragesExpr** *E* is constructed as:

```
Let R be the empty sequence;
while L1 is not empty:
{  assign the first element in L1 to iteration variable v1;
   while L2 is not empty:
   {   assign the first element in L2 to iteration variable v2;
       …
           while Ln is not empty:
           {   assign the first element in Ln to iteration variable vn;
               substitute every occurrence of ci in E by ei;
               substitute every occurrence of vi in E
                  by the corresponding coverage;
               evaluate b;
               if (b)
               then
                  evaluate P;
                  append evaluation result to R;
                  remove the first element from Ln;
           }
       …
       }
       remove the first element from L2;
   }
   remove the first element from L1;
}
```

The elements contained in the **coverageList** clause, constituting coverage identifiers, are taken from the coverage identifiers advertised by the server.

NOTE 1 Coverage identifiers can occur more than once in a **coverageList**. In this case the coverage will be evaluated each time it appears, respecting the overall inspection sequence.

EXAMPLE 1 Assume availability of coverages *A*, *B* and *C*. Then, the following request:

```
for $c in ( A, B, C )
return encode( $c, "image/tiff" )
```

will produce a result list containing three TIFF-encoded coverages.

Assume availabilityof satellite images *A*, *B*, and *C* and a coverage *M* acting as a mask (i.e. with range values of 0 and 1 and the same extent as *A*, *B*, and *C*). Then, masking each satellite image can be performed with this query:

```
for $s in ( A, B, C ),
    $m in ( M )
return encode( $s * $m, "image/tiff" )
```

The **let** clause declares a named constant and gives it a value.

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

EXAMPLE 2 The following statement defines a constant of name `$timeAxis` with value “date”.

```
let $timeAxis := "date"
```

NOTE 2 In most cases, named constants are used purely for convenience, to simplify the expressions and make the code more readable.

In a **`let`** clause the named constant only takes one value. This can be a single item or a sequence (there is no real distinction; an item is just a sequence of length one), and the sequence can contain nodes, or atomic values, or a mixture of the two.

Named constants cannot be updated. For example, something like `let $x:=$x+1` is not allowed. More specifically, it will not lead to an evaluation error, but the result will not be as expected (see literature on XPath). This rule can seem very strange if expecting a behaviour as in procedural languages such as JavaScript or python. But the coverage processing language is not that kind of language. It is a declarative language which works at a higher level. This constraint is essential to give optimizers the chance to find execution strategies that can search vast databases in fractions of a second. SQL, XSLT and XQuery users have found that this declarative style of programming enables to code at a higher level by telling the system what results are wanted, rather than telling it how to go about constructing those results.

6.2.2 processingExpr

Requirement 5 https://standards.isotc211.org/19123/-3/1/req/core/processingExpr
A **processingExpr** element **shall** be either an **encodeCoverageExpr** (see 6.8.1) or a **scalarExpr** (see 6.4.1).

6.2.3 coverageExpr

Requirement 6 https://standards.isotc211.org/19123/-3/1/req/core/coverageExpr
A **coverageExpr shall** be either a **coverageIdExpr** (see 6.2.4) or a **coverageConstructorExpr** (see 6.3.1) or a **coverageConstantExpr** (see 6.3.1) or a **getComponentExpr** (see 6.4.1) or an **inducedExpr** (see 6.5.1) or a **subsetExpr** (see 6.5.6.1) or a **crsTransformExpr** (see 6.6) or a **scaleExpr** (see 6.5.7) or a **decodeCoverageExpr** (see 6.8.2).

NOTE A **coverageExpr** always evaluates to a single coverage.

6.2.4 coverageIdExpr

The **coverageIdExpr** element represents the name of a single coverage available. It is represented by a coverage variable indicated in the **processCoveragesExpr** clause (see 6.2).

Requirement 7 https://standards.isotc211.org/19123/-3/1/req/core/coverageIdentifier
A **coverageIdExpr shall** be defined as follows.

Let

> *id* be a **variableName** bound to a coverage C_1 available.

Then,

> for any **coverageExpr** C_2,
> where
> C_2 = *id*
>
> C_2 is defined as:

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Coverage constituent
$id(C_2) = id(C_1)$
$crs(C_2) = crs(C_1)$
$domain(C_2) = domain(C_1)$
$interpolation(C_2) = interpolation(C_1)$
$rangeType(C_2) = rangeType(C_1)$
for all $p \in domain(C_2)$: $value(C_2,p) = value(C_1,p)$

EXAMPLE The following coverage expression evaluates to the complete, unchanged coverage `C`, assuming that coverage iteration variable `$c` is bound to it at the time of evaluation:

```
$c
```

6.3 Coverage-Generating Expressions

6.3.1 coverageConstructorExpr

The **coverageConstructorExpr** element creates a d-dimensional grid coverage for some $d \geq 1$ by defining the coverage's domain, range type and range through expressions. This allows entirely new shapes, dimensions, and values to be derived (see examples below).

The coverage domain is built from a CRS defining the multi-dimensional axes and the meaning of coordinates, including units of measure, indicating the coordinates of the direct positions, i.e. the points where values sit.

Axis names can be chosen according to the rules specified in ISO 19123-1.

A range type expression optionally creates the coverage range type. In the scope of the embedding condensers, this expression defines the range component names as known (immutable) variables. Values derived for some such range component will automatically be cast to the target type of that range component.

A range expression creates the coverage range. A **scalarExpr** is evaluated at every direct position of the coverage's domain.

Requirement 8 https://standards.isotc211.org/19123/-3/1/req/core/coverageConstructorExpr
A **coverageConstructorExpr shall** be defined as follows.

Let

`id` be an **identifier**,
`D` be a **domainExpr**,
`T` be a **rangeTypeExpr**,
`R` be a **rangeSetExpr.**

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02

Where

C is a **coverageConstructorExpr**
with
C = **coverage** id [D] [T] R

Let further

d be an **integer** with d>0,
c be a **crsName** representing a d-dimensional CRS,
a_i be pairwise distinct **variableName**s for $1 \le i \le d$,
$axis_i$ be pairwise distinct **axisName**s for $1 \le i \le d$,
$ie_{i,1}$, $ie_{i,2}$ be integer-valued **indexExpr**s for $1 \le i \le d$ with $ie_{i,1} \le ie_{i,2}$,
$ce_{i,1}$, $ce_{i,2}$ be **axisPointExpr**s for $1 \le i \le d$, which are valid coordinates for axis i as per CRS c with $ce_{i,1} \le ce_{i,2}$,
res_i be **axisPointExpr**s with $res_1 < \ldots < res_d$ for $1 \le i \le d$ valid for the i^{th} axis as per c,
$xe_{i,1}$,... be **axisPointExpr**s for $1 \le i \le d$, which are valid coordinates for axis $axis_i$ as per CRS c with $xe_{i,1} < xe_{i,2} < \ldots$,
im_1,..., im_m be (not necessarily distinct) **interpolationMethod**s for $1 \le i \le m$ with m>0 .

Where

D is a **domainExpr**
with

```
D =   domain
      crs c with
      axis1 axisdef1 [ interpolation im1 ],
      ...,
      axisd axisdefd [ interpolation imd ]
```

And

$axisdef_i$ is one of

```
axisdefi,index     =  index ( iei,1 : iei,2 )
axisdefi,regular   =  regular ( cei,1 : cei,2 ) resolution resi
axisdefi,irregular =  irregular( xei,1 , ... , xei,n )
```

And

axis names used in the **domainExpr shall** match pairwise against the CRS axes based on their order of occurrence in the D expression.

NOTE The axis names $axis_i$ are made available in the current context for use as iteration variables in the range set computation where coordinate values get bound to each direct position in turn allowing to inspect each direct position of the coverage. Iterator names can use the axis names defined in the CRS, or can define aliases which are matched with the CRS axis names by their position in the expression.

Let further

n be an **integer** with d>0,
f_1,..., f_n be **fieldNames**,
t_1,..., t_n be **rangeType**s .

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Where

T is a **rangeTypeExpr**
with
T = **range type**
f_1 : t_1,
…
f_n : t_n

Let further

r be a **scalarExpr** possibly containing occurrences of direct position coordinates $axis_i$ as defined in D and range component identifiers f_j as defined in T,
c_1, …, c_m be **constant**s where m=|*domain*(C)|.

Where

R is a **rangeSetExpr**
with R one of
R_1 = **range** r
R_2 = **range** <c_1,…, c_m>

and

R is part of a **coverageConstructorExpr** containing a **domainExpr**.

Then,

C is defined as the following ISO 19123-1 grid coverage:

Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

Coverage constituent
id(*C*) = *id*
crs(*C*) = *c* if *D* is present, otherwise the CRS resulting from evaluating *r*
domain(*C*) = domain extent resulting from evaluating *D* if present, otherwise the domain extent resulting from evaluating *r*
interpolation(*C*) = (x_1,..., x_d) where x_i = im_i where im_i is indicated, otherwise x_i = *none*.
rangeType(*C*) = ((f_1,t_1), ..., (f_n,t_n)) if *T* is present, otherwise the range type resulting from evaluating *r*; if no field names are provided (such as with R_2) then the range field names are implementation-dependent.
for all *p*∈*domain*(*C*) and **scalarExpr** *r*: *value*(*C*,*p*) = range value resulting from evaluating *r*, with possible occurrences of a_i substituted by the corresponding *p*[*i*] coordinate value. If, for example through computed direct positions, a location outside the domain of coverage addressed gets encountered then the behaviour is implementation dependent (possible options including assuming a null value for such a position or terminating evaluation of the request). for all *p*∈*domain*(*C*) and **rangeConstantExpr** <c_1,..., c_m>: *value*(*C*, *p*) is determined by assigning each value c_i in turn to a grid point location, whereby assignment proceeds in row-major order (per dimension from the lowest to the highest coordinate, and loops over the grid points with the first axis listed as outermost loop, the next axis listed as next-to-outermost loop, etc. and the last axis listed as innermost loop).

NOTE A concretization of this language can extend the capabilities of the coverage constant expression by allowing records at direct positions, rather than only atomic values.

6.3.2 Examples

The following examples illustrate use of the coverage constructor expressions in various practical scenarios relying on common CRSs and data types (both not specified in this document).

The first domain establishes a 2D WGS 84 grid with linear interpolation along both axes.

```
domain
crs "EPSG:4326" with
  Lat  regular (10:30) resolution 0.01 interpolation linear,
  Long regular (10:30) resolution 0.01 interpolation linear
```

In the following example, EPSG:4326 establishes Lat and Long axes. Therefore in the domain expression the first axis will be associated with *Lat* and the second with *Long*, regardless of the axis naming in the domain expression; no interpolation is admissible:

```
domain
  crs "EPSG:4326" with
```


AVA Documents
Document Sharing Hub
Full document details: DIN EN ISO 19123-3:2024-02

```
  Lat  regular (10:30) resolution 0.5,
  Long regular (10:30) resolution 0.5
```

The next domain establishes a 4D georeferenced timeseries datacube with a spectral dimension, regular in Lat/Long and irregular in time (given the varying number of days a month has and based on the daily resolution specified).

```
domain
crs "EPSG:4326+OGC:unixTtime" with
  Lat  regular (10:30) resolution 0.5,
  Long regular (10:30) resolution 0.5,
  Date irregular ( "2017-01-01", "2017-02-01","2017-03-01", "2017-04-01",
                   "2017-05-01", "2017-06-01","2017-07-01", "2017-08-01",
                   "2017-09-01", "2017-10-01", "2017-11-01", "2017-12-01"
                 )
```

The expression below represents a single-band range type:

```
range type
  panchromatic: integer
```

The following range type defines RGB pixels:

```
range type
  red  :integer,
  green:integer,
  blue :integer
```

The coverage constructor below resembles an induced operation, reducing intensity in all range fields by ½. Coverage type, domain and range type are adopted from the input coverage.

```
coverage Half
range (integer) $c / 2
```

Below is a complete coverage constructor representing a 3D georeferenced image timeseries whose range set gets loaded from some input file provided, represented by the positional parameter `$1`. Further, some sketchy INSPIRE XML metadata record is associated:

```
coverage MySatelliteDatacube
domain
  crs "EPSG:4326+OGC:unixTime" with
  Lat  regular (10:30) resolution 0.5,
  Long regular (10:30) resolution 0.5,
  Date regular ("2017-01":"2019-12") resolution "P1M"
range type panchromatic: integer
range decode( $1 )
```

The expression below computes a 256-bucket histogram over band `blue` of some coverage `$c` of unknown domain extent and dimension:

```
coverage histogram
domain
  crs "OGC:Index1D" with bucket index (0:255)
range type
  b :integer
```

Documents
Document Sharing Hub

Full document details: DIN EN ISO 19123-3:2024-02