

DIN EN ISO 22418

ICS 03.220.01; 35.240.60

**Intelligente Verkehrssysteme –
Protokoll zur schnellen Bekanntgabe von Diensten (FSAP) zur allgemeinen
Verwendung in ITS (ISO 22418:2020);
Englische Fassung EN ISO 22418:2020**

Intelligent transport systems –
Fast service announcement protocol (FSAP) for general purposes in ITS (ISO 22418:2020);
English version EN ISO 22418:2020

Systèmes de transport intelligents –
Protocole d'annonce de service rapide (FSAP) (ISO 22418:2020);
Version anglaise EN ISO 22418:2020

Gesamtumfang 63 Seiten

DIN-Normenausschuss Automobiltechnik (NAAutomobil)

Nationales Vorwort

Dieses Dokument (EN ISO 22418:2020) wurde vom Technischen Komitee ISO/TC 204 „Intelligent Transport Systems“ in Zusammenarbeit mit dem Technischen Komitee CEN/TC 278 „Intelligente Verkehrssysteme“, dessen Sekretariat von NEN (Niederlande) gehalten wird, erarbeitet.

Das zuständige deutsche Normungsgremium ist der Gemeinschaftsarbeitsausschuss NA 052-00-71 GA „Gemeinschaftsarbeitsausschuss NAAutomobil/DKE: Intelligente Verkehrssysteme“ des DIN-Normenausschusses Automobiltechnik (NAAutomobil).

Dieses Dokument enthält unter Berücksichtigung des DIN-Präsidialbeschlusses 1/2004 nur die Englische Fassung von EN ISO 22418:2020.

Das Präsidium des DIN hat mit seinem Beschluss 1/2004 festgelegt, dass von dem in den Regeln der europäischen Normungsarbeit von CEN/CENELEC verankerten Grundsatz, wonach Europäische Normen in den drei offiziellen Sprachen Deutsch, Englisch und Französisch veröffentlicht werden, in begründeten Ausnahmefällen abgewichen und auf die deutsche Sprachfassung verzichtet werden kann.

Die Genehmigung dafür hat die DIN-Geschäftsleitung entsprechend ihren in Anlage 1 zu dem DIN-Rundschreiben A 5/2004 festgelegten Kriterien für die vorliegende Norm auf Antrag des NA 052 NAAutomobil als Ergebnis einer Einzelfallentscheidung erteilt, zumal bereits dieser Norm zugrunde liegende Papiere überwiegend in englischer Sprache auch von den deutschen Marktteilnehmern angewendet werden.

Die Vorhaltung von ITS-Diensten an bestimmten Orten entlang einer Straße verlangt, dass die Verfügbarkeit und der Zweck solche Dienste bekannt sind damit ein Straßennutzer entscheiden kann, den angebotenen Dienst auch zu nutzen. Die Bekanntheit solcher Dienste kann über sogenannte Pull- oder Push-Mechanismen erreicht werden. Auch wenn Pull-Mechanismen bereits für zeitunkritische Verwendung allgemein bekannt und verstanden sind, basieren viele Anwendungsfälle auf Push-Mechanismen. Push-Mechanismen unterstützen „obligatorische Dienste“, die lokal und dynamisch verfügbar sein können, und beruhen in den meisten Fällen auf lokalen Richtlinien und nicht auf globaler Gesetzgebung.

Dieses Dokument legt in anschaulicher Art und Weise die Eigenschaften des kooperativen Push-Mechanismus „Dienstanzeige“, basierend auf dem in ISO/TS 16460 international harmonisierten Botschaftsformat fest, welches oberhalb lokaler Kommunikationsprotokolle angeordnet ist.

English Version

Intelligent transport systems —
Fast service announcement protocol (FSAP)
for general purposes in ITS
(ISO 22418:2020)

Systèmes de transport intelligents —
Protocole d'annonce de service rapide (FSAP)
(ISO 22418:2020)

Intelligente Verkehrssysteme —
Protokoll zur schnellen Bekanntgabe von Diensten
(FSAP) zur allgemeinen Verwendung in ITS
(ISO 22418:2020)

This European Standard was approved by CEN on 1 March 2020.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

This document (EN ISO 22418:2020) has been prepared by Technical Committee ISO/TC 204 "Intelligent transport systems" in collaboration with Technical Committee CEN/TC 278 "Intelligent transport systems" the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2020, and conflicting national standards shall be withdrawn at the latest by December 2020.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 22418:2020 has been approved by CEN as EN ISO 22418:2020 without any modification.

Contents

Page

Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	2
5 General requirements	2
6 Architecture	4
6.1 ITS communications architecture	4
6.2 Implementation architecture	4
6.3 Communication roles and entities	4
6.4 Communication phases	5
6.4.1 Overview	5
6.4.2 Service initialization phase	5
6.4.3 Service operation phase	8
6.5 Advertised services	8
6.6 FSAP reference architecture	9
7 Protocol elements	10
7.1 Management service access points	10
7.2 Protocol data units	10
7.2.1 General	10
7.2.2 Fast service advertisement message (FSAM)	11
7.2.3 Fast service response message (FSRM)	11
7.2.4 Secured messages	11
7.2.5 Request and response messages	12
7.3 Port numbers	12
7.4 ITS application object identifier (ITS-AID)	12
8 Protocol procedures	12
8.1 General	12
8.1.1 FSAP communication handler procedures	12
8.1.2 FSAP manager procedures	13
8.1.3 Extension elements	13
8.2 Service provider	14
8.2.1 FSAP registration	14
8.2.2 FSAP registration update	16
8.2.3 FSAP deregistration	17
8.2.4 FSAP communication management	18
8.2.5 Transmission of FSAM	22
8.2.6 Reception of FSRM	22
8.3 Service user	25
8.3.1 FSAP registration	25
8.3.2 FSAP registration update	26
8.3.3 FSAP deregistration	26
8.3.4 Reception of FSAM	27
8.4 Service operation phase	31
8.5 ITS station-internal management communications	32
8.6 Duplicate service detection	32
8.7 System service	32
8.7.1 General	32
8.7.2 Mandatory applications	32
9 Optionally supported features	

10 **Conformance**.....33

11 **Test methods**.....33

Annex A (normative) ASN.1 modules34

Annex B (normative) Support of application requirements for communications.....41

Annex C (normative) Support of path and flow management.....43

Annex D (normative) Implementation conformance statement.....44

Bibliography55

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 278, *Intelligent transport systems*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 22418:2018), which has been technically revised. The main changes compared to the previous edition are as follows:

- this document has been editorially aligned with draft ETSI EN 302 890-1 in order to make these two standards complement each other such that both can be published as European standards;
- one minor technical detail of the ASN.1 code related to a specific extension element was harmonized with ETSI.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Provisioning of ITS services at specific locations on the road network requires awareness of the availability and the purpose of such services in order to allow a road network user to make decisions on the potential consumption of such a service. Awareness of services can be achieved by pull and push mechanisms. Whilst pull mechanisms are well understood and deployed for non-time-critical usage, several use cases depend on a push mechanism. Whilst pull mechanisms require a-priori knowledge of an intended service, push mechanisms support also "mandatory services" that may be locally and dynamically applicable and defined by local policies rather than global regulations.

This document illustrates and specifies the features of the cooperative push mechanism "service announcement" based on the internationally harmonized message formats specified in ISO/TS 16460, and builds on any localized ITS-S communications protocol stack (ITS-SCPS), one of which is FNTP, specified in ISO 29281-1, which builds on the ITS-M5 access technology specified in ISO 21215. It is to be noted that the terms "service announcement" and "service advertisement" are used synonymously.

This document complements service announcement specifications at IEEE ("WAVE Service Advertisement" [WSA] specified in IEEE 1609.3[TM]) and at ETSI ("Service Announcement Essential Message" [SAEM] specified in draft ETSI EN 302 890-1):

- The WSA requires normatively only a subset of the functionality specified in ISO/TS 16460. WAVE is designed for the IEEE 802.11(TM) OCB localized communications access technology operated in the 5,9 GHz frequency bands allocated in the United States of America, also referred to as "US-DSRC".
- The SAEM, also using the message formats specified in ISO/TS 16460, is tailored in support of a limited ITS service domain identified in ETSI as "Basic Set of Applications", using only a small subset of functionality specified in ISO/TS 16460 and in this document. So far, ETSI requires usage of the ITS-S communication protocol stack constituted by ITS-G5, GeoNetworking, the Basic Transport Protocol and the common ETSI message header.

Using the same ITS-SCPS for transmission of the service announcement message (SAM) and the same limited subset of service announcement functionality, FSAP, WSA, and SAEM are binary compatible with respect to the shared service announcement features.

Understanding service advertisement and the related protocol specified in this document requires understanding of ISO/TS 16460.

Requirements are specified in the following clauses of this document.

- Clause 5 specifies general requirements.
- Clause 6 presents a tutorial on architectural issues related to FSAP.
- Clause 7 specifies protocol elements of FSAP.
- Clause 8 specifies protocol procedures of FSAP.
- Clause 10 specifies conformance declaration.
- Clause 11 specifies test methods.
- Annex A specifies the ASN.1 module for FSAP.
- Annex B specifies details of the optional support of presenting communication requirements of FSAP to the ITS station management in conformance with ISO 17423.
- Annex C specifies details of the optional support of path and flow management for FSAP in conformance with ISO 24102-6.
- Annex D presents the implementation conformance statement proforma.

Intelligent transport systems — Fast service announcement protocol (FSAP) for general purposes in ITS

1 Scope

This document specifies the fast service announcement protocol (FSAP) for general purposes in ITS. It references and supports all features of ISO/TS 16460, especially supporting the service response message (SRM) and related features in addition to the service announcement message (SAM), which enables only very basic features.

FSAP supports locally advertised ITS services uniquely identified by an ITS application identifier (ITS-AID).

This document specifies message formats and related basic protocol procedures by reference to ISO/TS 16460, and further related protocol requirements for operation of FSAP in the context of an ITS station specified in ISO 21217.

This document illustrates its relations to service announcement protocols specified by ETSI TC ITS and IEEE.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8825-2, *Information technology — ASN.1 encoding rules: Specification of Packed Encoding Rules (PER) — Part 2*

ISO/IEC 8825-7, *Information technology — ASN.1 encoding rules — Part 7: Specification of Octet Encoding Rules (OER)*

ISO/TS 16460, *Intelligent transport systems — Communications access for land mobiles (CALM) — Communication protocol messages for global usage*

ISO 17419, *Intelligent transport systems — Cooperative systems — Globally unique identification*

ISO 17423, *Intelligent transport systems — Cooperative systems — Application requirements and objectives*

ISO 21217, *Intelligent transport systems — Communications access for land mobiles (CALM) — Architecture*

ISO 29281-1, *Intelligent transport systems — Localized communications — Part 1: Fast networking & transport layer protocol (FNTTP)*

ISO 24102-3, *Intelligent transport systems — ITS station management — Part 3: Service access points*

ISO 24102-4, *Intelligent transport systems — ITS station management — Part 4: Station-internal management communications*

ISO 24102-6, *Intelligent transport systems — Communications access for land mobiles (CALM) — ITS station management — Part 6: Path and flow management*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21217 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Abbreviated terms

APDU	application protocol data unit
FSAM	fast service advertisement message
FSAP	fast service announcement protocol
FSRM	fast service response message
ITS-AID	ITS application identifier
ITS-SAPID	ITS-S application process identifier
ITS-SCPS	ITS station communication protocol stack
REQN	request message PDU, no response message PDU expected
REQW	request message PDU, response message PDU expected
RES	response message PDU, acknowledging a REQW
SAEM	service announcement essential message
SAM	service announcement message
SRM	service response message
S-FSAM	secured FSAM
S-FSRM	secured FSRM
SrvIniP	service initialization phase
SrvOpP	service operation phase

5 General requirements

The normative part of the specification of the service advertisement messages in ISO/TS 16460 is a normative part of this document.

The FSAP specified in this document shall be identified in FSAP APDUs by the version number three.

APDUs specified in this document are the FSAM and the FSRM.

The messages for FSAM and FSRM shall be encapsulated by a security frame, resulting in a S-FSAM and a S-FSRM.

Fragmented transmission of FSRMs and FSAMs is prohibited. Thus, the maximum size of S-FSAMs and S-FSRMs is limited by the capabilities of the protocol stack used for transmission.

FSAP is identified at the ITS-S networking and transport layer by:

- the well-known registered ITS port number (ITS-PN) $\text{PORT_SAM} = 1 = 0x00.01$, identifying the FSAP port that is receiving groupcasted S-FSAMs, and

- dynamically assigned ITS-PNs:
 - PORT_DYN_FSAM identifying the FSAP port that is receiving unicast S-FSAMs. The dynamic assignment is done in the ITS-SU that is transmitting S-FSRMs;
 - PORT_DYN_FSRM identifying the FSAP port that is receiving unicast S-FSRMs. The dynamic assignment is done in the ITS-SU that is transmitting S-FSAMs;

as illustrated in Table 1; see also 7.3 on ITS port numbers.

Table 1 — FSAP ITS port numbers

Direction	Source ITS-PN	Destination ITS-PN	MAC mode
From service advertiser to service user	PORT_DYN_FSRM	PORT_SAM	Groupcast (broadcast or multicast)
		PORT_DYN_FSAM	Unicast
From service user to service advertiser	PORT_SAM	PORT_DYN_FSRM	Unicast
	PORT_DYN_FSAM		

NOTE Procedures on how to perform multicast transmission of S-FSAMs are not specified in this document.

Unicast transmissions of S-FSRMs and S-FSAMs may be repeated, e.g. after timeout for a respective acknowledgement, as defined by implementation.

Further on the FSAP is identified by:

- the ITS-AID 2.113.664; see also 7.4. The p-encoded (ASN.1 unaligned packed encoding rules) presentation of this number of ASN.1 type ITS_{said} specified in ISO 17419 is 0pE0.00.00.00, i.e. fits into a four octet field.

An implementation supporting path and flow management shall conform to ISO 24102-6.

An implementation for a distributed ITS-SU, i.e. an ITS-SU consisting of several ITS-SCUs interconnected with an ITS station-internal network, shall conform to ISO 24102-4.

As

- identical message formats for service advertisement are used in IEEE 1609.3(TM) (WAVE SAM) and ETSI TS 102 890 (SAEM), and
- the features specifications in IEEE 1609.3(TM) and ETSI TS 102 890 are sub-sets of the specification in this document,

an implementation of FSAP optionally may support the service advertisement from IEEE WAVE devices and the service announcement from ETSI ITS stations by considering the following:

- WSM support
 - 1) The only supported access technology is IEEE 802.11(TM) OCB mode specified in IEEE 802.11(TM) (ISO 21215 with US frequency allocation and WAVE-specific details).
 - 2) The only networking & transport layer protocol supported is the WAVE Short Message protocol (WSMP) specified in IEEE 1609.3(TM), which uses the same message format as FNTTP with TPID-FS zero (ISO 29281-1).
 - 3) Port numbers are not used. Instead, the service advertisement message SAM is identified by the value 135 of ITS-AID, used as a transport layer destination address in WSMP (i.e. in FNTTP with TPID-FS zero [ISO 29281-1]).
 - 4) The WAVE SAM is identical to FSAM.

- 5) S-FSAM (Security encapsulated FSAM) uses the same format and encoding as WAVE does. WAVE security is specified in IEEE 1609.2(TM).
- 6) FSRM and other features, e.g. mandatory applications and private service channels, are not supported.

— SAEM support

- 1) The only supported access technology is IEEE 802.11(TM) OCB mode (ISO 21215 with EU frequency allocation and ETSI-specific details), referred to as ITS-G5.
- 2) The only networking & transport layer protocol currently supported is ETSI GeoNetworking/ETSI Basic Transport Protocol.
- 3) The SAEM is identified by the BTP port number for SAM specified in ETSI TS 103 248.
- 4) The SAEM is SAEM preceded by the ETSI common message header.
- 5) Security encapsulation is not specified.
- 6) FSRM and other features, e.g. mandatory applications and private service channels, are not supported.

Details of support of application requirements for communications, if supported in an implementation, shall be as specified in Annex B. Details of path and flow management, if supported in an implementation, shall be as specified in Annex C.

6 Architecture

6.1 ITS communications architecture

The FSAP is designed as a functionality of the ITS station and communication architecture specified in ISO 21217.

6.2 Implementation architecture

The FSAP specified in this document supports the implementation architectures introduced in ISO 21217.

6.3 Communication roles and entities

The FSAP distinguishes the following roles identified in ISO/TS 16460:

- a) Service advertiser:
 - management of advertisement requests from service providers;
 - transmission of FSAMs and reception of FSRMs.
- b) Service provider:
 - provision of ITS services.
- c) Service user:
 - reception of FSAMs and transmission of FSRMs;
 - consumption of ITS services.

An ITS-SU may simultaneously or sequentially act as a service advertiser, service provider, and service user.

This document does not explicitly consider the distinction of service advertiser ITS-SUs and service provider ITS-SUs; for the purpose here, the two roles are assumed to be located in the same ITS-SU.

An instance of any kind of ITS station identified in ISO 21217 (roadside, vehicle, portable, centre) may implement the FSAP.

6.4 Communication phases

6.4.1 Overview

In order to allow an ITS-SU to offer an ITS service to another ITS-SU by means of an application session, a service initialization phase (SrvIniP) is performed by the FSAP, where the SrvIniP is based on localized communication, e.g. applying the FNTTP networking & transport layer protocol specified in ISO 29281-1.

After initialization, the application session is performed during the service operation phase (SrvOpP), where the SrvOpP may be based on either localized communication or networking, e.g. IPv6 communication, over any kind of access technology.

During SrvIniP, handover to another protocol stack, e.g. another access technology and IPv6, may be demanded.

The real-time SrvIniP procedures are preferably implemented in an ITS-S router.

NOTE The specification of SrvOpP is outside the scope of this document.

6.4.2 Service initialization phase

The purpose of SrvIniP is to invite a peer ITS-SU by means of a fast service announcement message (FSAM) to use an ITS service which is uniquely identified by an ITS-AID specified in ISO 17419; ITS-AID points to an ITS application object.

NOTE 1 Usage of some allocated ITS-AID values are not always meaningful in FSAM.

Acceptance of such an invitation typically results in a session where the two peer ITS-S applications exchange data. However, a session is not necessarily needed, i.e. the service may be provided completely by the FSAM. Thus, FSAM provides also the means to periodically broadcast information from ITS broadcast services.

Three operational options of SrvIniP are specified. The distinction was originally motivated by the two ITS application objects:

- a) ITS application class (ISO 15628), and
- b) ITS application,

and was extended to allocate private communication channels to individual ITS station units (ITS-SUs).

Option a), originally designed for ITS application classes (DSRC-like SrvIniP, see ISO 15628), is illustrated in Figure 1. FSAM is sent by a service advertiser ITS station to invite for a service initialization phase. FSRM is sent by a service user ITS station to acknowledge FSAM. Successful SrvIniP is given by the first successful REQW or REQN of the service provider.

NOTE 2 In ISO 15628, BST corresponds functionally to FSAM, and VST corresponds functionally to FSRM.

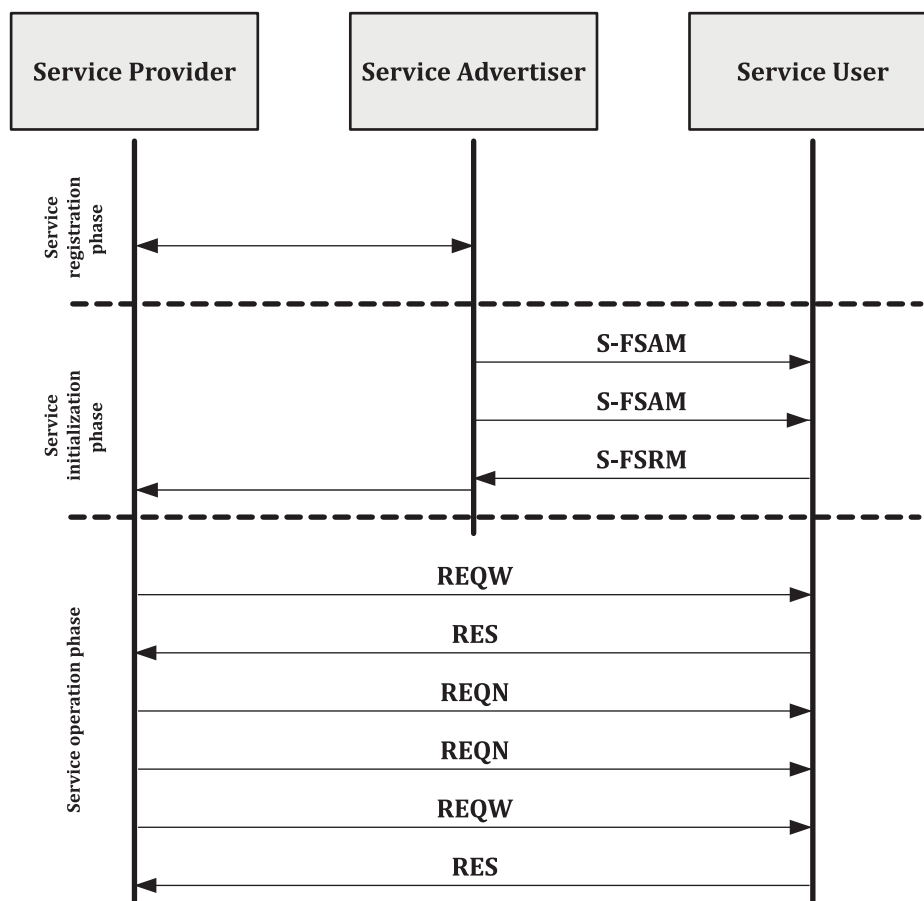


Figure 1 — ITS application session with FSRM

NOTE 3 The concept of application classes was introduced in ISO 15628. Distinction of classes was performed with an identifier of ASN.1 type `DSRCApplicationEntityID`. The difference between an ITS application class and an ITS application is that for an ITS application class several contexts exist. Each context itself can be referred to as an ITS application.

During a `SrvOpP`:

- requests, either with or without an expected response, are typically sent by the service provider, but may also be sent by the service user, and
- responses are typically sent by the service user, but may also be sent by the service provider, dependent on the specification of the ITS application.

NOTE 4 Rules on which data are sent by a service provider or by a service user apply strictly for ISO 15628. In general, for ITS there are no such rules.

NOTE 5 As specified in ISO 21217, the service user and service client instances of an ITS application are referred to as ITS-S application processes; ITS-S application processes residing in the "Applications" entity are referred to as ITS-S applications.

Option b), originally designed for ITS applications (WAVE-like `SrvIniP`)^[3], is illustrated in Figure 2. FSAM is sent by a service advertiser to perform service initialization. Successful `SrvIniP` is given by the first successful REQW or REQN of the service user.

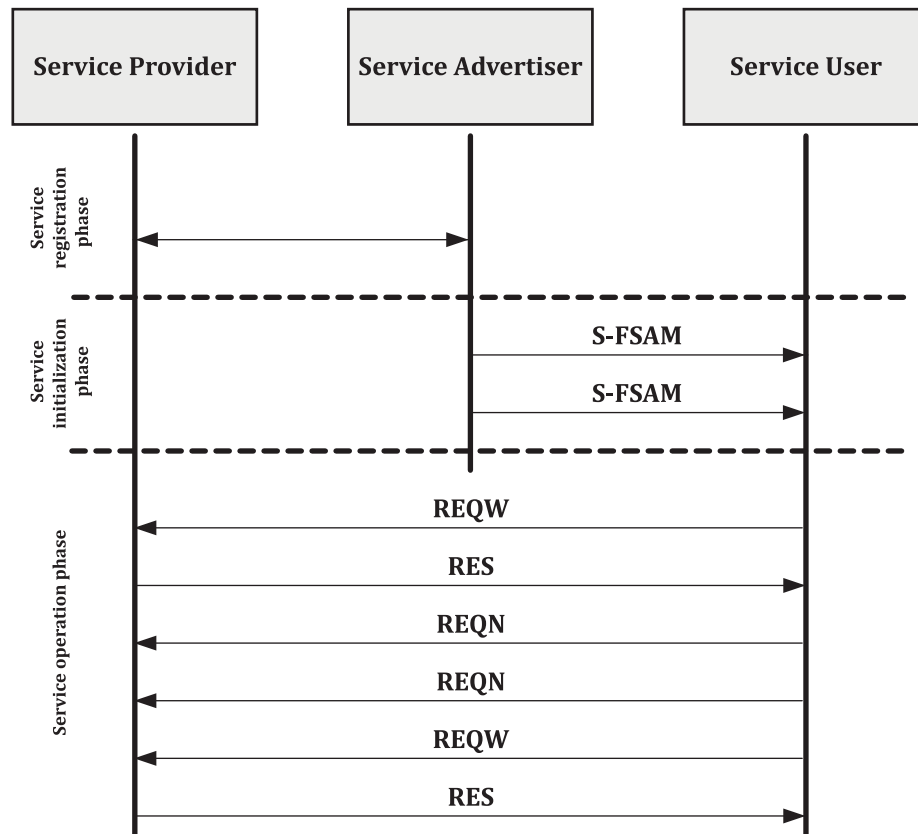


Figure 2 — ITS application session without FSRM

During a SrvOpP:

- requests, either with or without an expected response, are typically sent by the service user, but may also be sent by the service provider, and
- responses are typically sent by the service provider, but may also be sent by the service user, dependent on the specification of the ITS application.

NOTE 6 In general for ITS there is no such strict rule regarding which station type is sending which type of message.

Option c) presents the situation when a service advertiser wants to allocate private communication channels to service users. In this option, an additional handshake between the service advertiser and the service user is needed prior to start of the SrvOpP. Option c) is applicable for ITS applications and ITS application classes.

NOTE 7 "Private communication channel" does not necessarily mean that only a single service user station operates on it. It is up to the service advertiser station to allocate a private communication channel to one or several service user stations.

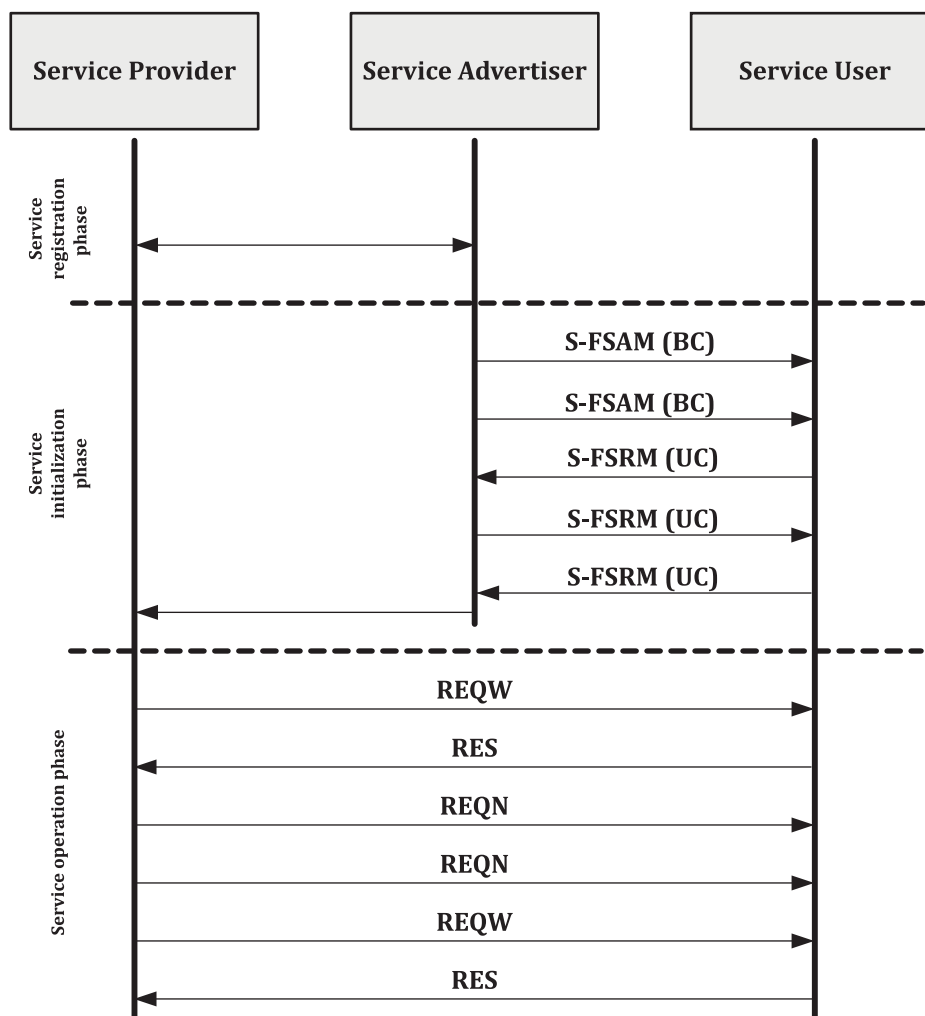


Figure 3 — ITS application session with privately allocated communication channel

6.4.3 Service operation phase

Management of reception and transmission of session messages, e.g.

- "Request with No response expected" (REQN),
- "Request With response expected" (REQW), and
- "Response to a request" (RES),

as illustrated in Figures 1, 2, and 3, is outside the scope of this document.

6.5 Advertised services

ITS services being advertised with FSAP are provided by ITS applications which are typically specified with two complementary ITS-S application processes, e.g. one implementing the provider part, the other implementing the user part; see ISO 21217.

An ITS application is uniquely identified by an ITS-AID specified in ISO 17419. The one or several ITS-S application processes of such a single ITS application are distinguished by means of the ITS-S application process identifier (ITS-SAPID) specified in ISO 17419. Thus, a specific ITS-S application process is uniquely identified by the tuple {ITS-AID, ITS-SAPID}.

ITS-SAPIDs can also be used to distinguish different versions of the ITS-S application process

In order to identify and execute the proper ITS-S application processes during the SrvOpP, two approaches are identified:

- a) management by FSAP;
- b) management by the ITS application not using specific features of FSAP.

Approach a) defines an ITS application in general as an ITS application class, i.e. an ITS application with different contexts (see ISO 17419). Thus, upon reception of an FSAM advertizing such an ITS application class, the service user station first will reply with an FSRM presenting the supported ITS-SAPID values. Based on this information, the service provider will select a suited ITS-S application process identified by the ITS-SAPID, if possible, or will not be able to provide the service.

A possible procedure b) would be to use version numbers in the APDUs of the ITS-S application processes, allowing a receiving entity to select the appropriate protocol.

6.6 FSAP reference architecture

The FSAP reference architecture is illustrated in Figure 4.

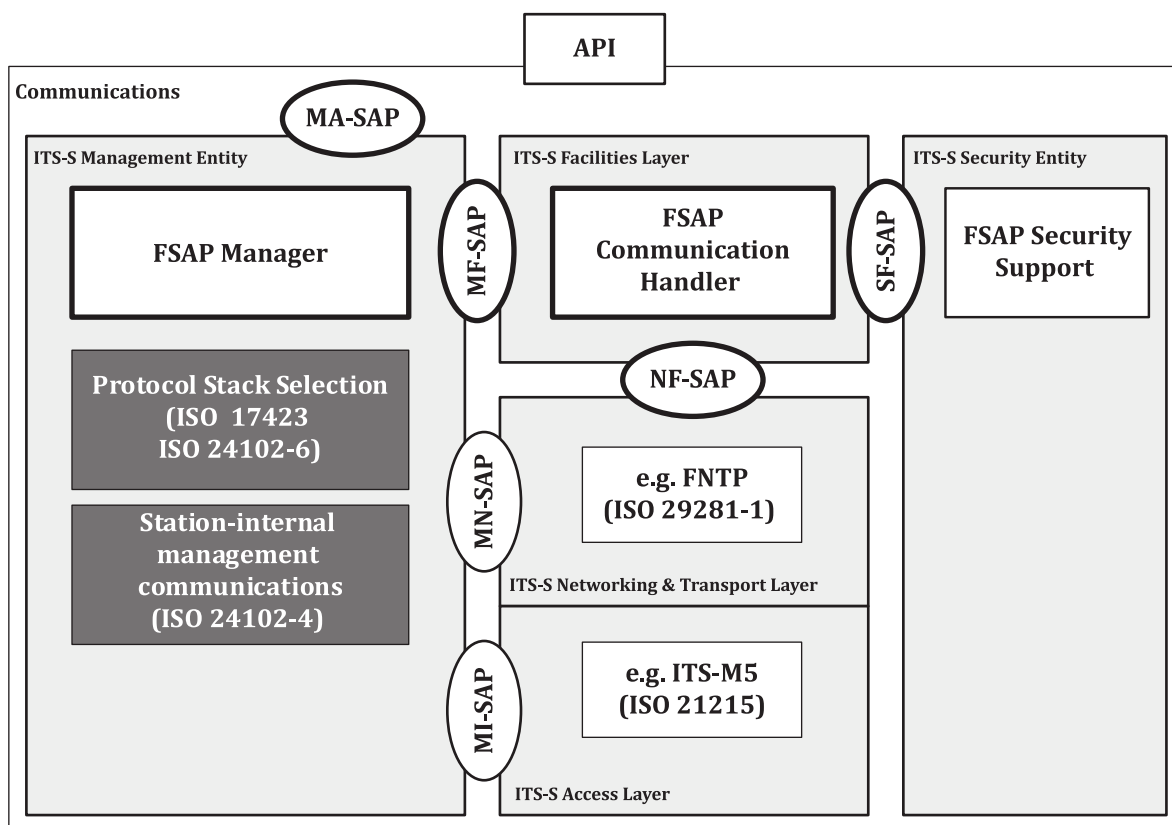


Figure 4 — FSAP reference architecture

The FSAP is specified by means of two functional entities located in the ITS station, see ISO 21217, i.e.

- "FSAP communication handler" located in the ITS-S facilities layer;
- "FSAP manager" located in the ITS-S management entity.

Security services in support of FSAP are located in the ITS-S security entity shown in Figure 4. Related specifications, except very general ones in 7.2.4, are out of scope of this document.

Further support functionalities are:

- protocol stack selection, e.g. as specified in ISO 17423 and ISO 24102-6;
- station-internal management communications, e.g. as specified in ISO 24102-4.

NOTE Initial investigations are underway in ISO/TC 204 to provide the functionality of the FSAP Communication Handler as part of an ITS station capability as defined in ISO/TS 17429.

7 Protocol elements

7.1 Management service access points

SAPs are functional descriptions which in many cases are not implemented as observable interfaces. Thus, in general, SAPs are not testable. The requirements set up in this document with respect to SAPs thus just mean the functional behaviour rather than a specific implementation. As far as related ASN.1 definitions are given, these become mandatory as soon as the defined elements become observable, e.g. within PDUs for ITS station-internal management communications as specified in ISO 24102-4.

FSAP uses functionality of the MA-SAP, MF-SAP, and SF-SAP. This functionality is provided by means of procedures with parameters presented in tables. Appropriate ASN.1 type definitions implementing this functionality are specified.

7.2 Protocol data units

7.2.1 General

The format of FSAM shall be identical to the format of SAM as specified in ISO/TS 16460; it is presented in Figure 5.

FSAM							
Header					Body		
4 bits	4 bits	4 bits	4 bits	Optional Variable	Optional Variable	Optional Variable	Optional Variable
Version	Option Selector	FSAM-ID	FSAM-Count	FSAM Extensions	Service Info Segment	Channel Info Segment	IPv6 Routing Advertisement

Figure 5 — General format of FSAM

The format of FSRM shall be identical to the format of SRM as specified in ISO/TS 16460; it is presented in Figure 6.

FSRM					
Header			Body		
4 bits	4 bits	Optional Variable	Optional Variable	Optional Variable	Optional Variable
Version	Option Selector	FSRM Extensions	Private Channel Allocation Request	Context Information	Private Channel Allocation Confirm

Figure 6 — General format of FSRM

None of the features specified in ISO/TS 16460 are prohibited for FSAM or FSRM.

7.2.2 Fast service advertisement message (FSAM)

FSAM is of ASN.1 type `Fsam` as specified in A.2. It is identical to the service advertisement message SAM of ASN.1 type `Sam` as specified in ISO/TS 16460.

7.2.3 Fast service response message (FSRM)

FSRM is of ASN.1 type `FsrM` as specified in A.2. It is identical to the service response message SRM of ASN.1 type `Srm` as specified in ISO/TS 16460.

7.2.4 Secured messages

The messages FSAM and FSRM shall be encapsulated by a security frame, resulting in a Secured FSAM (S-FSAM) and a Secured FSRM (S-FSRM) as presented in Figure 7.

Secured message				
Header			Body	Trailer
4 bit	4 bit	Optional Variable	Variable	Optional Variable
Version	Security Option Selector	Security Header	Original or processed FSAM / FSRM	Security Trailer

Figure 7 — Encapsulated FSAM and FSRM

Basic requirements are specified in ISO/TS 16460.

The "Secured message" in Figure 7 is specified with the following ASN.1 code, applying octet encoding rules (OER) as specified in ISO/IEC 8825-7:

```

Smessage ::= SEQUENCE {
    protocolVersion    INTEGER (0..255), -- actual version value is three
    content            SmessageContent
}

SmessageContent ::= CHOICE {
    unsecuredData      OCTET STRING, -- contains unmodified FSAM or FSRM
    signedData         SignedData,
    encryptedData      EncryptedData,
    ...
}

```

Currently identified values of the "Security Option Selector" are:

- 0x80: Unsecured message.

The optional security header and security trailer are not present. The body contains the unmodified FSAM or FSRM preceded by a length field indicating the number of octets contained in FSAM and FSRM, respectively.

- 0x81: Signed message.

The optional security header and trailer are present. The body contains the unmodified FSAM or FSRM preceded by a length field indicating the number of octets contained in FSAM and FSRM, respectively.

- 0x82: Encrypted message.

The optional security header and trailer are present. The body contains encrypted data.