

DIN EN 16602-70-18

ICS 49.140; 49.090

Einsprüche bis 2014-03-17

Entwurf**Raumfahrtproduktsicherung –
Vorbereitung, Zusammenbau und Befestigung von RF-Koaxial-Kabeln;
Englische Fassung FprEN 16602-70-18:2013**

Space product assurance –
Preparation, assembly and mounting of RF coaxial cables;
English version FprEN 16602-70-18:2013

Assurance produit des projets spatiaux –
Préparation, assemblage et montage des câbles radiofréquence coaxiaux;
Version anglaise FprEN 16602-70-18:2013

Anwendungswarnvermerk

Dieser Norm-Entwurf mit Erscheinungsdatum 2014-01-17 wird der Öffentlichkeit zur Prüfung und Stellungnahme vorgelegt.

Weil die beabsichtigte Norm von der vorliegenden Fassung abweichen kann, ist die Anwendung dieses Entwurfes besonders zu vereinbaren.

Stellungnahmen werden erbeten

- vorzugsweise online im Norm-Entwurfs-Portal des DIN unter www.entwuerfe.din.de bzw. für Norm-Entwürfe der DKE auch im Norm-Entwurfs-Portal der DKE unter www.entwuerfe.normenbibliothek.de, sofern dort wiedergegeben;
- oder als Datei per E-Mail an nl@din.de möglichst in Form einer Tabelle. Die Vorlage dieser Tabelle kann im Internet unter www.din.de/stellungnahme oder für Stellungnahmen zu Norm-Entwürfen der DKE unter www.dke.de/stellungnahme abgerufen werden;
- oder in Papierform an den Normenausschuss Luft- und Raumfahrt (NL) im DIN, 10772 Berlin (Hausanschrift: Burggrafenstr. 6, 10787 Berlin).

Die Empfänger dieses Norm-Entwurfs werden gebeten, mit ihren Kommentaren jegliche relevanten Patentrechte, die sie kennen, mitzuteilen und unterstützende Dokumentationen zur Verfügung zu stellen.

Gesamtumfang 43 Seiten

Normenausschuss Luft- und Raumfahrt (NL) im DIN

Nationales Vorwort

Dieses Dokument (FprEN 16602-70-18:2013) wurde vom Technischen Komitee CEN/CLC/TC 5 „Raumfahrt“ erarbeitet, dessen Sekretariat vom DIN (Deutschland) gehalten wird.

Dieses Dokument ist derzeit zum einstufigen Annahmeverfahren vorgelegt.

Dieses Dokument wurde speziell zur Behandlung von Raumfahrtsystemen erarbeitet und hat daher Vorrang vor jeglicher Europäischer Norm, da es denselben Anwendungsbereich hat, jedoch über einen größeren Geltungsbereich (z. B. Luft- und Raumfahrt) verfügt.

Nationaler Anhang NA (informativ)

Begriffe

3 Begriffe, Symbole und Abkürzungen

3.1 Begriffe aus anderen Normen

Für die Anwendung dieses Dokuments gelten die Begriffe nach ECSS-S-ST-00-01.

3.2 Für diese Norm spezifische Begriffe

3.2.1

kleinster Biegeradius

innerer Radius der Biegung, gemessen an der Außenfläche des Kabels

3.3 Abkürzungen

Für die Anwendung dieses Dokuments gelten die Abkürzungen nach ECSS-S-ST-00-01 und die folgenden Abkürzungen:

Abkürzung	Bedeutung
FEP	Perfluor(Ethylen-Propylen-)Kunststoff (en: fluorinated ethylene propylene)
PTFE	Polytetrafluorethylen (en: polytetrafluoroethylene)
SMA	Sub-Miniature-A (en: sub miniature version A)
VSWR	Stehwellenverhältnis (en: voltage standing wave ratio)

October 2013

ICS 49.090; 49.140

English version

Space product assurance - Preparation, assembly and mounting of RF coaxial cables

Assurance produit des projets spatiaux - Préparation,
assemblage et montage des câbles radiofréquence
coaxiaux

Raumfahrtproduktsicherung - Vorbereitung, Zusammenbau
und Befestigung von RF-Koaxial-Kabeln

This draft European Standard is submitted to CEN members for unique acceptance procedure. It has been drawn up by the Technical Committee CEN/CLC/TC 5.


If this draft becomes a European Standard, CEN and CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN and CENELEC in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN and CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN and CENELEC members are the national standards bodies and national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.

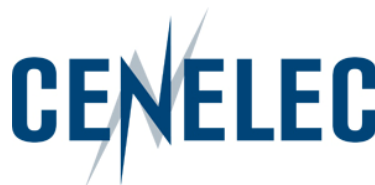

CEN-CENELEC Management Centre:
Avenue Marnix 17, B-1000 Brussels

Table of contents

Foreword	5
Introduction.....	6
1 Scope.....	7
2 Normative references	8
3 Terms, definitions and abbreviated terms.....	9
3.1 Terms from other standards.....	9
3.2 Terms specific to the present standard	9
3.3 Abbreviated terms.....	9
4 Principles and prerequisites of reliable soldered or crimped cable connections	10
4.1 Principles of reliable soldered or crimped semi-rigid cable connections	10
4.2 Prerequisites for assembly and mounting of semi-rigid coaxial cables	10
4.3 Alternative coaxial cable technologies	11
5 Requirements.....	12
5.1 Preparatory conditions.....	12
5.1.1 Facility cleanliness	12
5.1.2 Environmental conditions	12
5.1.3 Lighting requirements.....	13
5.1.4 Equipment and tools	13
5.2 Material selection.....	15
5.2.1 Solder	15
5.2.2 Flux.....	16
5.2.3 Solvents	16
5.2.4 Cable selection	17
5.2.5 Connector selection	17
5.3 Preparation of semi-rigid cable	18
5.3.1 General	18
5.3.2 Inspection of cable	18
5.3.3 Cutting cable to initial oversize length	18

5.3.4	Cable forming and minimum bend radius	18
5.3.5	Preconditioning heat treatment.....	19
5.3.6	Trimming cable to final length	20
5.3.7	Stripping the cable ends.....	21
5.3.8	Inspection of stripped cable ends	21
5.4	Preparation for soldering assembly of semi-rigid cables	22
5.4.1	General	22
5.4.2	Degolding and pretinning	22
5.4.3	Solder preforms	23
5.5	Assembly of connectors to RF coaxial cables	24
5.5.1	Solder assembly of semi-rigid cables	24
5.5.2	Crimp assembly of semi-rigid cables and other assembly techniques	28
5.5.3	Completed assemblies	28
5.6	Mounting of cables.....	29
5.6.1	Semi-rigid cables with straight solder-type connectors	29
5.6.2	Semi-rigid cables with right-angle connectors	30
5.6.3	Other cable mounting technologies	30
5.7	Process verification.....	31
5.7.1	General	31
5.7.2	Temperature cycling.....	31
5.7.3	Vibration.....	31
5.8	Quality assurance	31
5.8.1	Data	31
5.8.2	Nonconformance.....	32
5.8.3	Calibration.....	32
5.8.4	Traceability	32
5.8.5	Workmanship standards.....	32
5.8.6	Inspection	32
5.8.7	Operator and inspector training and certification	33
Annex A	(normative) Logbook – DRD	34
A.1	DRD identification	34
A.1.1	Requirement identification and source document.....	34
A.1.2	Purpose and objective.....	34
A.2	Expected response	34
A.2.1	Scope and content	34
A.2.2	Special remarks	34
Annex B	(normative) Workmanship standards	35

B.1	Overview	35
B.2	Illustrations	35
Annex C	(informative) Graphical information	37
C.1	Overview	37
C.2	Typical cable cut-off fixture	37
C.3	Typical cable-forming tool	38
C.4	Approved and non-approved straight solder-type cable-end connectors	39
C.5	Method of producing solder performs	40
C.6	Centre contact assembly	40
Bibliography		41

Figures

Figure B-1	: Photograph showing non-captive nut and preferred solder fillet	35
Figure B-2	: Microsection through preferred solder fillet, revealing full penetration of solder path	35
Figure B-3	: Unacceptable solder fillet dimensions	36
Figure C-1	: Typical cable cut-off fixture	37
Figure C-2	: Typical cable-forming tool	38
Figure C-3	: Approved and non-approved straight solder-type cable-end connectors	39
Figure C-4	: Method of producing solder preforms	40
Figure C-5	: Centre contact assembly	40

Tables

Table 5-1	: Design rules for minimum bend radius	19
Table 5-2	: Preconditioning heat treatment process	20

Foreword

This document (FprEN 16602-70-18:2013) has been prepared by Technical Committee CEN/CLC/TC 5 "Space", the secretariat of which is held by DIN (Germany).

This document (FprEN 16602-70-18:2013) originates from ECSS-Q-ST-70-18C.

This document is currently submitted to the Unique Acceptance Procedure.

This document has been developed to cover specifically space systems and will therefore have precedence over any EN covering the same scope but with a wider domain of applicability (e.g. : aerospace).

Introduction

The main part of this Standard is based on industrial experience and recommendations from European soldering technology experts. Modifications are incorporated into the text to provide for the specific requirement of low-outgassing electrical systems which are required by scientific and application satellites. Other additions were made in the light of recent technological advances and results of metallurgical test programmes. The use of processes other than solder assembly is recognized, but only certain general requirements are given in this Standard.

These requirements apply to assemblies designed to operate within the temperature limits from -45 °C to +85 °C. More extreme temperatures or other unusual environmental applications require special design measures or processing steps to provide environmental survival capability.

1

Scope

This Standard defines the technical requirements and quality assurance provisions for the assembly and mounting of high-reliability, radio-frequency (RF) coaxial-cable interconnections for use as transmission lines in spacecraft and associated equipment.

In general, these assemblies are designed for low-loss, stable operation from the relatively low frequencies through the higher frequencies in the microwave regions.

These transmission-line cables should not be confused with low-frequency cables with conductive sheaths (usually copper braid), which are used in applications where shielding of the centre conductors from the surrounding electrical ambient is required. The interconnection of those shielded cables, not covered by the present standard, is covered in ECSS-Q-ST-70-08.

This standard may be tailored for the specific characteristics and constraints of a space project in conformance with ECSS-S-ST-00.

2

Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this ECSS Standard. For dated references, subsequent amendments to, or revision of any of these publications do not apply. However, parties to agreements based on this ECSS Standard are encouraged to investigate the possibility of applying the more recent editions of the normative documents indicated below. For undated references, the latest edition of the publication referred to applies.

EN reference	Reference in text	Title
EN 16601-00-01	ECSS-S-ST-00-01	ECSS system — Glossary of terms
EN 16602-10-09	ECSS-Q-ST-10-09	Space product assurance — Nonconformance control system
EN 16602-20	ECSS-Q-ST-20	Space product assurance — Quality assurance
EN 16602-60	ECSS-Q-ST-60	Space product assurance — Electrical, electronic and electromechanical (EEE) components
EN 16602-70-02	ECSS-Q-ST-70-02	Space product assurance — Thermal vacuum outgassing test for the screening of space materials
EN 16602-70-08	ECSS-Q-ST-70-08	Space product assurance — Manual soldering of high-reliability electrical connections
EN 16602-70-26	ECSS-Q-ST-70-26	Space product assurance — Crimping of high-reliability electrical connections
EN 16602-70-28	ECSS-Q-ST-70-28	Space product assurance — Repair and modification of printed circuit board assemblies
	MIL-C-17G(3) SUP1	General specification for cables, radio frequency, flexible and semi-rigid. (8 Jan 1996)

Terms, definitions and abbreviated terms

3.1 Terms from other standards

For the purpose of this Standard, the terms and definitions from ECSS-S-ST-00-01 apply, in particular for the following terms:

requirement

3.2 Terms specific to the present standard

3.2.1 minimum bend radius

inside radius of the bend measured on the outer surface of the cable

3.3 Abbreviated terms

For the purpose of this Standard, the abbreviated terms from ECSS-S-ST-00-01 and the following apply:

Abbreviation	Meaning
FEP	fluorinated ethylene propylene
PTFE	polytetrafluoroethylene
SMA	sub miniature version A
VSWR	voltage standing wave ratio

4

Principles and prerequisites of reliable soldered or crimped cable connections

4.1 Principles of reliable soldered or crimped semi-rigid cable connections

Reliable soldered or crimped connections result from proper design, control of tools, materials and work environments and careful workmanship.

The basic design concepts, adherence to which ensures reliable connections and prevents joint failure, are:

- a. Avoidance of dimensional mismatch between the coaxial-cable assembly and the units being connected; i.e. not forcing the semi-rigid cable assembly into position and thereby cracking or pre-stressing one of the joints.
- b. Use of cable-end connectors with retractable (non-captive) coupling nuts; after completion of mounting, the coaxial-cable assembly is not in a state of tension resulting from axial movement when the connectors are threaded together.
- c. Minimizing the internal stresses on the soldered or crimped connections resulting from exposure to thermal cycling.

NOTE The thermal coefficient of expansion of the dielectric is about ten (10) times that of copper and in service this can introduce a tensile stress on the joint.

- d. The various assembly and mounting processes are covered by quality-control inspection steps.

4.2 Prerequisites for assembly and mounting of semi-rigid coaxial cables

Each supplier maintains documented soldering or crimping programmes which meet the requirements of this Standard for the types of connections employed and the articles involved. The programmes include procedures for training, certification, maintenance of certified status, recertification and revocation of certified status for soldering, crimping and inspection personnel. The supplier also prepares and has readily available workmanship standards consisting of

satisfactory work samples or visual aids which clearly illustrate the quality characteristics for all connections involved, including the applicable illustrations in Annex B of this Standard.

Records are kept to provide identification between the finished product and the operator. Records are also maintained of the training, testing and certification status of assembly operators. Records are retained for at least one year, or longer if this is a specific requirement of the customer's project.

Equipment and tools are verified and calibrated periodically for proper operation, and records of tool calibration and verification are maintained (see clause 5.8).

For soldering or crimping requirements not covered in this Standard, the supplier submits a process procedure including all pertinent quality requirements to the customer's relevant project office for approval in accordance with ECSS-Q-ST-70.

4.3 Alternative coaxial cable technologies

Alternative coaxial cable technologies are accepted for application in individual customer programmes following the completion of qualification and batch acceptance test programmes in accordance with clause 5.7. The precise test-programme and results are subject to review and acceptance by the relevant customer programme. For materials used in the alternative technology see ECSS-Q-ST-70-71.

Some mounting requirements for alternative technologies are given in clause 5.6.3 of this Standard.