

DIN EN 16603-50-03

ICS 49.140

Einsprüche bis 2014-05-07

Entwurf**Raumfahrttechnik –
Raumfahrt-Datenübertragung –
Telemetrieübertragungs-Rahmen-Protokoll;
Englische Fassung FprEN 16603-50-03:2013**

Space engineering –
Space data links –
Telemetry transfer frame protocol;
English version FprEN 16603-50-03:2013

Ingénierie spatiale –
Liaisons des données spatiales –
Protocole trame de transfert de télémesure;
Version anglaise FprEN 16603-50-03:2013

Anwendungswarnvermerk

Dieser Norm-Entwurf mit Erscheinungsdatum 2014-03-07 wird der Öffentlichkeit zur Prüfung und Stellungnahme vorgelegt.

Weil die beabsichtigte Norm von der vorliegenden Fassung abweichen kann, ist die Anwendung dieses Entwurfes besonders zu vereinbaren.

Stellungnahmen werden erbeten

- vorzugsweise online im Norm-Entwurfs-Portal des DIN unter www.entwuerfe.din.de bzw. für Norm-Entwürfe der DKE auch im Norm-Entwurfs-Portal der DKE unter www.entwuerfe.normenbibliothek.de, sofern dort wiedergegeben;
- oder als Datei per E-Mail an nl@din.de möglichst in Form einer Tabelle. Die Vorlage dieser Tabelle kann im Internet unter www.din.de/stellungnahme oder für Stellungnahmen zu Norm-Entwürfen der DKE unter www.dke.de/stellungnahme abgerufen werden;
- oder in Papierform an den Normenausschuss Luft- und Raumfahrt (NL) im DIN, 10772 Berlin (Hausanschrift: Burggrafenstr. 6, 10787 Berlin).

Die Empfänger dieses Norm-Entwurfs werden gebeten, mit ihren Kommentaren jegliche relevanten Patentrechte, die sie kennen, mitzuteilen und unterstützende Dokumentationen zur Verfügung zu stellen.

Gesamtumfang 47 Seiten

Normenausschuss Luft- und Raumfahrt (NL) im DIN

Nationales Vorwort

Dieses Dokument (FprEN 16603-50-03:2013) wurde vom Technischen Komitee CEN/CLC/TC 5 „Raumfahrt“ erarbeitet, dessen Sekretariat vom DIN (Deutschland) gehalten wird.

Dieses Dokument ist derzeit zum einstufigen Annahmeverfahren vorgelegt.

Dieses Dokument wurde speziell zur Behandlung von Raumfahrtsystemen erarbeitet und hat daher Vorrang vor jeglicher Europäischer Norm, da es denselben Anwendungsbereich hat, jedoch über einen größeren Geltungsbereich (z. B. Luft- und Raumfahrt) verfügt.

Das zuständige deutsche Normungsgremium ist der Arbeitsausschuss NA 131-10-01 AA „Interoperabilität von Informations-, Kommunikations- und Navigationssystemen“ im DIN-Normenausschuss Luft- und Raumfahrt (NL).

Nationaler Anhang NA (informativ)

3 Begriffe und Abkürzungen

3.1 Begriffe aus anderen Normen

Für die Anwendung dieses Dokuments gelten die Begriffe nach ECSS-S-ST-00-01.

3.2 Für diese Norm spezifische Begriffe

3.2.1

nicht belegte Daten

Daten, die keine Informationen tragen, jedoch übermittelt werden, um die zeit- oder synchronisationsbezogenen Anforderungen zu erfüllen

ANMERKUNG 1 zum Begriff: Das Bitmuster der nicht belegten Daten ist nicht festgelegt.

3.2.2

Missionsphase

Zeitspanne einer Mission, über die die festgelegten Telemetrie-Merkmale bestimmt werden

Anmerkung 1 zum Begriff: Der Übergang zwischen zwei aufeinanderfolgenden Missionsphasen kann eine Unterbrechung der Telemetriedienste verursachen.

3.2.3

Oktett

Satz von acht Binärziffern (Bits)

Anmerkung 1 zum Begriff: Die Benummerung von Oktetten innerhalb einer Datenstruktur beginnt mit 0.

Anmerkung 2 zum Begriff: Siehe 3.4 für die Konvention zur Benummerung von Bits.

3.2.4

Paket

Datenstruktur mit variabler Länge, bestehend aus Anwenderdaten einer höheren Schicht, die in die genormten Vorlaufinformationen eingebettet sind

3.2.5

statisch

ohne Änderungen innerhalb eines bestimmten virtuellen Kanals oder Masterkanals

Anmerkung 1 zum Begriff: Diese Norm enthält Anforderungen an die Unveränderlichkeit bestimmter Merkmale der darin festgelegten Datenstrukturen über eine oder alle Missionsphase(n).

3.3 Abkürzungen

Für die Anwendung dieses Dokuments gelten die Abkürzungen in ECSS-S-ST-00-01 und die folgenden Abkürzungen:

Abkürzung	Bedeutung
ASM	zugeordneter Synchronisationsmarker (en: attached sync marker)
CCSDS	Beratender Ausschuss für Weltraumdatensysteme (en: Consultative Committee for Space Data Systems)
FECF	Rahmenfehler-Kontrollfeld (en: Frame Error Control Field)
MSB	höchstwertiges Bit (en: most significant bit)
TM	Telemetrie (en: Telemetry)

3.4 Konventionen

3.4.1 Bit 0, Bit 1, Bit $N-1$

Um jedes Bit in einem N -Bit-Feld zu identifizieren, ist das erste zu übertragende Bit im Feld (d. h. das in einer graphischen Darstellung am weitesten links gelegene) als Bit 0 definiert; das folgende Bit ist als Bit 1 definiert usw. bis zum Bit $N-1$.

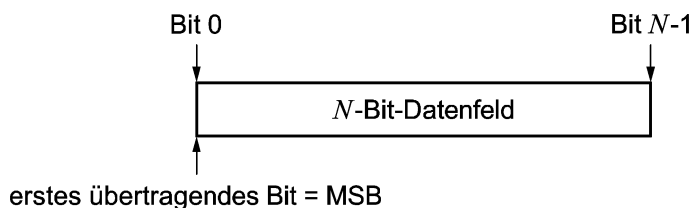


Bild 3-1 — Benummerungskonvention für Bits

3.4.2 Höchstwertiges Bit

Wird ein N -Bit-Feld zur Angabe eines Binärwerts genutzt (z. B. bei einer Zählvorrichtung), handelt es sich beim höchstwertigen Bit um das erste Bit im Feld, d. h. Bit 0 (siehe Bild 3-1).

3.4.3 Verwendung von Großbuchstaben bei den Bezeichnungen der Datenstrukturen und -felder

In dieser Norm werden für die Bezeichnungen der Datenstrukturen und -felder Großbuchstaben als erste Buchstaben verwendet.

Auf diese Weise können die Feldbezeichnungen innerhalb des Gesamttextes leicht identifiziert werden. So ist beispielsweise das Feld „Transfer Frame Data Field“ („Übertragungsrahmen-Datenfeld“) in einem Text, der Wörter wie „frame“ („Rahmen“), „data“ („Daten“) und „field“ („Feld“) enthält, leichter zu erkennen als das Feld „transfer frame data field“.

Außerdem wird die Zweideutigkeit dahingehend vermeiden, wo die Bezeichnung beginnt und endet. Beispielsweise bestehen die Felder „Transfer Frame Secondary Header“ („Sekundär-Header des Übertragungsrahmens“) und „Transfer Frame Secondary Header Length“ („Länge des Sekundär-Headers des Übertragungsrahmens“). Die Großbuchstaben helfen dem Leser bei der Unterscheidung zwischen „Transfer Frame Secondary Header length“ (d. h. der Länge des „Sekundär-Headers des Übertragungsrahmens“) und dem Feld mit der Bezeichnung „Transfer Frame Secondary Header Length“ (Feld „Länge des Sekundär-Headers des Übertragungsrahmens“).

October 2013

ICS 49.140

English version

Space engineering - Space data links - Telemetry transfer frame protocol

Ingénierie spatiale - Liaisons des données spatiales -
Protocole trame de transfert de télémétrie

Raumfahrttechnik - Raumfahrt-Datenübertragung
Telemetrieübertragungs-Rahmen-Protokoll

This draft European Standard is submitted to CEN members for unique acceptance procedure. It has been drawn up by the Technical Committee CEN/CLC/TC 5.

If this draft becomes a European Standard, CEN and CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN and CENELEC in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN and CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN and CENELEC members are the national standards bodies and national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



CEN-CENELEC Management Centre:
Avenue Marnix 17, B-1000 Brussels

Table of contents

Foreword	5
1 Scope.....	6
2 Normative references	7
3 Terms, definitions and abbreviated terms.....	8
3.1 Terms from other standards.....	8
3.2 Terms specific to the present standard	8
3.3 Abbreviated terms.....	9
3.4 Conventions.....	9
3.4.1 bit 0, bit 1, bit N-1	9
3.4.2 most significant bit.....	9
3.4.3 use of capitals for the names of data structures and fields	9
4 Overview.....	10
4.1 General.....	10
4.2 Physical channel.....	10
4.3 Master channels and virtual channels	11
4.4 Sharing transmission resources.....	11
4.5 Data fields in the frame	11
5 TM Transfer Frame	12
5.1 General.....	12
5.2 Transfer Frame Primary Header	14
5.2.1 General	14
5.2.2 Master Channel Identifier	15
5.2.3 Virtual Channel Identifier	16
5.2.4 Operational Control Field Flag	16
5.2.5 Master Channel Frame Count	16
5.2.6 Virtual Channel Frame Count.....	17
5.2.7 Transfer Frame Data Field Status	17

5.3	Transfer Frame Secondary Header	20
5.3.1	General	20
5.3.2	Transfer Frame Secondary Header Identification	21
5.3.3	Transfer Frame Secondary Header Data Field	22
5.3.4	Extended virtual channel frame count	22
5.4	Transfer Frame Data Field	23
5.4.1	Overview	23
5.4.2	General	23
5.4.3	Packet processing and extraction functions	24
5.4.4	Asynchronously inserted data	27
5.5	Operational Control Field	28
5.5.1	General	28
5.5.2	Type Flag	28
5.5.3	Type-1-Report	28
5.5.4	Type-2-Report	29
5.6	Frame Error Control Field	29
5.6.1	General	29
5.6.2	Frame Error Control Field encoding procedure	30
5.6.3	Frame Error Control Field decoding procedure	31
Annex A (informative) Frame error control		32
Annex B (informative) Changes from ESA-PSS-04-106		34
Annex C (informative) Differences from CCSDS recommendations		37
Annex D (informative) Mission configuration parameters		38
Bibliography		43
 Figures		
Figure 3-1: Bit numbering convention		9
Figure 5-1: TM Transfer Frame format		14
Figure 5-2: Format of Transfer Frame Primary Header		15
 Figure A-1 : Encoder		32
Figure A-2 : Decoder		33

Tables

Table 5-1: Major fields in a TM Transfer Frame	12
Table B-1: Differences in names from ESA-PSS-04-106 for fields in a Telemetry Transfer Frame	36

Foreword

This document (FprEN 16603-50-03:2013) has been prepared by Technical Committee CEN/CLC/TC 5 "Space", the secretariat of which is held by DIN (Germany).

This document (FprEN 16603-50-03:2013) originates from ECSS-E-ST-50-03C.

This document is currently submitted to the Unique Acceptance Procedure.

This document has been developed to cover specifically space systems and will therefore have precedence over any EN covering the same scope but with a wider domain of applicability (e.g. : aerospace).

1

Scope

This Standard contains the definition for Telemetry Transfer Frames which are fixed-length data structures, suitable for transmission at a constant frame rate on a space data channel.

The Telemetry Transfer Frame provides a standardized data structure for the transmission of space-acquired data over a telemetry space data link.

Usually, the source of the data is located in space and the receiver is located on the ground. However, this Standard may also be applied to space-to-space telemetry data links.

Further provisions and guidance on the application of this standard can be found, respectively, in the following publications:

- The higher level standard ECSS-E-ST-50, Communications, which defines the principle characteristics of communication protocols and related services for all communication layers relevant for space communication (physical- to application-layer), and their basic relationship to each other.
- The handbook ECSS-E-HB-50, Communications guidelines, which provides information about specific implementation characteristics of these protocols in order to support the choice of a certain communications profile for the specific requirements of a space mission..

Users of this present standard are invited to consult these documents before taking decisions on the implementation of the present one.

This standard may be tailored for the specific characteristics and constraints of a space project in conformance with ECSS-S-ST-00.

2

Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this ECSS Standard. For dated references, subsequent amendments to, or revisions of any of these publications, do not apply. However, parties to agreements based on this ECSS Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references the latest edition of the publication referred to applies.

EN reference	Reference in text	Title
EN 16601-00-01	ECSS-S-ST-00-01	ECSS system – Glossary of terms
EN 16603-50-01	ECSS-E-ST-50-01	Space engineering – Space data links – Telemetry synchronization and channel coding
EN 16603-50-04	ECSS-E-ST-50-04	Space engineering – Space data links – Telecommand protocols, synchronization and channel coding
	CCSDS 133.0-B-1	Space Packet Protocol – Blue Book, Issue 1, September 2003
	CCSDS 135.0-B-3	Space Link Identifiers – Blue Book, Issue 3, October 2006

Terms, definitions and abbreviated terms

3.1 Terms from other standards

For the purpose of this Standard, the terms and definitions from ECSS-ST-00-01 apply.

3.2 Terms specific to the present standard

3.2.1 idle data

data which carries no information, but is sent to conform to timing or synchronization requirements

NOTE The bit pattern of idle data is not specified.

3.2.2 mission phase

period of a mission during which specified telemetry characteristics are fixed

NOTE The transition between two consecutive mission phases can cause an interruption of the telemetry services.

3.2.3 octet

group of eight bits

NOTE 1 The numbering for octets within a data structure starts with 0.

NOTE 2 Refer to clause 3.4 for the convention for the numbering of bits.

3.2.4 packet

variable-length data structure consisting of higher layer user data encapsulated within standard header information

3.2.5 static

unchanged within a specific virtual channel or within a specific master channel

NOTE This Standard contains requirements on the invariability, throughout one or all mission phases, of certain characteristics of the data structures specified in it.

3.3 Abbreviated terms

For the purpose of this Standard, the abbreviated terms from ECSS-ST-00-01 and the following apply:

Abbreviation	Meaning
ASM	attached sync marker
CCSDS	Consultative Committee for Space Data Systems
FECF	Frame Error Control Field
MSB	most significant bit
TM	Telemetry

3.4 Conventions

3.4.1 bit 0, bit 1, bit N-1

To identify each bit in an N-bit field, the first bit in the field to be transferred (i.e. the most left justified in a graphical representation) is defined as bit 0; the following bit is defined as bit 1 and so on up to bit N-1.

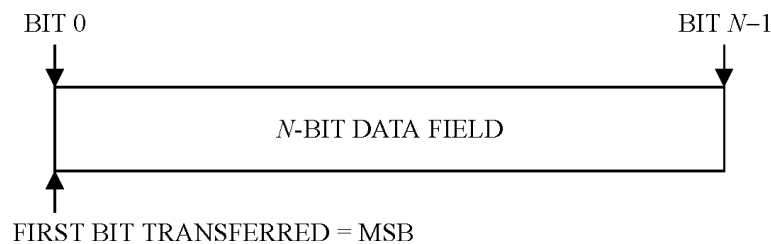


Figure 3-1: Bit numbering convention

3.4.2 most significant bit

When an N-bit field is used to express a binary value (such as a counter), the most significant bit is the first bit of the field, i.e. bit 0 (see Figure 3-1).

3.4.3 use of capitals for the names of data structures and fields

In this Standard initial capitals are used for the names of data structures and fields.

This enables field names to be easily identified in the surrounding text. For example, the field Transfer Frame Data Field is easier to see than transfer frame data field in text containing words such as frame and data and field.

It also prevents ambiguity over where the name begins and ends. For example, there are fields Transfer Frame Secondary Header and Transfer Frame Secondary Header Length. The capitals help the reader to distinguish between the Transfer Frame Secondary Header length (meaning 'the length of the Transfer Frame Secondary Header') and the Transfer Frame Secondary Header Length (meaning the field of that name).

4

Overview

4.1 General

The Telemetry Transfer Frame is a fixed-length data structure that provides an envelope for transmitting data units of several types over a telemetry space link. The frame is compatible with the ECSS standard for telemetry synchronization and channel coding defined in ECSS-E-ST-50-01.

The telemetry transfer frame protocol can operate in various configurations of the telemetry space link, depending on the telemetry channel coding scheme and security options selected. The correct operation of the protocol can only occur if a high-quality data channel is provided between the peer entities of the protocol.

NOTE 1 The Standard for telemetry channel coding, ECSS-E-ST-50-01, defines the coding mechanisms for a high-quality data channel, including frame synchronization and randomization. CCSDS 350.0-G-2 describes the security options.

NOTE 2 In this Standard the terms TM Transfer Frame and Telemetry Transfer Frame are used interchangeably, i.e. they are synonyms and have the same meaning as.

NOTE 3 Annex D describes the mission configuration parameters within the scope of this Standard.

4.2 Physical channel

A data channel carrying a stream of bits in a single direction is referred to as a physical channel.

For the TM Transfer Frame specified in this Standard, the value of the Transfer Frame Version Number is constant for all frames of a physical channel.

The length of the frames for a given physical channel is fixed for a mission phase.

4.3 Master channels and virtual channels

The TM Transfer Frame supports the division of the physical channel into master channels and virtual channels by means of identifier fields in the frame header.

A master channel is identified by the values of the Transfer Frame Version Number and the Spacecraft Identifier. Within a given physical channel, a master channel consists of all the frames that have the same Transfer Frame Version Number and the same Spacecraft Identifier.

For a typical space mission, all the frames on a physical channel have the same value for the Spacecraft Identifier, so in this case there is one master channel on the physical channel. However, multiple master channels can share a physical channel, which, for example, can be the case when one spacecraft is transporting another spacecraft such as a probe.

A master channel is divided into virtual channels using the Virtual Channel Identifier field. This is a 3-bit field and therefore supports up to eight virtual channels on a master channel.

4.4 Sharing transmission resources

Virtual channels enable one physical channel to be shared among multiple higher-layer data streams, each of which can have different characteristics.

The mechanisms and parameters for sharing access by the virtual channels to the physical channel are implementation dependent and not within the scope of this Standard.

4.5 Data fields in the frame

Every TM Transfer Frame contains the Transfer Frame Data Field, which is the main data-carrying field in the frame. Within a virtual channel, the length of the Transfer Frame Data Field is static during a mission phase.

There are status fields in the frame header that are related to the use of the Transfer Frame Data Field. The Transfer Frame Data Field carries packets or other data units.

Additionally to the Transfer Frame Data Field, the TM Transfer Frame has two optional fields for carrying data:

- The Transfer Frame Secondary Header, used to carry fixed-length mission-specific data.
- The Operational Control Field, used to carry status information to control the operation of the telecommand space link or other spacecraft activities.