

DIN EN 4709-002

ICS 03.220.50; 35.240.60; 49.020

Einsprüche bis 2021-03-15

Entwurf

**Luft- und Raumfahrt –
Unbemannte Luftfahrzeugsysteme –
Teil 002: Anforderungen an die direkte Fernidentifizierung;
Englische Fassung prEN 4709-002:2020**

Aerospace series –
Unmanned Aircraft Systems –
Part 002: Direct Remote Identification;
English version prEN 4709-002:2020

Série aérospatiale –
Aéronefs télépilotés –
Partie 002: Exigences d'identification directe à distance;
Version anglaise prEN 4709-002:2020

Anwendungswarnvermerk

Dieser Norm-Entwurf mit Erscheinungsdatum 2021-01-15 wird der Öffentlichkeit zur Prüfung und Stellungnahme vorgelegt.

Weil die beabsichtigte Norm von der vorliegenden Fassung abweichen kann, ist die Anwendung dieses Entwurfs besonders zu vereinbaren.

Stellungnahmen werden erbeten

- vorzugsweise online im Norm-Entwurfs-Portal von DIN unter www.din.de/go/entwuerfe bzw. für Norm-Entwürfe der DKE auch im Norm-Entwurfs-Portal der DKE unter www.entwuerfe.normenbibliothek.de, sofern dort wiedergegeben;
- oder als Datei per E-Mail an nl@din.de möglichst in Form einer Tabelle. Die Vorlage dieser Tabelle kann im Internet unter www.din.de/go/stellungnahmen-norm-entwuerfe oder für Stellungnahmen zu Norm-Entwürfen der DKE unter www.dke.de/stellungnahme abgerufen werden;
- oder in Papierform an den DIN-Normenausschuss Luft- und Raumfahrt (NL), 10772 Berlin oder Saatwinkler Damm 42/43, 13627 Berlin.

Die Empfänger dieses Norm-Entwurfs werden gebeten, mit ihren Kommentaren jegliche relevanten Patentrechte, die sie kennen, mitzuteilen und unterstützende Dokumentationen zur Verfügung zu stellen.

Gesamtumfang 58 Seiten

DIN-Normenausschuss Luft- und Raumfahrt (NL)

Nationales Vorwort

Der Verband der Europäischen Luft-, Raumfahrt- und Verteidigungsindustrie – Normung (ASD-STAN) ist vom Europäischen Komitee für Normung (CEN) für zuständig erklärt worden, Europäische Normen (EN) für das Gebiet der Luft- und Raumfahrt auszuarbeiten. Durch die Vereinbarung vom 3. Oktober 1986 wurde ASD Assoziierte Organisation (ASB) des CEN.

Das vorliegende Dokument (prEN 4709-002:2020) wurde von ASD-STAN, Fachbereich Autonomes Fliegen, unter Mitwirkung deutscher Experten des DIN-Normenausschusses Luft- und Raumfahrt (NL) erarbeitet.

Das zuständige deutsche Normungsgremium ist der Arbeitsausschuss NA 131-01-02 AA „Technische Systeme“ im DIN-Normenausschuss Luft- und Raumfahrt (NL).

Der vorliegende Norm-Entwurf enthält zur technischen Kommentierung einen Europäischen Norm-Entwurf (prEN) ausschließlich in Englischer Fassung aus der CEN-Umfrage.

Ein zweiter Norm-Entwurf wird nur die Deutsche Fassung der veröffentlichten ASD-STAN prEN enthalten. Es wird darauf hingewiesen, dass auf Grund der Verfahrensweise zur Normenerstellung bei ASD-STAN der zweite Norm-Entwurf ausschließlich der redaktionellen Prüfung der deutschen Sprachfassung dienen wird.

Entsprechend Beschluss 57/9 des Technischen Ausschusses des Beirats des DIN-Normenausschusses Luft- und Raumfahrt (NL) sind die europäischen Luft- und Raumfahrt-Normungsergebnisse zweisprachig, in Deutsch und Englisch, in das Deutsche Normenwerk zu überführen. Aus diesem Grund wird die Norm beide Sprachfassungen enthalten.

Aktuelle Informationen zu diesem Dokument können über die Internetseiten von DIN (www.din.de) durch eine Suche nach der Dokumentennummer aufgerufen werden.

Aerospace series - Unmanned Aircraft Systems - Part 002: Direct Remote identification

Série aérospatiale - Aéronefs télépilotes - Partie 002 :
Exigences d'identification directe à distance

Luft- und Raumfahrt - Unbemannte
Luftfahrzeugsysteme - Teil 002: Anforderungen an die
direkte Fernidentifizierung

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee ASD-STAN.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents

Page

European foreword	4
Introduction	5
1 Scope.....	6
2 Normative references.....	6
3 Terms, definitions and abbreviations	6
3.1 Terms and definitions	6
3.2 List of abbreviated terms	7
4 General design requirements.....	8
4.1 Privacy and personal data of remote pilots and drone operators	8
4.2 Conceptual overview	8
4.3 Mandatory information	9
4.4 Security of the DRI system	9
4.5 Upload of UAS operator registration number	10
4.6 Performance Requirements.....	13
4.7 Working Time.....	14
4.8 Add-on Specific requirements.....	14
4.9 DRI Display Applications.....	14
5 Requirements for Direct Remote Identification function	14
5.1 Data Dictionary	14
5.2 DRI messages.....	20
5.2.1 Message header	20
5.2.2 Block message	20
5.2.3 Basic ID Message	21
5.2.4 Location/Vector Message.....	22
5.2.5 Self-ID Message	26
5.2.6 System Message	26
5.2.7 Operator ID Message.....	29
5.2.8 Message Pack.....	30
5.3 Broadcast Transport Protocols.....	30
5.3.1 General.....	30
5.3.2 Bluetooth Legacy Advertising Transport Mechanism (4.x compatible)	31
5.3.3 Bluetooth Long Range Advertising Mechanism (5.x compatible)	33
5.3.4 Wi-Fi Aware Transport Method	38
5.3.5 Wi-Fi Aware Management Frames.....	38
5.3.6 Neighbour Awareness Networking (NAN)	39
5.3.7 NAN Service Discovery Frame and Synchronization Beacon Frame format.....	39
5.3.8 Wi-fi Operating Channels	43
5.3.9 Wi-Fi Beacon Transport Method	43
5.4 Output Power	45
5.5 Emission directivity	45
5.6 Update and Transmission Rates.....	45
6 Verification requirements and Test Methods.....	46

6.1	Scope.....	46
6.2	DRI Generic Test Procedure.....	46
6.2.1	General	46
6.2.2	Upload UAS Operator Registration Number test procedure.....	46
6.2.3	UA Category/UA Class configuration test procedure (for Add-on only)	46
6.2.4	UAS DRI Data Field transmission testing procedure	47
6.3	Update and Transmission Rates test procedure	49
6.3.1	General Test setup.....	49
6.3.2	Measurement procedure.....	49
Annex A (informative) Conformity methods and technical specifications references.....		51
A.1	Requirement verification stage	51
A.2	WiFi, Bluetooth channels, bandwidth, and frequencies	51
Annex ZA (informative) Relationship between this document and the essential requirements of Delegated regulation (EU) 2019/945 of 12th March 2019 on unmanned aircraft systems and on third-country operators of unmanned aircraft systems aimed to be covered.....		52
Bibliography		55

European foreword

This document (prEN 4709-002:2020) has been prepared by the Aerospace and Defence Industries Association of Europe — Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this document has received the approval of the National Associations and the Official Services of the member countries of ASD-STAN, prior to its presentation to CEN.

This document is currently submitted to the ASD-STAN National Domain Ballot in parallel to the CEN Enquiry.

This document was originally reviewed by the Domain Technical Coordinator of ASD-STAN's Autonomous flying Domain.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

Introduction

EASA published the Commission Delegated Regulation (EU) 2019/945 of 12th March 2019 on unmanned aircraft systems and on third-country operators of unmanned aircraft systems.

Many organizations are involved in developing a range of general technical standards for electrical safety, EMC, environmental and a range of other standards to be applied to specific applications. For UAS the picture is complex, but an acceptable means of compliance can be completed with existing technical standards and the use of electrical components that are intended to be incorporated into equipment and for which a risk assessment can be undertaken.

This document gives all economic operators (such as manufacturers, importers and distributors and their trade associations as well as bodies involved in the conformity assessment procedures) a viable way to prove compliance with the requirements laid out in the Delegated Act of 12th, March 2019 find commonality in compliance methods.

It is the manufacturer's responsibility to determine, based on his risk assessment, whether the risk is acceptable. Regarding what is an acceptable level of risk for a product, this is determined by the compliance with the safety objectives defined in the Delegated Act of 12th, March 2019.

The end user of this document assumes all responsibility for the safe application of these test methods. All relevant safety/quality procedures should be considered. Special consideration should be considered when operating the UAS for evaluations. All local, state, federal, and country laws should be considered when operating UAS.

For repeatability, it is assumed that environmental conditions (temperature, wind, pressure, humidity) are recorded during any tests and it is further assumed tests conducted unless otherwise noted within the following conditions: Temperature – 18-28 °C, Pressure – Atmospheric from sea level up to 2 000 m, Humidity – 10-60 %, Wind Speed – Calm (less than 0,3 m/s or zero on the Beaufort Scale).

1 Scope

This document will provide means of compliance to cover the “Direct Remote Identification” system for UA of the “open Category”. This document applies to Class 1 to Class 3 and Add-On.

The “direct remote identification” means a system that ensures the local broadcast of information about a UA in operation.

More specifically, this document will address drone capability to be identified during the whole duration of the flight, in real time and with no specific connectivity or ground infrastructure link, by existing mobile devices when within the broadcasting range. Such functionality, based on an open and documented transmission protocol (described in this document) and developed for security purposes and social acceptance, can be used by law enforcement people, critical infrastructure managers, and general public to get an instantaneous information on the drone flying around, providing various information such as UA identifier, UA navigation data and operational status, UAS Operator identifier and position as defined in the Delegated Regulation (EU) 2019/945.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ETSI EN 301489-1, *ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility*

ETSI EN 301489-17, *ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility*

ETSI EN 300328, *Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1.1

Direct Remote Identification

DRI

system that ensures the local broadcast of information about a UA in operation, including the marking of the UA, so that this information can be obtained without physical access to the UA

3.1.2

UAS Operator Registration Number

identifier delivered by the National Aviation Authority, upon UAS operator eRegistration procedure

Note 1 to entry: In this document UAS Operator Registration Number is equivalent to UAS Operator ID, UAS Operator Registration ID

3.2 List of abbreviated terms

Add-on	A standalone Direct Remote ID broadcast device integrating a GNSS function, a barometric function, a communication function, being able to provide position, height, speed over ground, track clockwise with true north, of the UA, and the remote pilote position or it's take-off position.
AGL	Above Ground Level
ASD-STAN	Aerospace and Defence Industries Association of Europe - Standardization
DRI	Direct Remote ID
EASA	European Union Aviation Safety Agency
EC	European Commission
EMC	Electro-Magnetic Compliance
ft	feet
GCS	Ground Control Station
ID	Identification
IEC	International Electrotechnical Commission
ISO	Internation Organization for Standardization
kts	knots
NM	Nautical Miles
MS	Member State
RID	Remote ID Display
SDF	Service Discovery Frame
UA	Unmanned Aircraft
UAS	Unmanned Aircraft System
UTC	Coordinated Universal Time
UTM	UAS Traffic Management
UUID	Universally Unique Identifier based on IETF RFC4122
C0, C1, C2, C3, C4	Class 0 to Class 4 that the UA belongs to "Open" Category
C5, C6	Class 5 to Class 6 that the UA belongs to "Specific" Category
C2 link	Command and Control link between UA and the GCS
DRI	Direct Remote Identification
TU	Time Unit (1 TU = 1024 microsecond)

4 General design requirements

4.1 Privacy and personal data of remote pilots and drone operators

Following European Commission consultation to EDPS (European Data Protection Supervisor), EDPS delivered an opinion about the Communication from the Commission to the European Parliament and the Council on “A new era for aviation - Opening the aviation market to the civil use of remotely piloted aircraft systems in a safe and sustainable manner”, the 26th of November 2014.

The EDPS recommends that the Commission encourages RPAS manufacturers to implement privacy by design and by default and data controllers to carry out data protection impact assessments where processing operations present specific risks to the rights and freedoms of data subjects (ie citizens) by virtue of their nature, scope or purposes. And to encourage measures that would facilitate identification of the controller of an RPAS. This last recommendation will be managed in the Delegated Regulation (EU) 2019/945, with the Direct Remote Identification feature requirement for UA and Add-on. The DRI data messages shall be then transmitted in plain text without encryption, such as the UA unique serial number, the UAS Operator Registration Number, the time-stamp, the position, the height, the speed, the direction, the emergency status of the UA, and the position of the remote pilot. As a consequence, this document does not cover the Remote Pilot/Operator privacy and data protection by design, and by default.

4.2 Conceptual overview

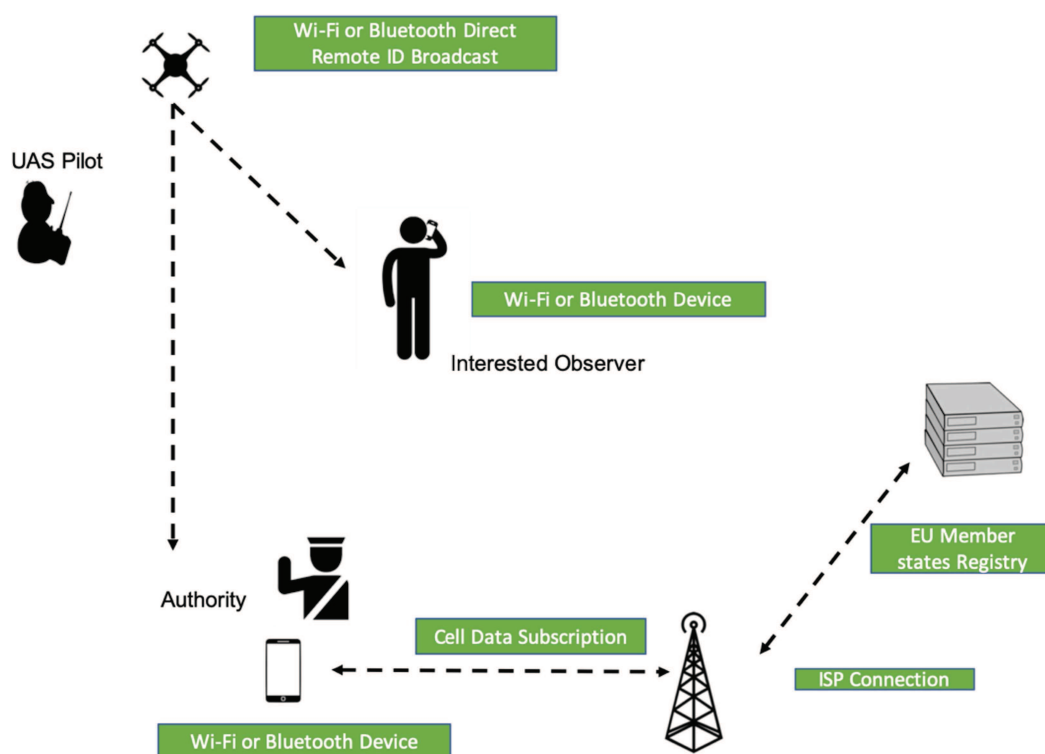


Figure 1 — DRI conceptual overview diagram

One or more UA are operating and broadcasting Direct Remote ID data. An interested observer wants to identify the UA.

The UA continuously broadcasts Remote ID data using one of the methods described in Clause 5. The UA is controlled locally by the Remote Pilot and has no interface with a U-Space service provider.

The interested observer accesses a Remote ID Display Application (RID App). This display application shows UA location and remote Pilot position or take-off position if not available, and a near-real-time trail of position reports on a map, and associated identification information when a particular UA is selected.

When the interested observer opens the Remote ID software on a receiver mobile device (such as smartphone), Remote ID data are acquired as follows:

1. The broadcast UA is transmitting its Remote ID advertisements continuously. The receiver mobile device (such as smartphone) uses its internal radios to listen for the advertisements from the UA, extract the Remote ID data, and show the location of the UA on the map and the position of the pilot, or the take-off position according to requirement matrix. As new position updates are received, the prior position reports become part of a near-real-time trail representing where the UA most recently flew.
2. The interested observer selects the UA symbols for the Broadcast UA on the map and views the corresponding ID information.
3. The interested observer closes the mobile application. After a period of time, the Remote ID software discards the information.

4.3 Mandatory information

The Direct Remote ID system shall broadcast locally the mandatory information listed below:

- The UAS operator registration number.
- The unique serial number of the UA (or exclusively the Add-on) compliant with standard ANSI/CTA-2063-A-2019.
- The time stamp, the geographical position of the UA and its height above the ground or its take-off point.
- The route course measured clockwise from true north and ground speed of the UA.
- The geographical position of the remote pilot, or if not available, the geographical position of the take-off point.
- The UAS emergency status for Class C1, C2, C3. Not required for Add-on.

The conformity to this requirement shall be proved per experiment method described in 6.2, “DRI Generic Test Procedure”.

4.4 Security of the DRI system

The Direct Remote Identification system shall reduce the ability of tampering the functionality of the direct remote identification system.

The Direct Remote Identification system is the on-board feature in the UA/Add-on that is formatting and transmitting over the air the DRI information to a compatible receiver mobile device.

The scope of this document does not include the receiver mobile device; thus, this security requirement does not apply to the receiver mobile device itself.

Specific considerations of this document regarding the security topic:

1. The UA and the Add-on come with a unique serial number; this number will be loaded at factory level and shall not be modified anymore afterwards. The protection of the unique serial number of the UA/Add-on shall be done by design. The serial number shall be stored in a secure memory area.

2. This document does not include the capability to store securely the UAS operator registration number.
3. This document does not include the capability to protect communication against user and/or malicious modification of sensors output values involved in DRI information computation (like GNSS, Barometer, Magnetometer, and Accelerometer...) and DRI radio-transmitter interface.
4. This document does not include the capability to protect against user and/or malicious software and hardware modification, the geographical position, the timestamp, the height, the take-off position, the speed, the route course, of the UA/Add-on.
5. This document does not include the capability to ensure DRI data integrity verification, the capability to ensure detection that the UA/Add-on's serial number is unique, when received by the Receiver Mobile Device. However, to provide such capabilities, a Digital Signature may be added to the DRI message.
6. This document does not include the capability to ensure DRI data received by the receiver mobile device are genuine and come from a UA/Add-on belonging to a registered UAS Operator, the capability to ensure detection of spoofing of the UAS Operator Registration Number. However, to provide such capabilities, a Digital Signature may be added to the DRI message.

The conformity to requirement "1." shall be proved per OEM's design documentation.

4.5 Upload of UAS operator registration number

UAS class C1, C2, C3 and the DRI Add-on shall have a direct remote identification that allows the upload of the UAS operator registration number and exclusively following the process provided by the registration system.

The DRI system shall not accept to upload an invalid UAS operator registration number.

- a) As shown in Figure 2, the unique UAS operator registration number issued by the Member States should consist of 16 alphanumeric characters in total organized as the following:
 - 1) three first alphanumeric characters corresponding to the ISO 3166 Alpha-3 code of the MS of registration (upper case only); and
 - 2) twelve following characters randomly generated consisting of alphanumeric characters (lower cases only).
 - 3) one character corresponding to checksum generated in line with point (c).
- b) MS should randomly generate additional three alphanumeric characters (lower cases only). They will be separated from the sixteen characters defined in (a) by a hyphen "-" (ASCII code DEC 45).
- c) MS should generate a checksum by applying the Luhn mod-36 algorithm to the fifteen alphanumeric characters resulting from the concatenation in the following order of:
 - 1) the twelve last alphanumeric characters of the UAS operator registration number defined in (a) (2); and
 - 2) the three randomly "xyz" generated additional alphanumeric characters defined in (b)

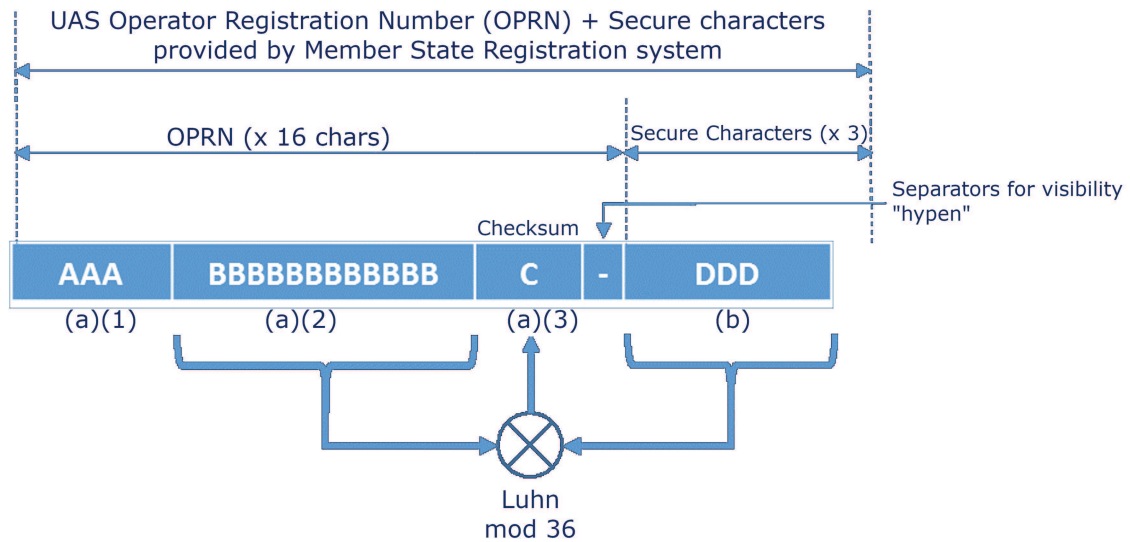


Figure 2 — UAS Operator Registration Number format

For the Luhn mod-36 algorithm, the mapping characters to code-points starts with the digits, then the lower-case letters as shown below:

Character	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	g	h
Code-point	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Character	i	j	k	l	m	n	o	p	q	r	s	t	u	v	w	x	y	z
Code-point	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35

An example of the UAS operator registration number is: "FIN87astrdge12k8" where:

- 'FIN' is the ISO 3166 Alpha-3 code of Finland,
- '87astrdge12k' are an example of the twelve (12) alphanumeric characters, as specified in (a)(2) in AMC1 Article 14(6) Registration of UAS operators and 'certified' UAS,
- '8' is the checksum value, i.e. the result of the application of the Luhn mod-36 algorithm to the 15 alphanumeric characters resulting from the concatenation of the 12 last alphanumeric characters of the UAS operator registration number defined in (a)(2) and the 3 randomly generated additional alphanumeric characters defined in (b) (i.e. 87astrdge12kxyz). Please note that the three alphanumeric characters corresponding to ISO 3166 Alpha-3 code, (in the example, the string "FIN"), are not used as a part of the checksum calculation, nor the hyphen character "-".

An example of the full string point (e) of the AMC1 Article 14(6), to be provided by a Member State is 'FIN87astrdge12k8-xyz' where:

- 'FIN87astrdge12k8' is the UAS operator registration number
- 'xyz' are an example of 3 randomly generated alphanumeric characters.

'8' is the checksum provided value, to be verified during the UAS operator registration number upload procedure;

The UAS operator registration number information consists of the UAS Operator Registration Number (OPRN) the public part including a checksum character, and the three randomly generated Secure Characters, the private part. Both parts are delivered to the operator from the Member State registration

system. The intention is that both parts are entered into the DRI System when uploading the operator registration number. The DRI System will use both parts to recalculate a checksum on its side and check the match.

However, the DRI System will only broadcast the public part (including the checksum). The private part is not stored in the UA and is not broadcast.

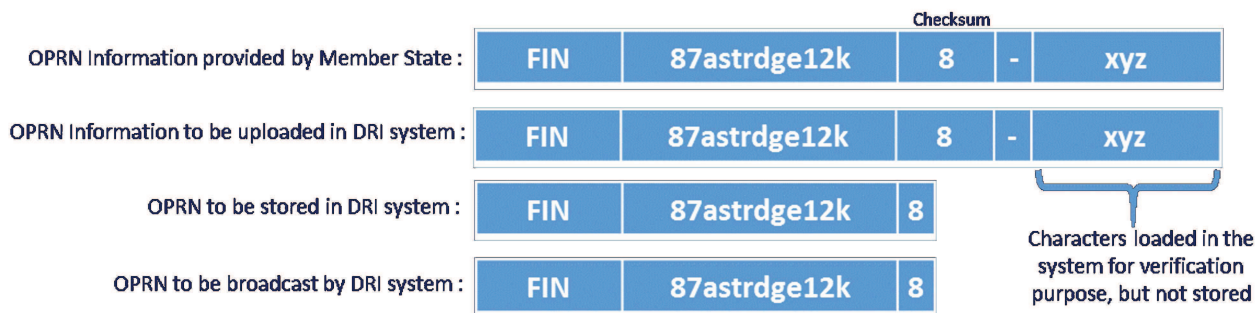


Figure 3 — UAS Operator Registration Number (OPRN) public and private parts

In the example used above, the public part is the string “FIN87astrdge12k8” and the private part is the string “xyz”.

Example of application of the Luhn mod-36 algorithm to the following 15 alphanumeric characters “87astrdge12kxyz”:

Character	8	7	a	s	t	r	d	g	e	1	2	k	x	y	z
Code-point	8	7	10	28	29	27	13	16	14	1	2	20	33	34	35
Double	16 (base 10) g (base 36)		20 (base 10) k (base 36)		58 (base 10) 1m (base 36)		26 (base 10) q (base 36)		28 (base 10) s (base 36)		4 (base 10) 4 (base 36)		66 (base 10) 1u (base 36)		70 (base 10) 1y (base 36)
Reduce	16	7	20	28	1+22	27	26	16	28	1	4	20	1+30	34	1+34
Sum of digits	16	7	20	28	23	27	26	16	28	1	4	20	31	34	35

Sum of digits = 16 + 7 + 20 + 28 + 23 + 27 + 26 + 16 + 28 + 1 + 4 + 20 + 31 + 34 + 35 = 316.

Thus 8 has to be added to 316 to get the number 324 so that $324 \bmod 36 = 0$.

Result: checksum = 8

Another example of application of the Luhn mod-36 algorithm to the following 15 alphanumeric characters “13azertyuiopabc”:

Sum of digit = 2 + 3 + 20 + 35 + 28 + 27 + 23 + 34 + 25 + 18 + 13 + 25 + 20 + 11 + 24 = 308

Result: checksum = g

A dedicated Human Interface will be necessary to allow the user to enter in the system, the UAS operator registration number and the secure characters delivered by the member state at the registration phase.

For the Add-on, a specific application shall be provided to allow users to enter the UAS Operator ID, check the consistency of the number, and set it in the device.

Based on the example above, the diagram hereafter describes the procedure to be implemented by the UAS Direct Remote ID function or the Add-On:

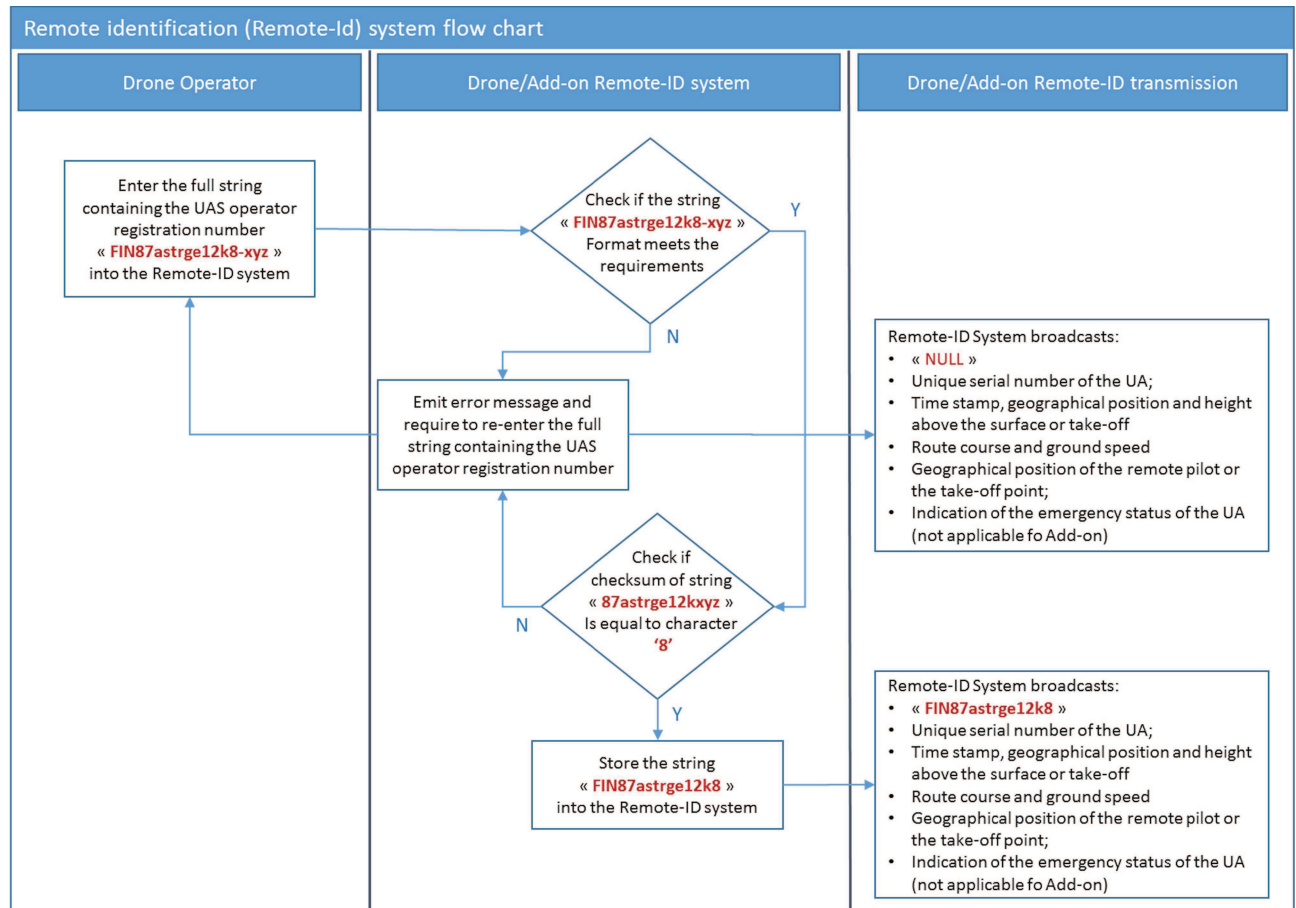


Figure 4 — UAS Operator Registration management flow

When an authority wishes to verify the broadcasted UAS operator registration number, the authority will have special access to the registration system for obtaining the private part. By recalculating the checksum over the public and the private part and comparing against the checksum that was broadcast from the UA, it will be possible to determine whether the broadcasted registration number is valid or not.

The conformity to this requirement shall be proved per experiment method described in 6.2 “DRI Generic Test Procedure”.

4.6 Performance Requirements

This document covers the power emission, periodicity of data mission, and range.

However, as radio-transmitting equipment, DRI system shall comply with relevant standards on radio-transmitting equipment, such as: ETSI EN 301489-1, ETSI EN 301489-17, ETSI EN 300328. For output power emission, refer to 5.4. For emission directivity, refer to 5.5.

Direct Remote Identification information shall be received by existing mobile receiver device (such as smartphone).

Direct Remote Identification information shall be broadcasted periodically in real-time to the Mobile receiver device. For update rates, refer to 5.6.

4.7 Working Time

The information broadcasted by the DRI system shall be transmitted from the switch-on of the UA/Add-on, when on ground, in the air, and landed, until the switch-off of the UA/Add-on.

4.8 Add-on Specific requirements

The add-on device, should be provided to the end-user, with a user's manual providing the reference of the transmission protocol used for the direct remote identification emission and the instruction to:

- install the module on the UA;
- upload the UAS operator registration number;
- configure the Class of the UA hosting the Add-on.

The add-on manufacturer shall provide a tool to configure the class of the UA, in the add-on.

4.9 DRI Display Applications

This subclause is not to be considered as a DRI requirement, but for information only, in order for compatible mobile receiver device, to get DRI data interpretation and display capability.

As described in 4.2 in the standard scenario for Direct Remote Identification the interested observer uses a receiver mobile device (such as smartphone) with specific Display Application to receive and display the information contained in Remote ID broadcasted by an UA.

In order to be easily accessible, the Display Application should be publicly available in the app store relevant for the receiver mobile device.

The app should display all mandatory information described in 4.3. In order to ensure validity of the Remote ID the authentication information, if transmitted by the UA, should be processed by the app and the result of the authentication be displayed. A way to display Remote ID could be a map view showing the position of the UA(s) together with the position of the smartphone.

All transport methods for Remote ID described in Clause 6 should be processed and displayed by the app in order to be used as testing tool. As the transport methods have different hardware requirements, a specific mobile receiver device may not be able to receive all transport methods. The app should show the user which transport methods are supported by the present mobile receiver device.

5 Requirements for Direct Remote Identification function

5.1 Data Dictionary

The block messages which will be transmitted by broadcast DRI service, rely on a semantic model which is defined as in Table 1 — Data dictionary; it includes the list of the required data fields for Direct Remote ID function, including the minimum characteristics that shall be supported by broadcast implementations. Since Direct Remote ID uses size-limited messages, some data fields require to use encoding methods that adjust the resolution or aggregate ranges of values.

In order to ensure compatibility of data fields and protocols between Delegated Act requirements and other specification requirements in the world, all the tables of Clause 5 below identify Recommended coded 'R', Mandatory coded 'M' and Optional coded 'O' values in the four rightest columns named C1, C2, C3, Add-On.

'M' = Mandatory, means the data field answer to an explicit requirement from the Delegated Act, consequently this data field shall be present in the global data set and its value correctly set.

‘O’ = Optional, means the data field doesn’t answer to an explicit requirement from the Delegated Act, consequently this data field shall be present in the global data set and its value could be set with the real value or set to null (ie null-characters if string or ‘0’ in numeric) or the value defined in the table to be used when the value is unknown).

‘R’ = Recommended, means the data field doesn’t answer to an explicit requirement from the Delegated Act, but ASD-STAN members representative of the industry, elaborating this standard specification, recommend the presence of this data field in the global data set and its value correctly set.

Table 1 — Data dictionary

Data Field	Description/Rationale	C1	C2	C3	Add-On
UAS ID	Three possible values: 1. Serial Number → see ref. CTA-2063-A-2019 Serial Number format. 2. UA Registration ID → likely given by the national CAA or an authorized representative. 3. UTM (UUID) → A traceable ID given by an UTM entity and acting as “session ID” to avoid sensitive information leakage	M O O	M O O	M O O	M O O
UAS ID Type	1. Serial Number, 2. Registration ID, or 3. UTM UUID	M O O	M O O	M O O	M O O
UA Type	Refer to Table 2 for values.	O	O	O	O
Classification Type	Specifies the type of data in the UA Category and Class fields	R	R	R	R
UA Category	The Category of the UA as defined in Implementing Act (EU) 2019/947	R	R	R	R
UA Class	The Class of the UA as defined in the Delegated Regulation (EU) 2019/945	R	R	R	R
Timestamp	The UTC time relevant to the acquisition of the of position information with a minimum resolution of one tenth of a second.	M	M	M	M
Timestamp Accuracy	Definition of the timestamp accuracy is 1/10ths of seconds. It’s the largest difference between Timestamp and true time of acquisition of the following parameters: Latitude, Longitude, Geodetic Altitude, Pressure Altitude and Height.	O	O	O	O

Data Field	Description/Rationale	C1	C2	C3	Add-On
Operational Status	Gives operational status of the UA, including UAS Emergency status. Not applicable to Add-on. Refer to Table 2 for values.	M	M	M	N/A
Operator ID	Refer to Subclause 4.5 “Upload of UAS operator registration number”.	M	M	M	M
Latitude	Limits from -90° to $+90^{\circ}$. Current latitude (within vertical accuracy limits) of the UA. The minimum resolution is at 7 decimal digits ($\sim 11\text{mm}$). Special Values as Invalid, No Value, or Unknown are coded with 0 deg simultaneously for both latitude and longitude.	M	M	M	M
Longitude	Limits from -180° (excluded); $+180^{\circ}$ (included). Current longitude (within horizontal accuracy limits) of the UA. This is necessary to display UA location. Minimum resolution: 7 decimal digits ($\sim 11\text{mm}$). Special Values as Invalid, No Value, or Unknown are coded with 0 deg simultaneously for both latitude and longitude.	M	M	M	M
Geodetic Altitude	The aircraft distance above or below the ellipsoid as measured along a line that passes through the aircraft and is normal to the surface of the WGS-84 ellipsoid. This value is given in meters having a minimum resolution of 1 meter. Special Values as Invalid, No Value, or Unknown are coded with $-1\,000\text{ m}$.	O	O	O	O
Pressure Altitude of Position	It is the elevation above a standard datum air-pressure plane (typically, $1\,013,25\text{ millibars}$ or $29,92\text{'' Hg}$). This value is given in meters having a minimum resolution of 1 meter. Special Values as Invalid, No Value, or Unknown are coded with $-1\,000\text{ m}$.	O	O	O	O
Height	Vertical distance of a UA position above take-off location or height above ground level (AGL). This value is given in meters having a minimum resolution of 1 meter. Special Values as Invalid, No Value, or Unknown are coded with $-1\,000\text{ m}$.	M	M	M	M
Height Type	Height above take-off location or height above ground level.	M	M	M	M
Geodetic Vertical Accuracy	Refer to Table 2 for values. This field indicates quality/containment on geodetic altitude. It derives from ADS-B Geodetic Vertical Accuracy (GVA).	O	O	O	O
Horizontal Accuracy	Refer to Table 2 for values. This field indicates quality / containment on horizontal position. It derives from ADS-B NACp.	O	O	O	O
Speed Accuracy	Refer to Table 2 for values. This field indicates quality / containment on horizontal ground speed.	O	O	O	O
Track Direction	It is the cardinal direction taken by the UA with reference to “True North-based” ground track angle. It is measured in clockwise degrees and has a minimum resolution of 1 degree. Special values as Invalid, No Value, or Unknown are coded with 361 deg.	M	M	M	M
Speed	Ground speed of flight. This value is provided in meters per second with a minimum resolution of $0,25\text{ m/s}$. Special values as Invalid, No Value, or Unknown are coded with 255 m/s . In case the speed is greater or equal than $254,25\text{ m/s}$, the code value is $254,25\text{ m/s}$.	M	M	M	M
Vertical Speed	Vertical speed upward in reference to the WGS84 value; it is measured in meters per second. Special values as Invalid, No Value, or Unknown are coded with 63 m/s . In case the speed is greater or equal to 62 m/s , the code value is 62 m/s .	O	O	O	O