

Zuverlässigkeitsmanagement

Teil 3-3: Anwendungsleitfaden
Analyse der Lebenszykluskosten
(IEC 56/782/CD:2001, Text Englisch)



IEC 60300-3-3

ICS 03.120.10; 29.020

Entwurf

Einsprüche bis 2002-07-31

Vorgesehen als Ersatz für
DIN IEC 60300-3-3:1999-03

Dependability management
Part 3-3: Application guide
Life cycle costing analysis
(IEC 56/782/CD:2001, text in English)

Gestation de la sûreté de fonctionnement
Partie 3-3: Guide d'application
Evaluation du coût du cycle de vie
(CEI 56/782/CD:2001, texte en anglais)

Anwendungswarnvermerk

Dieser Norm-Entwurf wird der Öffentlichkeit zur Prüfung und Stellungnahme vorgelegt.

Weil die beabsichtigte Norm von der vorliegenden Fassung abweichen kann, ist die Anwendung dieses Entwurfes besonders zu vereinbaren.

Stellungnahmen werden erbeten

- vorzugsweise als Datei per e-Mail an dke@din.de in Form einer Tabelle. Die Vorlage dieser Tabelle kann im Internet unter <http://www.din.de/stellungnahme> abgerufen werden;
- oder in Papierform an die DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik im DIN und VDE, Stresemannallee 15, 60596 Frankfurt am Main.

Das internationale Schriftstück IEC 56/782/CD:2001-11, „IEC 60300-3-3, Ed 2: Dependability management – Part 3-3: Application guide – Life cycle costing analysis“, ist unverändert in diesen deutschen Norm-Entwurf übernommen worden.

Fortsetzung Seite 2 und 3
und 71 Seiten IEC-Original

DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik im DIN und VDE

Nationales Vorwort

Dieser Norm-Entwurf enthält die englische Originalfassung des internationalen Norm-Entwurfs [Committee Draft (CD)] IEC 56/782/CD:2001-11 „IEC 60300-3-3, Ed 2: Dependability management – Part 3-3: Application guide –Life cycle costing analysis“.

Auf eine Übersetzung wird im derzeitigen Entwurfsstadium zugunsten einer schnelleren Verfügbarkeit, Kommentierung und Einflussnahme der deutschen Fachöffentlichkeit verzichtet. Eine deutsche Übersetzung wird bei den weiteren Bearbeitungsstufen des Normvorhabens angefertigt.

Der internationale Norm-Entwurf wurde vom TC 56 „Dependability“ der Internationalen Elektrotechnischen Kommission (IEC) erarbeitet.

Um eine Beschleunigung und Straffung der Normungsarbeit zu erreichen, haben IEC und das Europäische Komitee für Elektrotechnische Normung (CENELEC) vereinbart, dass ein auf IEC-Ebene entstandener internationaler Norm-Entwurf zeitgleich (parallel) bei IEC und CENELEC im CDV-Stadium zur Umfrage und im FDIS-Stadium zur Abstimmung gestellt wird.

Bei der Abstimmung zu dem europäischen Schluss-Entwurf bei CENELEC und dem internationalen Schluss-Entwurf bei IEC [Final Draft International Standard (FDIS)] sind jeweils nur „JA/NEIN“-Entscheidung möglich, wobei „NEIN“-Entscheidungen fundiert begründet werden müssen. Europäische Norm-Entwürfe, die die erforderliche Zustimmung in CENELEC erhalten haben und als Europäische Norm ratifiziert wurden, sind unverändert als Deutsche Normen zu übernehmen.

Für den vorliegenden Norm-Entwurf ist das nationale Arbeitsgremium K 132 „Zuverlässigkeit“ der DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik im DIN und VDE zuständig.

Änderungen

Gegenüber DIN IEC 60300-3-3:1999-03 wurden folgende Änderungen vorgenommen:

Neu hinzugekommen sind insbesondere die folgenden Anhänge:

- Anhang B: Berechnung der Lebenszykluskosten und Faktoren der Wirtschaftlichkeit;
- Anhang C: Beispiele für die Analyse der Lebenszykluskosten;
- Anhang D: Beispiele für die Modellentwicklung der Lebenszykluskosten;
- Anhang E: Beispiel für eine Produktstruktur und Lebenszykluskostenaufstellung für ein Bahnfahrzeug;
- Anhang F: Einsatz einer Tabellenkalkulation für die Lebenszykluskostenanalyse.

Nationaler Anhang NA (informativ)

Zusammenhang mit Europäischen und Internationalen Normen

Für den Fall einer undatierten Verweisung im normativen Text (Verweisung auf eine Norm ohne Angabe des Ausgabedatums und ohne Hinweis auf eine Abschnittsnummer, eine Tabelle, ein Bild usw.) bezieht sich die Verweisung auf die jeweils neueste gültige Ausgabe der in Bezug genommenen Norm.

Für den Fall einer datierten Verweisung im normativen Text bezieht sich die Verweisung immer auf die in Bezug genommene Ausgabe der Norm.

Der Zusammenhang der zitierten Normen mit den entsprechenden Deutschen Normen ergibt sich, soweit ein Zusammenhang besteht, grundsätzlich über die Nummer der entsprechenden IEC-Publikation. Beispiel: IEC 60068 ist als EN 60068 als Europäische Norm durch CENELEC übernommen und als DIN EN 60068 ins Deutsche Normenwerk aufgenommen.

IEC hat 1997 die Benummerung der IEC-Publikationen geändert. Zu den bisher verwendeten Normnummern wird jeweils 60000 addiert. So ist zum Beispiel aus IEC 68 nun IEC 60068 geworden.

CONTENTS

1	Scope	8
2	Normative references	8
3	Terms and definitions	8
4	Symbols and abbreviated terms	9
5	Life cycle costing	10
5.1	Objectives of life cycle costing	10
5.2	Product life cycle phases and LCC	10
5.3	Timing of LCC analysis	11
5.4	Dependability and LCC relationship	11
5.4.1	General	11
5.4.2	Dependability related costs	12
5.4.3	Consequential costs	13
5.5	LCC concept	14
5.5.1	General	14
5.5.2	LCC breakdown into cost elements	16
5.5.3	Estimation of cost	17
5.5.4	Sensitivity analysis	20
5.5.5	Impact of discounting, inflation and taxation on LCC	21
5.6	Life cycle costing	21
5.6.1	General	21
5.6.2	Life cycle costing plan	21
5.6.3	LCC model selection or development	22
5.6.4	LCC model application	22
5.6.5	Life cycle costing documentation	23
5.6.6	Review of life cycling costing results	23
5.6.7	Analysis update	24
5.7	Uncertainty and risks	24
6	LCC and environmental aspects	25
Annex A	(informative) Typical cost generating activities	27
A.1	General	27
A.2	Typical costs in the product life cycle phases	27
A.2.1	Concept and definition	27
A.2.2	Design and development	27
A.2.3	Manufacturing and installation	27
A.2.4	Operation and maintenance	28
A.2.5	Disposal	28
Annex B	(informative) LCC calculations and economic factors	30
B.1	Opportunity costs, discounting, inflation and taxation	30
B.1.1	General	30

B.1.2	Opportunity costs.....	30
B.1.3	Inflation	30
B.1.4	Taxation	30
B.1.5	Exchange rate	30
B.2	Application of financial techniques.....	31
B.2.1	General	31
B.2.2	Discounted cash flow.....	31
B.2.3	Internal Rate of Return (IRR)	31
B.2.4	Depreciation and amortization	31
B.2.5	Cost-benefit analysis	31
Annex C (informative)	Example of an LCC analysis.....	33
C.1	General	33
C.2	Cost Breakdown Structure (CBS).....	34
C.3	Product breakdown structure	36
C.4	Cost categories	37
C.5	Definition of cost elements.....	38
C.6	Calculation of costs	38
C.6.1	Preconditions and assumptions	38
C.6.2	Costs Investments for Maintenance (CIM).....	39
C.6.3	Costs for annual operation (CYO)	41
C.6.4	Costs for Annual Maintenance (CYM)	43
C.6.5	Total costs for 15 years' operation and maintenance (COM)	45
C.6.6	Presentation of undiscounted costs related to the cost breakdown structure	45
C.7	Examples of possible improvements for lower LCC.....	46
C.7.1	Data store reliability.....	46
C.7.2	Display console	47
C.7.3	Data transport network	47
C.7.4	Software upgrading.....	47
C.8	Revenue generation to be used for discounted cash flow analyses	47
C.9	Example using cash flow analysis.....	48
C.9.1	General	48
C.9.2	CIMSRU (See C.6.2.2).....	48
C.9.3	CIMFS (See C.6.2.4)	48
C.9.4	CIMFW (See C.6.2.5).....	48
C.9.5	CYOL (See C.6.3.1).....	48
C.9.6	CYOS (See C.6.3.2)	48
C.9.7	CYUO (See C.6.3.3)	49
C.9.8	CYMPBATT (See C.6.4.2).....	49
C.9.9	CYMPFAN (See C.6.4.2)	49
C.9.10	CYMCS (See C.6.4.3).....	49
C.9.11	CYMCW (See C.6.4.3).....	49
C.10	Life cycle cost outputs	50
C.10.1	Benefits of discounting.....	50

C.10.2 Design option trade-off	50
Annex D (informative) Examples of LCC model development	53
D.1 General	53
D.2 LCC model based on costs for the life cycle phases	53
D.2.1 First level breakdown	53
D.2.2 Second level breakdown	53
D.2.3 Third level breakdown	55
D.3 LCC model based on acquisition cost and ownership cost	56
D.3.1 General	56
D.3.2 Hierarchical structure	56
D.3.3 Cost elements level 1 to 7	57
Annex E (informative) Example of a product breakdown structure and LCC summary for a railway vehicle	61
Annex F (informative) Use of spreadsheet for LCC analysis	64
F.1 Example of spreadsheet	64
F.2 Example of spreadsheet for the maintenance phase used for a school	67

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DEPENDABILITY MANAGEMENT –
Part 3-3: Life cycle cost analysis – Application guide

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60300-3-3 has been prepared by IEC technical committee 56: Dependability.

The text of this standard is based on the following documents:

FDIS	Report on voting
XX/XX/FDIS	XX/XX/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 3.

The committee has decided that the contents of this publication will remain unchanged until _____. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

The IEC 60300 series of standards explain the procedures for implementing a dependability program during all phases of the life cycle of a product in order to achieve dependability objectives.

IEC 60300-1 is the top-level document that provides guidance on dependability management systems.

IEC 60300-2 is the next level down, and defines the tasks/elements that may need to be carried out to achieve dependability objectives, and gives guidance on how the tasks should be undertaken.

IEC 60300-3 series comprises Application Guides that develop the tasks in IEC 60300-2 with respect to specific areas of a product. One of these Application Guides is this document.

IEC 60300-3-3 is a generic guideline on Life Cycle Costing and covers all applications.

The examples included illustrate how LCC principles are applied in practice.

It may be advantageous for particular organizations or industry sectors to extract those parts relevant to their LCC needs and produce a rationalized approach to LCC. This could take the form of industry-specific guidelines or LCC models as shown in Figure 1.

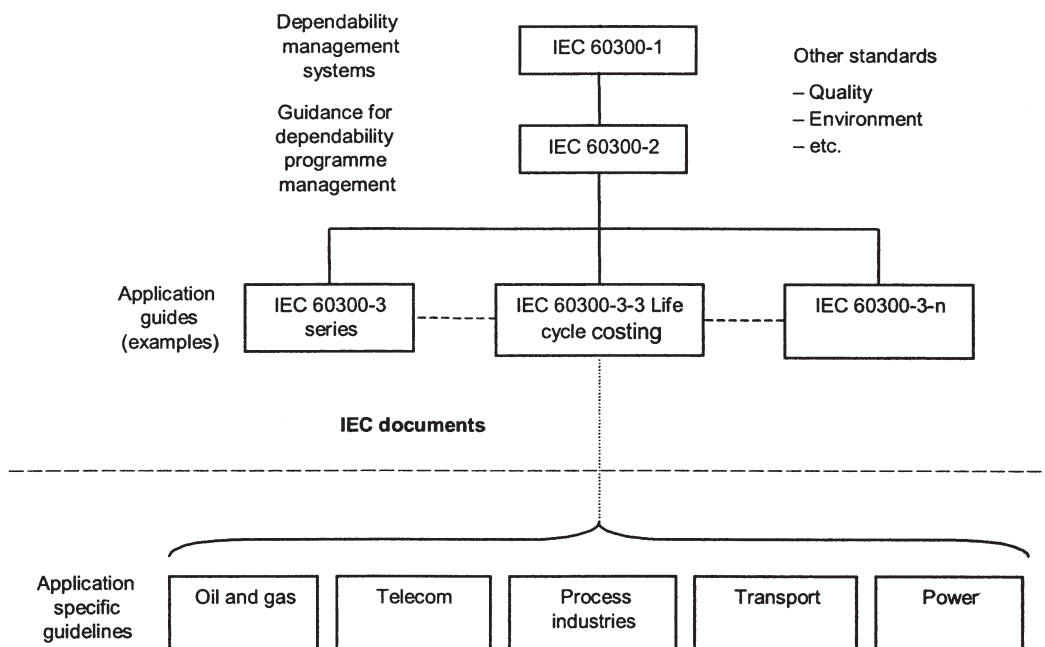


Figure 1 – Hierarchy of dependability documents

INTRODUCTION

Products today are required to be reliable. They have to perform their functions safely with no undue impact on the environment and be easily maintainable throughout their useful lives. The decision to purchase is not only influenced by the product's initial cost (acquisition cost) but also by the product's expected operating and maintenance cost over its life (ownership cost) and disposal cost. In order to achieve customer satisfaction, the challenge for suppliers is to design products that meet requirements, and are reliable and cost competitive by optimizing acquisition, ownership and disposal costs. This optimization process should ideally start at the product's inception and should be expanded to take into account all the costs that will be incurred throughout its lifetime. All decisions made about a product's design and manufacture may affect its performance, safety, reliability, maintainability, maintenance support requirements, etc., and ultimately determine its price and ownership and disposal costs.

Life cycle cost analysis is the process of economic analysis to assess the total cost of acquisition, ownership and disposal of a product. This analysis provides important inputs in the decision making process in the product design, development, use and disposal. Product suppliers can optimize their designs by evaluation of alternatives and by performing trade-off studies. They can evaluate various operating, maintenance and disposal strategies (to assist product users) to optimize life cycle cost (LCC). The life cycle cost analysis can also be effectively applied to evaluate the costs associated with a specific activity, for example, the effects of different maintenance concepts/approaches, to cover a specific part of a product, or to cover only selected phase or phases of a product's life cycle.

Life cycle cost analysis is most effectively applied in the product's early design phase to optimize the basic design approach. However, it should also be updated and used during the subsequent phases of the life cycle to identify areas of significant cost uncertainty and risks.

The necessity for formal application of the life cycle costing process to a product will normally depend on contractual requirements. However, life cycle cost analysis provides a useful input to any design decision making process. Therefore, it should be integrated with the design process, to the extent feasible, to optimize product characteristics and costs.

DEPENDABILITY MANAGEMENT –

Part 3-3: Life cycle cost analysis – Application guide

1 Scope

This part of IEC 60300 provides a general introduction to the concept of life cycle cost analysis. Although the life cycle costs consist of many contributing elements, this standard particularly highlights the costs associated with dependability of the product.

It is intended for general application by both customers (users) and suppliers of products. It explains the purpose and value of life cycle cost analysis and outlines the general approaches involved. It also identifies typical life cycle cost elements to facilitate project and programme planning.

General guidance for conducting a life cycle cost analysis, including life cycle cost model development together with examples, is provided.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-191:1990, *International Electrotechnical Vocabulary (IEV) – Part 191: Dependability and quality of service*

IEC 60300-1: *Dependability management – Part 1: Dependability management systems*

IEC 60300-2: *Dependability management – Part 2: Guidance for dependability programme management*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-191 and the following apply.

3.1

life cycle

time interval between a product's conception and its disposal

3.2

life cycle costing

process of economic analysis to assess the life cycle cost of a product over its life cycle or a portion thereof

3.3

base date

fixed point in time set as the common cost reference

4 Symbols and abbreviated terms

For the purposes of this document the following symbols and abbreviated terms apply.

A	Availability
C	Cost
CE	Cost Element
CER	Cost Estimating Relationships
C_L	labour cost
C_n	nominal cash flow in year n
DCF	Discounted Cash Flow
DF	Discounting Factor
IRR	Internal Rate of Return
LCC	Life Cycle Cost
m	number of years in operation
MAD	Mean Administrative Delay
MADT	Mean Accumulated Down Time
MLD	Mean Logistic Delay
MPH	Maintenance Personnel Hours
MRT	Mean Repair Time
MTD	Mean Technical Delay
MTTF	Mean Time To Failure
MTTR	Mean Time To Restoration
n	Number
NPV	Net Present Value
r	rate of interest, discount rate per annum
S_t	net cost in year t
t	Time
T	time period
t_0	base year
U	Unavailability
UC	Unit of Currency
X	discount rate
z	failure intensity

5 Life cycle costing

5.1 Objectives of life cycle costing

Life cycle costing is the process of economic analysis to assess the total cost of acquisition, ownership and disposal of a product. It can be applied to the whole life cycle of a product or to parts or combinations of different life cycle phases.

The primary objective of life cycle costing is to provide input to decision making in any or all phases of a product's life cycle.

An important objective in the preparation of application specific LCC models is to identify costs that may have a major impact on the LCC or may be of special interest for that specific application. Equally important is to identify costs that may only influence the LCC to a very small extent.

Life cycle costing can contribute to integrated logistic support analysis. See IEC 60300-3-12.

5.2 Product life cycle phases and LCC

Fundamental to the concept of life cycle costing is a basic understanding of a product life cycle and the activities that are performed during these phases. Also essential is an understanding of the relationship of these activities to the product performance, safety, reliability, maintainability and other characteristics, contributing to life cycle costs.

Six major life cycle phases of a product are as follows

- a) concept and definition;
- b) design and development;
- c) manufacturing;
- d) installation;
- e) operation and maintenance;
- f) disposal.

The total costs incurred during the above phases can be divided into three major areas, namely, acquisition costs, ownership costs and disposal costs. Hence, by definition:

$$\text{LCC} = \text{Cost}_{\text{acquisition}} + \text{Cost}_{\text{ownership}} + \text{Cost}_{\text{disposal}}$$

Acquisition costs are generally visible, and can be readily evaluated before the acquisition decision is made and may or may not include installation cost.

The ownership costs, which often are a major component of LCC, and in many cases exceed acquisition costs, are not readily visible and are difficult to predict and may include the cost associated with installation.

Disposal costs may represent a significant proportion of total LCC. Environmental legislation may require that the disposal phase of major projects, e.g. nuclear power stations, involve significant expenditure.

Figure 2 shows the life cycle phases of a product, together with some of the topics that should be addressed by a life cycle costing study.

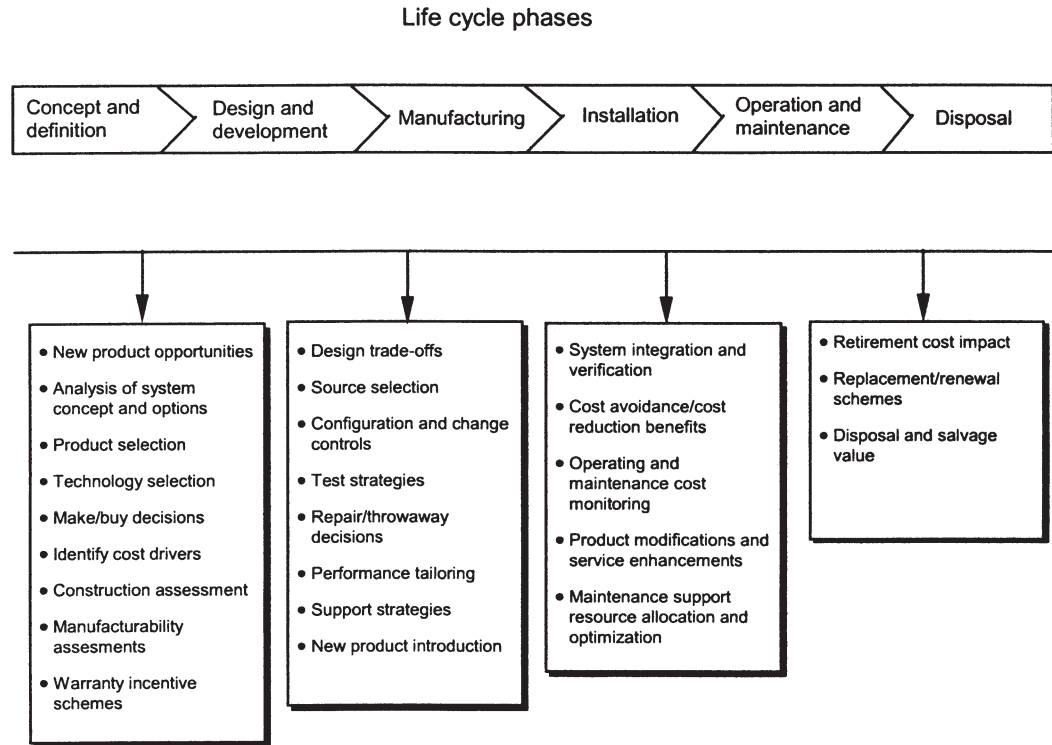


Figure 2 – Sample applications of Life Cycle Costing

5.3 Timing of LCC analysis

Early identification of acquisition, ownership and disposal costs enables the decision-maker to balance availability and other dependability factors against life cycle costs. Decisions made early in a product's life cycle have a much greater influence on LCC than those made later in a product's life cycle. Experience has shown that by the end of the concept and definition phases, more than half of product LCC may be committed by decisions. The opportunity to perform trade-offs becomes increasingly limited as the product advances in its life cycle.

Life cycle cost analysis may address the whole life cycle of a product or only part of it. The life cycle cost analysis should be tailored to suit a particular product/project in order to obtain the maximum benefit from the analysis effort.

5.4 Dependability and LCC relationship

5.4.1 General

Dependability of a product is the collective term used to describe the product's availability performance and its influencing factors, i.e. reliability performance, maintainability

performance and maintenance support performance. Performance in all these areas can have a significant impact on the LCC. Higher initial costs may result in improved reliability and/or maintainability, and thus improved availability with resultant lower operating and maintenance costs.


Dependability considerations should be an integral part of the design process and LCC evaluations. These considerations should be critically reviewed when preparing product specifications, and be continually evaluated throughout the design phases in order to optimize product design and the life cycle cost.

5.4.2 Dependability related costs

Costs associated with dependability elements may include the following, as appropriate:

- system recovery cost including corrective maintenance cost;
- preventive maintenance cost;
- consequential cost.

Figure 3 describes some dependability elements translated into operation and maintenance costs.

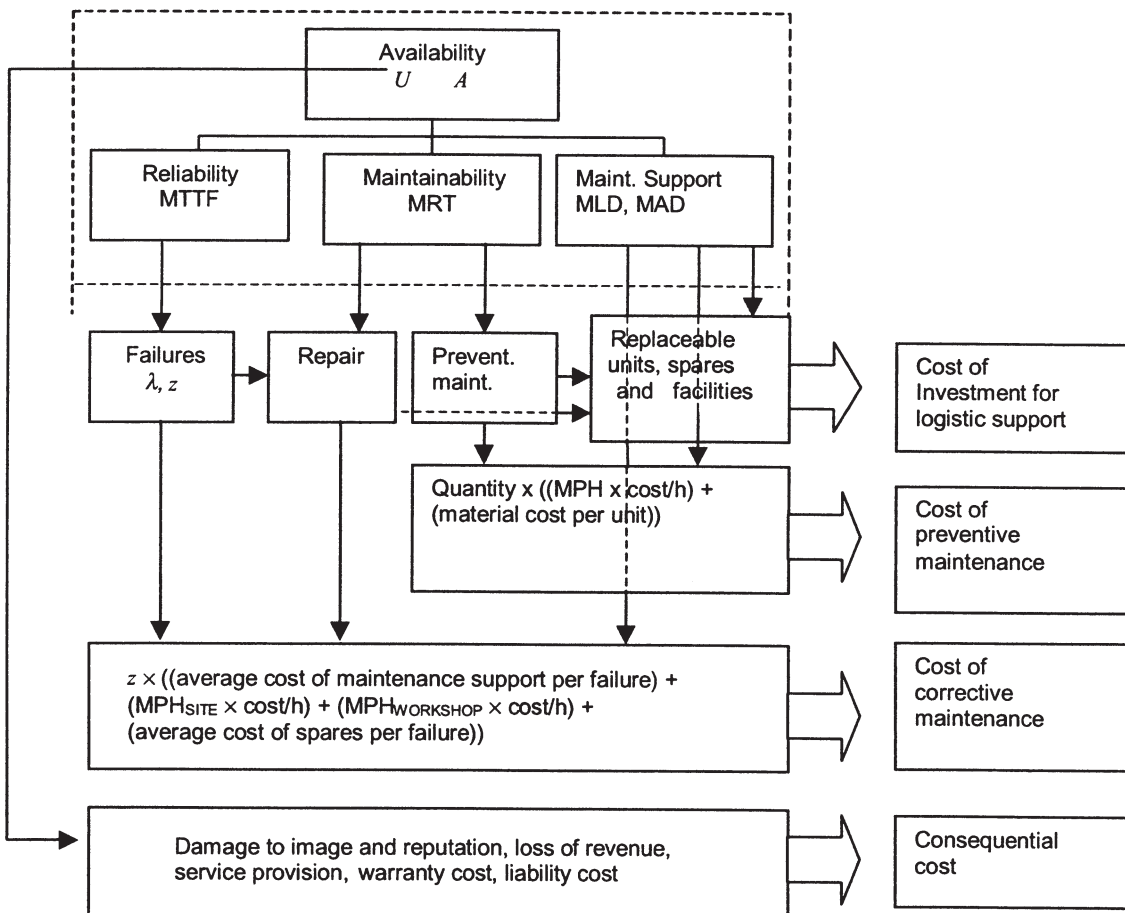

The following symbols and abbreviations apply in accordance with IEC 60050(191):

A is the Availability	MRT is the Mean Repair Time
U is the Unavailability	MTD is the Mean Technical Delay
z is the failure intensity	MLD is the Mean Logistic Delay
λ is the failure rate	MAD is the Mean Administrative Delay
MTTF is the Mean Time To Failure	MPH is the Maintenance Person Hours

Figure 3 – Typical relationship between dependability and LCC for the operation and maintenance phase

5.4.3 Consequential costs

5.4.3.1 General

When a product or service becomes unavailable, a series of consequential costs may be incurred. These costs may include:

- warranty cost;
- liability cost;
- cost due to loss of revenue;
- costs for providing an alternative service.

In addition, further consequential costs should be identified by applying risk analysis techniques to determine costs of adverse impacts on the company's:

- image;
- reputation;
- prestige;

which in turn may result in loss of clients.

Costs of recovering from or mitigating against these risks should be included in consequential costs.

In most cases, these costs are difficult to assess, but sometimes it is possible to quantify them. For example, these costs may be estimated based on publicity campaign costs and costs of marketing efforts or compensations in order to retain the clients. Where applicable, these costs should be accounted for.

The unavailability of a product can significantly affect its LCC. Therefore, the availability performance of a product and associated life cycle cost needs to be optimized. With increasing reliability (all other factors held constant), the acquisition costs will generally increase but maintenance and support costs will decrease. The LCC is optimized when the incremental increase in acquisition costs due to reliability improvements equals the incremental savings in maintenance and support costs, and in consequential costs. At a certain point, an optimum product reliability, which corresponds to the lowest life cycle cost, is achieved.

5.4.3.2 Warranty costs

Warranties provide protection to the customers, insulating them from the cost of correcting product failures, in particular during the early stages of product operations. The cost of warranties is usually borne by the suppliers, and may be affected by reliability, maintainability and maintenance support characteristics of the product.

Suppliers can exercise significant control over these characteristics during design and development, and manufacturing phases thus influencing the warranty costs.

Warranties usually apply for a limited period of time, and a number of conditions generally apply. Warranties rarely include protection against consequential costs incurred by the customer due to product unavailability.

Warranties may be supplemented or replaced by service contracts whereby the supplier performs, in addition to any arrangements made by the customer, all preventive and corrective maintenance for a fixed period of time that can be renewed for any period up to the whole product lifetime. In the latter case, the suppliers are motivated to build an optimum level of reliability and maintainability into their product, usually at higher acquisition costs.

5.4.3.3 Liability costs

A liability will arise where for example, a supplier fails to comply with their legal obligations. The cost of compensating for a breach of the law needs to be considered as part of the LCC. This is especially important in the case of products that have a high potential to cause human injury and/or environmental damage. Liability costs are also important for new products for which risks involved may not be fully apparent and/or well understood. Where required, a risk analysis, together with past experience and expert judgement, may be used to provide an estimate of these costs.

5.5 LCC concept

5.5.1 General

An LCC model, like any other model, is a simplified representation of the real world. It extracts the salient features and aspects of the product and translates them into cost estimating relationships. In order for the model to be realistic, it should:

- a) represent the characteristics of the product being analysed, including its intended use environment, maintenance concept, operating and maintenance support scenarios, and any constraints or limitations;
- b) be comprehensive in order to include and highlight all factors that are relevant to LCC;
- c) be simple enough to be easily understood and allow for its timely use in decision making, and future update and modification;
- d) be designed in such a way as to allow for the evaluation of specific elements of LCC independent from other elements.

A simple LCC model is basically an accounting structure that contains mathematical expressions for the estimation of cost associated with each of the cost elements constituting the LCC.

In some cases, a model may need to be specifically developed for the problem under study; while for some other cases, commercially available models may be used. Each LCC model has its own flexibility and application. Knowledge of the contents and the conditions under which they apply are important in order to assure adequacy of their use. Before selecting a model, the amount of information needed should be identified together with the results expected from using the model. Someone familiar with the details of the model is needed to review it so as to determine the applicability of all cost factors, empirical relationships, elements, and other constants and variables in the model.

Therefore, before using any existing LCC model, it should be suitably validated for the life cycle costing study under consideration. To do this, the cost factors and other parameters from a known example, along with the operational scenario should be used to assess the extent to which the model provides realistic results.

Many products are designed to have very long life, for example buildings or power stations. For such products, a number of costs, for instance for functional changes or product enhancement, will occur at intervals during the life of the product and techniques to deal with these should be incorporated in the model.

LCC modelling includes

- cost breakdown structure;
- product/work breakdown structure;
- selection of cost categories;
- selection of cost elements;
- estimation of costs;
- presentation of results.

When applicable it may also include

- environmental aspects;
- uncertainties and risks;
- sensitivity analysis;
- treatment of costs.

The cost breakdown structure presents a breakdown of costs incurred over the major phases (or phases of interest) of the life cycle of a product. Annex C includes examples of presentation of costs related to cost breakdown structure.

The product/work breakdown structure is composed of a detailed breakdown of hardware, services, and data identifying all major tasks and supporting work packages. Annex E gives an example of a product breakdown structure and LCC summary for a railway vehicle.

The total life cycle cost for the six life cycle phases of a product is

$$LCC = C_{CD} + C_{DD} + C_M + C_I + C_{OM} + C_D$$

where

- C_{CD} is the cost of the concept and definition phase;
- C_{DD} is the cost of the design and development phase;
- C_M is the cost of the manufacturing phase;
- C_I is the cost of the installation phase;
- C_{OM} is the cost of the operation and maintenance phase;
- C_D is the cost of the disposal phase.

Annex D presents examples of these costs.

The appropriate life cycle phases, or parts or combinations of these phases, should be selected to suit the special needs of each specific analysis. In a more general way, LCC can also be divided into acquisition cost, ownership cost and disposal cost.

Detailed expressions for costs for the different phases can be developed separately. The cost elements, factors, etc. should have unique identities. In a situation where analyses cover several phases, the identities of cost elements, factors, etc. should be unique in the total LCC model. It is normally an advantage to maintain the product/work breakdown structure unvaried for the particular study.

5.5.2 LCC breakdown into cost elements

In order to estimate the total life cycle cost, it is necessary to break down the total LCC into its constituent cost elements. These cost elements should be individually identified so that they can be distinctly defined and estimated. The identification of the elements and their corresponding scope should be based on the purpose and scope of the LCC study.

The cost element is the link between cost categories and the product/work breakdown structure. The selection of cost elements should be related to the complexity of the product, as well as to the cost categories of interest in accordance with the required cost breakdown structure. See the example in Annex C.

One approach, often used to identify the required cost elements, involves the breakdown of the product to lower indenture levels (work breakdown structure), cost categories and life cycle phases. This approach can best be illustrated by the use of a three-dimensional matrix shown in Figure 4. This matrix involves identification of the following aspects of the product:

- breakdown of the product to lower indenture levels (that is the product/work breakdown structure);
- the time in the life cycle when the work/activity is to be carried out (that is the life cycle phases);
- the cost category of applicable resources such as labour, materials, fuel/energy, overhead, transportation/travel (that is the cost categories).

This kind of approach has the advantage of being systematic and orderly, thus giving a high level of confidence that all cost elements have been included.

Annex A identifies typical activities for which the costs should be addressed.

An example of a product breakdown structure, and LCC summary for a railway vehicle is presented in Annex E.

Costs associated with LCC elements may be further allocated between recurring and non-recurring costs so that the total of all recurring and non-recurring costs equals LCC. LCC elements may also be estimated in terms of fixed and variable costs. The latter costs, for example, will vary with the number of copies of the product to be produced and put into use.

To facilitate control and decision making, and to support the life cycle cost process, the costs information should be collected and reported to be consistent with the defined LCC

breakdown structure. A database should be established and maintained to capture results of previous LCC studies, in order to serve as a source of experience feedback.

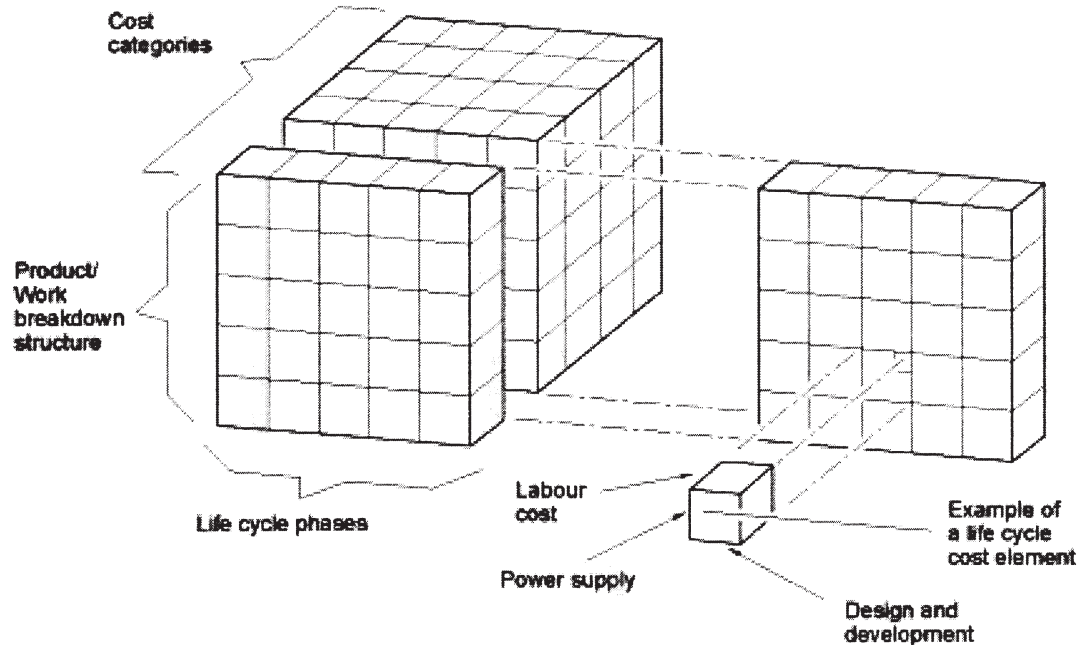


Figure 4 – Cost element concept

5.5.3 Estimation of cost

5.5.3.1 General

Examples of methods that may be used to estimate the attribute of a cost element are

- engineering cost method;
- analogous cost method;
- parametric cost method.

Examples of application of each method are given below.

When carrying out an LCC analysis for a certain product, one or more of these methods, or other methods, may be used as appropriate.

In order to reduce different types of uncertainties involved in the LCC analyses, it should be possible to perform sensitivity analyses, for example by introducing minimum and maximum values to the parameters of the LCC model into the cost estimation equations.

5.5.3.2 Engineering cost method

When using the engineering cost method, the cost attributes for the particular cost elements are directly estimated by examining the product component by component, or part by part. Often standard established cost factors, for example, the current engineering and manufacturing estimates, are used to develop the cost of each element

and its relationship to other elements. Older estimates available may be updated to the present time by the use of appropriate factors, e.g. annual discounting and escalation factors.

The engineering cost method can be illustrated by the following example concerning the cost related to a recurring cost element:

The labour cost for the manufacture of a power supply is to be estimated. The following information is given:

Product:	Power supply
Life cycle phase:	Manufacturing phase
Cost category:	Labour cost

According to detailed assessment of manufacturing steps, provided by the manufacturing department, the time consumption for the production of one unit of the particular power supply is 38,8 person hours. Suppose the labour cost is UC 54.50/person hour. The total labour cost for the production of one unit is then $38,8 \times 54,50 = \text{UC } 2114,60$.

5.5.3.3 Analogous cost method

In this method, cost estimations based on experience from a similar product or technology are used. Historical data, updated to reflect cost escalation, effects of technology advances, etc. are utilized. This technique may be one of the least complex and least time consuming methods. It is easily applied to components of the product for which there is some experience and actual data.

The analogous cost method can be illustrated by the following example where an estimate of the cost for parts and material for a power supply, using experience from an older power unit, is used.

The following information is given:

Product:	Power supply
Life cycle phase:	Manufacturing phase
Cost category:	Parts and materials

For a somewhat less complex power supply produced 4 years ago the cost for parts and materials was UC 220. Overall cost escalation over 4 years is taken to be 5 %.

The cost for additional parts will be about UC 50.

Therefore, cost for parts and materials for the new power supply unit is estimated to be:

$$\begin{aligned} &\text{Cost of parts and material } (1+0.05) + \text{cost for additional parts} \\ &220 \times 1,05 + 50 = \text{UC } 281 \end{aligned}$$

5.5.3.4 Parametric cost method

The parametric cost method for LCC uses parameters and variables to develop cost estimating relationships. The method might be used differently in other areas.

The relationships are usually in the form of equations where, for example, person hours are converted into costs.

An example of the parametric cost method used for a calculation of active corrective maintenance cost for a subsystem P_{14} , is given in Figure 5.

Product breakdown
structure (P)

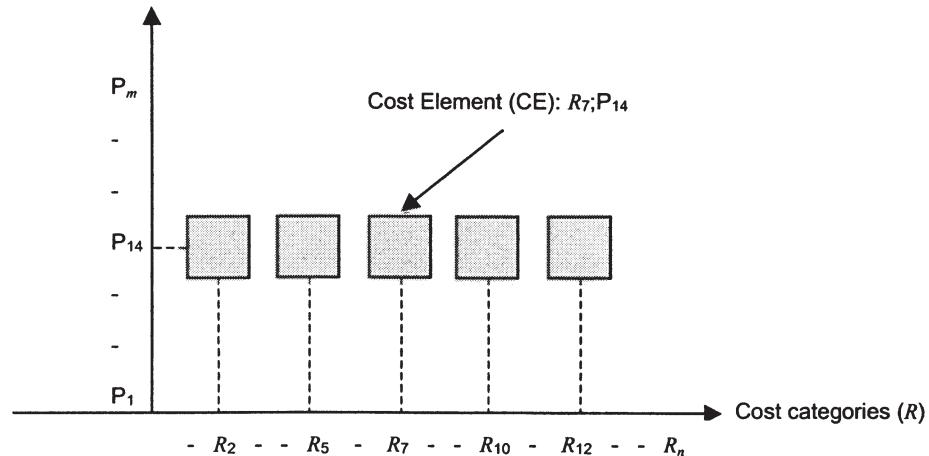


Figure 5 – Example of cost elements used in the parametric cost method

In Figure 5

R_2 is the investment cost in test equipment, workshop (non-recurring);

R_5 is the investment cost in spares, workshop (non-recurring);

R_7 is the labour cost, site (recurring);

R_{10} is the labour cost, workshop (recurring);

R_{12} is the spares consumption cost, workshop (recurring);

P_{14} is subsystem P_{14} .

Cost of active corrective maintenance for subsystem P_{14} for a 10 years' period =

$$= \text{Cost}(R_2; P_{14}) + \text{Cost}(R_5; P_{14}) + \{\text{Cost}(R_7; P_{14}) + \text{Cost}(R_{10}; P_{14}) + \text{Cost}(R_{12}; P_{14})\} \times 10$$

(ignoring the effects of inflation, etc.)

NOTE Active corrective maintenance is defined in IEC 60050(191), see definition 191-08-07 and Figure 191-10.

Where, for example, the cost related to element $(R_7; P_{14})$ is calculated as follows.

$\text{Cost}(R_7; P_{14})$ is the labour cost, active corrective maintenance at site for sub-system P_{14}

$$\text{Cost}(R_7; P_{14}) = QP_{14} \times ZP_{14} \times C_L \times n \times \text{MRT} \quad \text{cost/year}$$

where

QP_{14} is the quantity or number of items, in this example $QP_{14} = 1$;

ZP_{14} is the expected number of failures/year for sub system P_{14} ;

C_L is the labour cost/hour;

n is the number of persons required to carry out the repair;

MRT is the mean repair time in hours/action.

Assume:

$QP_{14} = \text{one item /system}$

$ZP_{14} = 0,3 \text{ failures/year}$

$C_L = \text{UC } 50/\text{hour}$

$n = \text{one person}$

MRT = 2.4 hours/action

Then

$$\text{Cost}(R_7; P_{14}) = 1 \times 0,3 \times 50 \times 1 \times 2,4 = \text{UC } 36/\text{year}$$

To calculate the labour cost over 10 years, the result should be multiplied by 10 (ignoring the effects of inflation, etc.)

If different factors, for instance inflation or discounting, have to be taken into account, this could be included in the estimation of cost related to each element or at a higher cost element level in the LCC model.

$\text{Cost}(R_{10}; P_{14})$, etc. are calculated in a similar way.

5.5.4 Sensitivity analysis

In order to identify significant cost contributors, sensitivity analyses should be performed. Data may be varied to establish their impact on the total LCC or part of it.

To facilitate the sensitivity analysis, it is important that the LCC model is developed in such a manner that, when a common parameter, for instance person hour cost, is varied, this is automatically reflected wherever this parameter is used.

It may be desirable to use minimum or maximum values of certain data or even a distribution. The LCC model in that case should be developed to meet these needs.

It should be noted that the results of LCC calculations might not match with the actual/observed costs. This is because there are many influencing random factors, such as environmental conditions and human errors during operation, which cannot be accurately modelled in the calculations.

Environmental issues, as well as traditional factors such as cost and time, have to be considered in LCC calculations. Therefore, methods have to be used to rank environmental consequences of different activities. These methods can provide the bases for environmental planning and integrating environmental issues with decision making.

5.5.5 Impact of discounting, inflation and taxation on LCC

Several factors complicate the process of LCC analysis; for example, the real value of money changes constantly and factors such as opportunity costs, inflation and taxation may need to be taken into account.

Annex B introduces these concepts and briefly indicates the methods that may be used to take account of them.

5.6 Life cycle costing

5.6.1 General

Life cycle costing is the process of identifying and evaluating the costs associated with acquisition, ownership and disposal of a product during its life cycle. In order to produce results which can be usefully and correctly employed, any LCC analysis should be conducted in a structured and well-documented manner using the following steps:

- a) life cycle costing plan (including definition of objective);
- b) LCC model selection or development;
- c) LCC model application;
- d) life cycle costing documentation;
- e) review of life cycle costing results;
- f) analysis update.

The above steps may be carried out in an iterative fashion if efforts at any stage indicate a need to revisit and modify work accomplished at earlier stages. Assumptions made at each step should be rigorously documented to facilitate such iterations and to aid in interpretation of the results of the analysis.

LCC analysis is a multidisciplinary activity. The analysts should be familiar with the basic principles of LCC (including typical cost elements, sources of cost data and financial principles), and should have a clear understanding of the methods of assessing the uncertainties associated with cost estimation. Depending upon the scope of the analysis, it will be important to obtain cost inputs from individuals who are familiar with all phases of the product life cycle. This may include representatives of both the supplier(s) and the customer(s).

5.6.2 Life cycle costing plan

Life cycle costing should begin with development of a plan, which addresses the purpose, and scope of the analysis. The plan should address the following elements.

- a) Define the analysis objectives in terms of the outputs that should be provided by the analysis, and the decisions which outputs will be used to support. Typical objectives are:
 - determination of the LCC for a product, in order to support planning, contracting, budgeting or similar needs;
 - evaluation of the impact of alternative courses of action (such as design approaches, product acquisition or support policies or alternative technologies) on the LCC of a product; or