

EIA STANDARD



*ANSI/EIA-198-3-9-F(2019)
Approved: July 31, 2019*

Ceramic Dielectric Capacitors Classes I, II, III and IV – Part III: Detail Specification Sheets – Section 9: High Voltage Ceramic Capacitors, Conformally Coated and Multilayer Surface Mount

EIA-198-3-9-F
(Revision of EIA-198-3-9-E)

July 2019



NOTICE

EIA Engineering Standards and Publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such Standards and Publications shall not in any respect preclude any member or nonmember of ECIA from manufacturing or selling products not conforming to such Standards and Publications, nor shall the existence of such Standards and Publications preclude their voluntary use by those other than ECIA members, whether the standard is to be used either domestically or internationally.

Standards and Publications are adopted by ECIA in accordance with the American National Standards Institute (ANSI) patent policy. By such action, ECIA does not assume any liability to any patent owner, nor does it assume any obligation whatever to parties adopting the Standard or Publication.

This EIA Standard is considered to have International Standardization implication, but the International Electrotechnical Commission activity has not progressed to the point where a valid comparison between the EIA Standard and the IEC document can be made.

This Standard does not purport to address all safety problems associated with its use or all applicable regulatory requirements. It is the responsibility of the user of this Standard to establish appropriate safety and health practices and to determine the applicability of regulatory limitations before its use.

(From Standards Proposal No. 5251, formulated under the cognizance of the P-2.1 Committee on EIA National Ceramic Dielectric Capacitors Standards).

Published by

©Electronic Components Industry Association 2019
Standards & Technology Department
13873 Park Center Road, Suite 315
Herndon, VA 20171

**PLEASE!
DON'T VIOLATE
THE
LAW!**

This document is copyrighted by the ECIA and may not be reproduced without permission.

Organizations may obtain permission to reproduce a limited number of copies through entering into a license agreement. For information, contact:

IHS Markit
15 Inverness Way East
Englewood, CO 80112-5704 or call
USA and Canada (1-877-413-5184), International (303-397-7956)

Contents

EIA Detail Specification Sheet.....	i
1. Requirements	1
2. Part Number Guidelines and Product Availability	2

Figures


<u>Figure 1. High Voltage Ceramic, Radial-Leaded Conformally Coated Dimensions</u>	<u>i</u>
<u>Figure 2. High Voltage Ceramic Multilayer Surface Mount Dimensions</u>	<u>ii</u>

Tables

<u>Table 1. Characteristics of and Requirements for High Voltage Ceramic Capacitors.....</u>	<u>2</u>
<u>Table 2. High Voltage Ceramic, Encapsulated Radial Leaded, General Availability</u>	<u>3</u>
<u>Table 3. High Voltage Ceramic, Multilayer Surface Mount, General Availability.....</u>	<u>3</u>
<u>Table 4. Encapsulated Radial Leaded Range Chart.....</u>	<u>4</u>
<u>Table 5. Multilayer Surface Mount Range Chart</u>	<u>5</u>

EIA Detail Specification Sheet **High Voltage Ceramic Capacitors, Conformally Coated and Multilayer Surface Mount**

Figure 1. High Voltage Ceramic, Radial-Leaded Conformally Coated Dimensions

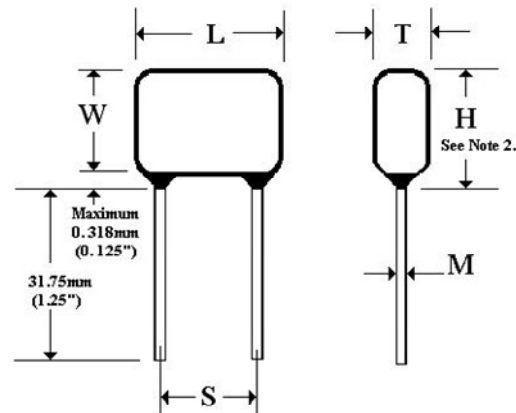

Size Identifier	Width W – Max. Millimeters (Inches)	Length L – Max. Millimeters (Inches)	Thickness T – Max. Millimeters (Inches)
CC2228	5.59 (0.220)	7.0 (0.276)	5.08 (0.200)
CC2832	7.11 (0.280)	8.13 (0.320)	6.35 (0.250)
CC2855	7.11 (0.280)	13.97 (0.550)	6.86 (0.270)
CC3037	7.62 (0.300)	9.40 (0.370)	6.35 (0.250)
CC4051	10.16 (0.400)	13.0 (0.512)	6.86 (0.270)
CC5057	12.70 (0.500)	14.48 (0.570)	6.86 (0.270)
CC6067	15.24 (0.600)	17.02 (0.670)	6.86 (0.270)
CC6013	15.24 (0.600)	33.02 (1.300)	6.86 (0.270)
CC7277	18.29 (0.720)	19.56 (0.770)	6.86 (0.270)
CC7215	18.29 (0.720)	38.10 (1.500)	6.86 (0.270)
1) Original (design) dimensions are in inches.			
2) Consult manufacturer specifications for lead length, lead separation, and H dimension requirements.			