

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Transitions, pulses and related waveforms – Terms, definitions and algorithms

Transitions, impulsions et formes d'ondes associées – Termes, définitions et algorithmes



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Transitions, pulses and related waveforms – Terms, definitions and algorithms

Transitions, impulsions et formes d'ondes associées – Termes, définitions et algorithmes

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

XB

ICS 01.040.17; 17.220.20

ISBN 978-2-83220-747-5

Warning! Make sure that you obtained this publication from an authorized distributor.

Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms, definitions and symbols	7
3.1 General	7
3.2 Terms and definitions	7
3.3 Symbols	25
3.4 Deprecated terms.....	25
4 Measurement and analysis techniques	26
4.1 General	26
4.2 Method of waveform measurement	26
4.3 Description of the waveform measurement process	27
4.4 Waveform epoch determination	28
4.4.1 Selection of waveform epoch.....	28
4.4.2 Exclusion of data from analysis	28
5 Analysis algorithms for <i>waveforms</i>	28
5.1 Overview and guidance	28
5.2 Selecting <i>state levels</i>	28
5.2.1 General	28
5.2.2 Data-distribution-based methods - Histograms.....	28
5.2.3 Data-distribution-based methods - Shorth estimator	31
5.2.4 Other methods.....	33
5.2.5 Algorithm switching.....	34
5.3 Determination of other single <i>transition waveform</i> parameters	34
5.3.1 General	34
5.3.2 Algorithm for calculating signed waveform amplitude	34
5.3.3 Algorithm for calculating percent reference levels	35
5.3.4 Algorithms for calculating reference level instants	35
5.3.5 Algorithm for calculating transition duration between x1 % and x2 % reference levels	36
5.3.6 Algorithm for calculating the undershoot and overshoot aberrations of step-like waveforms.....	36
5.3.7 Algorithm for calculating waveform aberrations	38
5.3.8 Algorithm for calculating transition settling duration	39
5.3.9 Algorithm for calculating transition settling error	40
5.4 Analysis of single and repetitive pulse waveforms	40
5.4.1 General	40
5.4.2 Algorithm for calculating pulse duration	40
5.4.3 Algorithm for calculating waveform period.....	40
5.4.4 Algorithm for calculating pulse separation.....	41
5.4.5 Algorithm for calculating duty factor.....	42
5.5 Analysis of compound waveforms.....	42
5.5.1 General	42
5.5.2 Waveform parsing	43
5.5.3 Subepoch classification	45
5.5.4 Waveform reconstitution	46

5.6	Analysis of impulse-like waveforms	46
5.6.1	Algorithm for calculating the impulse amplitude	46
5.6.2	Algorithm for calculating impulse center instant	46
5.7	Analysis of time relationships between different waveforms	46
5.7.1	General	46
5.7.2	Algorithm for calculating delay between different waveforms	46
5.8	Analysis of waveform aberration	46
5.9	Analysis of <i>fluctuation</i> and <i>jitter</i>	46
5.9.1	General	46
5.9.2	Determining standard deviations	47
5.9.3	Measuring fluctuation and jitter of an instrument	50
5.9.4	Measuring <i>fluctuation</i> and <i>jitter</i> of a <i>signal</i> source	53
Annex A (informative)	<i>Waveform</i> examples	54
Bibliography		64
Figure 1	– Single <i>positive-going transition</i>	10
Figure 2	– Single <i>negative-going transition</i>	11
Figure 3	– Single <i>positive pulse waveform</i>	13
Figure 4	– Single <i>negative pulse waveform</i>	13
Figure 5	– <i>Overshoot</i> and <i>undershoot</i> in <i>single positive-going transition</i>	15
Figure 6	– <i>Overshoot</i> and <i>undershoot</i> in a <i>single negative-going transition</i>	15
Figure 7	– <i>Pulse train</i>	17
Figure 8	– <i>Compound waveform</i>	22
Figure 9	– Calculation of <i>waveform aberration</i>	23
Figure 10	– Waveform acquisition and measurement process	27
Figure 11	– Generation of a <i>compound waveform</i>	43
Figure A.1	– <i>Step-like waveform</i>	54
Figure A.2	– Linear <i>transition waveform</i>	55
Figure A.3	– Exponential <i>waveform</i>	56
Figure A.4	– <i>Impulse-like waveform</i>	57
Figure A.5	– Rectangular <i>pulse waveform</i>	58
Figure A.6	– Trapezoidal <i>pulse waveform</i>	59
Figure A.7	– Triangular <i>pulse waveform</i>	60
Figure A.8	– Exponential <i>pulse waveform</i>	61
Figure A.9	– Double <i>pulse waveform</i>	62
Figure A.10	– Bipolar <i>pulse waveform</i>	62
Figure A.11	– Staircase <i>waveform</i>	63
Figure A.12	– <i>Pulse train</i>	63
Table 1	– Comparison of the results from the exact and approximate formulas for computing the standard deviation of the calculated standard deviations	49

INTERNATIONAL ELECTROTECHNICAL COMMISSION

TRANSITIONS, PULSES AND RELATED WAVEFORMS – TERMS, DEFINITIONS AND ALGORITHMS

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60469 has been prepared by IEC technical committee 85: Measuring equipment for electrical and electromagnetic quantities.

This first edition of IEC 60469 cancels and replaces the second edition of IEC 60469-1 and the second edition of IEC 60469-2, both published in 1987. It constitutes a technical revision.

This first edition of IEC 60469:

- combines the contents of IEC 60469-1:1987 and IEC 60469-2:1987;
- updates terminology;
- adds algorithms for computing values of pulse parameters;
- adds a newly-developed method for computing state levels.

The text of this standard is based on the following documents:

CDV	Report on voting
85/409/CDV	85/433/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

All terms defined in Clause 3 are italicized in this document.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The purpose of this standard is to facilitate accurate and precise communication concerning parameters of transition, pulse, and related waveforms and to establish the techniques and procedures for measuring them. Because of the broad applicability of electrical pulse technology in the electronics industries (such as computer, telecommunication, and test instrumentation industries), the development of unambiguous definitions for pulse terms and the presentation of methods and/or algorithms for their calculation is important for communication between manufacturers and consumers within the electronics industry. The availability of standard terms, definitions, and methods for their computation helps improve the quality of products and helps the consumer better compare the performance of different products. Improvements to digital waveform recorders (including oscilloscopes) have facilitated the capture, sharing, and processing of waveforms. Frequently these waveform recorders have the ability to process the waveform internally and provide pulse parameters. This process is done automatically and without operator intervention. This standard can be applied in many more scientific and engineering applications than mentioned above, such as optics, cosmology, seismology, medicine, etc., and ranging from single events to highly repetitive signals and from signals with bandwidths less than 1 Hz to those exceeding 1 THz. Consequently, a standard is needed to ensure that the definitions and methods of computation for pulse parameters are consistent.

IEC 60469-1 dealt with terms and definitions for describing waveform parameters and IEC 60469-2 described the waveform measurement process. The purpose of this standard is to combine the contents of IEC 60469-1 and IEC 60469-2, update terminology, correct errors, add algorithms for computing values of pulse parameters, and add a newly-developed method for computing state levels. This standard reflects two major changes compared to IEC 60469-1 and IEC 60469-2, which are the parameter definitions and algorithms. Changes to the definitions included adding new terms and definitions, deleting unused terms and definitions, expanding the list of deprecated terms, and updating and modifying existing definitions. This standard contains definitions for approximately 100 terms commonly used to describe the waveform measurement and analysis process and waveform parameters. Many of the terms in standards IEC 60469-1 and IEC 60469-2 have been deleted entirely or deprecated. Deprecated terms were kept in this standard to provide continuity between this standard and IEC 60469-1 and IEC 60469-2. Terms are deprecated whenever they cannot be defined unambiguously or precisely. Development of a set of agreed-upon terms and definitions presented the greatest difficulty because of the pervasive misuse, misrepresentation, and misunderstanding of terms. Legacy issues for instrumentation manufacturers and terms of common use also had to be addressed. This standard also resulted in the development of algorithms for computing the values of certain waveform parameters in all cases where these algorithms could be useful or instructive to the user of the standard. The purpose of adding these algorithms, which are recommended for use, was to provide industry with a common and communicable reference for these parameters and their computation. Heretofore, this was not available and there existed much debate and misunderstanding between various groups measuring the same parameters. Similarly, this is the reason for including several examples of basic waveforms, with formulae, in Annex A. The algorithms focus on the analysis of two-state, single-transition waveforms. The analysis of compound waveforms (waveforms with two or more states and/or two or more transitions) is accomplished by first decomposing the compound waveform into its constituent two-state single-transition waveforms. A method for performing this decomposition is provided.

Algorithms for the analysis of fluctuation and random jitter of waveforms were also introduced into this standard. These algorithms describe the computation of the mean and standard deviation of jitter and fluctuation. This standard also contains methods to estimate the *accuracy* of the standard deviation and to correct its value.

TRANSITIONS, PULSES AND RELATED WAVEFORMS – TERMS, DEFINITIONS AND ALGORITHMS

1 Scope

This International Standard provides definitions of terms pertaining to transitions, pulses, and related waveforms and provides definitions and descriptions of techniques and procedures for measuring their parameters. The waveforms considered in this standard are those that make a number of transitions and that remain relatively constant in the time intervals between transitions. Signals and their waveforms for which this standard apply include but are not limited to those used in: digital communications, data communications, and computing; studies of transient biological, cosmological, and physical events; and electrical, chemical, and thermal pulses encountered and used in a variety of industrial, commercial, and consumer applications.

This standard does not apply to sinusoidally-varying or other continuously-varying signals and their waveforms.

The object of this standard is to facilitate accurate and precise communication concerning parameters of transitions, pulses, and related waveforms and the techniques and procedures for measuring them.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

None.

3 Terms, definitions and symbols

3.1 General

Along with the recommended terms and their definitions, this clause also contains a number of deprecated but widely used terms. These deprecated terms and the reason for their deprecation are given after the definition of the recommended term.

Throughout this standard, time is taken to be an independent variable, symbolized with the letter t . "Waveform value" is used to refer to the dependent variable, symbolized by $y(t)$. For particular waveforms, "waveform value" will be synonymous with terms such as "voltage", "current", "power", or some other quantity. All defined terms are italicized in this document.

3.2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.2.1 aberration region

3.2.1.1 post-transition aberration region

interval between a user-specified *instant* and a fixed *instant*, where the fixed *instant* is the first sampling *instant* succeeding the 50 % *reference level instant* for which the corresponding *waveform* value is within the *state boundaries* of the *state* succeeding the 50 % *reference level instant*

Note 1 to entry: The user-specified *instant* occurs after the fixed *instant* and is typically equal to the fixed *instant* plus three times the *transition duration*.

3.2.1.2 pre-transition aberration region

interval between a user-specified *instant* and a fixed *instant*, where the fixed *instant* is the first sampling *instant* preceding the 50 % *reference level instant* for which the corresponding *waveform* value is within the *state boundaries* of the *state* preceding the 50 % *reference level instant*.

Note 1 to entry: The user-specified *instant* occurs before the fixed *instant* and is typically equal to the fixed *instant* minus three times the *transition duration*.

3.2.2 accuracy

closeness of agreement between a measured quantity value and a true quantity value of a measurand

[ISO/IEC Guide 99:2007, 2.13]

3.2.3 amplitude

3.2.3.1 impulse amplitude

difference between the specified *level* corresponding to the *maximum peak (minimum peak)* of the positive (negative) *impulse-like waveform* and the *level* of the *state* preceding the first *transition* of that *impulse-like waveform*

3.2.3.2 waveform amplitude

difference between the *levels* of two different *states* of a *waveform*

Note 1 to entry: Two different definitions for *amplitude* are authorized by this standard because they are both in common use (see 3.2.3.2.1.. In all applications of this standard, the chosen definition shall be clearly identified.:

3.2.3.3 signed waveform amplitude,

level of the *state* succeeding a *transition* minus the *level* of the *state* preceding the same *transition*

3.2.3.4 unsigned waveform amplitude

absolute value of the *signed amplitude*

3.2.4 correction

operation combining the results of the conversion operation with the transfer function information to yield a *waveform* that is a more accurate representation of the *signal*

Note 1 to entry: Correction may be effected by a manual process by an operator, a computational process, or a compensating device or apparatus. Correction shall be performed to an *accuracy* that is consistent with the overall *accuracy* desired in the *waveform measurement process*.

Note 2 to entry: See 4.2 concerning the conversion operation.

3.2.5

cycle

portion of a *periodic waveform* with a *duration* of one *period*

3.2.6

delaying

process in which the time of arrival of a *signal* is caused to occur later in time

3.2.7

differentiation

shaping process in which a *waveform* is converted to a *waveform* whose shape is or approximates the time derivative of that *waveform*

3.2.8

duration

difference between two specified *instants*

3.2.9

duty factor

DEPRECATED: duty cycle

unless otherwise specified, for a *periodic pulse train*, the ratio of the *pulse duration* to the *waveform period*

Note 1 to entry: The term *duty cycle* is a deprecated term because the word *cycle* in this standard refers to the *period* of a *signal*.

3.2.10

fluctuation

variation (dispersion) of a *level* parameter of a set of *repetitive waveforms* with respect to a *reference amplitude* or a *reference level*

Note 1 to entry: Unless otherwise specified by a mathematical adjective, root-mean-square (rms) fluctuation is assumed.

3.2.11

frequency

reciprocal of the period

Note 1 to entry: The period is the *waveform period*.

[IEC 60050-103:2009, 103-06-02, modified – the note to entry has been replaced.]

3.2.12

glitch

transient that leaves an initial *state*, enters the boundaries of another *state* for a *duration* less than the *duration* for *state occurrence*, and then returns to the initial *state*

3.2.13

instant

particular time value within a *waveform epoch* that, unless otherwise specified, is referenced relative to the *initial instant* of that *waveform epoch*

3.2.13.1

final instant

last sample *instant* in the *waveform*

3.2.13.2

impulse center instant

instant at which a user-specified approximation to the *maximum peak* (*minimum peak*) of the positive (negative) *impulse-like waveform* occurs

3.2.13.3

initial instant

first sample *instant* in the *waveform*

3.2.13.4

pulse center instant

average of the two *instants* used to calculate the pulse *duration*

3.2.13.5

reference level instant

instant at which the *waveform* intersects a specified *reference level*

3.2.13.6

transition occurrence instant

first 50 % *reference level instant*, unless otherwise specified, on the *transition* of a *step-like waveform*

SEE: Figure 1, Figure 2, Figure 3, and Figure 4.

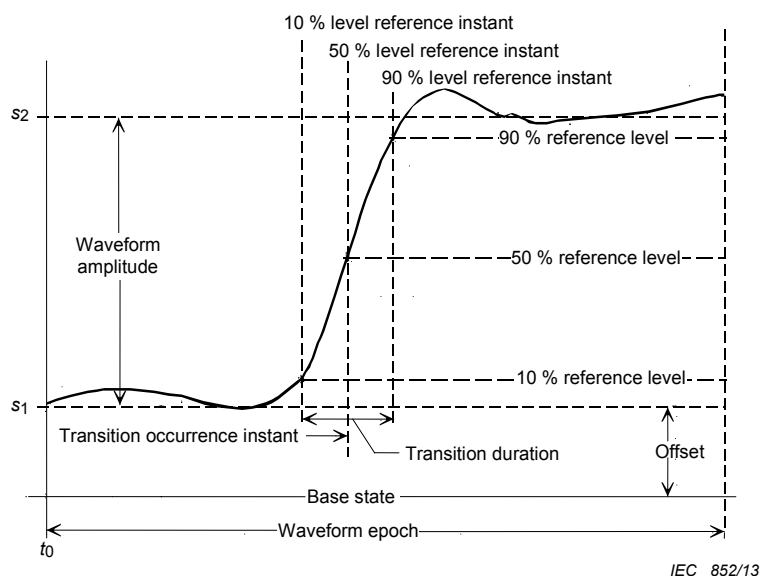


Figure 1 – Single positive-going transition

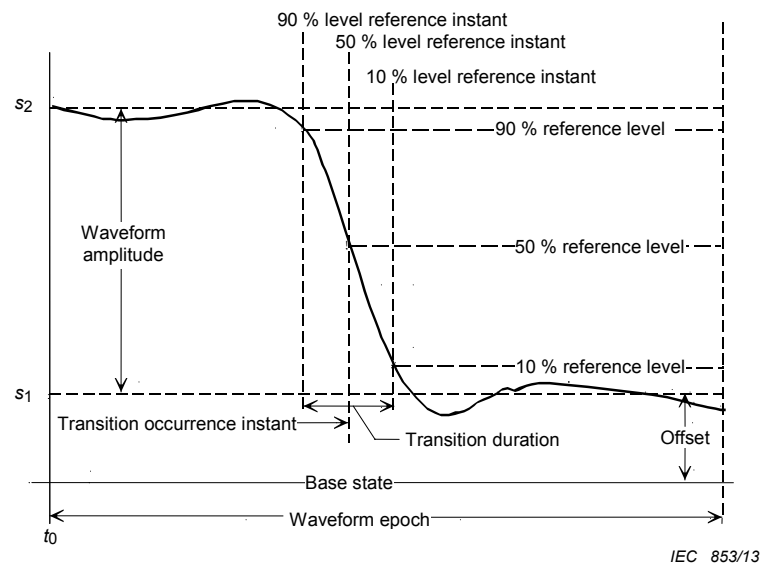


Figure 2 – Single negative-going transition

Note 1 to entry: See 5.3.4 concerning *reference level instants*.

3.2.14 integration

shaping process in which a *waveform* is converted to a *waveform* whose shape is or approximates the time integral of that *waveform*

3.2.15 interval

set of all values of time between a first *instant* and a second *instant*, where the second *instant* is later in time than the first.

Note 1 to entry: These first and second *instants* are called the endpoints of the interval. The endpoints, unless otherwise specified, are assumed to be part of the interval.

3.2.16 jitter

variation (dispersion) of a time parameter between successive *cycles* of a repetitive *signal* and/or between successively acquired *waveforms* of a *repetitive signal* for a given *reference level instant* or *duration*.

Note 1 to entry: Unless otherwise specified by a mathematical adjective, rms *jitter* is assumed.

3.2.16.1 cycle-to- n^{th} -cycle jitter

jitter between specified *reference level instants* of any two specified *cycles* of a *repetitive signal*

3.2.16.2 period jitter

jitter in the period of a repetitive signal or its waveform

3.2.16.3 pulse duration jitter

jitter in the pulse duration of a signal or its waveform

3.2.16.4

trigger jitter

jitter between a *repetitive signal* and the trigger event that is used to generate or measure that *signal*

3.2.17

level

constant value having the same units as y

3.2.17.1

average level

pertaining to the value of the mean of the *waveform level*

If the *waveform* takes on n discrete values y_j , all equally spaced in time, the *average level* is,

$$\bar{y} = \left(\frac{1}{n} \right) \sum_{j=1}^n y_j.$$

If the *waveform* is a continuous function of time $y(t)$,

$$\bar{y} = \left(\frac{1}{t_2 - t_1} \right) \int_{t_1}^{t_2} y(t) dt.$$

Note 1 to entry: The summation or integral extends over the *waveform epoch* for which the *average level* is desired or, if the function is *periodic*, over any integral number of *periodic* repetitions of the function.

3.2.17.2

average absolute level

pertaining to the mean of the absolute *waveform* value

If the *waveform* takes on n discrete values y_j , all equally spaced in time, the *average absolute level* is,

$$\overline{|y|} = \left(\frac{1}{n} \right) \sum_{j=1}^n |y_j|.$$

If the *waveform* is a continuous function of time $y(t)$,

$$\overline{|y|} = \left(\frac{1}{t_2 - t_1} \right) \int_{t_1}^{t_2} |y(t)| dt.$$

Note 1 to entry: The summation or the integral extends over the *waveform epoch* for which the *average absolute level* is desired or, if the function is *periodic*, over any integral number of *periodic* repetitions of the function.

3.2.17.3

percent reference level

reference level specified by:

$$y_{x\%} = y_{0\%} + \frac{x}{100} (y_{100\%} - y_{0\%}),$$

where

$$0\% < x < 100\%$$

$$y_{0\%} = \text{level of low state}$$

$y_{100} \%$ = level of high state

$y_0 \%$, $y_{100} \%$, and $y_x \%$ are all in the same unit of measurement.

SEE: Figure 1, Figure 2, Figure3, and Figure 4.

Note 1 to entry: Commonly used *reference levels* are: 0 %, 10 %, 50 %, 90 %, and 100 %.

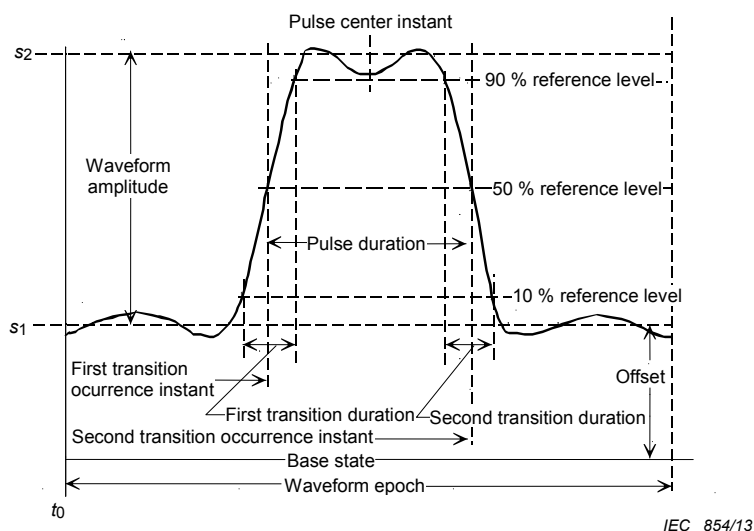


Figure 3 – Single positive pulse waveform

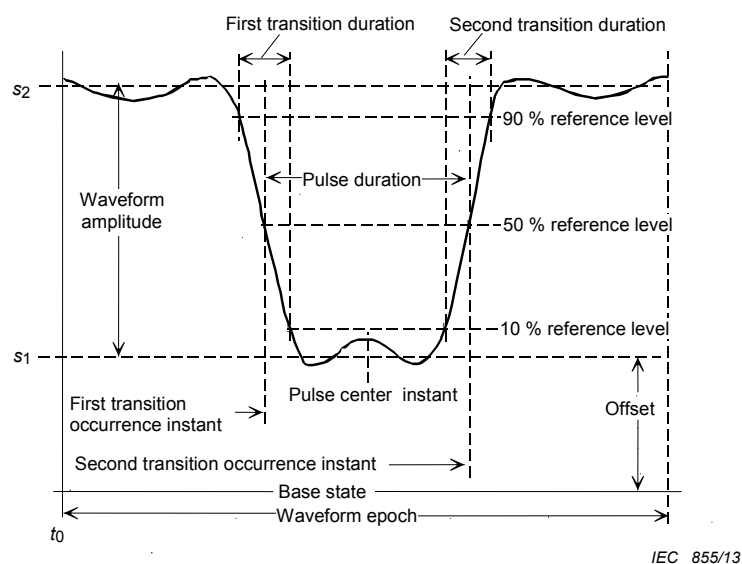


Figure 4 – Single negative pulse waveform

3.2.17.4

reference level

DEPRECATED: mesial, proximal, distal

user specified *level* that extends through all *instants* of the *waveform epoch*

Note 1 to entry: *Mesial*, *proximal*, and *distal* lines are deprecated terms because

- (a) line refers to consideration of and computations using a *pictorial waveform representation*, whereas *waveforms* today are primarily stored in *digital waveform representations* and computation and viewing are done using a computer;
- (b) the terms *mesial*, *proximal*, and *distal* refer to user-defined *reference levels* and it is not necessary to have redundant definitions for these *reference levels*;
- (c) the terms *proximal* and *distal* cannot be used unambiguously to describe lines or points on either side of a *transition* of a *step-like waveform* because they depend on whether the *step-like waveform* is for a *positive pulse* or a *negative pulse*. In other words, for (3), the proximal line and points if referenced to the 10 % *reference level* will appear to the left of a *transition* for a *positive pulse* and to the right for a *negative pulse*.

3.2.17.5

root-mean-square (rms) level

pertaining to the value of the square root of the average of the squares of the *waveform* values

If the *waveform* takes on n discrete values y_j , all equally spaced in time, the root-mean-square *level* is,

$$y_{\text{rms}} = \sqrt{\left(\frac{1}{n}\right) \sum_{j=1}^n y_j^2}.$$

If the *waveform* is a continuous function of time $y(t)$,

$$y_{\text{rms}} = \sqrt{\left(\frac{1}{t_2 - t_1}\right) \int_{t_1}^{t_2} y^2(t) dt}.$$

The summation or the integral extends over the *waveform epoch* for which the rms *level* is desired or, if the function is *periodic*, over any integral number of *periodic* repetitions of the function.

3.2.17.6

root sum of squares level

rss level

pertaining to the value of the square root of the arithmetic sum of the squares of the *waveform* values

If the *waveform* takes on n discrete values y_j , all equally spaced in time, the root sum of squares *level* is,

$$y_{\text{rss}} = \sqrt{\sum_{j=1}^n y_j^2}.$$

If the *waveform* is a continuous function of time $y(t)$,

$$y_{\text{rss}} = \sqrt{\int_{t_1}^{t_2} y^2(t) dt}.$$

Note 1 to entry: The summation or the integral extends over the *waveform epoch* for which the root sum of squares *level* is desired.

3.2.18

offset

algebraic difference between two specified *levels*.

SEE: Figure 1, Figure 2, Figure 3, and Figure 4.

Note 1 to entry: Unless otherwise specified, the two *levels* are *state 1* and the *base state*.



3.2.19 overshoot

waveform aberration within a post-transition aberration region or pre-transition aberration region that is greater than the upper state boundary for the associated state level

SEE: Figure 5 and Figure 6.

Note 1 to entry: If more than one such waveform aberration exists, the one with the largest magnitude is the overshoot unless otherwise specified.

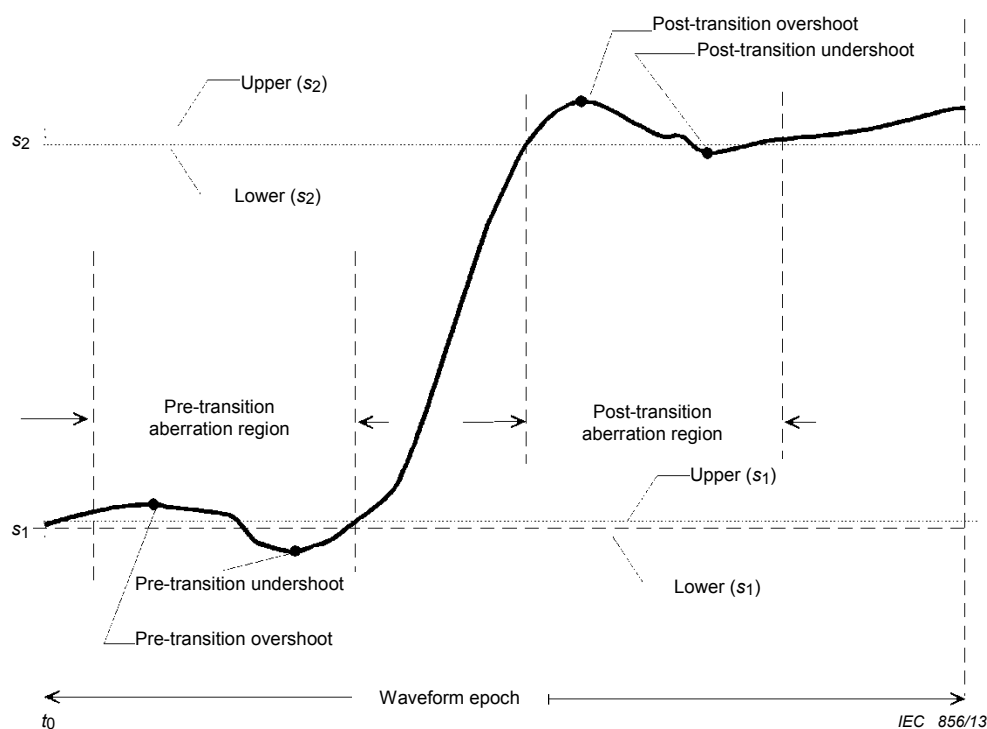


Figure 5 – Overshoot and undershoot in single positive-going transition

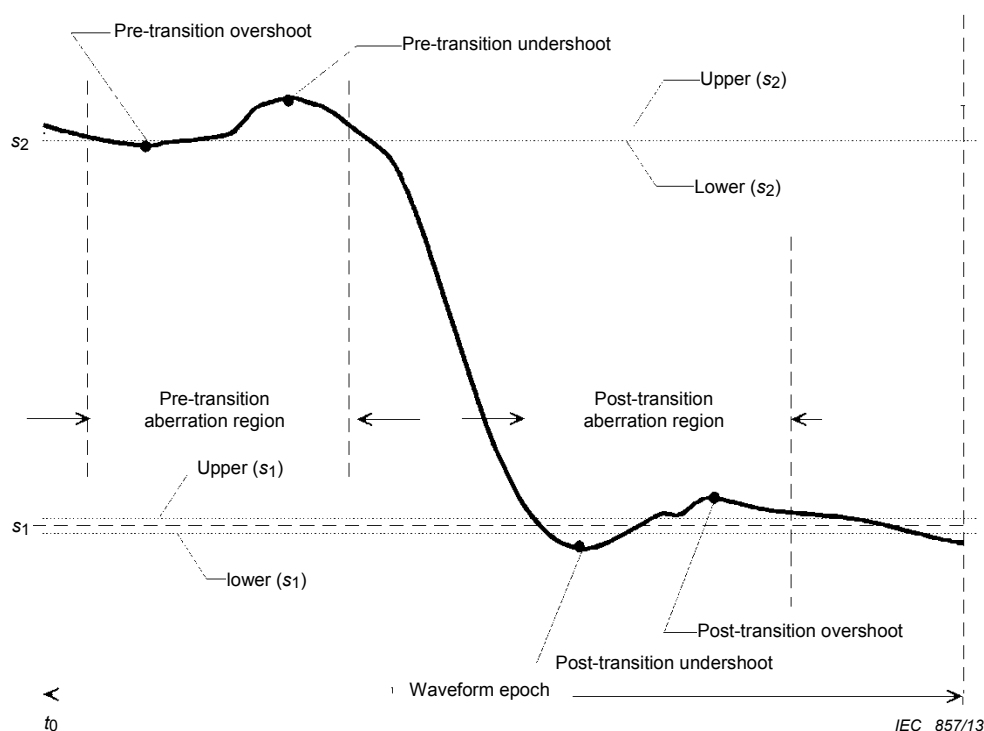


Figure 6 – Overshoot and undershoot in a single negative-going transition

3.2.20

parameter

any value (number multiplied by a unit of measure) that can be calculated from a *waveform*

3.2.20.1

level parameter

parameter whose units are the same as the units of *levels*

3.2.20.2

time parameter

parameter whose units are a unit of time

3.2.21

maximum peak

pertaining to the greatest value of the *waveform*

3.2.22

minimum peak

pertaining to the least value of the *waveform*

3.2.23

peak-to-peak

pertaining to the value of the difference between the extrema of the specified *waveform*

3.2.24

periodic

identically recurring at equal intervals of the independent variable (IEV)

Note 1 to entry: The independent variable is often time.

[IEC 60050-103:2009, 103-05-09, modified – the note to entry has been replaced.]

3.2.25

aperiodic

not recurring at equal intervals of the independent variable

Note 1 to entry: The independent variable is often time.

3.2.26

precision

closeness of agreement between indications or measured quantity values obtained by replicate measurements on the same or similar objects under specified conditions

[ISO/IEC Guide 99:2007, 2.15, modified – the notes in the original definition have been deleted.]

3.2.27

pulse duration

DEPRECATED: pulse width

difference between the first and second *transition occurrence instants*

SEE Figure 3 and Figure 4.

Note 1 to entry *Pulse width*, as well as *full width at half maximum (FWHM)* and *half width at half maximum (HWHM)* are, in general, deprecated terms, because width is a word that denotes a spatial parameter whereas the parameter of interest is time. However, in some applications it may be desirable to discuss the spatial location of a propagating pulse and its spatial distribution, i.e., pulse width in matter or space. FWHM, HWHM, and full duration at half maximum (FDHM) are deprecated terms because of the reference to the maximum value of the *waveform*, where the *waveform amplitude* may be either positive or negative and the *waveform* may contain noise.


3.2.28**pulse separation**

duration between the 50 % *reference level* instant, unless otherwise specified, of the second *transition* of one *pulse* in a *pulse train* and that of the first *transition* of the immediately following *pulse* in the same *pulse train*

3.2.29**pulse train**

repetitive sequence of *pulse waveforms*. Unless otherwise specified, all of the *pulse waveforms* in the sequence are assumed to be identical

SEE: Figure 7 and Figure A.12.

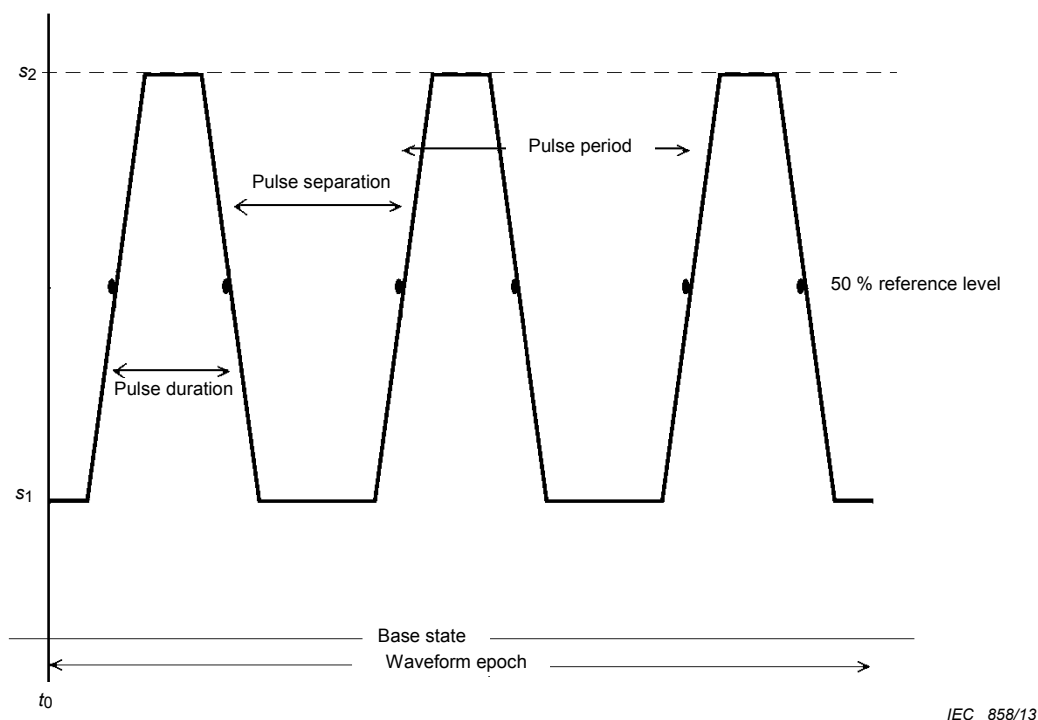

IEC 858/13

Figure 7 – Pulse train

3.2.30**pulse waveform**

DEPRECATED: leading edge

DEPRECATED: trailing edge

waveform whose *level* departs from one *state*, attains another *state*, and ultimately returns to the original *state*

SEE: Figures 3 and Figure 4.

Note 1 to entry: As defined here, a pulse waveform consists of two *transitions* and two *states*. (See Clause 4.) Alternatively, a *pulse waveform* can be described as a *compound waveform* consisting of the sum of a positive (negative) *step-like waveform* and a *delayed* negative (positive) *step-like waveform* both having the same *unsigned waveform amplitude*.

Note 2 to entry: *Leading edge* and *trailing edge* are deprecated because 1) the word *edge* describes the property of a geometric figure, which is not contained by or representative of the physical signal that corresponds to the *waveform* and 2) the terms *first* and *second* adequately and unambiguously describe the meanings of *leading* and *trailing*.

3.2.30.1

negative pulse waveform

pulse waveform whose first transition is a negative-going transition

SEE: Figure 4.

3.2.30.2

positive pulse waveform

pulse waveform whose first transition is a positive-going transition

SEE: Figure 3.

3.2.31

reference

of or pertaining to a time, *level*, *waveform feature*, or *waveform* that is used for comparison with, or evaluation of, other times, *levels*, *waveform features*, or *waveforms*.

Note 1 to entry: A *reference* entity may, or may not, be an ideal entity.

3.2.32

repetitive

of or pertaining to a series of specified *waveform features* or *waveforms* that repeat or recur in time

3.2.33

non-repetitive

of or pertaining to a series of specified waveform features or waveforms that do not repeat or recur in time

3.2.34

resolution

smallest distinguishable increment into which a measured quantity is divided

3.2.35

ringing

aberration in the form of a superimposed oscillatory *waveform* that, when present, usually follows a *transition*

3.2.36

runt

transient that leaves an initial *state*, does not attain the *level* of another *state*, and returns to the initial *state*

3.2.37

sampling

the process of taking samples of a signal, usually at equal time intervals

Note 1 to entry: These samples represent *waveform levels* and are taken at selected *instants*.

[IEC 60050-704:1993, 704-23-02, modified – the note to entry has been replaced.]

3.2.38

signal

a physical phenomenon, one or more of whose characteristics may vary to represent information

Note 1 to entry: This phenomenon is a function of time.

[IEC 60050-701:1988, 701-01-02, modified – the note to entry has been replaced.]

3.2.39**spike**

transient that leaves an initial *state*, exceeds the farthest *state boundary* of any other state, and returns to the initial *state*

3.2.40**state**

particular *level* or, when applicable, particular *level* and upper and lower limits (the upper and lower *state boundaries*) that are referenced to or associated with that *level*

Note 1 to entry: Unless otherwise specified, multiple *states* are ordered from the most negative *level* to the most positive *level*, and the *state levels* are not allowed to overlap. The most negative *state* is called *state 1*. The most positive *state* is called *state n*. The *states* are denoted by $s_1, s_2, \dots, s_n$; the *state levels* are denoted by $level(s_1), level(s_2), \dots, level(s_n)$; the upper *state boundaries* are denoted by $upper(s_1), upper(s_2), \dots, upper(s_n)$; and the lower *state boundaries* are denoted by $lower(s_1), lower(s_2), \dots, lower(s_n)$.

Note 2 to entry: *States*, *levels*, and *state boundaries* are defined to accommodate pulse metrology and digital applications. In pulse metrology, the *levels* of a *waveform* are measured and *states* (with or without associated *state boundaries*) are then associated with those *levels*. In digital applications, *states* are defined (with *state boundaries*) and the *waveform* values are determined to either lie within a *state* or not.

3.2.40.1**base state**

state of a *waveform* that, unless otherwise specified, possesses a *level* closest to zero

SEE: Figure 1, Figure 2, Figure 3, and Figure 4.

3.2.40.2**high state**

the most positive *state* within the *waveform epoch*, unless otherwise specified

Note 1 to entry: For *waveforms* with exactly two *states*, such as the single *transition waveform*, the terms *low state* and *high state* may be used in lieu of the terms *state 1* and *state 2*, respectively.

3.2.40.3**low state**

the most negative *state* within the *waveform epoch*, unless otherwise specified

Note 1 to entry: For *waveforms* with exactly two *states*, such as the single *transition waveform*, the terms *low state* and *high state* may be used in lieu of the terms *state 1* and *state 2*, respectively.

3.2.40.4**positive state**

state whose *level* is greater than zero

3.2.40.5**negative state**

state whose *level* is less than zero

3.2.41**state boundaries**

upper and lower limits of the *states* of a *waveform*

Note 1 to entry: All values of a *waveform* that are within the boundaries of a given *state* are said to be in that *state*. The *state boundaries* are defined by the user.

3.2.42**state occurrence**

contiguous region of a *waveform* that is bounded by the upper and lower *state boundaries* of a *state*, and whose *duration* equals or exceeds the specified minimum *duration* for state attainment. The state occurrence consists of the entire portion of the *waveform* that remains within the boundaries of that state

Note 1 to entry: State occurrences are numbered as ordered pairs (s_i, n) , where s_i refers to the i^{th} state, and n is the number of the occurrence of that particular state within the waveform epoch. In a given waveform epoch, when the waveform first enters a state s_1 , that state occurrence is $(s_1, 1)$. If and when the waveform exits that state, that state occurrence is over. If and when the waveform next enters and remains in state s_1 , that state occurrence would be labeled $(s_1, 2)$; and so on. Thus, the state occurrences for a single pulse, as shown in Figures 3 and 4, are $(s_1, 1)$, $(s_2, 1)$, $(s_1, 2)$. The state occurrences for the compound waveform shown in Figure 8 are $(s_2, 1)$, $(s_4, 1)$, $(s_3, 1)$, $(s_5, 1)$, $(s_1, 1)$. Note that a waveform can exit one state occurrence without (necessarily) immediately entering another state occurrence, that is, the waveform state between state occurrences can be undefined for some time interval, for example, during transitions and in the case of transients (such as, runt pulses).

3.2.43 synchronizing

process of aligning the transition occurrence instant of one pulse or other event with the transition occurrence instant of another pulse or event

Note 1 to entry: If two series of events, such as two pulse trains, are synchronized, then their periods shall be integer multiples of one another.

3.2.44 terminal feature

any contiguous region of a waveform that is neither a state occurrence, nor a transient, nor a transition

Note 1 to entry: This feature, if present, occurs only at the beginning and/or end of a waveform.

3.2.45 tilt

DEPRECATED: droop

a distortion of a waveform state wherein the overall slope over the extent of the waveform state is essentially constant and other than zero.

Note 1 to entry: Tilt may be of either polarity.

Note 2 to entry: The term *droop* is a deprecated term because it implies a negative slope and, therefore, cannot be applied unambiguously to both positive pulse waveforms and negative pulse waveforms.

3.2.46 transient

any contiguous region of a waveform that begins at one state, leaves and subsequently returns to that state, and contains no state occurrences

3.2.47 transition

contiguous region of a waveform that connects, either directly or via intervening transients, two state occurrences that are consecutive in time but are occurrences of different states

3.2.47.1 negative-going transition

DEPRECATED: falling edge

a transition whose terminating state is more negative than its originating state

Note 1 to entry: The endpoints of the negative-going transition are the last exit of the waveform from the higher state boundary and the first entry of the waveform into the lower state boundary.

Note 2 to entry: *Falling edge* is a deprecated term because 1) the word edge describes the property of a geometric figure, which is not contained by or representative of the physical signal that corresponds to the waveform and 2) falling refers to motion or position of physical objects.

3.2.47.2 pass through transition

transition from an initial state to a non-consecutive state through any number of other states where the duration in these other states is less than the duration for state occurrence

3.2.47.3**positive-going transition**

DEPRECATED: rising edge

transition whose terminating *state* is more positive than its originating *state*.

Note 1 to entry: The endpoints of the *positive-going transition* are the last exit of the *waveform* from the lower *state boundary* and the first entry of the *waveform* into the higher *state boundary*.

Note 2 to entry: *Rising edge* is a deprecated term because 1) the word *edge* describes the property of a geometric figure, which is not contained by or representative of the physical signal that corresponds to the *waveform* and 2) *rising* refers to motion or position of physical objects.

3.2.48**transition duration**

DEPRECATED: risetime, falltime, transition time

difference between the two *reference level instants* of the same *transition*

SEE: Figure 1 and Figure 2.

Note 1 to entry: Unless otherwise specified, the two *reference levels* are the 10 % and 90 % *reference levels*.

Note 2 to entry: The terms *risetime*, *falltime*, and *transition time*, although widely used, are deprecated because they are ambiguous and confusing. First, the use of the word *time* in this standard refers exclusively to an *instant* and not an *interval*. Also, if the *first transition* of a *waveform* within a *waveform epoch* happens to be a *negative transition*, some users may refer to its *transition duration* as its *risetime*, and some others may refer to its *transition duration* as its *falltime*. If the use of these deprecated terms is required, then *risetime* is synonymous with the *transition duration* of a *positive-going transition*, and *falltime* is synonymous with the *transition duration* of a *negative-going transition*. If the upper and lower *state boundaries* of the two *states* are not the user-defined *reference levels* (for example, the 10 % and 90 % *reference levels*), then the *duration* of a *transition* is not equal to the *transition duration*.

3.2.49**transition settling duration**

DEPRECATED: settling time

time interval between the 50 % *reference level instant*, unless otherwise specified, and the final *instant* the waveform crosses the *state boundary* of a specified *state* in its approach to that *state*

Note 1 to entry: The term *settling time* is a deprecated term because the word *time* in this standard refers exclusively to an *instant* and not an *interval*.

3.2.50**transition settling error**maximum error between the *waveform value* and a specified *reference level* within a user-specified *interval* of the *waveform epoch*. The *interval* starts at a user-specified *instant* relative to the 50 % *reference level instant***3.2.51****triggering**process in which a *step-like waveform*, *pulse*, or *compound waveform* initiates a predetermined event or response**3.2.52****true value**

quantity value consistent with the definition of a quantity

[SOURCE: ISO/IEC Guide 99:2007, definition 2.11, modified – the wording of the definition has been changed and the original notes to the definition have not been retained.]

3.2.53

undershoot

DEPRECATED: preshoot

waveform aberration within a *post-transition aberration region* or *pre-transition aberration region* that is less than the lower *state boundary* for the associated *state level*. If more than one such *waveform aberration* exists, the one with the largest magnitude is the undershoot unless otherwise specified

SEE: Figure 5 and Figure 6.

Note 1 to entry: Preshoot is a deprecated term because “pre” is a temporal prefix and “shoot,” in this context, refers to a *level parameter*.

3.2.54

waveform

representation of a *signal* (for example, a graph, plot, oscilloscope presentation, discrete time series, equations, or table of values).

SEE: Figure 1, Figure 2, Figure 3, Figure 4, and the figures of Annex A.


Note 1 to entry: Note that the term *waveform* refers to a measured or otherwise-defined estimate of the physical phenomenon or *signal*.

3.2.54.1

compound waveform

waveform which may be completely represented by *m states* and *n transitions* where $(m + n) \geq 4$

SEE: Figure 8.

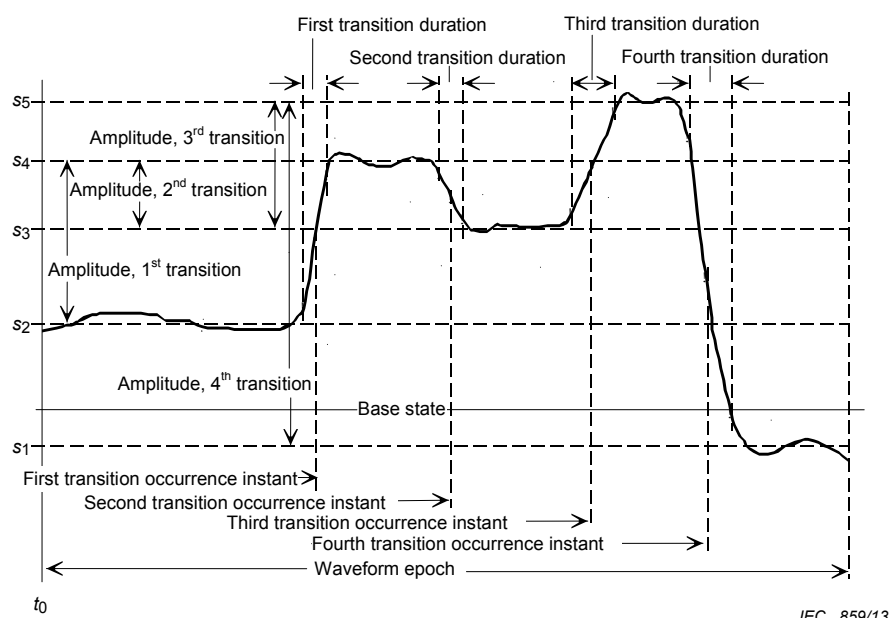

The dots indicate the intersection of the *waveform* with the 10 %, 50 %, and 90 % *reference levels*. The term “amplitude” is used in place of the defined term *waveform amplitude* because of space constraints. References to *transition durations* and *transition occurrence instants* for the *transitions* are abbreviated by, for example, “second transition duration” instead of the more accurate reference “*transition duration, second transition*.”

Figure 8 – Compound waveform

Note 1 to entry: Any *compound waveform* can be parsed (see 5.5) into *n* two-state *waveforms*.

3.2.54.2**impulse-like waveform**

waveform that, when convolved with an ideal step, yields a step-like waveform

SEE: Figure A.4.

3.2.54.3**reference waveform**

waveform against which other *waveforms* are compared.

Note 1 to entry: Clause 7 contains figures that depict different *reference waveforms*.

3.2.54.4**step-like waveform**

waveform whose *level* departs from one *state* and attains another *state*.

SEE: Figure 1 and Figure 2.

Note 1 to entry: Unless otherwise specified, multiple *transitions* are ordered from the earliest *transition occurrence instant* to the latest occurrence in time.

3.2.54.5**transition waveform**

waveform consisting of a *transition* and the two *states* joined by that *transition*

3.2.55**waveform aberration**

algebraic difference in *waveform* values between all corresponding *instants* in time of a *waveform* and a *reference waveform* in a specified *waveform epoch*

SEE: Figure 9.

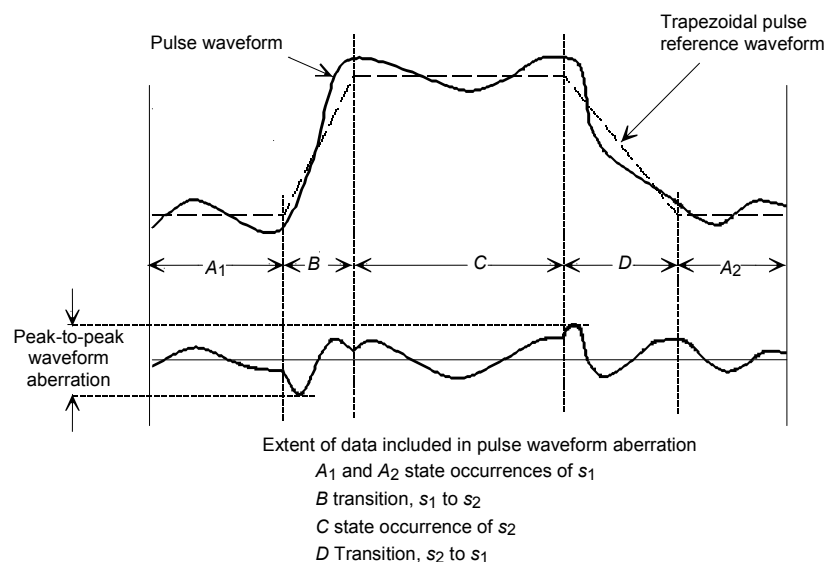


Figure 9 – Calculation of waveform aberration

3.2.55.1**percent waveform aberration**

for a two-state *waveform*, the *waveform aberration* expressed as a percentage of the *waveform amplitude* of the *reference waveform*, unless otherwise specified

Note 1 to entry: *Compound waveforms* may be parsed (see 5.5) into a set of two-state *waveforms* after which *percent waveform aberration* may be defined for each two-state *waveform* of that set.

3.2.56

waveform delay (advance)

duration between the first *transition occurrence instant* of two *waveforms*

3.2.57

waveform epoch

interval to which consideration of a *waveform* is restricted for a particular calculation, procedure, or discussion. Except when otherwise specified, the waveform epoch is assumed to be the span over which the *waveform* is measured or defined

SEE: Figure 1, Figure 2, Figure 3, and Figure 4.

3.2.58

waveform feature

specified portion or segment of a *waveform*

3.2.59

waveform measurement process

realization of a method of waveform measurement in terms of specific devices, apparatus, instruments, auxiliary equipment, conditions, operators, and observers

Note 1 to entry: In this process, a value (a number multiplied by a unit) of measurement is assigned to the elements of the *waveform*.

3.2.60

waveform period

the minimum *duration* after which a *periodic waveform* repeats

Note 1 to entry: The period of a repetitive two-state *waveform* is the *duration* between specified *reference level instants* for the same *transition*, either the *negative-going transition* or the *positive-going transition*, of two consecutive *pulses* in a *pulse train*. The period is equal to the sum of the *pulse separation* and the *pulse duration*.

3.2.61

waveform representation

3.2.61.1

pictorial waveform representation

graph, plot, or display in which a *waveform* is presented for observation or analysis

Note 1 to entry: Any of the *waveform* formats defined in 3.2.61.2 to 3.2.61.2.2 may be presented in the pictorial format.

3.2.61.2

sampled waveform representation

waveform which is a series of *sample* numerical values taken sequentially or nonsequentially as a function of time

Note 1 to entry: It is assumed that nonsequential samples may be rearranged in time sequence to yield either *aperiodically sampled waveform representations* (3.2.61.2.1) or *periodically sampled waveform representations* (3.2.61.2.2).

3.2.61.2.1

aperiodically sampled waveform representation,

format which is identical to the *periodically sampled format*, above, except that the sampling in real time is not *periodic* and wherein the data exists as coordinate *instant* pairs, $t_1, y_1; t_2, y_2; \dots; t_n, y_n$

3.2.61.2.2**periodically sampled waveform representation**

a finite sequence of *levels* $y_0, y_1, y_2, \dots, y_n$ each of which represents the value of the *waveform* at times $t_0, t_0 + \Delta t, t_0 + 2\Delta t, \dots, t_0 + n\Delta t$, respectively, wherein the data may exist in a pictorial format or as a list or table of numbers

3.3 Symbols

A :	<i>waveform amplitude</i>
d_f :	<i>duty factor</i>
i :	<i>discrete time index</i>
n :	<i>number of elements in a waveform</i>
O_{post} :	<i>overshoot in the post-transition aberration region of a waveform</i>
O_{pre} :	<i>overshoot in the pre-transition aberration region of a waveform</i>
s_k :	<i>state level k</i>
t :	<i>continuous time</i>
$t_{x\%}$:	<i>x % reference level instant</i>
t_0 :	<i>initial instant</i>
T :	<i>waveform period</i>
t_d :	<i>transition duration</i>
T_D :	<i>waveform delay</i>
T_p :	<i>pulse duration</i>
T_s :	<i>pulse separation</i>
U_{post} :	<i>undershoot in the post-transition aberration region of a waveform</i>
U_{pre} :	<i>undershoot in the pre-transition aberration region of a waveform</i>
W_a :	<i>waveform aberration, given as percentage of waveform amplitude</i>
$y(t)$:	<i>waveform amplitude values for a continuous-time signal</i>
y_i :	<i>waveform amplitude values for a discrete-time waveform, with discrete time index i</i>
y_{rms} :	<i>root-mean-square (rms) level (see 3.2.17.5)</i>
y_{rss} :	<i>root sum of squares (rss) level (see 3.2.17.6)</i>
$y_{x\%}$:	<i>x % reference level</i>
$\bar{y}$:	<i>average level (see 3.2.17.1)</i>
$\bar{y}_i$:	<i>mean over a collection of waveforms $y_{k,i}$, where k is the waveform index</i>
Σ_i :	<i>the standard deviation of a set of standard deviations</i>

3.4 Deprecated terms

The terms listed below on the left are the deprecated terms in alphabetical order and the terms on the right are the accepted terms:

Droop	<i>tilt</i>
Duty cycle	<i>duty factor</i>
Preshoot	<i>overshoot or undershoot in the pre-transition aberration region</i>
Pulse width	<i>pulse duration</i>
Falltime (fall time)	<i>transition duration</i>
Falling edge	<i>negative-going transition</i>
Leading edge	<i>first transition</i>
Risetime (rise time)	<i>transition duration</i>

Rising edge	<i>positive-going transition</i>
Trailing edge	<i>second transition</i>
Transition	<i>transition duration,</i>

NOTE *transition* is deprecated when used to refer to an *interval* within a *waveform epoch*. *Transition*, when referring to an event, as defined in 3.44, is not deprecated.

4 Measurement and analysis techniques

4.1 General


This clause provides descriptions of the techniques and procedures for time-domain waveform measurements. The descriptions provided are independent of specific devices, apparatus, instruments, or computing devices that may be used in these measurements and are prerequisite to:

- a) efficient communication of the results of *transition*, *pulse*, and *compound waveform* measurements;
- b) development and use of physical artifact standards for *transition*, *pulse*, and *compound waveform* apparatus;
- c) development and use of procedures for apparatus that employ *transition*, *pulse*, and *compound waveform* techniques.

4.2 Method of waveform measurement

A method of making a *waveform* measurement comprises:

- a) the complete specification of all relevant functional characteristics of the devices, apparatus, instruments, and auxiliary equipment to be used;
- b) the specification of all essential corrections required to compensate or adjust for departure of the measurement process from ideality;
- c) the procedures to be used in making essential corrections;
- d) the operations to be performed and their sequence;
- e) the conditions under which all operations are to be carried out.

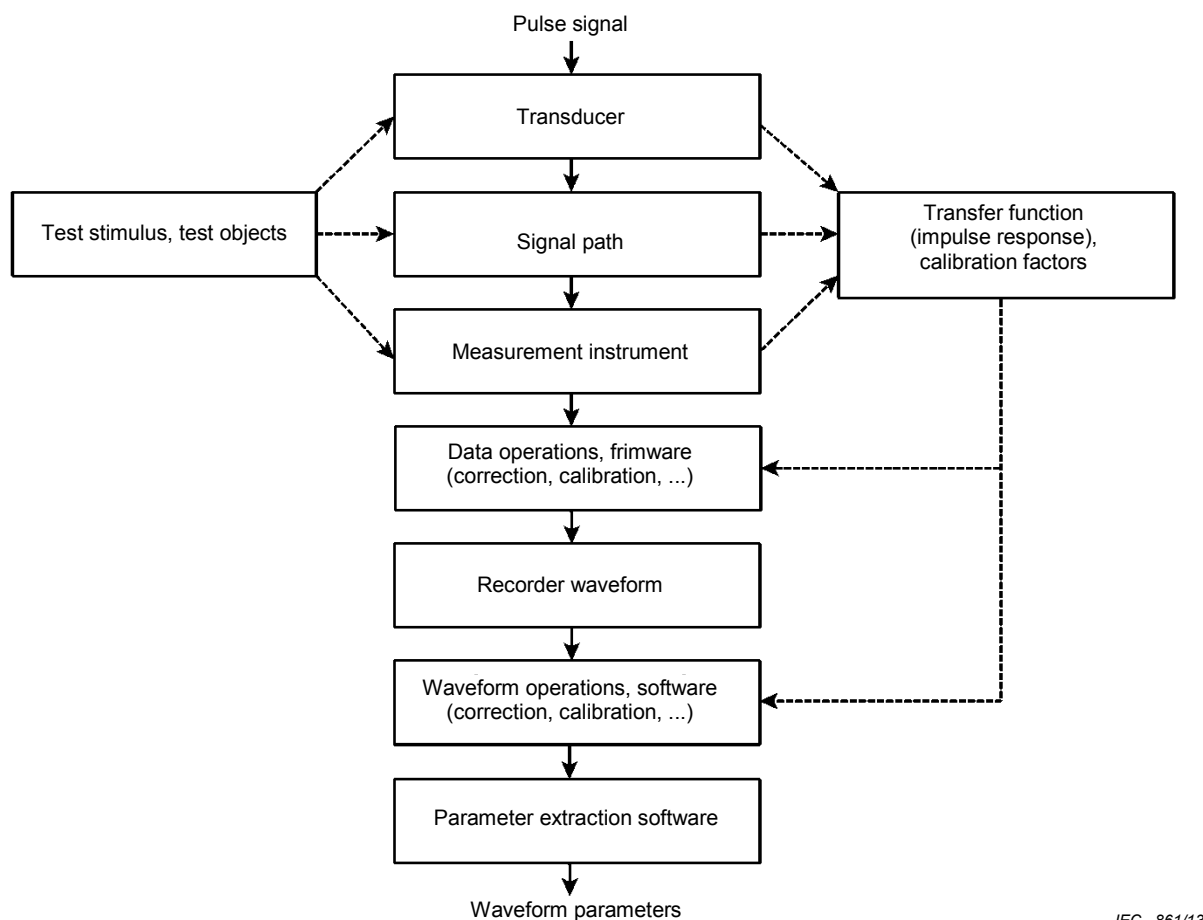

IEC 861/13

Figure 10 – Waveform acquisition and measurement process

4.3 Description of the waveform measurement process

The object of any *waveform measurement process* is the determination to some *accuracy*, either expressed or implied, of the value of one or more *parameters* of a *waveform*. Figure 10 shows the constituent steps of any *waveform measurement process* where, as indicated, the process involves two distinct sequential subprocesses: *signal-to-waveform* conversion and *waveform* analysis. Thus, the *waveform measurement process* involves:

- a) the conversion of a *signal* into its transform, which is called its *waveform*;
- b) analysis of the *waveform* to determine the value of one or more *parameters*;
- c) the assertion or assumption that the value of the *waveform parameter* thus determined is, to some *accuracy*, identical to the value of the *signal parameter*.

The validity of the final assertion or assumption is dependent on the combined validity of the first two steps.

The vast array of devices, apparatus, instruments, and techniques which may be configured in virtually limitless combinations to provide *signal-to-waveform* conversion renders the discussion of specific implementations beyond the scope of this standard. Such discussion is deferred to other standards, documents, or specifications that describe or define the characteristics or methods of specific devices, apparatus, instruments, or techniques.

4.4 Waveform epoch determination

4.4.1 Selection of waveform epoch

A *waveform epoch* shall contain the *waveform features* under analysis. The *waveform epoch* shall contain sufficient data to yield all necessary *state levels* to the desired *accuracy* prescribed in the measurement process. These data may be augmented by *reference levels* that are determined using another *waveform epoch*.

4.4.2 Exclusion of data from analysis

A *waveform* may include *waveform features* or events that are non-pertinent in the circumstances of, or to the application of, the *waveform*. Non-pertinent data may be excluded from analysis, however, the basis for any such exclusion shall be stated.

When data within a *waveform epoch* are excluded from analysis the following shall be specified:

- a) the extent, in time or waveform value, of the excluded data;
- b) the basis for excluding the data;
- c) whether the excluded data is ignored (that is, the *waveform* that is analyzed is discontinuous) or replaced (that is, the excluded data are replaced with other assumed or derived data).

5 Analysis algorithms for waveforms

5.1 Overview and guidance

The analysis of a two-*state waveform* requires the sequential determination of the following:

- a) low or first *state level* and high or second *state level*;
- b) *transition* or *waveform amplitude*;
- c) necessary *percent reference levels* and corresponding *reference level instants* (unless otherwise specified, these are assumed to be the 10 %, 50 %, and 90 % *reference levels* and *reference level instants*);
- d) values of all other *waveform parameters* as computed from *level* or *instant* pairs;
- e) parameters contributing to the uncertainty in the computation of the *waveform parameters* should be identified and their relative importance assessed.

5.2 Selecting *state levels*

5.2.1 General

In the following sections, algorithms for determining *state levels* are described. There is no requirement that the same algorithm be used for determining different *state levels*. (These algorithms are described for single *transition waveforms* or single *pulse waveforms*, but they may also be applied to *compound waveforms* if desired.)

5.2.2 Data-distribution-based methods - Histograms

5.2.2.1 General

A histogram is an amplitude density representation of a *signal* whereas, for comparison, a *waveform* is an amplitude-versus-time representation of a *signal*. The amplitude density representation shows the number of occurrences of a given amplitude versus amplitude. To generate a histogram, the amplitude range must be divided into *M* unique, but not necessarily equal, amplitude intervals. For simplicity, however, we will consider only the equal-amplitude-interval case. The amplitude interval is called the histogram bin width and *M* is the number of

bins or the histogram size. The histogram is formed by counting the number of times a *waveform* value fits within a particular histogram bin; this is referred to as the bin count.

5.2.2.2 Algorithm:

- a) Determine the maximum and minimum amplitude values, $y_{\max}$ and $y_{\min}$, of the *waveform* or data using a)1) or a)2).
 - 1) Search the *waveform* or data for $y_{\min}$ and $y_{\max}$.
 - 2) Set $y_{\min}$ and $y_{\max}$ from criteria specified by the user of this standard or knowledge of the *waveform* or data.
- b) Calculate the amplitude range, y_R , of the *waveform* or data using: $y_R = y_{\max} - y_{\min}$.
- c) Calculate the bin width:
 - 1) For equal sized bins, Δy is found by dividing y_R by M (selection of M is discussed below):

$$\Delta y = \frac{y_R}{M} = \frac{y_{\max} - y_{\min}}{M}, \quad (1)$$

where

Δy is the histogram bin width

M is the number of histogram bins,

$y_{\max}$ is the maximum amplitude value of the signal, y

$y_{\min}$ is the minimum amplitude value of the signal, y ,

y_R is the range of the signal values.

- 2) For unequal-sized bins, the user of this standard specifies an array of bin widths, Δy_i .
- d) Initially set $B_j = 0$ for $j = 1 \dots M$, where B_j is the count for the j^{th} histogram bin. Sort through the *waveform* or data values, y_i , $i = 1, N$, where N is the number of *waveform* values, and if y_i lies within the range of a bin, that is if: $(y_{\min} + [j-1]\Delta y) < y_i < (y_{\min} + j\Delta y)$ for $1 \leq j \leq M$, for equal size bins, or $(y_{\min} + \Delta y_j) < y_i < (y_{\min} + \Delta y_{j+1})$ for $1 \leq j \leq M$ for unequal-size bin widths, then set $B_j = B_j + 1$, where B_j is the count in the j^{th} histogram bin. If a data value equals the value of a bin boundary, that data value must be assigned to one of the bins located on either side (below or above) of that bin boundary. The side that is selected must be consistently applied to all such data values and specified by the user of this standard.

5.2.2.3 Selection of the number of histogram bins, M

5.2.2.3.1 General

Two methods are described in this section to select M for a waveform that exhibits a bimodal amplitude distribution and contains one *transition*. N_S -state waveforms ($N_S > 2$) and N_T -transition waveforms ($N_T > 1$) can also be operated on with the techniques mentioned here, however, these techniques will require that the *waveform* be parsed (see 5.5) into subwaveforms where each subwaveform contains one *transition* and two *states*. The limitations of each method for determining M are indicated. All of these methods are based on the requirement that the extracted pulse parameters agree with observation. The value of M has an upper and lower limit. The value of M should be large enough so that the desired amplitude resolution of the parameters that are derived from the histogram is not degraded or reduced. The value of M should not be so large that the histogram bin width is smaller than the amplitude quantization of the waveform. The amplitude quantization is dependent on the input range of the instrument over which the input range of the analog-to-digital converter (ADC) is applied, the number of bits in the ADC, and whether or not signal averaging was performed.

If the data for which a histogram is being made is obtained from an ADC, then it is usually important to make the histogram bin width compatible with the width of the quantization.

of the analog-to-digital converter. The width of the quantization bin of an analog-to-digital converter is the interval of input values that produce a single output value, that is, the interval between transition *levels* of the analog-to-digital converter. If the data is the average of N readings of the analog-to-digital converter, then each analog-to-digital-converter bin is effectively divided into N equal-sized smaller bins. (Averaging effectively reduces the bin size of the analog-to-digital converter.)

Each histogram bin width shall be an integer number of ADC bin widths. If the histogram bin width used in 5.2.2.2 is equal to $(n + x)$ analog-to-digital-converter bin widths, where n is an integer and x is less than 1, then each histogram bin will actually have a width of either n analog-to-digital-converter bin widths or $(n + 1)$ analog-to-digital-converter bin widths. If n is very large, so that the relative difference between n and $n + 1$ is small, then this error in histogram bin width is not important.

There is an additional consideration if the selection of *state levels* is based on the mode of a histogram. Bin widths, which are intended to be equal, can be unequal due to the differential nonlinearity of the analog-to-digital converter. In this case, the mode may occur in the widest bin rather than in its correct bin. When this is a possibility, the histogram counts (the number of *waveform* values that lie within each histogram bin) should be corrected for the bin widths before the histogram is analyzed.

5.2.2.3.2 Method 1

Select a fixed value of M . The selection of M may be based on observation, common practice, or some other valid means.

5.2.2.3.3 Method 2

A large (or small) value of M is selected as initial value. The value of M is then decremented (or incremented) until a particular histogram criterion is attained. One criterion that has been used is that the least populated of the two mode bins contains a count that is equal to at least 1 % of the number of elements, N_e , in the *waveform*. This method assumes the *waveform* exhibits a bimodal amplitude distribution and that it is positioned such that the bin corresponding to $level(s_2)$ and $level(s_1)$ has a count greater than or equal $0.01N_e$. Typically this latter requirement is assured by positioning the *waveform* such that either the *duration* of $level(s_2)$ or $level(s_1)$ is no less than 10 % of the *waveform epoch*. (Although shorter *durations* may work, this has not been tested.) This method can be adapted to apply to *waveforms* containing more than one *transition* and more than two modes in the amplitude distribution if the *waveform* is appropriately parsed. However, for each segment, the *duration* of the the $level(s_2)$ or $level(s_1)$ in that *waveform* segment must provide at least $0.01N_e$ amplitude occurrences. If this method is implemented automatically, that is, without operator intervention, it requires that the $level(s_2)$ and $level(s_1)$ are located in opposite halves of y_R . An implementation of this method using equal sized bins is described in [1]¹, which also shows the effects of varying bin width on computed pulse parameters.

5.2.2.4 Splitting the bimodal histogram into two parts (subhistograms)

This procedure conceptually separates the histogram, computed as described in 5.2.2, into upper and lower histograms from which the modes for each are computed and subsequently used to determine *waveform state levels*. This procedure is based on the values of two *parameters*, f_1 and f_2 , where $f_1 \leq f_2$, defined by the user of this standard. Typical values for this pair of variables are $(f_1, f_2) = (0.5, 0.5)$ or $(f_1, f_2) = (0.4, 0.6)$. Let B_j , for $j = 1 \dots M$, be the bin counts in a histogram as defined in 5.2.2. Let j_{low} be the smallest value of j for which $B_j > 0$, and let j_{high} be the largest value of j for which $B_j > 0$. The range of the lower histogram is $j_{low} \leq j \leq f_1(j_{high} - j_{low})$. The range of the upper histogram is $(j_{low} + f_2[j_{high} - j_{low}]) \leq j \leq j_{high}$.

¹ Numbers in square brackets refer to the Bibliography.

Waveform aberrations and/or other spurious artifacts may adversely affect the ability of automated algorithms to find the appropriate *waveform level* around which the histogram is split. On the other hand, manual (operator) selection of the appropriate *waveform level* will not be confounded by spurious content

5.2.2.5 Determining state levels from the histogram

Split the bimodal histogram into two parts as described in 5.2.2.4. Find the means or modes of the two subhistograms found in 5.2.2.4. The low state level is given by the mode or mean of the lower histogram and the high state level is given by the mode or mean of the upper histogram. Solomon et al [2] examine the effect of different histogram methods on the values of the state levels.

5.2.3 Data-distribution-based methods - Shorth estimator

This discussion will address *step-like waveforms*. The shorth of a finite collection of data values is the shortest interval comprising a certain fraction, f_S , of the data values. The fraction $f_S = 1/2$ unless otherwise specified. The shorth estimator is a location estimator, similar to the least median of squares (LMS) estimator [3]. The first step in the shorth estimator method is to label or group *waveform* values as belonging to a particular *state*. The *k*-means method (4) is an effective approach for grouping the *waveform* values. In this method, the *waveform* values are grouped according to their difference relative to a particular *average level*, where in this case *average levels* are computed for the two *state occurrences* of the *step-like waveform*.

a) Grouping *waveform* values:

- 1) Initialize the *average levels*, $\bar{y}_1$ and $\bar{y}_2$, for the two *states occurrences*, $(s_1,1)$ and $(s_2,1)$ (note that in a *step-like waveform*, there are only two *state occurrences*):
 - i) $\bar{y}_1 = y_{\min}$, or as otherwise specified by the user of this standard
 - ii) $\bar{y}_2 = y_{\max}$, or as otherwise specified by the user of this standard, where $y_{\min}$ and $y_{\max}$ are the minimum and maximum amplitude values of the *waveform*, y .
- 2) Segregate each *waveform* value, y_i , into $(s_1,1)$ or $(s_2,1)$ based on the difference in amplitude between y_i and the *average levels*. The *average levels* are then updated by calculating the average values of the y_i assigned to each *state occurrences*. The process continues until the y_i values no longer switch *state occurrences*, or, equivalently, until the *average levels* no longer change. The following algorithm is now given:

```

do
   $\bar{y}_{1,old} = \bar{y}_1$ 
   $\bar{y}_{2,old} = \bar{y}_2$ 
  for  $i = 1 \dots N$ 
    if  $|y_i - \bar{y}_1| < |y_i - \bar{y}_2|$  then assign  $y_i$  to  $(s_1,1)$ 
    else assign  $y_i$  to  $(s_2,1)$ 
  endfor
   $\bar{y}_1 = \text{average level of } (s_1,1)$ 
   $\bar{y}_2 = \text{average level of } (s_2,1)$ 
while  $\bar{y}_1 - \bar{y}_{1,old} \neq 0$  and  $\bar{y}_2 - \bar{y}_{2,old} \neq 0$ 
where  $N$  is the number of samples in  $y$ .
```

After the algorithm converges, typically in two or three iterations, it yields $(s_1,1)$ and $(s_2,1)$, the two *state occurrences* of the *step-like waveform*. The set of N *waveform*

values in $(s_1, 1)$ (the first *state occurrence*) is given by $(s_1, 1) = \{y_1^{(1)}, y_2^{(1)}, \dots, y_{N_1}^{(1)}\}$ and the set of N_2 *waveform* values in $(s_2, 1)$ is given by $(s_2, 1) = \{y_1^{(2)}, y_2^{(2)}, \dots, y_{N_2}^{(2)}\}$.

The next step in this process is to obtain the shorth and the corresponding shorth collection for both $(s_1, 1)$ and $(s_2, 1)$. The shorth collection comprises the data values that are contained in the shorth. As used here, the shorth of the i^{th} *state occurrence* is the shortest *interval* containing the specified fraction of the values assigned to the i^{th} *state occurrence*.

- b) Determining the shorth collection. The shorth collection is computed independently for $(s_1, 1)$ and $(s_2, 1)$ per the following procedure:

- 1) Reorder $(s_1, 1)$ into a non-decreasing sequence to give $(s_1, 1)_{nd} = y_{(1)}^{(1)} \leq y_{(2)}^{(1)} \leq \dots \leq y_{(N_1)}^{(1)}$,
- 2) Reorder $(s_2, 1)$ into a non-decreasing sequence to give $(s_2, 1)_{nd} = y_{(1)}^{(2)} \leq y_{(2)}^{(2)} \leq \dots \leq y_{(N_2)}^{(2)}$,

where

N_1 is the number of samples in $(s_1, 1)$ and

N_2 is the number of samples in $(s_2, 1)$. For clarity, $y_i^{(1)}$ is not necessarily equal to $y_{(i)}^{(1)}$ and $y_i^{(2)}$ is not necessarily equal to $y_{(i)}^{(2)}$.

- 3) Perform the following to compute the shorth collection for $(s_1, 1)$:

$h = \lfloor f_s N_1 \rfloor + 1$, where $\lfloor x \rfloor$ is the greatest integer less than or equal to x

$d = N_1 - h + 1$

$min_diff = 10^9$

for $i = 1 \dots d$

$diff = y_{(h+i-1)}^{(1)} - y_{(i)}^{(1)}$

if $(diff < min_diff)$ then

$min_diff = diff$

$m = i$

endif

endfor

The shorth collection for $(s_1, 1)$: $= (y_{(m)}^{(1)}, \dots, y_{(h+m-1)}^{(1)})$

- 4) Perform the following to compute the shorth collection for $(s_2, 1)$:

$k = \lfloor f_s N_2 \rfloor + 1$

$d = N_2 - k + 1$

$min_diff = 10^9$

for $i = 1 \dots d$

$diff = y_{(k+i-1)}^{(2)} - y_{(i)}^{(2)}$

if $(diff < min_diff)$ then

$min_diff = diff$

$n = i$

endif

endfor

The shorth collection for $(s_2, 1)$: $= (y_{(n)}^{(2)}, \dots, y_{(k+n-1)}^{(2)})$

NOTE The algorithm in Steps 3 and 4 produces a shorth collection that, if two or more successive intervals qualify for the shorth, selects the first interval. If the user of this standard implements a shorth collection criterion different from that used here, the user of this standard shall indicate the criterion used.

- c) Finally, the mean of the value, unless otherwise specified, of the shorth collection is used to estimate *levels* of each *state*(5).

1) The *level* of s_1 is computed using: $level(s_1) = \frac{1}{h} \sum_{j=m}^{h+m-1} y_{(j)}^{(1)}.$

2) The *level* of s_2 is computed using: $level(s_2) = \frac{1}{k} \sum_{j=n}^{k+n-1} y_{(j)}^{(2)}.$

As a simple illustration, suppose $N_1 = 11$ and

$$(y_{(1)}^{(1)}, \dots, y_{(N_1)}^{(1)}) = (10, 45, 50, 53, 56, 58, 60, 62, 63, 65, 75).$$

Then, $h = \lfloor 11/2 \rfloor + 1 = 6$, and the smallest of the differences in the corresponding set of differences, 58-10, 60-45, 62-50, 63-53, 65-56, and 75-58 is 9, which corresponds to the interval (56, 65), which is the shorth. The values contained in the shorth are 56, 58, 60, 62, 63, and 65. $Level(s_1)$ is calculated as $level(s_1) = (56+58+60+62+63+65)/6 = 60,67$.

5.2.4 Other methods

5.2.4.1 Peak magnitude

Determine the *maximum peak* and *minimum peak* values of the single *transition waveform* or the single *pulse waveform*:

- take the *minimum peak* value as the low or first *state level*;
- take the *maximum peak* value as the high or second *state level*.

This algorithm is best suited to the analysis of waveforms with *state levels* of negligible or relatively short *duration*.

5.2.4.2 Initial (final) instant

For a single *transition waveform*, determine the values of the *initial instant* and the *final instant*. Take the value at either the *initial instant* or the *final instant*, whichever is the more *negative*, as the low or *first state level*. Then, take the value at either the *initial instant* or the *final instant*, whichever is the more *positive*, as the *high* or *second state level*.

For a single *pulse waveform*, only one of the two *state levels* can be determined by the initial (final) instant method. In this case, determine the value of the *initial (final) instant*. For a *positive pulse waveform* take this value as the low or *first state level*. For a *negative pulse waveform* take this value as the *high* or *second state level*.

5.2.4.3 User defined

This method is based on assumptions made by, or expectations of, the user of this standard regarding the behavior of the waveform generator. These assumptions or expectations should be based on knowledge of, for example, the waveform generator circuitry, the interaction between the waveform generator and the load (measurement instrument), and/or previous observations. Using this information, the user of this standard states what the values are for the *low* and *high states* of the *waveform*.

5.2.4.4 Use of other waveform epochs

Two or more *waveform epochs* may be necessary because the *waveform* from which a given *parameter* is to be computed may not contain enough information for that computation. For example, in computing *transition duration*, if the *waveform* has not settled to its final or initial

states within a shorter *waveform epoch* from which *transition duration* can be computed, and the *waveform* of longer *epoch(s)* does not have the temporal resolution required to accurately compute the *transition duration*, then two or more *epochs* are necessary to compute *transition duration*. At least two *waveforms* will be required, one or more having a long *epoch* from which the *state levels* will be obtained, and one having a short *epoch* from which the *transition duration* will be computed.

- a) Identify the *waveform epochs* to be used, E_1 , E_2 and possibly E_3 . Three *waveforms* are necessary if the *low state* and *high state* are to be computed from different *waveforms*.
- b) Acquire the *waveform(s)* from which the *low state* and *high state* are to be determined.
- c) Compute the *low state* and *high state* of the appropriate *waveforms* by a method specified by the user of this standard.

The *low state* and *high state* thus determined are the *low state* and *high state* of the *waveform*.

5.2.4.5 Static levels

This method requires that the pulse generator used to generate the *step-like waveform* can be operated such that it also provides two static (constant-valued) *levels*, one corresponding to the *low state* of the pulse to be measured and the other to the *high state* of the same pulse. Furthermore, these static *levels* shall be supplied at the same connector from which the pulse is output and that these *levels* can be uniquely selected.

- a) Operate the pulse generator so that it outputs a static *level* that is equal to the *level* of the *low state* of the pulse.
- b) Acquire a *waveform* of this *low state level* and compute its value by a method specified by the user of this standard; this is the *low state* of the *waveform*.
- c) Operate the pulse generator to output a static *level* that is equal to the *high state* of the pulse and measure this *level*.
- d) Acquire a *waveform* of this *high state level* and compute its value by a method specified by the user of this standard; this is the *high state* of the *waveform*.

5.2.5 Algorithm switching

The above methods may be dynamically chosen based upon the input *waveform*. For example, some algorithms use a histogram method or a peak magnitude method depending upon the shape of the histogram. If several methods are combined or employed, the criteria for when a particular method is used should be stated.

5.3 Determination of other single *transition waveform* parameters

5.3.1 General

After the *low* or *state 1 level* and the *high* or *state 2 level* of a single *transition waveform* or a single *pulse waveform* have been determined, all other *transition* or *pulse waveform parameters* defined in this standard are calculable directly from the definitions of those *parameters* presented in this standard.

Some *waveform* recorders contain internal hardware or firmware for calculating *waveform parameters*. In the process of calculating these *waveform parameters*, the recorder may filter the *waveform* prior to interpolation. Consequently, the user of this standard should be aware of any internal filtering performed by the *waveform* recorder because this filtering may affect the value of the *parameter*. If filtering is performed in the process of calculating *waveform parameters*, the type of filter and its defining variables shall be specified.

5.3.2 Algorithm for calculating signed waveform amplitude

- a) Determine s_1 and s_2 using a method described in 5.2.
- b) The *waveform amplitude*, A , is the difference between $level(s_2)$ and $level(s_1)$

- 1) For positive-going transitions, A is given by:

$$A = \text{level}(s_2) - \text{level}(s_1), \quad (2)$$

where

A is the amplitude of the waveform,

$\text{level}(s_1)$ is the state level of s_1 , and

$\text{level}(s_2)$ is the state level of s_2 .

- 2) For negative-going transitions, A is given by:

$$A = \text{level}(s_1) - \text{level}(s_2). \quad (3)$$

5.3.3 Algorithm for calculating percent reference levels

- a) Calculate the waveform amplitude, A , as described in 5.3.2.
b) Calculate the value for the percent reference level, $y_x \%$, using:

$$y_x \% = \text{level}(s_1) + \frac{|A|}{100} x \%, \quad (4)$$

where

$y_x \%$, is the value of the percent reference level,

x represents the percentage for the percent reference level specified by the user of this standard, and

$\text{level}(s_1)$ is the state level of s_1 .

NOTE $y_x \%$ may or may not equal the value of a sample in the waveform.

5.3.4 Algorithms for calculating reference level instants

5.3.4.1 General

The algorithms for calculating reference level instants use linear interpolation between the instants at which the waveform is sampled. If the interval between successive waveform samples is too large for linear interpolation to be sufficiently accurate, the accuracy of the computed reference levels and associated reference level instants will be reduced. If this limitation causes errors in parameter values that are larger than a tolerance specified by the user of this standard, then a more sophisticated interpolation method based on more than two adjacent samples may be used. The selection of an alternate interpolation method depends on knowledge of the waveform and is beyond the scope of this standard. The interpolation method and the conditions in which it is used shall be specified.

5.3.4.2 Algorithm for calculating the 50 % reference level instant

- a) Calculate the 50 % reference level as described in 5.3.3.
b) Calculate the 50 % reference level instant for $y_{50 \%}$ using linear interpolation:

$$t_{50\%} = t_{50\%-} + \left(\frac{t_{50\%+} - t_{50\%-}}{y_{50\%+} - y_{50\%-}} \right) (y_{50\%} - y_{50\%-}) \quad (5)$$

where

$t_{50 \%}$ is the 50 % reference level instant,

$t_{50 \% -}$ and $t_{50 \% +}$ are two consecutive sampling instants corresponding to data nearest in value to $y_{50 \%}$ such that $y_{50 \% -} \leq y_{50 \%} \leq y_{50 \% +}$, and



Documents

Document Sharing Hub

$y_{50\% -}$ and $y_{50\% +}$ are the two consecutive waveform values corresponding to $t_{50\% -}$ and $t_{50\% +}$.

If there is more than one 50 % reference level instant, the first one is the 50 % reference level instant, unless otherwise specified.

5.3.4.3 Algorithm for calculating other reference level instants

- Supply a reference level, $y_x\%$, by either calculating the $y_x\%$ as described in 5.3.3 for a value of x or of $y_x\%$ specified or provided by the user of this standard
- Calculate the reference level instant for $y_x\%$ using linear interpolation:

$$t_{x\%} = t_{x\% -} + \left(\frac{t_{x\% +} - t_{x\% -}}{y_{x\% +} - y_{x\% -}} \right) (y_{x\%} - y_{x\% -}), \quad (6)$$

where

$t_x\%$ is the reference level instant for the reference level selected by the user of this standard,

$y_x\%$ is the reference level specified by the user of this standard

$t_{x\% -}$ and $t_{x\% +}$ are two consecutive sampling instants corresponding to data nearest in value to $y_x\%$ such that $y_{x\% -} \leq y_x\% \leq y_{x\% +}$, and

$y_{x\% -}$ and $y_{x\% +}$ are the two consecutive waveform values corresponding to $t_{x\% -}$ and $t_{x\% +}$.

If there is more than one reference level instant, the reference level instant closest to the 50 % reference level instant (see 5.3.4.2) is used, unless otherwise specified.

5.3.5 Algorithm for calculating transition duration between $x_1\%$ and $x_2\%$ reference levels

- Calculate the reference level instant, $t_{x_1\%}$, for the $x_1\%$ reference level in accordance with 5.3.4 that is nearest to the 50 % reference level instant, unless otherwise specified.
- Calculate the reference level instant, $t_{x_2\%}$, for the $x_2\%$ reference level in accordance with 5.3.4 that is nearest to the 50 % reference level instant, unless otherwise specified.
- Calculate the transition duration, $t_{x_1\% - x_2\%}$:

$$t_{x_1\% - x_2\%} = |t_{x_1\%} - t_{x_2\%}|, \quad (7)$$

where

$t_{x_1\% - x_2\%}$ is the duration between the $x_1\%$ reference level and the $x_2\%$ reference level,

$t_{x_1\%}$ is the reference level instant for the $x_1\%$ reference level, and

$t_{x_2\%}$ is the reference level instant for the $x_2\%$ reference level.

5.3.6 Algorithm for calculating the undershoot and overshoot aberrations of step-like waveforms

- Determine $level(s_1)$ and $level(s_2)$ using a method described in 5.2 and define the upper boundary and lower boundary for the states corresponding to these levels.
- Determine the maximum and minimum waveform values, $y_{\max}$ and $y_{\min}$.
- Calculate the waveform amplitude, A , as described in 5.3.2.
- Calculate the $x_1\%$ and $x_2\%$ reference levels and the 50 % reference level as described in 5.3.3. Typically used reference levels are the 10 % and 90 % reference levels.

- e) Calculate the *reference level instants*, t_{x1} %, t_{50} % and t_{x2} %, as described in 5.3.4, for the *reference levels* determined in step (d).
- f) Calculate the *transition duration*, for the *reference levels instants* determined in step (e), as described in 5.3.5.
- g) Calculating the *overshoot* and *undershoot* in the *pre-transition aberrations region*.
 - 1) Calculate the last *instant*, t_{pre} , which occurs before t_{50} % when the waveform exits the upper (lower) *state boundary* of the *low state* (*high state*) for a *positive-going* (*negative-going*) *transition* using the method described in 5.3.4.
 - 2) Define the *pre-transition aberration region* as that between $t_{pre} - 3t_{10\%-90\%}$ and t_{pre} (or as specified by the user of this standard).
 - 3) Search the *pre-transition aberration region* for the maximum value, $y_{max,pre}$, and the minimum value, $y_{min,pre}$. $y_{max,pre}$ is the maximum y_i in the *pre-transition aberration region* and $y_{min,pre}$ is the minimum y_i in the *pre-transition aberration region*.
 - 4) If $y_{max,pre}$ is equal to or less than the upper *state boundary* of s_1 (s_2) for a *positive-going* (*negative-going*) *transition* then the *overshoot* in the *pre-transition aberration region*, O_{pre} , is zero; otherwise compute the percentage *overshoot* in the *pre-transition aberration region* using:

$$O_{pre}(\%) = \frac{y_{max,pre} - level(s_k)}{|A|} 100\%, \quad (8)$$

where

O_{pre} is the *overshoot* value in the *pre-transition aberration region*,

$y_{max,pre}$ is the maximum waveform value in the *pre-transition aberration region*,

A is the *waveform amplitude*,

$level(s_k)$ is the state level of the k^{th} state. $level(s_k) = level(s_1)$ for a positive-going transition and $level(s_k) = level(s_2)$ for a negative-going transition.

- 5) If $y_{min,pre}$ is equal to or greater than the lower *state boundary* s_1 (s_2) for a *positive-going* (*negative-going*) *transition*, then the *undershoot* in the *pre-transition aberration region*, U_{pre} , is zero, otherwise compute the percentage *undershoot* in the *pre-transition aberration region* using:

$$U_{pre}(\%) = \frac{level(s_k) - y_{min,pre}}{|A|} 100\%, \quad (9)$$

where

U_{pre} is the *undershoot* value in the *pre-transition aberration region*,

$y_{min,pre}$ is the minimum waveform value in the *pre-transition aberration region*,

A is the *waveform amplitude*,

$level(s_k)$ is the state level of the k^{th} state. $level(s_k) = level(s_1)$ for a positive-going transition and $level(s_k) = level(s_2)$ for a negative-going transition.

- h) Calculating the *overshoot* and *undershoot* in the *post-transition aberration region*.
 - 1) Calculate the first *instant*, t_{post} , that occurs after t_{50} % when the waveform enters the lower (upper) *state boundary* of the *high state* (*low state*) for a *positive-going* (*negative-going*) *transition* using the method described in 5.3.4.
 - 2) Define the *post-transition aberration region* as that between t_{post} and $t_{post} + 3t_{10\%-90\%}$ (or as specified by the user of this standard).
 - 3) Search the *post-transition aberration region* for the maximum value, $y_{max,post}$ and the minimum value, $y_{min,post}$. $y_{max,post}$ is the maximum y_i in the *post-transition aberration region* and $y_{min,post}$ is the minimum y_i in the *post-transition aberration region*.

- 4) If $y_{\max, \text{post}}$ is equal to or less than the upper *state boundary* of s_2 (s_1) for a *positive-going* (*negative-going*) *transition* then the *overshoot* in the *post-transition aberration region*, O_{post} , is zero, otherwise compute the percentage *overshoot* in the *post-transition aberration region* using:

$$O_{\text{post}}(\%) = \frac{y_{\max, \text{post}} - \text{level}(s_k)}{|A|} 100\%, \quad (10)$$

where

O_{post} is the *overshoot* value in the *post-transition aberration region*,

$y_{\max, \text{pre}}$ is the maximum *waveform* value in the *post-transition aberration region*,

A is the *waveform amplitude*,

$\text{level}(s_k)$ is the state level of the k^{th} state. $\text{Level}(s_k) = \text{level}(s_1)$ for a positive-going transition and $\text{level}(s_k) = \text{level}(s_2)$ for a negative-going transition.

- 5) If $y_{\min, \text{post}}$ is equal to or greater than the lower *state boundary* s_2 (s_1) for a *positive-going* (*negative-going*) *transition*, then the *undershoot* in the *post-transition aberration region*, U_{post} , is zero, otherwise compute the percentage *undershoot* in the *post-transition aberration region* using:

$$U_{\text{post}}(\%) = \frac{\text{level}(s_k) - y_{\min, \text{post}}}{|A|} 100\%, \quad (11)$$

where

U_{post} is the *undershoot* value in the *post-transition aberration region*,

$y_{\max, \text{pre}}$ is the minimum *waveform* value in the *post-transition aberration region*,

A is the *waveform amplitude*,

$\text{level}(s_k)$ is the state level of the k^{th} state. $\text{Level}(s_k) = \text{level}(s_1)$ for a positive-going transition and $\text{level}(s_k) = \text{level}(s_2)$ for a negative-going transition.

5.3.7 Algorithm for calculating waveform aberrations

- Calculate the $x1\%$ and $x2\%$ *reference levels* as described in 5.3.3. Typically used *reference levels* are the 10% and 90% *reference levels*.
- Calculate the *reference level instants*, $t_{x1\%}$ and $t_{x2\%}$, as described in 5.3.4, for the *reference levels* determined in step (a).
- Determine the *pre-transition aberration region* and *post-transition aberration region* as described in 5.3.6 and exclude those regions in the calculation of *waveform aberration*.
- Calculate the parameters for generating the *reference waveform*, $r(t)$. Unless otherwise specified, the trapezoidal *pulse waveform* (see Fig. A.6) will be used as the *reference waveform* for calculating *waveform aberrations*.
 - Calculate the slope through the *reference levels* and *reference level instants* of the *waveform* using:

$$S = \left(\frac{y_{x2\%} - y_{x1\%}}{t_{x2\%} - t_{x1\%}} \right).$$

- Calculate the *reference level instants*, $t_0\%$ and $t_{100\%}$, that will be used to generate $r(t)$ in step (e).
 - The *reference levels* and their associated *reference level instants* of the *reference waveform* should be chosen such that the slope of the line through these points is a close fit to the corresponding *waveform* values.
 - Compute the $t_{100\%}$ *reference level instant* using:

$$t_{100\%} = t_{x2\%} + \frac{\text{level}(s_2) - y_{x2\%}}{S}$$

iii) Compute the t_0 % *reference level instant* using:

$$t_{0\%} = t_{x1\%} + \frac{\text{level}(s_1) - y_{x1\%}}{S}$$

e) Generate the trapezoidal *reference waveform*, $r(t)$, using:

$$r(t_n) = \begin{cases} y_{0\%}, & \text{for } t_{0\%} \\ S(t_n - t_{0\%}) + y_{0\%}, & \text{for } t_{0\%} \leq t_n \leq t_{100\%} \\ y_{100\%}, & \text{for } t_n > t_{100\%} \end{cases}$$

f) The *waveform aberrations* are calculated as the maximum positive and negative deviation of the measured *waveform* from the *reference waveform* and are presented as a percentage of the *waveform amplitude*. Calculate *waveform aberration* using:

$$W_a = \begin{cases} \left(\frac{\max\{y_n - r(t_n)\}_{T_{ab}}}{y_{100\%} - y_{0\%}} \right) 100\% \\ \left(\frac{\min\{y_n - r(t_n)\}_{T_{ab}}}{y_{100\%} - y_{0\%}} \right) 100\% \end{cases}, \quad (12)$$

where

W_a is the *waveform aberration*,

$\max\{\dots\}$ return the maximum value of its argument,

$\min\{\dots\}$ returns the minimum value of its argument,

$y_{100\%}$ is the value of the 100 % *reference level*,

$y_{0\%}$ is the value of the 0 % *reference level*,

$r(t_n)$ is the *reference waveform*,

n is the discrete time index of the *waveform*,

T_{ab} is the *interval* over which the *waveform aberration* is being calculated.

5.3.8 Algorithm for calculating transition settling duration

- a) Calculate the 50 % *reference level*, as described in 5.3.3.
- b) Calculate the 50 % *reference level instant* as described in 5.3.4.
- c) Specify the *state boundaries* of the specified *state* (usually state 2).
- d) Determine the *instant* at which the *waveform* enters and subsequently remains within the specified *state boundary*.
 - 1) Starting at the end of the waveform epoch, check each waveform value against the specified state boundaries.
 - 2) Record the sampling instant of the first waveform value encountered that is found outside the state boundary.
 - 3) Calculate the instant that the waveform crosses the state boundary using the method described in 5.3.4.
 - 4) Calculate the transition settling duration by finding the difference between the instant determined in step (d)3) and the 50 % reference level instant determined in step (a).