IEC 60539-1

Edition 2.0 2008-02

INTERNATIONAL STANDARD

QC 430 000

Directly heated negative temperature coefficient thermistors – Part 1: Generic specification

withdrawn

IEC 60539-1:2008(E)

Documents
Document Sharing Hub

Full document details: IEC 60539-1 2008

THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2008 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub
The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,…). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub
Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org
The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv
If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

withdrawn

Documents
Document Sharing Hub

Full document details: IEC 60539-1 2008

IEC 60539-1

Edition 2.0 2008-02

INTERNATIONAL STANDARD

QC 430 000

Directly heated negative temperature coefficient thermistors – Part 1: Generic specification

withdrawn

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE X

ICS 31.040.30

ISBN 2-8318-9584-7

Documents
Document Sharing Hub

Full document details: IEC 60539-1 2008

CONTENTS

FOREWORD 4

1 General 6
1.1 Scope 6
1.2 Normative references 6
2 Technical data 8
2.1 Units, symbols and terminology 8
2.2 Terms and definitions 8
2.3 Preferred values 16
2.4 Marking 16
3 Quality assessment procedures 17
3.1 General 17
3.2 Primary stage of manufacture 17
3.3 Structurally similar components 17
3.4 Qualification approval procedures 18
3.5 Quality conformance inspection 18
3.6 Certified test records of released lots 18
3.7 Delayed delivery 19
3.8 Release for delivery under qualification approval before the completion of group B tests 19
3.9 Alternative test methods 19
3.10 Unchecked parameters 19
4 Test and measurement procedures 19
4.1 General 19
4.2 Standard atmospheric conditions for testing 19
4.3 Drying and recovery 20
4.4 Mounting (for surface mount thermistors only) 20
4.5 Visual examination and check of dimensions 21
4.6 Zero-power resistance 22
4.7 B-value or resistance ratio 22
4.8 Insulation resistance (for insulated types only) 23
4.9 Voltage proof (for insulated types only) 26
4.10 Resistance/temperature characteristic 26
4.11 Dissipation factor (δ) 26
4.12 Thermal time constant by ambient temperature change (τ_a) 28
4.13 Thermal time constant by cooling after self-heating (τ_C) 28
4.14 Robustness of terminations (not applicable to surface mount thermistors) 29
4.15 Resistance to soldering heat 30
4.16 Solderability 31
4.17 Rapid change of temperature 32
4.18 Vibration 32
4.19 Bump 33
4.20 Shock 33
4.21 Free fall (if specified in the detail specification) 33

Withdrawn
AVA Documents
Document Sharing Hub
Full document details: IEC 60539-1 2008

4.22 Thermal shock (if specified in the detail specification) 34
4.23 Cold (if required by the sectional specification) 34
4.24 Dry heat (if required by the sectional specification) 34
4.25 Damp heat, steady state 35
4.26 Endurance 35
4.27 Shear (adhesion) test 40
4.28 Substrate bending test 40
4.29 Component solvent resistance 41
4.30 Solvent resistance of marking 41
4.31 Salt mist (if required by the sectional specification) 41
4.32 Sealing (if required by the sectional specification) 41
4.33 Composite temperature/humidity cycle (if required by the sectional specification) 41

Annex A (normative) Interpretation of sampling plans and procedures as described in IEC 60410 for use within the IEC quality assessment system for electronic components (IECQ) 43
Annex B (normative) Rules for the preparation of detail specifications for capacitors and resistors for electronic equipment 44
Annex C (informative) Typical examples of mountings for measurements of directly heated thermistors 45

Figure 1 – Typical resistance-temperature characteristic for NTC thermistors 10
Figure 2 – Decreased power dissipation curve 12
Figure 3 – Maximum current derating 14
Figure 4 – Zero-power resistance measuring basic circuit 22
Figure 5 – Test method 1 23
Figure 6 – Test method 2 24
Figure 7 – Test method 2 24
Figure 8 – Test method 3 25
Figure 9 – Test method 4 25
Figure 10 – Example of test chamber 27
Figure 11 – Dissipation factor measuring circuit 27
Figure 12 – Thermal time constant measuring circuit 29
Figure 13 – Endurance at room temperature with $I_{max.25}$ evaluating circuit 36
Figure 14 – Maximum permissible capacitance test circuit (method 1) 39
Figure 15 – Maximum permissible capacitance test circuit (method 2) 39
Figure C.1 – Mounting for measurements of surface mount thermistors 45

Table 1 – Upper and lower category temperatures and duration of the damp heat test 16
Table 2 – Tensile force 30

Withdrawn

Documents
Document Sharing Hub
Full document details: IEC 60539-1 2008

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIRECTLY HEATED NEGATIVE TEMPERATURE COEFFICIENT THERMISTORS –

Part 1: Generic specification

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60539-1 has been prepared by IEC technical committee 40: Capacitors and resistors for electronic equipment.

This second edition cancels and replaces the first edition published in 2002 and constitutes a minor revision related to tables, figures and references.

The text of this standard is based on the following documents:

FDIS	Report on voting
40/1878A/FDIS	40/1895/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

Withdrawn

AVA Documents
Document Sharing Hub

Full document details: IEC 60539-1 2008

The QC number that appears on the front cover of the publication is the specification number in the IEC Quality Assessment System for Electronic Components (IECQ).

IEC 60539 consists of the following parts, under the general title *Directly heated negative temperature coefficient thermistors:*

Part 1: Generic specification

Part 2: Sectional specification: Surface mount negative temperature coefficient thermistors

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

withdrawn

Documents
Document Sharing Hub

Full document details: IEC 60539-1 2008

DIRECTLY HEATED NEGATIVE TEMPERATURE COEFFICIENT THERMISTORS –

Part 1: Generic specification

1 General

1.1 Scope

This part of IEC 60539 is applicable to directly heated negative temperature coefficient thermistors, typically made from transition metal oxide materials with semiconducting properties.

It establishes standard terms, inspection procedures and methods of test for use in sectional and detail specifications of electronic components for quality assessment or any other purpose.

1.2 Normative references

The following referenced documents are indispensable for the application of this document.. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60027-1, *Letter symbols to be used in electrical technology – Part 1: General*

IEC 60050, *International Electrotechnical Vocabulary (IEV)*

IEC 60062, *Marking codes for resistors and capacitors*

IEC 60068-1:1988, *Environmental testing – Part 1: General and guidance*
Amendment 1 (1992)

IEC 60068-2-1:2007, *Environmental testing – Part 2-1: Tests – Tests A: Cold*

IEC 60068-2-2:2007, *Environmental testing – Part 2-2: Tests – Tests B: Dry heat*

IEC 60068-2-6:1995, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-11:1981, *Environmental testing – Part 2-11: Tests – Test Ka: Salt mist*

IEC 60068-2-14:1984, *Environmental testing – Part 2-14: Tests – Test N: Change of temperature*

Amendment 1 (1986)

IEC 60068-2-17:1994, *Environmental testing – Part 2-17: Tests – Test Q: Sealing*

IEC 60068-2-20:1979, *Environmental testing – Part 2-20: Tests – Test T: Soldering*
Amendment 2 (1987)

IEC 60068-2-21:2006, *Environmental testing – Part 2-21: Tests – Test U: Robustness of terminations and integral mounting devices*

Withdrawn

AVA Documents Document Sharing Hub

Full document details: IEC 60539-1 2008

IEC 60068-2-27:1987, *Environmental testing – Part 2-27: Tests – Test Ea and guidance: Shock*

IEC 60068-2-29:1987, *Environmental testing – Part 2-29: Tests – Test Eb and guidance: Bump*

IEC 60068-2-32:1975, *Environmental testing – Part 2-32: Tests – Test Ed: Free fall*
Amendment 2 (1990)

IEC 60068-2-38:1974, *Environmental testing – Part 2-38: Tests – Test Z/AD: Composite temperature/humidity cyclic test*

IEC 60068-2-45:1980, *Environmental testing – Part 2-45: Tests – Test XA and guidance: Immersion in cleaning solvents*
Amendment 1 (1993)

IEC 60068-2-52:1996, *Environmental testing – Part 2-52: Tests – Test Kb: Salt mist, cyclic (sodium chloride solution)*

IEC 60068-2-54:2006, *Environmental testing – Part 2-54: Tests – Test Ta: Solderability testing of electronic components by the wetting balance method*

IEC 60068-2-58:2004, *Environmental testing – Part 2-58: Tests – Test Td: Test methods for solderability, resistance to dissolution of metallization and to soldering heat of surface mounting devices (SMD)*

IEC 60068-2-69:2007, *Environmental testing – Part 2-69: Tests – Test Te: Solderability testing of electronic components for surface mounting devices (SMD) by the wetting balance method*

IEC 60068-2-78:2001, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC 60294, *Measurement of the dimensions of a cylindrical component having two axial terminations*

IEC 60410, *Sampling plans and procedures for inspection by attributes*

IEC 60617, *Graphical symbols for diagrams*

IEC 60717, *Method for the determination of the space required by capacitors and resistors with unidirectional terminations*

IEC 61249-2-7, *Materials for printed boards and other interconnecting structures – Part 2-7: Reinforced base materials clad and unclad – Epoxide woven E-glass laminated sheet of defined flammability (vertical burning test), copper-clad*

IECQ 001002-3, *IEC Quality Assessment System for Electronic Components (IECQ) – Rules of procedure – Part 3: Approval procedures*

ISO 1000, *SI units and recommendations for the use of their multiples and of certain other units*

Withdrawn

AVA Documents
Document Sharing Hub

Full document details: IEC 60539-1 2008

2 Technical data

2.1 Units, symbols and terminology

Units, graphical symbols, letter symbols and terminology should, whenever possible, be taken from the following publications:

– IEC 60027-1
– IEC 60050
– IEC 60617
– ISO 1000

When further items are required, they should be derived in accordance with the principles of the publications listed above.

2.2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.2.1
type
products having similar design features manufactured by the same techniques and falling within the manufacturer's usual range of ratings for these products

NOTE 1 Mounting accessories are ignored, provided they have no significant effect on the test results.

NOTE 2 Ratings cover the combination of

– electrical ratings;

– sizes;

– climatic category.

NOTE 3 The limits of the range of ratings should be given in the detail specification.

2.2.2
style
variation within a type having specific nominal dimensions and characteristics

2.2.3
thermistor
thermally sensitive semiconducting resistor whose primary function is to exhibit an important change in electrical resistance with a change in body temperature

2.2.4
negative temperature coefficient thermistor (NTC)
thermistor in which the resistance decreases with increasing temperature

2.2.5
directly heated negative temperature coefficient thermistor
thermistor which obtains its resistance variation by the changes of physical conditions such as current through it, ambient temperature, humidity, wind velocity, gas, etc.

2.2.6
indirectly heated negative temperature coefficient thermistor
thermistor which obtains its resistance variation primarily by the change of temperature of the thermistor, due to the change of a current through a separate heater which is in close contact with, but electrically insulated from, the thermistor element

NOTE The temperature of the thermistor can also be changed by the changes of physical conditions such as current through the thermistor element itself, ambient temperature, humidity, wind velocity, gas, etc.

Withdrawn
AVA Documents Document Sharing Hub
Full document details: IEC 60539-1 2008

2.2.7
positive temperature coefficient (PTC) thermistor (for information only)
thermistor in which the resistance increases with increasing temperature

2.2.8
thermistor with wire terminations
thermistor provided with wire terminations

2.2.9
thermistor without wire terminations
thermistor provided only with two metallized faces, to be used as electrical contacts

2.2.10
insulated thermistor
thermistor coated with materials such as resin, glass or ceramic, capable of meeting the requirements of the insulation resistance and voltage proof tests when specified in the test schedule

2.2.11
non-insulated thermistor
thermistor with or without coating materials for surfacing of elements but not intended to meet the requirements of the insulation resistance and voltage proof tests when specified in the test schedule

2.2.12
surface mount thermistor
thermistor whose small dimensions and nature or shape of terminations make them suitable for use in hybrid circuits and on printed board

2.2.13
assembled thermistor (probe)
thermistor encapsulated in different materials such as tubes, plastic and metal housing and/or assembled with cables and/or connectors

2.2.14
thermistor for sensing
thermistor which responds to temperature changes and therefore is used for temperature sensing and control

2.2.15
inrush current limiting thermistor
thermistor which limits the inrush current just after switching on the power

2.2.16
residual resistance (only for inrush current-limiting thermistors)
value of the d.c. resistance of a thermistor when its thermal stability is reached with the maximum current passing

2.2.17
maximum permissible capacitance (only for inrush current-limiting thermistors)
maximum permissible capacitance value of a capacitor which can be connected to a thermistor under loading

2.2.18
zero-power resistance, R_T
value of the d.c. resistance of a thermistor, when measured at a specified temperature, under such conditions that the change in resistance due to the internal generation of heat is negligible with respect to the total error of measurement

Withdrawn

AVA Documents
Document Sharing Hub

Full document details: IEC 60539-1 2008

2.2.19
rated zero-power resistance
nominal value at the standard reference temperature of 25 °C, unless otherwise specified

2.2.20
resistance-temperature characteristic
relationship between the zero-power resistance and the body temperature of a thermistor

The resistance law follows approximately the formula:

$$R = R_a \times e^{B\left(\frac{1}{T} - \frac{1}{T_a}\right)}$$

where

R is the zero-power resistance in ohms (Ω) at absolute temperature T in kelvins (K);

R_a is the zero-power resistance in ohms (Ω) at absolute temperature T_a in kelvins (K);

B is the thermal sensitivity index (see 2.2.22).

NOTE This formula is only applicable for representing the resistance variation over a restricted temperature range. For more precise representation of the R/T-curve, a resistance/temperature relation should be specified in tabulated form in the detail specification.

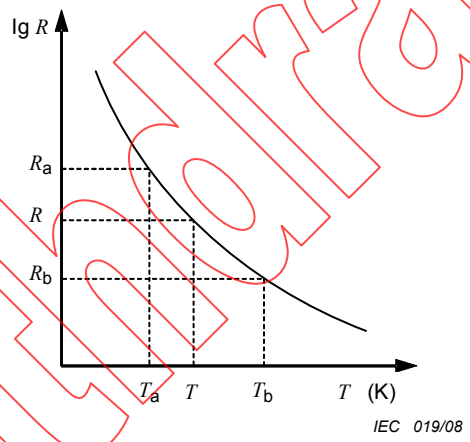

Figure 1 – Typical resistance-temperature characteristic for NTC thermistors

2.2.21
resistance ratio
ratio of the zero-power resistance of a thermistor measured at the reference temperature of 25 °C to that measured at 85 °C, or at such other pairs of temperatures as may be prescribed in the detail specification

2.2.22
***B*-value**
index of the thermal sensitivity expressed by the formula:

$$B = [(T_a \times T_b)/(T_b - T_a)] \times \ln(R_a/R_b)$$

or

$$B = 2{,}303 \times [(T_a \times T_b)/(T_b - T_a)] \times \log(R_a/R_b)$$

where

B is a constant in kelvins (K);

R_a is the zero-power resistance in ohms (Ω) at temperature T_a in kelvins (K);

Withdrawn
Documents
Document Sharing Hub
Full document details: IEC 60539-1 2008

R_b is the zero-power resistance in ohms (Ω) at temperature T_b in kelvins (K);

T_a = 298,15 K *;

T_b = 358,15 K *.

* The values given above for T_a and T_b are the preferred values and are equivalent to +25 °C and +85 °C respectively.

NOTE Where the detail specification prescribes that the B-value should be measured at other temperatures, the specified values (in kelvins) shall be used for T_a and T_b in the calculation in place of the preferred values and the B-value may be expressed by "$B_{a/b}$".

2.2.23
zero-power temperature coefficient of resistance, α_T
ratio at a specified temperature (T) of the rate of change of zero-power resistance with temperature to the zero-power resistance of the thermistor, expressed by the formula:

$$\alpha_T = (1/R_T) \times (dR_T/dT) \times 100$$

The value α_T can be approximately calculated by the formula:

$$\alpha_T = (-B/T^2) \times 100$$

where

α_T is the zero-power temperature coefficient of resistance in %/K;

R_T is the zero-power resistance in ohms at temperature T in kelvins (K);

B is the index of the thermal sensitivity in kelvins (K).

2.2.24
category temperature range
range of ambient temperatures for which the thermistor has been designed to operate continuously at zero-power, defined by the temperature limits of the appropriate category

2.2.25
upper category temperature, θ_{max}
maximum ambient temperature for which a thermistor has been designed to operate continuously at zero-power

2.2.26
lower category temperature, θ_{min}
minimum ambient temperature for which a thermistor has been designed to operate continuously at zero-power

2.2.27
storage temperature range
range of ambient temperatures for which a thermistor can be stored continuously under no-load condition

2.2.28
decreased power dissipation curve (not for inrush current-limiting thermistors)
relation between the ambient temperature and the maximum power dissipation $P_{max\theta}$, which is usually expressed as curve a or, alternatively, as curve b in Figure 2

Withdrawn

Documents
Document Sharing Hub
Full document details: IEC 60539-1 2008

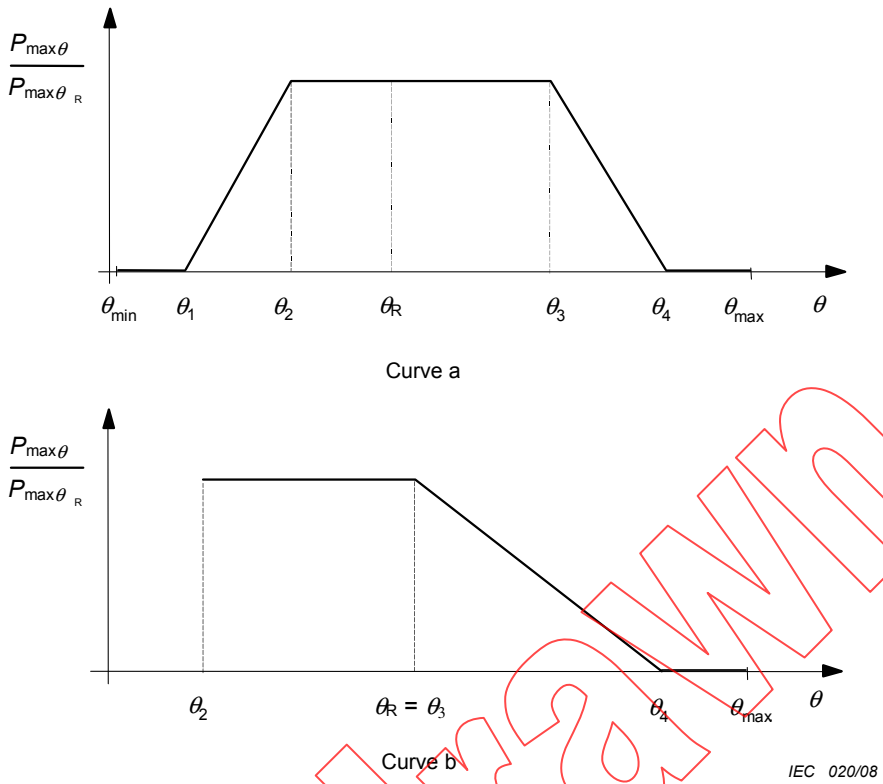

Figure 2 – Decreased power dissipation curve

2.2.29

maximum power dissipation at rated ambient temperature θ_R ($P_{max\theta_R}$)

maximum value of the power dissipation which can be continuously applied to the thermistor at the rated ambient temperature θ_R.

NOTE See curve a, $\theta 2 \leq \theta R \leq \theta 3$ or curve b, $\theta 2 \leq \theta R = \theta 3$ in Figure 2.

The rated ambient temperature θ_R is the ambient temperature specified in the detail specification and is usually 25 °C.

2.2.30

maximum power dissipation at ambient temperature θ ($P_{max\theta}$)

maximum value of the power dissipation which can be continuously applied to the thermistor at an ambient temperature θ

Curve a

The maximum power dissipation rises at a temperature θ_1 linearly to a temperature θ_2. Between temperature θ_2 and θ_3 the power dissipation is constant. When the temperature exceeds θ_3, the power dissipation must be decreased linearly to zero at a temperature θ_4

The maximum power dissipation at ambient temperature θ in general is calculated as follows:

$$P_{max\theta} = I_{max\theta} \times U$$

where U is the voltage across the thermistor (for $I_{max\theta}$, see 2.2.32).

The maximum power dissipation can be expressed by the following formula:

Withdrawn

Documents
Document Sharing Hub
Full document details: IEC 60539-1 2008

$\theta_1 \leq \theta \leq \theta_2$: $$P_{\max.\theta} = P_{\max.\theta_R} \times \frac{\theta - \theta_1}{\theta_2 - \theta_1}$$

$\theta_3 \leq \theta \leq \theta_4$: $$P_{\max.\theta} = P_{\max.\theta_R} \times \frac{\theta_4 - \theta}{\theta_4 - \theta_3}$$

where

θ_R is the rated ambient temperature in Celsius (°C);

θ_1 is the temperature in Celsius (°C) specified in the detail specification below which zero-power shall be applied. θ_1 is equal to the lower category temperature $\theta_{\min.}$(°C) or higher;

θ_2 is the lowest temperature at which $P_{\max.\theta}$ can be applied. θ_2 = 0 °C, unless otherwise specified in the detail specification;

θ_3 is the maximum temperature at which $P_{\max.\theta}$ can be applied. θ_3 = 55 °C, unless otherwise specified in the detail specification;

θ_4 is the temperature in Celsius (°C) specified in the detail specification, above which zero-power shall be applied. θ_4 is equal to, or lower than, the upper category temperature $\theta_{\max}$ (°C).

Curve b

The maximum power dissipation is constant between temperature θ_2 and θ_R. θ_2 = 0 °C, unless otherwise specified in the detail specification. When the temperature exceeds θ_R, the power dissipation must be decreased linearly to zero at a temperature θ_4.

The maximum power dissipation at ambient temperature θ in general is calculated as follows:

$$P_{\max\theta} = I_{\max\theta} \times U$$

where U is the voltage across the thermistor (for $I_{\max.\theta}$, see 2.2.32).

The maximum power dissipation can be expressed by the following formula:

$\theta_R \leq \theta \leq \theta_4$: $$P_{\max\theta} = P_{\max\theta_R} \times \frac{\theta_4 - \theta}{\theta_4 - \theta_R}$$

where

θ_R is the rated ambient temperature in Celsius (°C). θ_R = 25 °C, unless otherwise specified in the detail specification;

θ_4 is the temperature in Celsius (°C) specified in the detail specification, above which zero-power shall be applied. θ_4 is equal to, or lower than the upper category temperature $\theta_{\max}$ (°C).

2.2.31

maximum current at ambient temperature of 25 °C ($I_{\max 25}$) (for inrush current-limiting thermistors)

maximum value of current (d.c. or r.m.s. values for sine-shaped a.c.) which can be continuously applied to the thermistor at an ambient temperature of 25 °C.

NOTE 1 See curve c, $\theta_2 \leq$ 25 °C $\leq \theta_3$ or curve d, $\theta_2 \leq \theta_R = \theta_3$ in Figure 3.

NOTE 2 The maximum power dissipation at ambient temperature of 25 °C ($P_{\max 25}$) is calculated by $P_{\max 25} = I_{\max 25} \times U$, where U is the voltage drop across the thermistor.

Withdrawn

Documents
Document Sharing Hub

Full document details: IEC 60539-1 2008