IEC 61753-088-2

Edition 1.0 2013-03

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Fibre optic interconnecting devices and passive components – Performance standard –
Part 088-2: Non-connectorized single-mode fibre optic LAN WDM devices with channel spacing of 800 GHz for category C – Controlled environments

Dispositifs d'interconnexion et composants passifs à fibres optiques – Norme de performance –
Partie 088-2: Dispositifs LAN WDM à fibres optiques unimodales, non connectorisés, avec un espacement entre canaux de 800 GHz, pour catégorie C – Environnements contrôlés

IEC 61753-088-2:2013

Documents
Document Sharing Hub

Full document details: IEC 61753-088-2 2013

THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.
If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.
Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,…).
It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,…).
Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

Documents
Document Sharing Hub

Full document details: IEC 61753-088-2 2013

IEC 61753-088-2

Edition 1.0 2013-03

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Fibre optic interconnecting devices and passive components – Performance standard –
Part 088-2: Non-connectorized single-mode fibre optic LAN WDM devices with channel spacing of 800 GHz for category C – Controlled environments

Dispositifs d'interconnexion et composants passifs à fibres optiques – Norme de performance –
Partie 088-2: Dispositifs LAN WDM à fibres optiques unimodales, non connectorisés, avec un espacement entre canaux de 800 GHz, pour catégorie C – Environnements contrôlés

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX T

ICS 33.180.20

ISBN 978-2-83220-653-9

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

AVA Documents
Document Sharing Hub

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

Full document details: IEC 61753-088-2 2013

CONTENTS

FOREWORD 4
1 Scope 6
2 Normative references 6
3 Terms and definitions 7
4 Test conditions 8
5 Test report 8
6 Reference components 9
7 Performance requirements 9
7.1 Channel requirements 9
7.2 Dimensions 9
7.3 Test details and requirements 9
Annex A (normative) Sample size 15
Annex B (informative) Logarithmic transfer matrix for an integrated 1 × 4 LAN WDM device 16
Annex C (informative) Logarithmic transfer matrix for an individual 1 × 2 LAN WDM device 18
Annex D (informative) General information for applications of integrated 1 × 4 LAN WDM devices 22
Annex E (informative) General information for internal configurations of integrated 1 × 4 LAN WDM devices 23
Bibliography 25

Figure 1 – Configuration of integrated 1 × 4 LAN WDM device 8
Figure 2 – Configuration of individual 1 × 2 LAN WDM device 8
Figure D.1 – Block diagram for 100GBASE-LR4 and 100GBASE-ER4 transmit/receive paths 22
Figure E.1 – Configuration example of serial-type integrated 1 × 4 LAN WDM device (DEMUX) 23
Figure E.2 – Configuration example of serial-type integrated 1 × 4 LAN WDM device (MUX) 23
Figure E.3 – Configuration example of tree-type integrated 1 × 4 LAN WDM device (MUX/DEMUX) 24

Table 1 – Channel requirements 9
Table 2 – Test details and requirements 10
Table A.1 – Number of samples for each test 15
Table B.1 – Logarithmic transfer matrix for channel 1: Frequency range of 231,584 – 231,216 THz (≈1 294,53 – 1 296,59 nm) 16
Table B.2 – Logarithmic transfer matrix for channel 2: Frequency range of 230,784 – 230,416 THz (≈1 299,02 – 1 301,09 nm) 16
Table B.3 – Logarithmic transfer matrix for channel 3: Frequency range of 229,984 – 229,616 THz (≈1 303,54 – 1 305,63 nm) 16
Table B.4 – Logarithmic transfer matrix for channel 4: Frequency range of 229,184 – 228,816 THz (≈1 308,09 – 1 310,19 nm) 17

AVA Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

Table C.1 – Logarithmic transfer matrix for channel 1: Frequency range of 231,584 – 231,216 THz (≈1 294,53 – 1 296,59 nm) 18
Table C.2 – Logarithmic transfer matrix for channel 2: Frequency range of 230,784 – 230,416 THz (≈1 299,02 – 1 301,09 nm) 18
Table C.3 – Logarithmic transfer matrix for channel 3: Frequency range of 229,984 – 229,616 THz (≈1 303,54 – 1 305,63 nm) 18
Table C.4 – Logarithmic transfer matrix for channel 4: Frequency range of 229,184 – 228,816 THz (≈1 308,09 – 1 310,19 nm) 18
Table C.5 – Logarithmic transfer matrix for channel 1: Frequency range of 231,584 – 231,216 THz (≈1 294,53 – 1 296,59 nm) 19
Table C.6 – Logarithmic transfer matrix for channel 2: Frequency range of 230,784 – 230,416 THz (≈1 299,02 – 1 301,09 nm) 19
Table C.7 – Logarithmic transfer matrix for channel 3: Frequency range of 229,984 – 229,616 THz (≈1 303,54 – 1 305,63 nm) 19
Table C.8 – Logarithmic transfer matrix for channel 4: Frequency range of 229,184 – 228,816 THz (≈1 308,09 – 1 310,19 nm) 19
Table C.9 – Logarithmic transfer matrix for channel 1: Frequency range of 231,584 – 231,216 THz (≈1 294,53 – 1 296,59 nm) 19
Table C.10 – Logarithmic transfer matrix for channel 2: Frequency range of 230,784 – 230,416 THz (≈1 299,02 – 1 301,09 nm) 20
Table C.11 – Logarithmic transfer matrix for channel 3: Frequency range of 229,984 – 229,616 THz (≈1 303,54 – 1 305,63 nm) 20
Table C.12 – Logarithmic transfer matrix for channel 4: Frequency range of 229,184 – 228,816 THz (≈1 308,09 – 1 310,19 nm) 20
Table C.13 – Logarithmic transfer matrix for channel 1: Frequency range of 231,584 – 231,216 THz (≈1 294,53 – 1 296,59 nm) 20
Table C.14 – Logarithmic transfer matrix for channel 2: Frequency range of 230,784 – 230,416 THz (≈1 299,02 – 1 301,09 nm) 20
Table C.15 – Logarithmic transfer matrix for channel 3: Frequency range of 229,984 – 229,616 THz (≈1 303,54 – 1 305,63 nm) 21
Table C.16 – Logarithmic transfer matrix for channel 4: Frequency range of 229,184 – 228,816 THz (≈1 308,09 – 1 310,19 nm) 21

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – PERFORMANCE STANDARD –

Part 088-2: Non-connectorized single-mode fibre optic LAN WDM devices with channel spacing of 800 GHz for category C – Controlled environments

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61753-088-2 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components of IEC technical committee 86: Fibre optics.

This first edition of IEC 61753-088-2 cancels and replaces IEC/PAS 61753-088-2 published in 2010.

The text of this standard is based on the following documents:

FDIS	Report on voting
86B/3549/FDIS	86B/3591/RVD

Documents
Document Sharing Hub

Full document details: IEC 61753-088-2 2013

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61753 series, published under the general title, *Fibre optic interconnecting devices and passive components performance standard,* can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

Documents
Document Sharing Hub

Full document details: IEC 61753-088-2 2013

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – PERFORMANCE STANDARD –

Part 088-2: Non-connectorized single-mode fibre optic LAN WDM devices with channel spacing of 800 GHz for category C – Controlled environments

1 Scope

This part of IEC 61753 contains the minimum initial test and measurement requirements and severities which a non-connectorized single-mode fibre optic Local Area Network Wavelength Division Multiplexing (LAN WDM) device with channel spacing of 800 GHz needs to satisfy in order to be categorized as meeting the requirements of Category C – Controlled environments, as defined in Annex A of IEC 61753-1:2007. The applications of LAN WDM devices are optical MUX and DEMUX for 100GBASE-LR4 (required operating range of 2 m to 10 km) and 100GBASE-ER4 (required operating range of 2 m to 30 km) defined in IEEE P802.3ba, as shown in Annex D. The requirements cover both an integrated 1×4 LAN WDM device and an individual 1×2 LAN WDM device for cascaded module construction.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-2-50, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*[1]

IEC 61300 (all parts), *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*

IEC 61300-2-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-1: Tests – Vibration (sinusoidal)*

IEC 61300-2-4, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-4: Tests – Fibre/cable retention*

IEC 61300-2-9, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-9: Tests – Shock*

IEC 61300-2-17, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-17: Tests – Cold*

IEC 61300-2-18, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-18: Tests – Dry heat – High temperature endurance*

IEC 61300-2-19, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-19: Tests – Damp heat (steady state)*

[1] A fourth edition is due to be published shortly.

Documents
Document Sharing Hub

Full document details: IEC 61753-088-2 2013

IEC 61300-2-22, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-22: Tests – Change of temperature*

IEC 61300-2-42, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-42: Tests – Static side load for connectors*

IEC 61300-3-7, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-7: Examinations and measurements – Wavelength dependence of attenuation and return loss* of single mode components

IEC 61300-3-20, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-20: Examinations and measurements – Directivity of fibre optic branching devices*

IEC 61300-3-28, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-28: Examinations and measurements – Transient loss*

IEC 61300-3-29, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-29: Examinations and measurements – Measurement techniques for characterizing the amplitude of the spectral transfer function of DWDM components*

IEC 61753-1:2007, *Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standard*

IEC 62074-1, *Fibre optic interconnecting devices and passive components – Fibre optic WDM devices – Part 1: Generic specification*

ITU-T Recommendation G.959.1, *Optical transport network physical layer interfaces*

IEEE P802.3ba, *Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62074-1, as well as the following, apply.

3.1
LAN WDM device
wavelength-selective branching device which performs the function both of wavelength multiplexing and demultiplexing with DWDM channel frequency of 231,4 THz, 230,6 THz, 229,8 THz, and 229,0 THz, where the channel frequency spacing is 800 GHz

3.2
integrated 1 × 4 LAN WDM device
single-mode fibre-pigtailed wavelength-selective branching device as shown in Figure 1. There is 1 common port (P0) and 4 input/output ports (P1-P4) corresponding to the 4 frequency channels

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

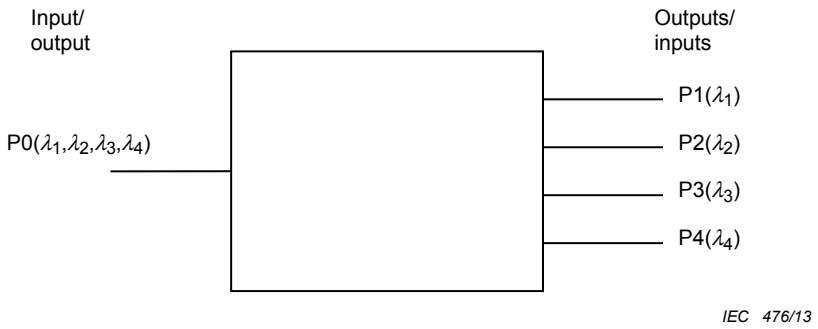

Figure 1 – Configuration of integrated 1 × 4 LAN WDM device

3.3
individual 1 × 2 LAN WDM device
single-mode fibre-pigtailed wavelength-selective branching device as shown in Figure 2. There are 4 types of individual 1 × 2 LAN WDM device, corresponding to the 4 frequency channels. There is 1 common port (P0) and 2 input/output ports (P1, P2). The signal of the corresponding channel frequency passes through between P0 and P1. The signals of non corresponding channel frequencies pass through between P0 and P2.

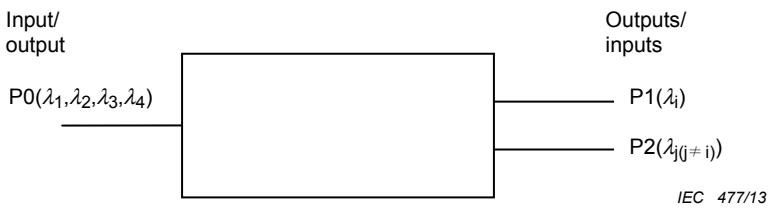

Figure 2 – Configuration of individual 1 × 2 LAN WDM device

4 Test conditions

Unless otherwise specified, all test methods are in accordance with the IEC 61300 series. LAN WDM devices used for each test are intended to be previously unstressed new samples but may also be selected from previously used samples if desired. The samples shall have pigtails of single-mode fibres as per IEC 60793-2-50, category B1.1, B1.3 or B6 in either coated fibres (primary and secondary) or reinforced cable format. All measurements shall be carried out under standard atmospheric conditions, unless otherwise specified. If the device is provided with an active temperature control, this shall be set at the set-point specified by the manufacturer.

The requirements apply to every combination of input and output ports.

All tests are to be carried out to validate performance over the required operating channel frequency range. As a result, single or multiple spectral bands may be chosen for the qualification and differing target specifications may be assigned to each spectral band.

5 Test report

Fully documented test reports and supporting evidence shall be prepared and be available for inspection as evidence that the tests have been carried out and complied with.

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

6 Reference components

The test for these components does not require the use of reference components.

7 Performance requirements

7.1 Channel requirements

Table 1 shows channel requirements (design information) as specified by IEEE P802.3ab and ITU-T Recommendation G.959.1.

Table 1 – Channel requirements

No	Items	Requirements
1	Centre frequency	Channel 1: 231,4 THz (≑ 1 295,56 nm) Channel 2: 230,6 THz (≑ 1 300,05 nm) Channel 3: 229,8 THz (≑ 1 304,58 nm) Channel 4: 229,0 THz (≑ 1 309,14 nm)
2	Channel spacing	800 GHz
3	Channel frequency range	Centre frequency ± 184 GHz Channel 1: 231,584 – 231,216 THz (≑ 1 294,53 – 1 296,59 nm) Channel 2: 230,784 – 230,416 THz (≑ 1 299,02 – 1 301,09 nm) Channel 3: 229,984 – 229,616 THz (≑ 1 303,54 – 1 305,63 nm) Channel 4: 229,184 – 228,816 THz (≑ 1 308,09 – 1 310,19 nm)

7.2 Dimensions

Dimensions shall comply with those given in appropriate manufacturers drawings.

7.3 Test details and requirements

A minimum length of fibre or cable of 2,0 m per port shall be included in all climatic and environmental test chambers. Even though a wavelength range is used instead of the precise required frequency range, the wavelength range required includes the required frequency range.

Documents
Document Sharing Hub

Full document details: IEC 61753-088-2 2013

Table 2 – Test details and requirements *(1 of 5)*

No	Tests	Requirements	Details	
1	Attenuation (insertion loss) IEC 61300-3-29	Maximum allowable attenuation (insertion loss) over the channel frequency range according to Table 1: 2,0 dB (Integrated 1 × 4 LAN WDM device) See Annex B. 0,85 dB for P0-P1 (Individual 1 × 2 LAN WDM device) See Annex C. 0,45 dB for P0-P2 (Individual 1 × 2 LAN WDM device) See Annex C	Method: Launch fibre length: Wavelength scanning range Wavelength resolution Wavelength accuracy Step size	A and B can be applicable ≥ 2,0 m 1 290 – 1 315 nm ≤ 0,05 nm ≤ ± 0,025 nm ≤ 0,025 nm The insertion loss shall be determined as the worst case over all states of polarization. Test results should be obtained under measurement uncertainty of ± 0,05 dB
2	Adjacent: channel isolation IEC 61300-3-29	Minimum allowable adjacent channel isolation over the channel frequency range according to Table 1: 25 dB (Integrated 1 × 4 LAN WDM device) See Annex B. 25 dB for P0-P1 (Individual 1 × 2 LAN WDM device) See Annex C. 14 dB for P0-P2 (Individual 1 × 2 LAN WDM device) See Annex C	Method: Launch fibre length: Wavelength scanning range Wavelength resolution Wavelength accuracy Step size	A and B can be applicable ≥ 2,0 m 1 290 – 1 315 nm ≤ 0,05 nm ≤ ± 0,025 nm ≤ 0,025 nm The adjacent channel isolation is specified only for DEMUX. The adjacent channel isolation shall be determined as the worst case over all states of polarization. Test results should be obtained under measure-ment uncertainty of ± 0,5 dB

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

Table 2 *(2 of 5)*

No	Tests	Requirements	Details	
3	Non-adjacent channel Isolation IEC 61300-3-29	Minimum allowable non-adjacent channel isolation over the channel frequency range according to Table 1: 35 dB (Integrated 1 × 4 LAN WDM device) See Annex B. 35 dB for P0-P1 (Individual 1 × 2 LAN WDM device) See Annex C. 14 dB for P0-P2 (Individual 1 × 2 LAN WDM device) See Annex C	Method: Launch fibre length: Wavelength scanning range Wavelength resolution Wavelength accuracy Step size	A and B can be applicable ≥ 2,0 m 1 290 – 1 315 nm ≤ 0,05 nm ≤ ± 0,025 nm ≤ 0,025 nm The non-adjacent channel isolation is specified only for DEMUX. The non-adjacent channel isolation shall be determined as the worst case over all states of polarization. Test results should be obtained under measurement uncertainty of ± 0,5 dB
4	Return loss IEC 61300-3-7	Minimum allowable return loss over the channel frequency range according to Table 1: 40 dB Grade R	Method: Launch fibre length	A, B, C and D can be applicable. ≥ 2,0 m Test results should be obtained under measurement uncertainty of ± 1 dB. All ports not under test shall be terminated to avoid unwanted reflections contributing to the measurement
5	Directivity IEC 61300-3-20	Maximum allowable directivity over the channel frequency range according to Table 1: 50 dB Grade U	Launch fibre length: Source:	≥ 2,0 m Laser diode Test results should be obtained under measurement uncertainty of ± 1 dB. All ports not under test shall be terminated to avoid unwanted reflections contributing to the measurement. The directivity shall be measured between any pair of input or output ports

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

Table 2 *(3 of 5)*

N°	Tests	Requirements	Details	
6	Polarization dependent loss (PDL) IEC 61300-3-29	Maximum allowable PDL over the channel frequency range according to Table 1: 0,5 dB for 1 x 4 0,2 dB for 1 x 2	Method: Launch fibre length: Wavelength scanning range: Wavelength resolution: Wavelength accuracy: Step size	A and B can be applicable ≥ 2,0 m 1 290 – 1 315 nm ≤ 0,05 nm ≤ ± 0,025 nm ≤ 0,025 nm Test results should be obtained under measurement uncertainty of ± 0,05 dB
7	Optical power handling IEC 61300-2-14	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. During the test, the insertion loss change is monitored. During and after the test, the insertion loss change shall be within ± 0,3 dB of the initial value.	Method: Input power for short-term test: Duration of the optical power exposure: Temperature: Note:	2 200 mW, 400 mW, 600 mW, 800 mW, (continuing in increments of 200 mW) 500 h (long-term test) 60 °C ± 2 °C Input power for the long-term test is determined by he short-term test. Test results should be obtained under attenuation measurement uncertainty of less than ± 0,05 dB. Test results should be obtained under return loss measurement uncertainty of less than ± 1 dB
8	Cold: IEC 613002-17	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. The insertion loss change after the test shall be within ± 0,3 dB of the initial value	Temperature: Duration of exposure:	–10 °C ± 2 °C 96 h

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

Table 2 *(4 of 5)*

No	Tests	Requirements	Details	
9	High temperature endurance IEC 61300-2-18	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. The insertion loss change after the test shall be within ± 0,3 dB of the initial value	Temperature: Duration of exposure	+60 °C ± 2 °C 96 h
10	Damp heat (steady state) IEC 61300-2-19	Before and after the test, the limits of insertion loss, isolation and return loss of test no. 1, 2 and 3 shall be met. During the test, the insertion loss change is monitored. During and after the test, the insertion loss change shall be within ± 0,3 dB of the initial value. During the test, the adjacent and non-adjacent isolation changes are monitored. The sum of the initial values and the changes of the isolations shall be within the value defined at test no. 2 and 3	Temperature: Relative humidity: Duration of exposure	+40°C ± 2 °C 93 $^{+2}_{-3}$ % RH 96 h
11	Change of temperature IEC 61300-2-22	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. During the test, the insertion loss change is monitored. During and after the test, the insertion loss change shall be within ± 0,3 dB of the initial value. During the test, the adjacent and non-adjacent isolation changes are monitored. The sum of the initial values and the changes of the isolations shall be within the value defined at test no. 2 and 3	High temperature: Low temperature: Number of cycles: Duration at extreme temperature: Rate of change: Maximum interval between measurements	+60 °C ± 2 °C –10 °C ± 2 °C 5 60 min 1 °C/min 30 min
12	Vibration IEC 61300-2-1 IEC 61300-3-28	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. During the test, the insertion loss change is monitored. During and after the test, the insertion loss change shall be within ± 0,3 dB of the initial value. During the test, the adjacent and non-adjacent isolation changes are monitored. The sum of the initial values and the changes of the isolations shall be within the value defined at test no. 2 and 3	Frequency range: Number of axes: Number of sweeps: Sweep rate: Amplitude	5 Hz – 55 Hz. 3 orthogonal axes 15/axis 1 octave/min 0,75 mm

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

Table 2 *(5 of 5)*

No	Tests	Requirements	Details	
13	Shock IEC 61300-2-9	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. The insertion loss change after the test shall be within ± 0,3 dB of the initial value.	Acceleration: Duration: Number of axis: Number of shocks:	Components: 5 000 m/s^2 Modules: 0,125 kg < module mass ≤ 0,225 kg: 2 000 m/s^2 0,225 kg < module mass ≤ 1 kg: 500 m/s^2 1 ms, half sine pulse 3 axes in 2 directions 2 shocks per axis, 12 shock in total
14	Optical fibre cable flexing IEC 61300-2-44	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. The insertion loss change after the test shall be within ± 0,3 dB of the initial value	Tensile force: Number of cycles:	2 N for reinforced cable 30 cycles ± 90°
15	Fibre/cable retention IEC 61300-2-4	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. The insertion loss change after the test shall be within ± 0,3 dB of the initial value	Magnitude and rate of application: Duration of the test: Point of application of tensile load: Method of mounting:	(10 ± 1) N at 5 N/s for reinforced cables (5,0 ± 0,5) N at 0,5 N/s for secondary coated fibres (2,0 ± 0,2) N at 0,5 N/s for primary coated fibres 120 s duration at 10 N 60 s duration at 2 N or 5 N 0,3 m from the exit point of the fibre / cable from the specimen. The sample shall be rigidly mounted such that the load is only applied to the fibre/cable retention mechanism
16	Static side load IEC 61300-2-42	Before and after the test, the limits of insertion loss, adjacent channel isolation, non-adjacent channel isolation and return loss of test no. 1, 2, 3 and 4 shall be met. The insertion loss change after the test shall be within ± 0,3 dB of the initial value	Magnitude and duration of the tensile load: Direction of application:	1 N for 1 h for reinforced cable 0,2 N for 5 min for secondary coated fibres Two mutually perpendicular directions

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013

Annex A
(normative)

Sample size

The number of samples to be evaluated for each test is defined in the sample size column in the following Table A.1.

Table A.1 – Number of samples for each test

No	Tests	Sample size
1	Attenuation (insertion loss)	12
2	Adjacent channel isolation	12
3	Non-adjacent channel Isolation	12
4	Return loss	12
5	Directivity	12
6	Polarisation dependent loss (PDL)	12
7	Optical power handling	6
8	Cold	6
9	High temperature endurance	6
10	Damp heat (steady state)	6
11	Change of temperature	6
12	Vibration (sinusoidal)	6
13	Shock	6
14	Optical fibre cable flexing	6
15	Fibre/cable retention	6
16	Static side load	6

Documents
Document Sharing Hub
Full document details: IEC 61753-088-2 2013