

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Fibre optic interconnecting devices and passive components – Fibre optic
connector interfaces –
Part 4: Type SC connector family**

**Dispositifs d'interconnexion et composants passifs fibroniques – Interfaces de
connecteurs fibroniques –
Partie 4: Famille de connecteurs de type SC**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Fibre optic interconnecting devices and passive components – Fibre optic
connector interfaces –
Part 4: Type SC connector family**

**Dispositifs d'interconnexion et composants passifs fibroniques – Interfaces de
connecteurs fibroniques –
Partie 4: Famille de connecteurs de type SC**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.20

ISBN 978-2-8322-1077-6

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	6
3 Terms and definitions	6
4 Description	6
5 Interfaces	7
Annex A (informative) Panel dimensions	35
A.1 General	35
A.2 Simplex adaptor	35
A.3 Duplex adaptor	35
Bibliography	37
Figure 1 – Simplex PC plug connector interface	8
Figure 2 – Simplex adaptor connector interface	11
Figure 3 – Pin gauge for adaptor	12
Figure 4 – Duplex PC plug connector interface	13
Figure 5 – Duplex adaptor connector interface	16
Figure 6 – Simplex angled PC plug connector interface	18
Figure 7 – Duplex angled PC plug connector interface	20
Figure 8 – Simplex active device receptacle interface for angled PC connector plug	23
Figure 9 – Simplex active device receptacle interface for PC connector plug	26
Figure 10 – Duplex active device receptacle interface for angled PC connector plug	29
Figure 11 – Duplex active device receptacle interface for PC connector plug	32
Figure A.1 – Panel cut out	35
Figure A.2 – Fixture cut out	35
Table 1 – Interfaces	7
Table 2 – Intermateability of interfaces	7
Table 3 – Dimensions of the simplex PC plug connector interface	9
Table 4 – Grade characteristics for simplex PC plug connector	10
Table 5 – Dimensions of the simplex adaptor connector interface	11
Table 6 – Grade characteristics for simplex adaptor connector	12
Table 7 – Pin gauge dimensions	12
Table 8 – Dimensions of the duplex PC plug connector interface	14
Table 9 – Grade characteristics for duplex PC plug connector	15
Table 10 – Dimensions of the duplex adaptor connector interface	17
Table 11 – Grade of the duplex adaptor connector	17
Table 12 – Dimensions of the simplex angled PC plug connector interfaces	19
Table 13 – Dimensions of the duplex angled PC plug connector interfaces	21
Table 14 – Dimensions of the simplex active device receptacle interface for angled PC connector plug	24

Table 15 – Alignment feature grade of the simplex active device receptacle interface for angled PC connector plug.....	25
Table 16 – Mechanical stop feature grade of the simplex active device receptacle interface for angled PC connector plug	25
Table 17 – Dimensions of the simplex active device receptacle interface for PC connector plug	27
Table 18 – Alignment feature grade of the simplex active device receptacle interface for PC connector plug	28
Table 19 – Mechanical stop feature grade of the simplex active device receptacle interface for PC connector plug.....	28
Table 20 – Dimensions of the duplex active device receptacle interface for angled PC connector plug	30
Table 21 – Alignment feature grade of the duplex active device receptacle interface for angled PC connector plug	31
Table 22 – Mechanical stop feature grade of the duplex active device receptacle interface for angled PC connector plug	31
Table 23 – Dimensions of the duplex active device receptacle interface for PC connector plug	33
Table 24 – Alignment feature grade of the duplex active device receptacle interface for PC connector plug	34
Table 25 – Mechanical stop feature grade of the duplex active device receptacle interface for PC connector plug.....	34
Table A.1 – Dimensions for simplex adaptor	35
Table A.2 – Dimensions for duplex adaptor.....	36

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING
DEVICES AND PASSIVE COMPONENTS –
FIBRE OPTIC CONNECTOR INTERFACES –****Part 4: Type SC connector family****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61754-4 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics. It is an International Standard.

This third edition cancels and replaces the second edition published in 2013 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) the test method IEC 61300-3-22 for the compression force of the ferrule was added;
- b) Annex A (informative) with cut out dimension requirements for testing the strength of mounted adaptors was added.

The text of this International Standard is based on the following documents:

Draft	Report on voting
86B/4563/FDIS	86B/4584/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts of the IEC 61754 series, under the general title *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces*, can be found on the IEC website.

Future standards in this series will carry the new general title as cited above. Titles of existing standards in this series will be updated at the time of the next edition.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – FIBRE OPTIC CONNECTOR INTERFACES –

Part 4: Type SC connector family

1 Scope

This part of IEC 61754 specifies the standard interface dimensions for type SC family of connectors.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61300-3-22, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-22: Examinations and measurements – Ferrule compression force*

IEC 61754-1, *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces – Part 1: General and guidance*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61754-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Description

The parent connector for the type SC connector family is a single position plug connector characterized by a 2,5 mm nominal ferrule diameter. It includes a push-pull coupling mechanism which is spring loaded relative to the ferrule in the direction of the optical axis. The plug has a single male key which may be used to orient and limit the relative position between the connector and the component to which it is mated. The optical alignment mechanism of the connector is of a sleeve style.

This document defines the standard interface dimensions of active device receptacles for the type SC connectors. The receptacles are used to retain the connector plug and mechanically maintain the optical datum target of the plugs at a defined position within the receptacle housings.

5 Interfaces

This document contains the standard interfaces showed in Table 1.

Table 1 – Interfaces

Interface IEC 61754-4-1	Simplex plug connector interface – push/pull, physical contact (PC)
Interface IEC 61754-4-2	Simplex adaptor connector interface – push/pull
Interface IEC 61754-4-3	Duplex plug connector interface – push/pull, PC
Interface IEC 61754-4-4	Duplex adaptor connector interface – push/pull
Interface IEC 61754-4-5	Simplex plug connector interface – push/pull, angled PC (APC) 8°
Interface IEC 61754-4-6	Duplex plug connector interface – push/pull, APC 8°
Interface IEC 61754-4-X1	Simplex active device receptacle interface – for APC 8° connector plug
Interface IEC 61754-4-X2	Simplex active device receptacle interface – for PC connector plug
Interface IEC 61754-4-X3	Duplex active device receptacle interface – for APC 8° connector plug
Interface IEC 61754-4-X4	Duplex active device receptacle interface – for PC connector plug

Table 2 shows the intermateability of interfaces.

Table 2 – Intermateability of interfaces

Plugs	Adaptors/active device receptacles					
	61754-4-2	61754-4-4	61754-4-X1	61754-4-X2	61754-4-X3	61754-4-X4
61754-4-1	Mate	Mate	Not mate	Mate	Not mate	Mate
61754-4-3	Not mate	Mate	Not mate	Not mate	Not mate	Mate
61754-4-5	Mate	Mate	Mate	Not mate	Mate	Not mate
61754-4-6	Not mate	Mate	Not mate	Not mate	Mate	Not mate

Figure 1 is an example of a simplex PC plug connector interface. Table 3 gives dimensions of the simplex PC plug connector interface and Table 4 gives the grade characteristics for simplex PC plug connector interface.

A chamfer or radius is allowed to a maximum depth of 1,8 mm from the ferrule endface.

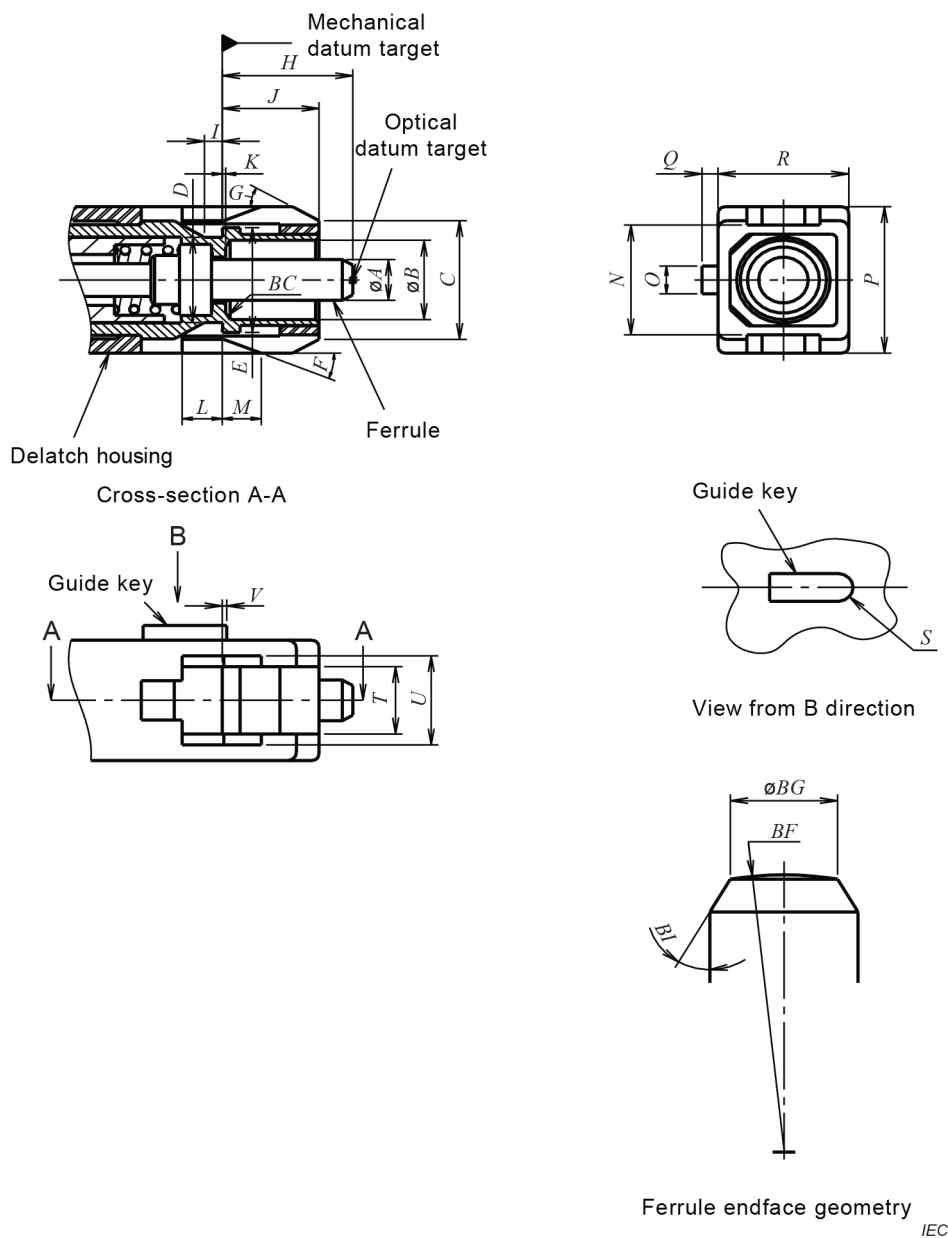


Figure 1 – Simplex PC plug connector interface

Table 3 – Dimensions of the simplex PC plug connector interface

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>A</i>	See Table 4		
<i>B</i>	4,8 mm	4,9 mm	
<i>C</i>	6,8 mm	7,4 mm	
<i>D</i>	4,9 mm	5,3 mm	
<i>E</i>	6,7 mm	6,8 mm	
<i>F</i>	19°	23°	Angle, unit in degrees
<i>G</i>	25°	35°	Angle, unit in degrees
<i>H</i>	7,15 mm	7,5 mm	^a
<i>I</i>	0,8 mm	1,2 mm	
<i>J</i>	5,3 mm	5,5 mm	
<i>K</i>	–	0,05 mm	
<i>L</i>	2,11 mm	–	^b
<i>M</i>	2,0 mm	2,8 mm	^{b c}
<i>N</i>	6,6 mm	6,8 mm	
<i>O</i>	1,6 mm	1,8 mm	
<i>P</i>	8,89 mm	8,99 mm	
<i>Q</i>	0,8 mm	1,0 mm	
<i>R</i>	7,29 mm	7,39 mm	
<i>S</i>	0,8 mm	0,90 mm	Radius
<i>T</i>	4,05 mm	4,15 mm	
<i>U</i>	5,4 mm	5,6 mm	
<i>V</i>	0 mm	0,5 mm	^b
<i>BC</i>	0 mm	0,5 mm	Chamfer or round
<i>BF</i>	See IEC 61755-3-1		Radius ^d
<i>BG</i>	See IEC 61755-3-1		Diameter
<i>BI</i>	25°	35°	Angle, unit in degrees
^a Dimension <i>H</i> is given for plug endface when not mated. The ferrule is movable by a certain axial compression force, with direct contacting endfaces, and therefore dimension <i>H</i> is variable. Ferrule compression force shall be 7,8 N to 11,8 N when dimension <i>H</i> is 7,0 mm ± 0,1 mm. The compression force shall be measured according to IEC 61300-3-22. ^b The delatch housing shall be movable to the right or left. Dimensions <i>L</i> , <i>M</i> and <i>V</i> are given when the delatch housing is at the furthest right. Dimension <i>M</i> shall be negative, when the delatch housing is at the furthest left. ^c The right end of <i>M</i> shall be at the left of the mechanical datum target when the delatch housing is at the furthest left. ^d Dome eccentricity of the spherical polished endface shall be less than 50 µm.			

Table 4 – Grade characteristics for simplex PC plug connector

Grade	Dimensions		Remarks
	mm		
	<i>A</i>		
	Minimum	Maximum	
A	See IEC 61755-3-1		a
B	See IEC 61755-3-1		a
C	See IEC 61755-3-1		a
D	See IEC 61755-3-1		a
A _m	Grade not specified at this time		a b
B _m	2,497	2,500	a b
C _m	2,494	2,500	a b
^a Add the grade number to the interface reference number.			
^b Refer to future IEC 61755-6-1 for guidance ¹ .			

Figure 2 is an example of a simplex adaptor connector interface. Table 5 gives dimensions of the simplex adaptor connector interface and Table 6 gives the grade of the simplex adaptor connector interface.

¹ Under preparation. Stage at the time of publication: IEC/CDM 61755-6-1:2021.

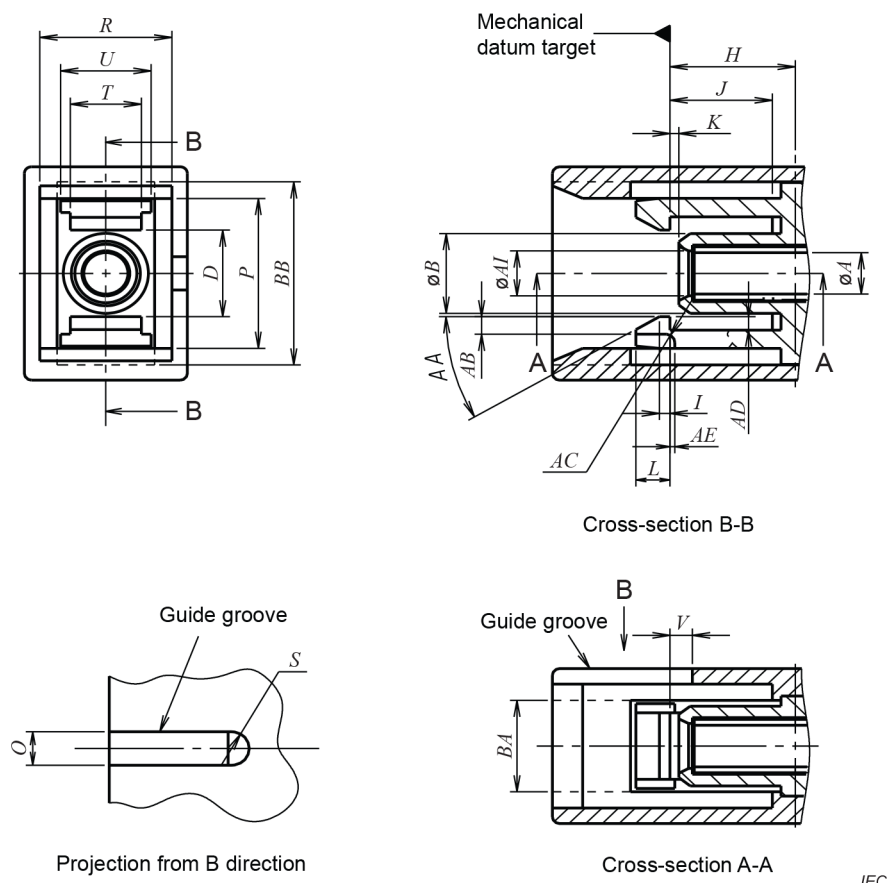


Figure 2 – Simplex adaptor connector interface

Table 5 – Dimensions of the simplex adaptor connector interface

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>A</i>	See Table 6		
<i>B</i>	4,39 mm	4,79 mm	
<i>D</i>	4,9 mm	5,5 mm	
<i>H</i>	6,9 mm	7,1 mm	
<i>I</i>	0,4 mm	0,8 mm	
<i>J</i>	5,51 mm	5,90 mm	
<i>K</i>	0,06 mm	1,00 mm	
<i>L</i>	1,9 mm	2,1 mm	
<i>O</i>	2,0 mm	2,2 mm	
<i>P</i>	9,0 mm	9,1 mm	
<i>R</i>	7,4 mm	7,5 mm	
<i>S</i>	1,0 mm	1,1 mm	Radius
<i>T</i>	3,80 mm	4,04 mm	
<i>U</i>	5,0 mm	5,3 mm	
<i>V</i>	0,6 mm	1,6 mm	
<i>AA</i>	27°	33°	Angle, unit in degrees
<i>AB</i>	0,8 mm	1,0 mm	
<i>AC</i>	0,4 mm	0,6 mm	Radius

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>AD</i>	0,7 mm	0,8 mm	
<i>AE</i>	0,4 mm	0,6 mm	
<i>AI</i>	2,7 mm	2,8 mm	
<i>BA</i>	5,4 mm	5,6 mm	a
<i>BB</i>	10,8 mm	11,2 mm	a

^a The dotted line structure in Figure 2 is a groove-shape preventing interference when the latch is deformed. It is optional.

Table 6 – Grade characteristics for simplex adaptor connector

Grade	Dimensions		Remarks
	mm		
	A		
	Minimum	Maximum	
a			Resilient sleeve ^{a b}

^a Add the grade number to the interface reference number.

^b The connector alignment feature is a resilient sleeve. The feature shall accept a pin gauge shown in Figure 3 to the centre of the adaptor with a force of 2 N to 5,9 N under the condition that another pin gauge is inserted into the feature from the other side. The centre of the adaptor is defined by the right side position of dimension *H*.

Figure 3 is an example of a pin gauge for adaptor. Table 7 gives pin gauge dimensions.

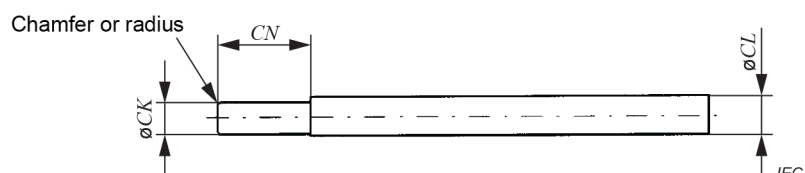


Figure 3 – Pin gauge for adaptor

Table 7 – Pin gauge dimensions

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>CK</i>	2,498 5	2,499 5	Surface roughness: grade N4 (0,2 μ m radius)
<i>CL</i>	2,8	4,8	
<i>CN</i>	7		

Figure 4 is an example of a duplex PC plug connector interface. Table 8 gives dimensions of the duplex PC plug connector interface and Table 9 gives the grade of the duplex PC plug connector interface.

A chamfer or radius is allowed to a maximum depth of 1,8 mm from the ferrule endface.

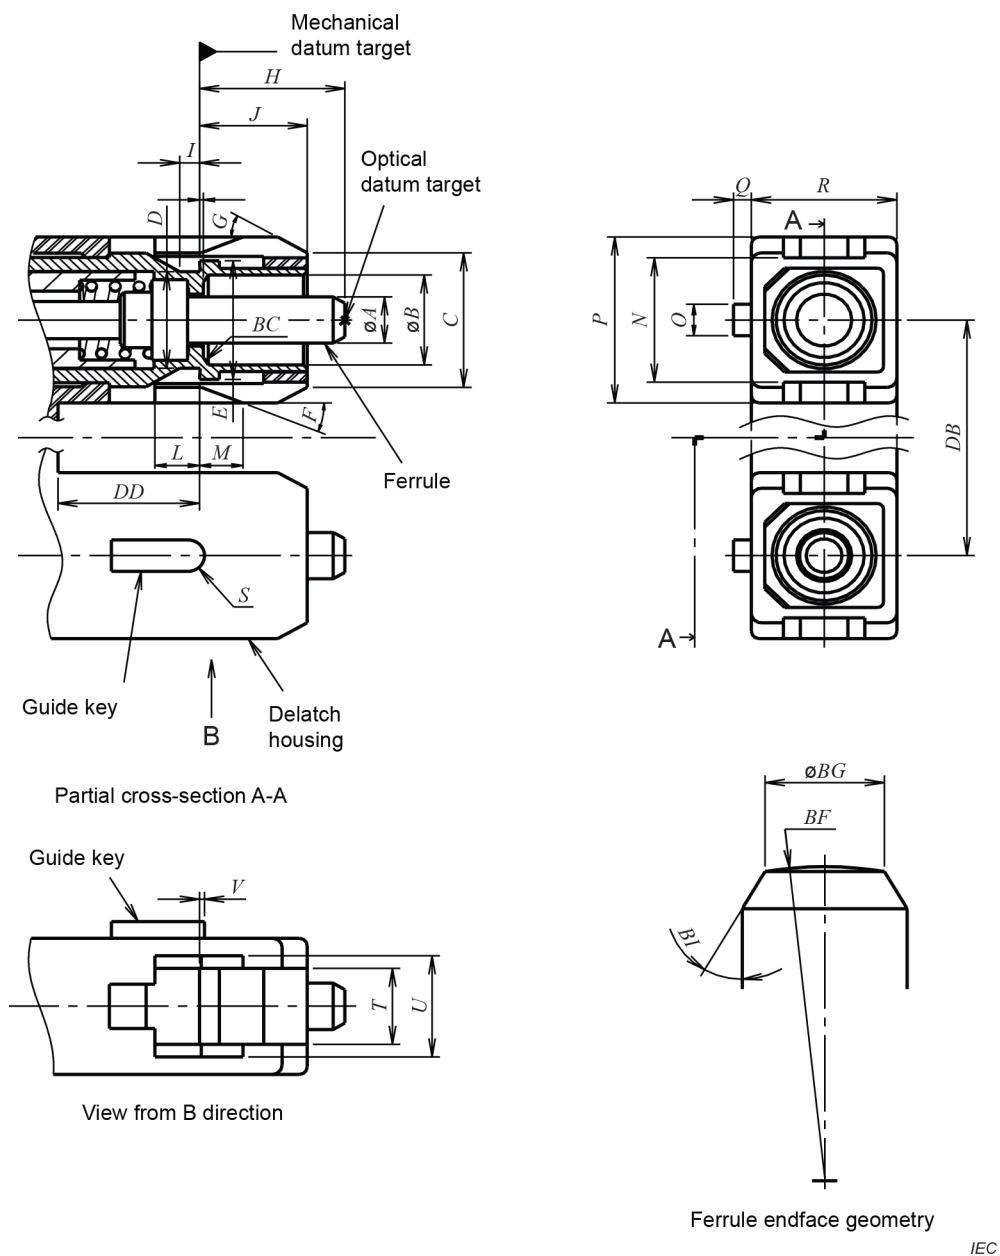


Figure 4 – Duplex PC plug connector interface

Table 8 – Dimensions of the duplex PC plug connector interface

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>A</i>	See Table 9		
<i>B</i>	4,8 mm	4,9 mm	
<i>C</i>	6,8 mm	7,4 mm	
<i>D</i>	4,9 mm	5,3 mm	
<i>E</i>	6,7 mm	6,8 mm	
<i>F</i>	19°	23°	Angle, unit in degrees
<i>G</i>	25°	35°	Angle, unit in degrees
<i>H</i>	7,15 mm	7,5 mm	^a
<i>I</i>	0,8 mm	1,2 mm	
<i>J</i>	5,3 mm	5,5 mm	
<i>K</i>	–	0,05 mm	
<i>L</i>	2,11 mm	–	^b
<i>M</i>	2,0 mm	2,8 mm	^{b c}
<i>N</i>	6,6 mm	6,8 mm	
<i>O</i>	1,6 mm	1,8 mm	
<i>P</i>	8,79 mm	8,89 mm	^d
<i>Q</i>	0,8 mm	1,0 mm	
<i>R</i>	7,29 mm	7,39 mm	
<i>S</i>	0,8 mm	0,9 mm	Radius
<i>T</i>	4,05 mm	4,15 mm	
<i>U</i>	5,4 mm	5,6 mm	
<i>V</i>	0 mm	0,5 mm	^b
<i>BC</i>	0 mm	0,5 mm	Chamfer or round
<i>BF</i>	See IEC 61755-3-1		Radius ^f
<i>BG</i>	See IEC 61755-3-1		Diameter
<i>BI</i>	25°	35°	Angle, unit in degrees
<i>DB</i>	12,65 mm	12,75 mm	^e
<i>DD</i>	7 mm	35 mm	
^a Dimension <i>H</i> is given for plug endface when not mated. The ferrule is movable by a certain axial compression force, with direct contacting endfaces, and therefore dimension <i>H</i> is variable. Ferrule compression force shall be 7,8 N to 11,8 N when dimension <i>H</i> is 7,0 mm ± 0,1 mm. The compression force shall be measured according to IEC 61300-3-22. ^b The delatch housing shall be movable to the right or left. Dimensions <i>L</i> , <i>M</i> and <i>V</i> are given when the delatch housing is at the furthest right. ^c The right end of <i>M</i> shall be at the left of the mechanical datum target when the delatch housing is at the furthest left. ^d The delatch housing may be a rigid sleeve. When two simplex plugs are retained together by a flexible sleeve, dimension <i>P</i> shall be from 8,89 mm to 8,99 mm. ^e The delatch housing may be a rigid sleeve. When two simplex plugs are retained together by a flexible sleeve, dimension <i>DB</i> shall be from 12,25 mm to 13,15 mm. ^f The dome eccentricity of the spherical polished endface shall be less than 50 µm.			

Table 9 – Grade characteristics for duplex PC plug connector

Grade	Dimensions		Remarks
	mm		
	<i>A</i>		
	Minimum	Maximum	
A	See IEC 61755-3-1		a
B	See IEC 61755-3-1		a
C	See IEC 61755-3-1		a
D	See IEC 61755-3-1		a
A _m	Grade not specified at this time		a b
B _m	2,497	2,500	a b
C _m	2,494	2,500	a b
^a Add the grade number to the interface reference number.			
^b Refer to future IEC 61755-6-1 for guidance.			

Figure 5 is an example of a duplex adaptor connector interface. Table 10 gives dimensions of the duplex adaptor connector interface and Table 11 gives the grade of the duplex adaptor connector interface.

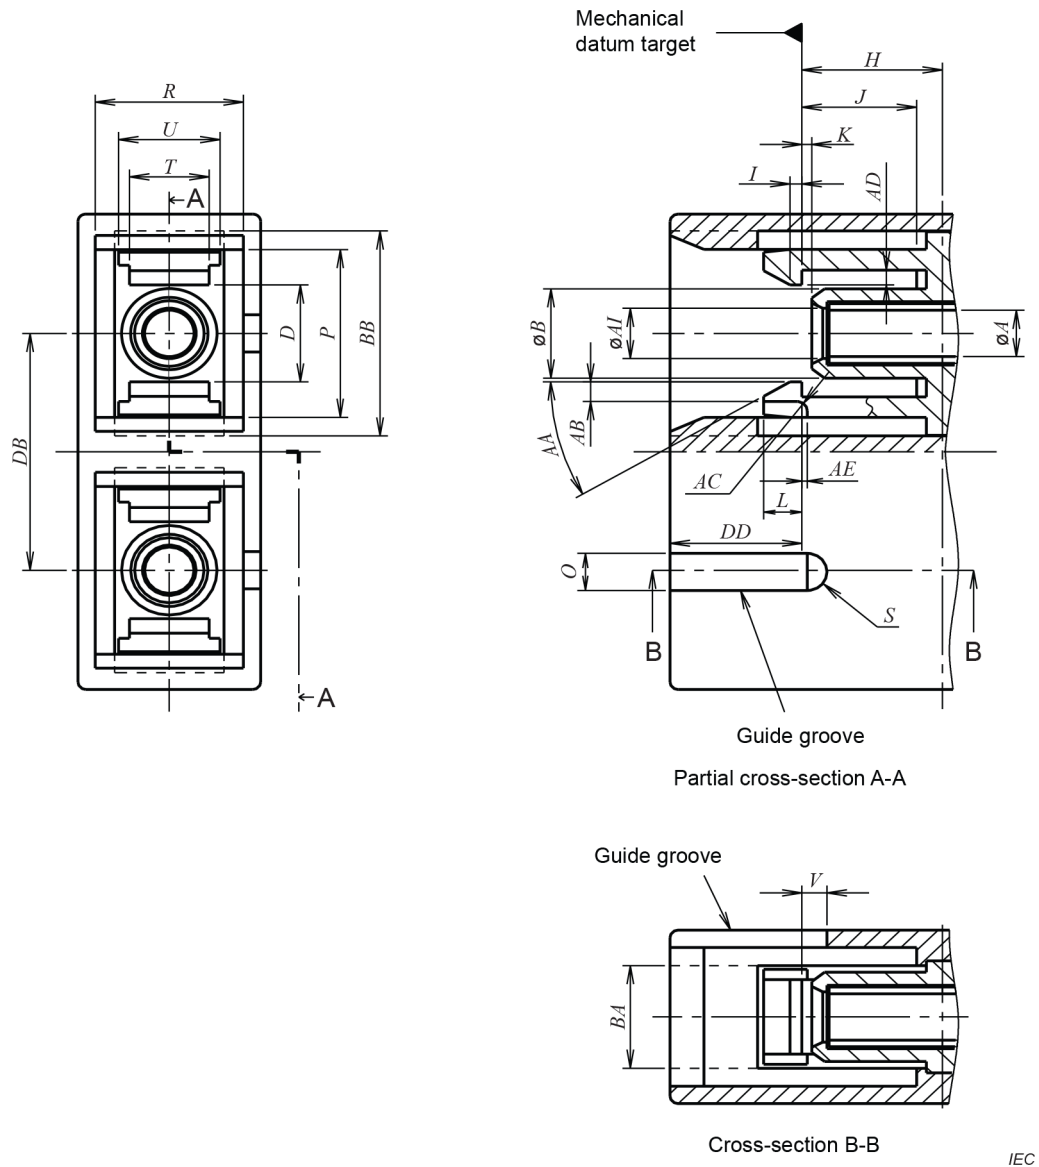


Figure 5 – Duplex adaptor connector interface

Table 10 – Dimensions of the duplex adaptor connector interface

Reference	Dimensions mm		Remarks
	Minimum	Maximum	
<i>A</i>	See Table 11		
<i>B</i>	4,39 mm	4,69 mm	
<i>D</i>	4,9 mm	5,5 mm	
<i>H</i>	6,9 mm	7,1 mm	
<i>I</i>	0,4 mm	0,8 mm	
<i>J</i>	5,51 mm	5,90 mm	
<i>K</i>	0,06 mm	1,00 mm	
<i>L</i>	1,9 mm	2,1 mm	
<i>O</i>	2,0 mm	2,2 mm	
<i>P</i>	9,0 mm	9,1 mm	
<i>R</i>	7,4 mm	7,5 mm	
<i>S</i>	1,0 mm	1,1 mm	Radius
<i>T</i>	3,80 mm	4,04 mm	
<i>U</i>	5,0 mm	5,3 mm	
<i>V</i>	0,6 mm	1,6 mm	
<i>AA</i>	27°	33°	Angle, unit in degrees
<i>AB</i>	0,8 mm	1,0 mm	
<i>AC</i>	0,4 mm	0,6 mm	Radius
<i>AD</i>	0,7 mm	0,8 mm	
<i>AE</i>	0,4 mm	0,6 mm	
<i>AI</i>	2,7 mm	2,8 mm	
<i>BA</i>	5,4 mm	5,6 mm	^a
<i>BB</i>	10,8 mm	11,2 mm	^a
<i>DB</i>	12,65 mm	12,75 mm	
<i>DD</i>	–	6,99 mm	

^a The dotted line structure in Figure 5 is a groove-shape preventing interference when the latch is deformed. It is optional.


Table 11 – Grade of the duplex adaptor connector

Grade	Dimensions		Remarks
	mm		
	<i>A</i>		
	Minimum	Maximum	
a	—	—	Resilient sleeve ^{a b}

^a Add grade number to the interface reference number.

^b The connector alignment feature is a resilient sleeve. The feature shall accept a pin gauge shown in Figure 3 to the centre of the adaptor with a force of 2,0 N to 5,9 N under the condition that another pin gauge is inserted into the feature from the other side. The centre of the adaptor is defined by the right side position of dimension *H*.

Figure 6 is an example of a simplex angled PC plug connector interface. Table 12 gives dimensions of the simplex angled PC plug connector interface. The detail dimensions of optical interfaces for APC are defined in IEC 61755-3-2.

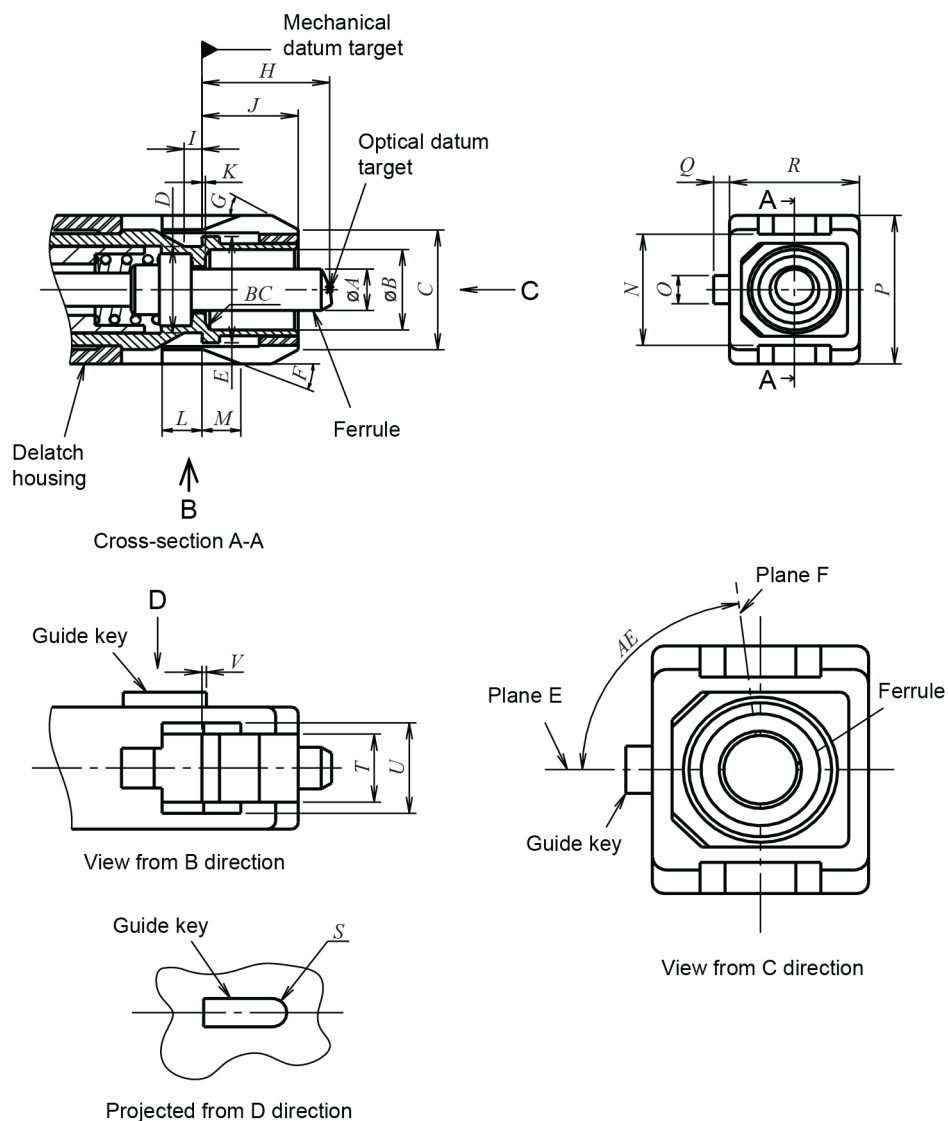

IEC

Figure 6 – Simplex angled PC plug connector interface (1 of 2)

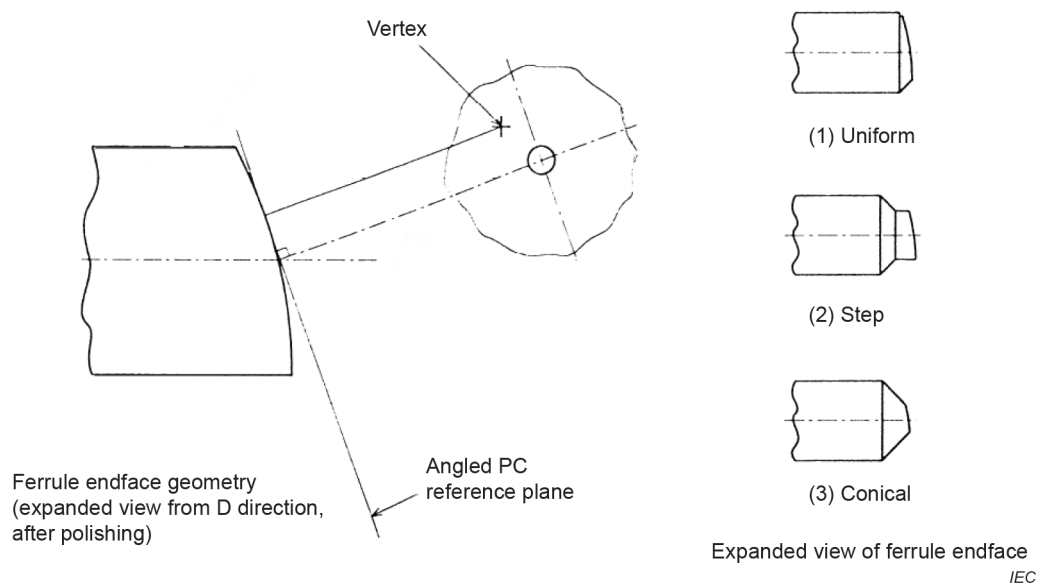



Figure 6 – Simplex angled PC plug connector interface (2 of 2)

Table 12 – Dimensions of the simplex angled PC plug connector interfaces

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>A</i>	See IEC 61755-3-2		a
<i>B</i>	4,8 mm	4,9 mm	
<i>C</i>	6,8 mm	7,4 mm	
<i>D</i>	4,9 mm	5,3 mm	
<i>E</i>	6,7 mm	6,8 mm	
<i>F</i>	19°	23°	Angle, unit in degrees
<i>G</i>	25°	35°	Angle, unit in degrees
<i>H</i>	7,15 mm	7,5 mm	b
<i>I</i>	0,8 mm	1,2 mm	
<i>J</i>	5,3 mm	5,5 mm	
<i>K</i>	–	0,05 mm	
<i>L</i>	2,11 mm	–	c
<i>M</i>	2,0 mm	2,8 mm	c d
<i>N</i>	6,6 mm	6,8 mm	
<i>O</i>	1,6 mm	1,8 mm	
<i>P</i>	8,89 mm	8,99 mm	
<i>Q</i>	0,8 mm	1,0 mm	
<i>R</i>	7,29 mm	7,39 mm	
<i>S</i>	0,8 mm	0,9 mm	Radius
<i>T</i>	4,05 mm	4,15 mm	
<i>U</i>	5,4 mm	5,6 mm	
<i>V</i>	0 mm	0,5 mm	c
<i>BC</i>	0 mm	0,5 mm	Chamfer or round
<i>EA</i>	–	–	e

- a Add the grade number to the interface reference number.
- b Dimension H is given for plug endface when not mated. It is movable by a certain axial compression force, with direct contacting endfaces, and therefore dimension H is variable. Ferrule compression force shall be 7,8 N to 11,8 N when dimension H is $7,0 \text{ mm} \pm 0,1 \text{ mm}$. The compression force shall be measured according to IEC 61300-3-22.
- c The delatch housing shall be movable to the right or left. Dimensions L , M and V are given when the delatch housing is at the furthest right.
- d The right end of M shall be at the left of the mechanical datum target when the delatch housing is at the furthest left.
- e Dimension EA is defined as an angle between two planes: one plane, plane E, passes through the axis of the ferrule and axis of symmetry of the key of the angled endface connector plug. The other plane, plane F, passes through the axis of the ferrule and the normal to the angled PC reference plane. Dimension EA shall be 90° as a basic dimension.

Figure 7 is an example of a duplex angled PC plug connector interface. Table 13 gives dimensions of the duplex angled PC plug connector interface. The detail dimensions of optical interfaces for APC are defined in IEC 61755-3-2.

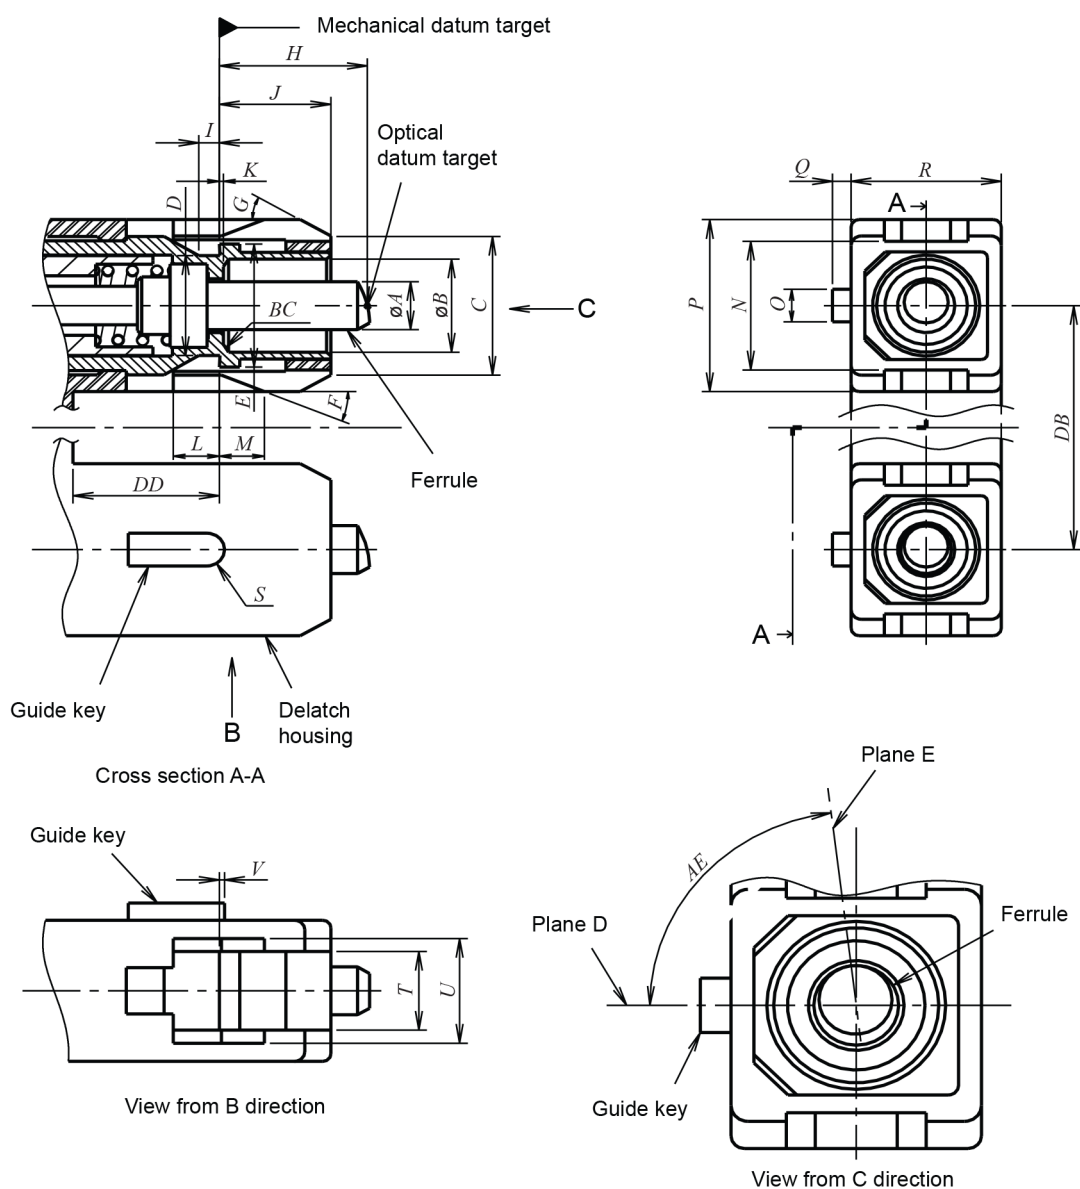

IEC

Figure 7 – Duplex angled PC plug connector interface (1 of 2)

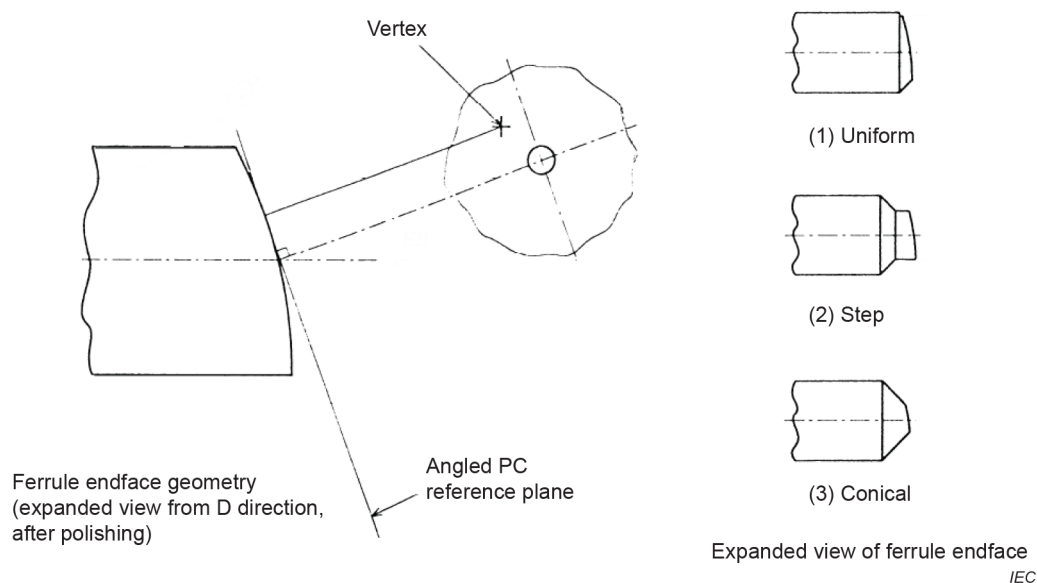


Figure 7 – Duplex angled PC plug connector interface (2 of 2)

Table 13 – Dimensions of the duplex angled PC plug connector interfaces

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>A</i>	See IEC 61755-3-2		a
<i>B</i>	4,8 mm	4,9 mm	
<i>C</i>	6,8 mm	7,4 mm	
<i>D</i>	4,9 mm	5,3 mm	
<i>E</i>	6,7 mm	6,8 mm	
<i>F</i>	19°	23°	Angle, unit in degrees
<i>G</i>	25°	35°	Angle, unit in degrees
<i>H</i>	7,15 mm	7,5 mm	b
<i>I</i>	0,8 mm	1,2 mm	
<i>J</i>	5,3 mm	5,5 mm	
<i>K</i>	–	0,05 mm	
<i>L</i>	2,11 mm	–	c
<i>M</i>	2 mm	2,8 mm	c d
<i>N</i>	6,6 mm	6,8 mm	
<i>O</i>	1,6 mm	1,8 mm	
<i>P</i>	8,79 mm	8,89 mm	e
<i>Q</i>	0,8 mm	1,0 mm	
<i>R</i>	7,29 mm	7,39 mm	
<i>S</i>	0,8 mm	0,9 mm	Radius
<i>T</i>	4,05 mm	4,15 mm	
<i>U</i>	5,4 mm	5,6 mm	
<i>V</i>	0 mm	0,5 mm	c
<i>BC</i>	0 mm	0,5 mm	Chamfer or round
<i>DB</i>			f
<i>DD</i>	7,0 mm		

Reference	Dimensions		Remarks
	Minimum	Maximum	
<i>EA</i>	–	–	g
^a Add the grade number to the interface reference number. ^b Dimension <i>H</i> is given for plug endface when not mated. The ferrule is movable by a certain axial compression force, with direct contacting endfaces, and therefore dimension <i>H</i> is variable. Ferrule compression force shall be 7,8 N to 11,8 N when dimension <i>H</i> is 7,0 mm ± 0,1 mm. The compression force shall be measured according to IEC 61300-3-22. ^c The delatch housing shall be movable to the right or left. Dimensions <i>L</i>, <i>M</i> and <i>V</i> are given when the delatch housing is at the furthest right. ^d The right end of <i>M</i> shall be at the left of the mechanical datum target when the delatch housing is at the furthest left. ^e The delatch housing may be rigid sleeve. When two simplex plugs are retained together by a flexible sleeve, dimension <i>P</i> shall be from 8,89 mm to 8,99 mm. ^f When two simplex plugs are retained together by a flexible sleeve, dimension <i>DB</i> shall be from 12,25 mm to 13,15 mm. ^g Dimension <i>EA</i> is defined as an angle between two planes: one plane, plane D, passes through the axis of the ferrule and axis of symmetry of the key of the angled endface connector plug. The other plane, plane E, passes through the axis of the ferrule and the normal to the angled PC reference plane. Dimension <i>EA</i> shall be 90° as a basic dimension.			

Figure 8 is an example of a simplex active device receptacle interface for angled PC connector plug. Table 14 gives dimensions of the simplex active device receptacle interface for angled PC connector plug.

Table 15 and Table 16 give alignment feature grade and mechanical stop feature grade for the simplex active device receptacle interface for angled PC connector plug.