IEC 62341-6-1

Edition 2.0 2017-01

INTERNATIONAL STANDARD

colour inside

Organic light emitting diode (OLED) displays – Part 6-1: Measuring methods of optical and electro-optical parameters

Documents
Document Sharing Hub

IEC 62341-6-1:2017-01(en)

Full document details: IEC 62341-6-1 2017

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue
The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,…). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org
The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary
65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-1 2017

IEC 62341-6-1

Edition 2.0 2017-01

INTERNATIONAL STANDARD

colour inside

Organic light emitting diode (OLED) displays –
Part 6-1: Measuring methods of optical and electro-optical parameters

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.260

ISBN 978-2-8322-3845-5

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: IEC 62341-6-1 2017

CONTENTS

FOREWORD 5
1 Scope 7
2 Normative references 7
3 Terms, definitions, and abbreviated terms 7
3.1 Terms and definitions 7
3.2 Abbreviated terms 8
4 Structure of measuring equipment 8
5 Standard measuring conditions 8
5.1 Standard environmental conditions for measurements 8
5.2 Standard dark room conditions for measurements 8
5.3 Standard setup conditions 9
5.3.1 General 9
5.3.2 Adjustment of OLED display modules 9
5.3.3 Starting conditions of measurements 9
5.3.4 Measuring equipment requirements 9
5.4 Standard locations of measurement field 11
5.5 Standard test patterns 11
6 Measuring methods for optical parameters 16
6.1 Primary luminance, colour, and uniformity of full-colour high-resolution modules 16
6.1.1 Purpose 16
6.1.2 Measuring conditions 16
6.1.3 Measuring method for high-resolution full-colour modules 16
6.1.4 Maximum luminance of white and RGB primaries 18
6.1.5 Average colour of white and RGB primaries 18
6.1.6 Luminance uniformity of white and RGB primaries 19
6.1.7 Colour non-uniformity of white and RGB primaries 19
6.1.8 Colour additivity of white and RGB primaries 20
6.1.9 White correlated colour temperature 20
6.2 Primary luminance, colour, and uniformity of low-resolution modules 21
6.2.1 Purpose 21
6.2.2 Measuring conditions 21
6.2.3 Measuring method for low-resolution modules and segmented displays 21
6.3 Signal loading 21
6.3.1 Purpose 21
6.3.2 Measuring conditions 21
6.3.3 Measuring methods 21
6.4 Dark room contrast ratio 22
6.4.1 Purpose 22
6.4.2 Measuring conditions 22
6.4.3 Measuring method 23
6.5 Display colour gamut, colour gamut area, and colour gamut volume 23
6.5.1 Purpose 23
6.5.2 Measuring conditions 23
6.5.3 Measuring method 23
6.5.4 Display colour gamut 24

AVA Documents
Document Sharing Hub
Full document details: IEC 62341-6-1 2017

6.5.5 Display colour gamut area in CIE 1976 chromaticity diagram 24
6.5.6 Colour gamut volume 24
7 Measuring methods for power consumption 26
7.1 Purpose 26
7.2 Measuring conditions 26
7.3 Measuring method 26
Annex A (normative) Response time of passive matrix display panels 28
A.1 Purpose 28
A.2 Measuring conditions 28
A.3 Measuring method 28
Annex B (normative) Luminance current efficiency 30
B.1 Purpose 30
B.2 Measuring conditions 30
B.3 Measuring method 30
Annex C (informative) Veiling glare frustum 32
Annex D (informative) Methods to obtain the correlated colour temperature (CCT) from chromaticity coordinates 33
D.1 Method 1: using McCamy's approximate formula 33
D.2 Method 2: using Javier Hernandez-Andres's approximate formula 33
D.3 Method 3: graphical determination of correlated colour temperature 34
Annex E (informative) Measuring the performance of modern colour-managed displays and panels 36
E.1 Legacy displays 36
E.2 Modern displays 36
E.3 Results 38
E.4 Conclusion 41
Annex F (informative) Simple window luminance and colour measurements 42
F.1 Background 42
F.2 Measuring conditions 42
F.3 Maximum full-screen luminance 42
F.4 4 % window luminance 42
F.5 Sampled luminance non-uniformity 42
F.6 4 % window centre colour 43
F.7 Sampled colour non-uniformity 44
Bibliography 45

Figure 1 – Layout diagram of measurement setup 10
Figure 2 – Standard measurement positions in the active area of the display 11
Figure 3 – Test pattern scaling used to define the area size of the coloured rectangles in the active area of the display 12
Figure 4 – Low APL loading series of red, green, blue, and white test patterns used for basic luminance, colour, and uniformity measurements 13
Figure 5 – Medium (top) and high (bottom) APL loading versions of CTR pattern 14
Figure 6 – Standard low APL RGBCMY test pattern used for centre luminance and colour measurements 15
Figure 7 – Optional medium APL RGBCMY test pattern used for centre luminance and colour measurements 16

Documents
Document Sharing Hub
Full document details: IEC 62341-6-1 2017

Figure 8 – Sequence for measuring luminance and colour at the nine standard display positions for all coloured tile patterns 17
Figure 9 – Colour of blackbody source at various temperatures as represented on the CIE 1931 chromaticity diagram 20
Figure 10 – Example representation of the same primary colours in the CIE 1931 (left) and CIE 1976 (right) chromaticity diagrams 24
Figure 11 –Example of the range of colours produced by a given display as represented by the CIELAB colour space 25
Figure 12 – Example of measurement setup of power consumption 27
Figure A.1 – Relationship between the driving signal and the optical response times 29
Figure B.1 – Example of a measurement configuration for measuring luminance current efficiency 31
Figure C.1 – Pattern for veiling glare frustum 32
Figure D.1 – CIE 1931 XYZ chromaticity diagram 34
Figure D.2 – Blackbody locus (Planckian locus) and isotemperature lines in CIE 1931 chromaticity diagram 35
Figure E.1 – Legacy model where the independent drive electronics provide a direct correlation between the input RGB signals and the display's colour primaries 36
Figure E.2 – Example of modern drive models utilizing multi-dimensional LUTs for RGB (top) and multi-primary (bottom) displays 37
Figure E.3 – Example of APL loading behaviour for a WRGB (top) and RGB (bottom) OLED display 39
Figure E.4 – Low APL loading test pattern with small box size (1/9 the screen size dimensions) 40
Figure E.5 – APL loading profiles for several input colours measured at the centre of the test pattern using Figure E.4 41
Figure F.1 – Example of a simple 4 % white window pattern at the centre of the screen 43

Table 1 – Standard digital-equivalent input signals for rendering the white, primary and secondary colours in test patterns 15
Table 2 – Example of luminance measured of the same colour at the nine standard screen positions and the resulting luminance non-uniformity 18
Table 3 – Example of the same colour measured at the nine standard screen positions and the resulting chromaticity non-uniformity 18
Table 4 – Scaling the size of the colour boxes in the APL loading pattern relative to the screen dimensions 22
Table 5 – Example of a summary sheet for module power consumption measurements 27
Table D.1 – x_e, y_e, A_i and t_i for Formula (D.3) and Formula (D.4) 33
Table E.1 – Example of luminance data for an RGB and WRGB OLED display 38

Documents
Document Sharing Hub
Full document details: IEC 62341-6-1 2017

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ORGANIC LIGHT EMITTING DIODE (OLED) DISPLAYS –

Part 6-1: Measuring methods of optical and electro-optical parameters

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62341-6-1 has been prepared by IEC technical committee 110: Electronic display devices.

This second edition cancels and replaces the first edition published in 2009. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) extends the applicability of the measuring methods to include OLED displays that have multi-primary or red, green, blue and white sub-pixels;
b) adds a method to characterize how the luminance is affected by the amount of content on the screen;
c) adds a method to determine the dark room colour gamut volume in the CIELAB colour space.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-1 2017

The text of this standard is based on the following documents:

FDIS	Report on voting
110/816/FDIS	110/830/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all the parts in the IEC 62341 series, under the general title *Organic light emitting diode (OLED) displays*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-1 2017

ORGANIC LIGHT EMITTING DIODE (OLED) DISPLAYS –

Part 6-1: Measuring methods of optical and electro-optical parameters

1 Scope

This part of IEC 62341 specifies the standard measurement conditions and measuring methods for determining optical and electro-optical parameters of organic light-emitting diode (OLED) display modules and, where specified, OLED display panels. These methods are limited to flat displays measured in a dark room.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-845, *International Electrotechnical Vocabulary – Part 850: Lighting* (available at www.electropedia.org)

IEC 61966-2-1, *Multimedia systems and equipment – Colour measurement and management – Part 2-1: Colour management – Default RGB colour space – sRGB*

IEC 62341-1-2, *Organic light emitting diode (OLED) displays – Part 1-2: Terminology and letter symbols*

IEC 62341-6-2:2015, *Organic light emitting diode (OLED) displays – Part 6-2: Measuring methods of visual quality and ambient performance*

CIE 15:2004, *Colorimetry, 3rd edition*

CIE S 014-1, *Colorimetry – Part 1: CIE Standard Colorimetric Observers*

3 Terms, definitions, and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-845, IEC 62341-1-2, and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1.1
signal pixel
smallest encoded picture element in the input image

Documents
Document Sharing Hub

Full document details: IEC 62341-6-1 2017

3.1.2
pre-gamma average picture level
average input level of all signal pixels relative to an equivalent white pixel driven by a digital RGB input

Note 1 to entry: Unless otherwise stated, the pre-gamma average picture level (APL) will simply be referred to as average picture level in this document.

Note 2 to entry: The APL will normally be expressed as a percentage, where a full white screen at maximum drive level would be 100 % APL.

3.2 Abbreviated terms

APL	average picture level
CCT	correlated colour temperature
CIE	Commission internationale de l'éclairage (International Commission on Illumination)
CIELAB	CIE 1976 ($L^*a^*b^*$) colour space
CMY	cyan, magenta, and yellow
DUT	device under test
LMD	light-measuring device
LUT	look-up table
PMOLED	passive matrix organic light-emitting diode
RGB	red, green, and blue
RGBCMY	red, green, blue, cyan, magenta, and yellow
sRGB	standard RGB colour space as defined in IEC 61966-2-1
UCS	uniform chromaticity scale
WRGB	white, red, green, and blue

4 Structure of measuring equipment

The system diagrams and/or operating conditions of the measuring equipment shall comply with the structure specified in each item.

5 Standard measuring conditions

5.1 Standard environmental conditions for measurements

Measurements shall be carried out under standard environmental conditions at a temperature of 25 °C ± 3 °C, at a relative humidity of 25 % to 85 %, and at an air pressure of 86 kPa to 106 kPa. When different environmental conditions are used, they shall be noted in the report.

5.2 Standard dark room conditions for measurements

The luminance contribution from unwanted background illumination reflected off the test display shall be less than 1/20 of the display's black state luminance. If these conditions are not satisfied, then background subtraction is required and it shall be noted in the test report. In addition, if the sensitivity of the LMD is inadequate to measure 1/20 of the black level, then the lower limit of the LMD shall be noted in the test report.

Documents
Document Sharing Hub
Full document details: IEC 62341-6-1 2017

5.3 Standard setup conditions

5.3.1 General

Standard setup conditions are given below. Any deviations from these conditions shall be recorded.

5.3.2 Adjustment of OLED display modules

The display shall be measured at its factory default settings. If other settings are used, they shall be noted in the test report. These settings shall be held constant for all measurements, unless stated otherwise. It is important, however, to make sure that not only the adjustments are kept constant, but also that the resulting physical quantities remain constant during the measurement. This is not automatically the case because of, for example, warm-up effects.

5.3.3 Starting conditions of measurements

Measurements shall be started after the OLED display and the measuring instruments achieve stability. It is recommended that, when the display is first turned on, it be operated for at least 30 min with a loop of colour patterns rendered on the screen. Sufficient warm-up time has been achieved when the luminance of the test feature to be measured varies by less than ±3 % over the entire measurement method for a given display image.

5.3.4 Measuring equipment requirements

5.3.4.1 General conditions

Light measurements shall generally be measured in terms of photometric or colorimetric units for a CIE 1931 standard colorimetric observer as defined in CIE S 014-1. Luminance can be measured by a photometer, and CIE tristimulus values (X, Y, Z) or CIE chromaticity coordinates by a colorimeter. A spectroradiometer can also obtain photometric and colorimetric values through a numerical conversion of the measured spectral radiance data (see for example [1][1]). Non-contact LMD, where the LMD is not in direct contact with the screen, shall be used without an illumination source. The following requirements are given for these instruments:

a) The LMD shall be a luminance meter, a colorimeter, or a spectroradiometer. The spectroradiometer shall be capable of measuring spectral radiance over at least the 380 nm to 780 nm spectral range, with a maximum bandwidth of 10 nm for smooth broadband spectra. For OLED primaries with bandwidth ≤ 25 nm, the maximum bandwidth shall be ≤ 5 nm. The spectral bandwidth of the spectroradiometer shall be an integer multiple of the sampling interval. For example, a 5 nm sampling interval can be used for a 5 nm or 10 nm bandwidth.

   Care shall be taken to ensure that the LMD has enough sensitivity and dynamic range to perform the required task. The measured LMD signal shall be at least ten times greater than the dark level (noise floor) of the LMD, and no greater than 85 % of the saturation level.

b) The LMD shall be focused on the image plane of the display and generally aligned perpendicular to the display surface at the centre of the measurement field, unless stated otherwise.

c) The relative uncertainty and repeatability of all the measuring devices shall be maintained by following the instrument supplier's recommended calibration schedule.

d) The LMD integration time shall be an integer number of frame periods, synchronized to the frame rate, or the integration time shall be greater than one hundred frame periods.

---

[1] Numbers in square brackets refer to the Bibliography.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-1 2017

e) If LMD measurements are taken for displays with impulse driving or duty driving, the high peak luminance of these displays can cause detector saturation errors. The accuracy of these measurements can be checked by attenuating the light with a neutral-density filter. If the change in signal amplitude of the detector is proportional to the transmittance of the neutral-density filter, then there are no detector saturation errors. This method is for measuring the maximum time-averaged full-screen luminance.

When using LMDs, stray light within the LMD (e.g. lens flare, veiling glare) and non-uniformities of sensitivity across the detector area should be considered.

In addition to LMDs that form an average value for the measured quantity over the measurement field under consideration (i.e. spot photometers, Figure 1), there are imaging LMDs which give a value (or an array of values, e.g. R, G and B) for each individual area-element on the DUT. Such LMDs can replace a sequential mechanical scan of the surface of a display by an image of the entire active area of the DUT, and a subsequent evaluation of the data.

When imaging LMDs are used, a flat-field correction shall be applied to the LMD at the measuring distance.

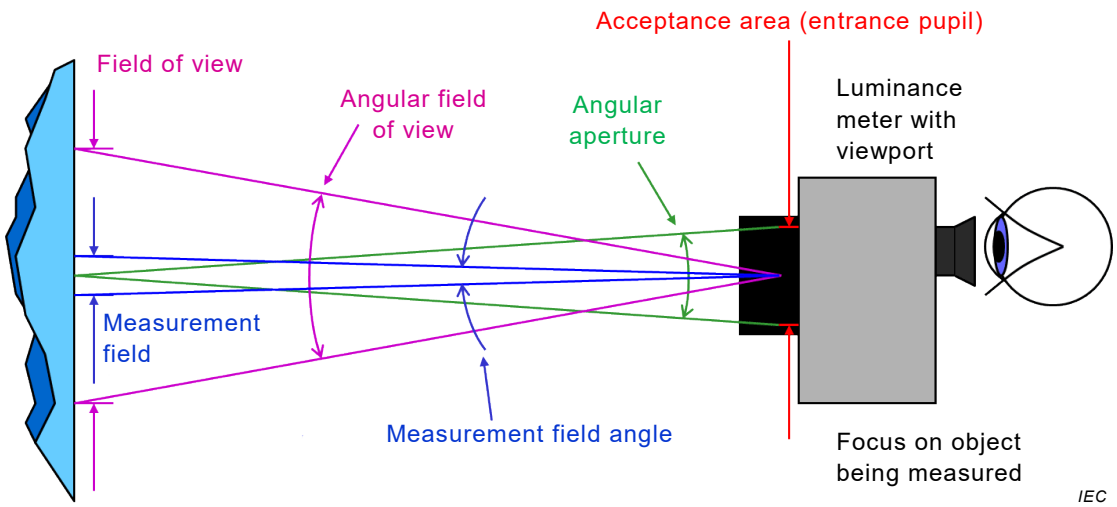

Figure 1 – Layout diagram of measurement setup

5.3.4.2 High pixel count matrix displays (≥ 320 × 240 pixels)

The following applies for high pixel count matrix displays.

a) When measuring matrix displays, the light-measuring devices should be set to a measurement field that includes more than 500 pixels. For LMDs with a circular measurement field, this would be equivalent to a disk with a diameter greater than 25 display pixels. If smaller measurement areas are necessary, photometric and colorimetric equivalence to 500 pixels shall be confirmed and noted in the test report.

b) For small displays, the recommended measuring distance is between 20 cm to 50 cm. For larger displays, the measurement area shall contain at least 500 pixels. The measuring distance shall be noted in the report.

c) The angular aperture shall be less than or equal to 5°, and the measurement field angle shall be less than or equal to 2° (see Figure 1).

d) The display shall be operated at its design field frequency. When using separate driving signal equipment to operate a panel, the drive conditions shall be noted in the report.

5.3.4.3 Low pixel count matrix displays (< 320 × 240 pixels) and segmented displays

The following applies for low pixel count matrix displays.

Documents
Document Sharing Hub
Full document details: IEC 62341-6-1 2017

a) Low pixel count displays may contain fewer than 500 pixels. When the number of pixels in the measurement field is less than 500, it shall be noted in the report. The angular aperture shall be less than or equal to 5°, and the measurement field angle shall be less than or equal to 2°. The measurement conditions used shall be recorded.

b) For segment displays, the angular aperture shall be less than or equal to 5°, and the measurement field angle shall be less than or equal to 2°. All measurements shall be performed at the centre of a segment with the measurement field completely contained within the segment.

c) For small displays, the recommended measuring distance is between 20 cm to 50 cm. For larger displays, follow the manufacturer's recommended viewing distance. For larger displays, the measurement area shall contain at least 500 pixels. The measuring distance shall be noted in the report.

5.4 Standard locations of measurement field

Luminance, spectral distribution and/or tristimulus measurements may be taken at several specified positions on the display's surface. The standard measurement locations are identified by positions P_1 to P_9 in the active area, as illustrated in Figure 2. The active screen area is divided into nine equal-sized boxes, with the measurement area centred within each box and identified by the corresponding numbering shown in Figure 2. Each box is 1/3 of the width (W) and height (H) of the active area. Centre screen measurements are taken at position P_5. The display or detector shall be translated in the horizontal and vertical directions to perform measurements at the desired display positions, with all measurements taken normal to the screen. Any deviation from the standard positions above shall be recorded.

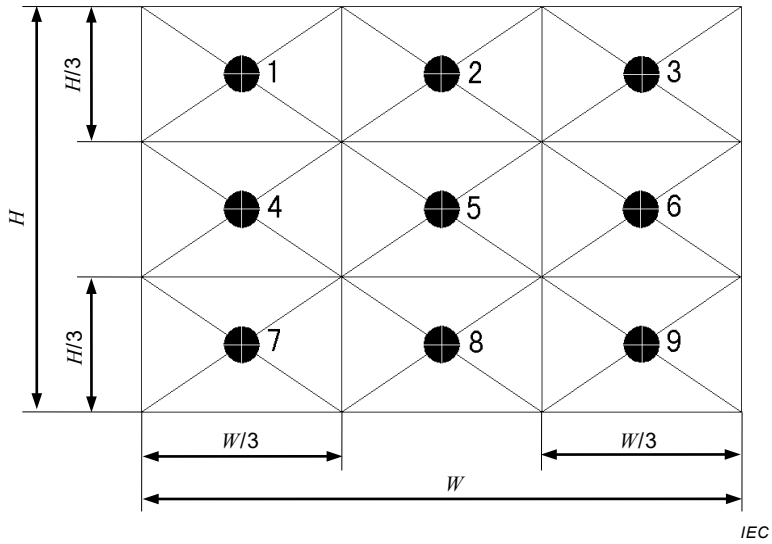

Figure 2 – Standard measurement positions in the active area of the display

5.5 Standard test patterns

The characterization of display luminance and colour can depend on the display test pattern. Therefore, several standard test patterns are given to help make the measurements more realistic to actual use cases (see Annex E). Additional test patterns may also be used (see Annex F). The standard test patterns use the scaling illustrated in Figure 3. The display is divided into a 3 × 3 array of rectangular areas, each of which has sides that are 1/3 of the dimension of the height and width of the screen's active area. Each of these nine rectangular areas can then be further subdivided into smaller rectangles, as demonstrated in the upper left-hand corner of Figure 3. The smallest subdivision would yield a rectangular box that has dimensions of 1/9 of those of the active area of each region of the 3 × 3 array.

Documents
Document Sharing Hub
Full document details: IEC 62341-6-1 2017

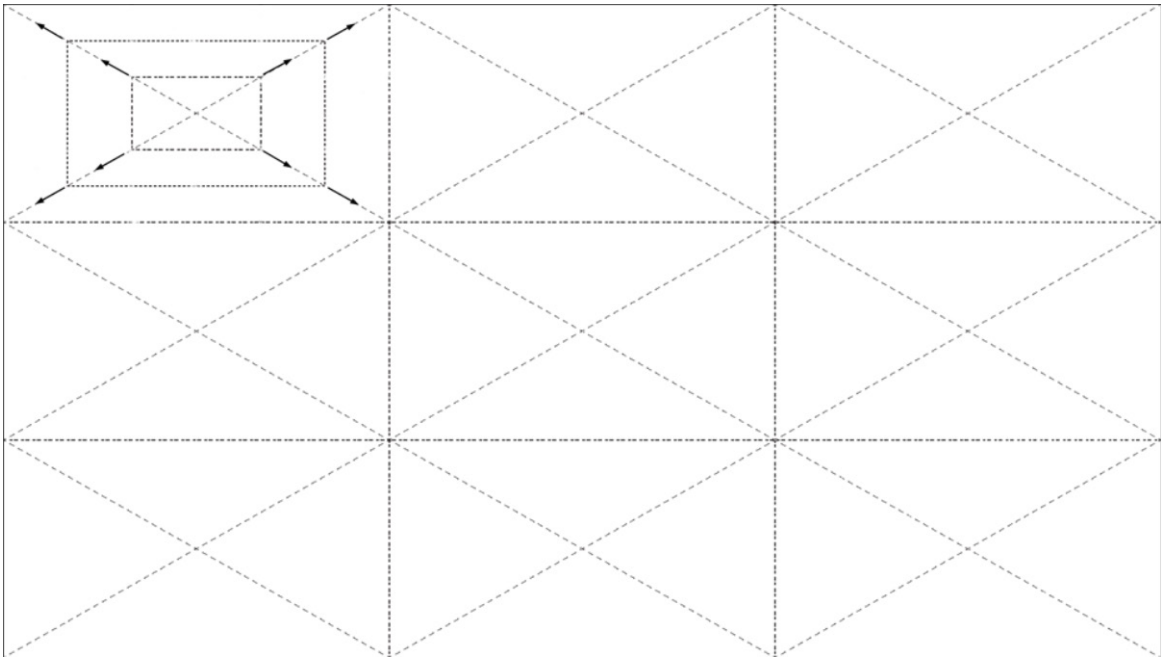

Figure 3 – Test pattern scaling used to define the area size of the coloured rectangles in the active area of the display

The standard test pattern for basic primary luminance and colour measurements shall use the low APL loading example of the colour tile test patterns illustrated in Figure 4. In this case, coloured rectangular boxes, with 1/9 of the dimensions of the active area, are centred on the nine standard active area locations on a black background. The red, green, and blue boxes are driven at the maximum input signal levels for the primary channels. For example, the red box is driven at the maximum input signal for the red channel, while the green and blue channels are at their minimum signal level. The white boxes are driven at their maximum red, green, and blue channel inputs. Each colour tile pattern is identified by the initials CT (colour tile) and the colour of the centre box. The patterns in Figure 4 are identified as CTR, CTG, CTW, and CTB when starting from the upper left-hand pattern and moving clockwise.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-1 2017

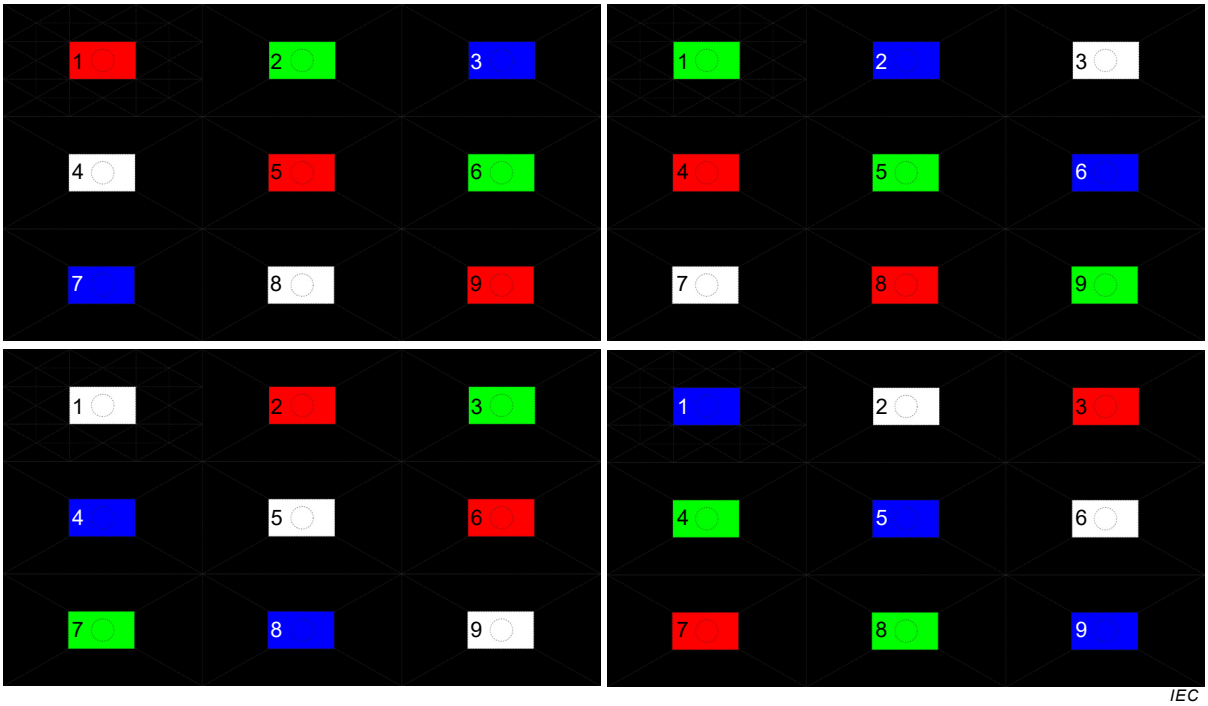

Figure 4 – Low APL loading series of red, green, blue, and white test patterns used for basic luminance, colour, and uniformity measurements

The area scaling of the coloured rectangles is adjusted to manipulate the APL loading on the display. The amount of APL loading is input-referred, assuming it is an RGB digital input. The percent APL is defined as:

$$APL(\%) = 100 \times \frac{\sum_{i=1}^{N} PL_i}{N} \tag{1}$$

where the summation is over all pixels in the active area, PL_i is the normalized signal pixel level of the i-th pixel relative to maximum white level, and N is the total number of pixels. A 100 % APL would be represented by all pixels in the active area at maximum white level. This would be implemented by setting the levels for the red, green, and blue input channels to their maximum values. A single primary colour (e.g. red) rendered on a full screen would have 1/3 of the APL of a full white screen. If it is assumed that the red, green, and blue areas correspond to 1/3 of the APL of the white areas, then the APL for each pattern in Figure 4 is (starting at the upper left-hand corner and going clockwise) 5,3 %, 5,3 %, 6,2 %, and 5,3 %. The average APL for the four patterns in Figure 4 is 5,6 %. An example calculation of the top left pattern in Figure 4 is given by:

[(7 primary colours x 1/3 of white) + (2 white boxes x 3/3 of white)]

x [$(1/9)^2$ fractional area of boxes] = 5,3% APL

Higher loading versions of the colour tile pattern are illustrated in Figure 5. The sequence of four-colour tile patterns at the medium loading geometry would give an average APL equivalent of 22 %, whereas the high loading pattern would give an average APL equivalent of 50 %.

Documents
Document Sharing Hub
Full document details: IEC 62341-6-1 2017