IEC 62341-6-2

Edition 2.0 2015-12

INTERNATIONAL STANDARD

colour inside

Organic light emitting diode (OLED) displays – Part 6-2: Measuring methods of visual quality and ambient performance

IEC 62341-6-2:2015-12(en)

Documents
Document Sharing Hub

Full document details: IEC 62341-6-2 2015

THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2015 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue
The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,…). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org
The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary
More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-2 2015

IEC 62341-6-2

Edition 2.0 2015-12

INTERNATIONAL STANDARD

colour inside

Organic light emitting diode (OLED) displays –
Part 6-2: Measuring methods of visual quality and ambient performance

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.260

ISBN 978-2-8322-3026-8

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: IEC 62341-6-2 2015

CONTENTS

FOREWORD 5
1 Scope 7
2 Normative references 7
3 Terms, definitions and abbreviations 7
3.1 Terms and definitions 7
3.2 Abbreviations 10
4 Structure of measuring equipment 10
5 Standard measuring conditions 10
5.1 Standard measuring environmental conditions 10
5.2 Standard lighting conditions 10
5.2.1 Dark-room conditions 10
5.2.2 Ambient illumination conditions 11
5.3 Standard setup conditions 16
5.3.1 General 16
5.3.2 Adjustment of OLED display modules 16
5.3.3 Starting conditions of measurements 16
5.3.4 Conditions of measuring equipment 16
6 Visual inspection of static images 17
6.1 General 17
6.2 Classification of visible defects 17
6.2.1 General 17
6.2.2 Reference examples for subpixel defects 17
6.2.3 Reference example for line defects 19
6.2.4 Reference example for mura defects 19
6.3 Visual inspection method and criteria 20
6.3.1 Standard inspection conditions 20
6.3.2 Standard inspection method 21
6.3.3 Inspection criteria 23
7 Electro-optical measuring methods under ambient illumination 24
7.1 Reflection measurements 24
7.1.1 Purpose 24
7.1.2 Measuring conditions 24
7.1.3 Measuring the hemispherical diffuse reflectance 25
7.1.4 Measuring the reflectance factor for a directional light source 26
7.2 Ambient contrast ratio 28
7.2.1 Purpose 28
7.2.2 Measuring conditions 28
7.2.3 Measuring method 28
7.3 Display daylight colour 29
7.3.1 Purpose 29
7.3.2 Measuring conditions 29
7.3.3 Measuring method 29
7.4 Daylight colour gamut volume 30
7.4.1 Purpose 30
7.4.2 Measuring conditions 30
7.4.3 Measuring method 31

AVA Documents
Document Sharing Hub

7.4.4 Reporting 32
Annex A (informative) Measuring relative photoluminescence contribution from displays 34
A.1 Purpose 34
A.2 Measuring conditions 34
A.3 Measuring the bi-spectral photoluminescence of the display 34
A.4 Determining the relative PL contribution from the display 34
Annex B (informative) Diagnostic for observing display luminance dependence from ambient illumination 37
B.1 Purpose 37
B.2 Measuring method 37
Annex C (informative) Calculation method of daylight colour gamut volume 38
C.1 Purpose 38
C.2 Procedure for calculating the colour gamut volume 38
C.3 Surface subdivision method for CIELAB gamut volume calculation 40
C.3.1 Purpose 40
C.3.2 Assumptions 40
C.3.3 Algorithm 40
C.3.4 Software example execution 40
Bibliography 46

Figure 1 –Example of visual inspection room setup for control of ambient room lighting and reflections 11
Figure 2 –Example of measurement geometries for a uniform hemispherical diffuse illumination condition using an integrating sphere and sampling sphere 13
Figure 3 – Directional source measurement geometry using an isolated source 15
Figure 4 – Directional source measurement geometry using a ring light source 15
Figure 5 – Layout diagram of measurement setup 16
Figure 6 – Classification of visible defects 17
Figure 7 – Bright subpixel defects 18
Figure 8 – Criteria for classifying bright and dark subpixel defects 19
Figure 9 – Bright and dark line defects 19
Figure 10 –Sample image of line mura 20
Figure 11 – Example of spot mura 20
Figure 12 – Setup condition for visual inspection of electro-optical visual defects 22
Figure 13 – Shape of scratch and dent defect 24
Figure 14 –Example of range in colours produced by a given display as represented by the CIELAB colour space 32
Figure A.1 – Scaled bi-spectral photoluminescence response from a display 35
Figure A.2 – Decomposed bi-spectral photoluminescence response from a display 35
Figure B.1 – Example of display luminance reduction caused by the high illuminance from a high intensity LED flashlight directed at the display surface 37
Figure C.1 – Analysis flow chart for calculating the colour gamut volume 38
Figure C.2 – Graphical representation of the colour gamut volume for sRGB in the CIELAB colour space 39

Table 1 – Definitions for types of scratch and dent defects 24

Documents
Document Sharing Hub
Full document details: IEC 62341-6-2 2015

Table 2 – Eigenvalues M_1 and M_2 for CIE daylight Illuminants D50 and D75 26
Table 3 – Example of minimum colours required for gamut volume calculation of a 3-primary 8-bit display 31
Table 4 – Measured tristimulus values for the minimum set of colours (see Table 3) required for gamut volume calculation under the specified ambient illumination condition 33
Table 5 – Calculated white point in the darkened room and daylight ambient condition 33
Table 6 – Colour gamut volume in the CIELAB colour space 33
Table C.1 – Tristimulus values of the sRGB primary colours 39
Table C.2 –Example of sRGB colour set represented in the CIELAB colour space 39
Table C.3 –Example of sRGB colour gamut volume in the CIELAB colour space 40

Documents
Document Sharing Hub
Full document details: IEC 62341-6-2 2015

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ORGANIC LIGHT EMITTING DIODE (OLED) DISPLAYS –

Part 6-2: Measuring methods of visual quality and ambient performance

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62341-6-2 has been prepared by IEC technical committee 110: Electronic display devices.

This second edition cancels and replaces the first edition published in 2012. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) Contents of 7.4 are changed.
b) Contents and items of Annex C are changed.
c) Annex B is added.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-2 2015

The text of this standard is based on the following documents:

FDIS	Report on voting
110/695/FDIS	110/718/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

A list of all parts of the IEC 62341 series, published under the general title *Organic light emitting diode (OLED) displays,* can be found on the IEC website.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-2 2015

ORGANIC LIGHT EMITTING DIODE (OLED) DISPLAYS –

Part 6-2: Measuring methods of visual quality and ambient performance

1 Scope

This part of IEC 62341 specifies the standard measurement conditions and measurement methods for determining the visual quality and ambient performance of organic light emitting diode (OLED) display modules and panels. This document mainly applies to colour display modules.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050 (all parts), *International Electrotechnical Vocabulary* (available at www.electropedia.org)

IEC 61966-2-1, *Multimedia systems and equipment – Colour measurement and management – Part 2-1: Colour management – Default RGB colour space – sRGB*

IEC 62341-1-2, *Organic light emitting diode (OLED) displays – Part 1-2: Terminology and letter symbols*

CIE 15:2004, *Colorimetry*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-845 and IEC 62341-1-2, as well as the following apply.

3.1.1
visual inspection
means for checking image quality by human visual observation for classification and comparison against limit sample criteria

3.1.2
subpixel defects
all or part of a single subpixel, the minimum colour element, which is visibly brighter or darker than surrounding subpixels of the same colour.

Note 1 to entry: Further classifications of subpixel defects are made depending on the number and configuration of multiple subpixel defects within a region of the display.

Note 2 to entry: For monochromatic displays, the term “dot defect” may be used.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-2 2015

3.1.3
bright subpixel defects
defects in subpixels or dots which are visibly brighter than surrounding subpixels of the same colour when addressed with a uniform dark or grey background

3.1.4
dark subpixel defects
defects in subpixels or dots which are visibly darker than surrounding subpixels of the same colour when addressed with a uniform bright background (e.g. > 50 % full screen luminance)

3.1.5
partial subpixel defects
defects in subpixels or dots with part of the emission area obscured such that a visible difference in brightness is observed in comparison with neighboring subpixels of the same colour

3.1.6
clustered subpixel defects
subpixel or dot defects gathered in a specified area or within a specified distance

Note 1 to entry: This is also known as “close subpixel defect”.

3.1.7
unstable subpixel
subpixel or dot that changes luminance in an uncontrollable way

3.1.8
pixel shrinkage
reduction in the active emissive area of one or more subpixels (or dots) over time

3.1.9
panel edge shrinkage
reduction in the active emissive area from the edges of the display area over time

3.1.10
line defects
defects in a vertical or horizontal bright or dark line parallel to a row or column observed against a dark or bright background, respectively

3.1.11
bright line defects
defects in lines appearing bright when displayed with a uniform dark or grey pattern

3.1.12
dark line defects
defects in lines appearing dark when displayed with a uniform bright or grey pattern

3.1.13
mura
visible defects in regions in which the luminance and colour non-uniformity generally vary more gradually than subpixel level defects

Note 1 to entry: For classification, the maximum dimension should be less than one fourth of the display width or height.

3.1.14
line mura
variation in luminance consisting of one or more lines extending horizontally or vertically across all or a portion of the display

AVA Documents
Document Sharing Hub
Full document details: IEC 62341-6-2 2015

3.1.15
colour mura
mura that appears primarily in only one colour channel and results in a local variation of the white point (or CCT)

3.1.16
spot mura
visible defects in regions in which the luminance variation is larger than a single pixel, and which appear as a localized slightly darker or brighter region with a smoothly varying edge

3.1.17
mechanical defects
image artefacts arising from defects in protective and contrast enhancement films, coatings, mechanical fixturing, or other elements within the active area of the display

3.1.18
scratch defect
defect appearing as fine single or multiple lines or scratches, generally light in appearance on a dark background, and independent of the display state

3.1.19
dent defect
localized spot generally white or grey in appearance on dark background and independent of the display state

3.1.20
foreign material
defect caused by a foreign material like dust or thread in between the contrast enhancement films, protective films, or on an emitting surface within the active area of the display

3.1.21
bubble
defect caused by a cavity in or between sealing materials, adhesives, contrast enhancement films, protective films, or any other films within the active area of the display

3.1.22
ambient contrast ratio
contrast ratio of a display with external natural or artificial illumination incident onto its surface and which includes indoor illumination from luminaires, or outdoor daylight illumination

3.1.23
colour gamut boundary
surface determined by a colour gamut's extremes

3.1.24
colour gamut volume
single number for characterizing the colour response of a display device in a three-dimensional colour space

Note 1 to entry: Typically the colour gamut volume is calculated in the CIELAB colour space.

3.1.25
ambient colour gamut volume
single number for characterizing the colour response of a display device, under a defined ambient illumination condition, in a three-dimensional colour space

Note 1 to entry: Typically the colour gamut volume is calculated in the CIELAB colour space.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-2 2015

3.2 Abbreviations

For the purposes of this document, the following abbreviations apply.

CCT	correlated colour temperature
CIE	Commission Internationale de l'Eclairage (International Commission on Illumination)
CIELAB	CIE 1976 (L*a*b*) colour space
DUT	device under test
HD	high definition
ISO	International Organization for Standardization
LED	light emitting diode
LMD	light measuring device
LTPS	low temperature polysilicon
OLED	organic light emitting diode
PL	photoluminescence
QVGA	quarter video graphics array
RGB	red, green, blue
SDCM	standard deviation of colour matching
sRGB	standard RGB colour space as defined in IEC 61966-2-1
TFT	thin film transistor
TV	television
UV	ultraviolet

4 Structure of measuring equipment

The system diagrams and/or operating conditions of the measuring equipment shall comply with the structure specified in each item.

5 Standard measuring conditions

5.1 Standard measuring environmental conditions

Electro-optical measurements and visual inspection shall be carried out under the standard environmental conditions, at a temperature of 25 °C ± 3 °C, a relative humidity of 25 % to 85 %, and a pressure of 86 kPa to 106 kPa. When different environmental conditions are used, they shall be noted in the visual inspection or ambient performance report.

5.2 Standard lighting conditions

5.2.1 Dark-room conditions

The luminance contribution from the background illumination reflected off the test display shall be ≤ 0,01 cd/m^2 or less than 1/20 the display's black state luminance, whichever is lower. If these conditions are not satisfied, then background subtraction is required and it shall be noted in the ambient performance report. In addition, if the sensitivity of the LMD is inadequate to measure at these low levels, then the lower limit of the LMD shall be noted in the ambient performance report.

Unless stated otherwise, the standard lighting conditions shall be the dark-room conditions.

Documents
Document Sharing Hub

Full document details: IEC 62341-6-2 2015

5.2.2 Ambient illumination conditions

5.2.2.1 Ambient illumination conditions for visual inspection

Ambient illumination conditions have a strong impact on the ability of the inspector to resolve defects, and large variations of light intensity in the visual field can lead to inspector fatigue and a resulting loss of sensitivity to defects. Refer to ISO 9241-310 for general guidance on optimal illumination conditions for visual inspection of pixel defects. [1][1]

For inspector comfort and consistency of inspection conditions, an average ambient illuminance of between 50 lx and 150 lx is suggested in the inspector's work area. This ambient illuminance may be measured, for example, with an illuminance meter facing directly upward in a horizontal plane at the approximate eye level of the inspector. Care shall be taken to use diffuse illumination and diffuse textures in the inspection environment, to avoid glare in the visual field of the inspector. An example of the measurement geometry is shown in Figure 1.

The display under test shall be placed to avoid direct illumination from ambient room light sources. In addition, dark light-absorbing materials shall be used to cover specular surfaces that may be viewed by the inspector in direct reflection from the display surface. In any case, to limit degradation of the display contrast from ambient light, the ambient illuminance incident from room light sources on the display surface measured with the display off shall be < 20 lx. If ambient illuminance at the display surface is > 20 lx, it shall be noted in the visual inspection report.

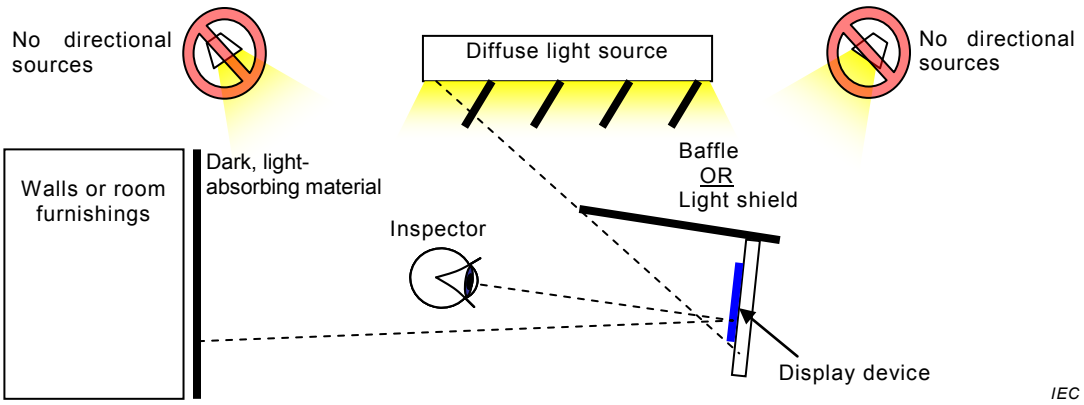

Figure 1 –Example of visual inspection room setup for control of ambient room lighting and reflections

5.2.2.2 Ambient illumination conditions for electro-optical measurements

The following illumination conditions are prescribed for electro-optical measurements of displays in ambient indoor or outdoor illumination conditions. Ambient indoor room illumination and outdoor illumination of clear sky daylight, on a display shall be approximated by the combination of two illumination geometries.[2] Uniform hemispherical diffuse illumination will be used to simulate the background lighting in a room, or the hemispherical skylight incident on the display, with sun occluded. A directed source in a dark room will simulate the effect of directional illumination on a display by a luminaire in a room, or from direct sunlight.

Some displays can emit photoluminescence (PL) when exposed to certain light. The relative impact of PL on the reflection measurement can be determined, and is described in Annex A. An illumination condition that causes a significant reflection measurement error due to the presence of PL should be treated carefully. If the same illumination spectral distribution and

[1] Numbers in square brackets refer to the Bibliography.

Documents
Document Sharing Hub
Full document details: IEC 62341-6-2 2015

illumination/detection geometry is used for the reflection measurements and the calculation of ambient contrast ratio and colour, then the PL can be incorporated into the reflection coefficients. However, if the illumination spectrum used in the calculations is significantly different, then the reflected component shall be measured separately from the PL component. The latter case is not addressed in this document.

It should also be confirmed that the display luminance is not sensitive to the ambient illumination incident on the display. Annex B provides a simple diagnostic to confirm this.

The following illumination conditions shall be used to simulate indoor and outdoor display viewing environments:

a) Indoor room illumination conditions:

1) Uniform hemispherical diffuse illumination – Use a light source closely approximating CIE Standard Illuminant A, CIE Standard Illuminant D65, or CIE Standard Illuminant D50 as defined in CIE 15:2004. The use of an infrared-blocking filter is also recommended to minimize sample heating from the illuminants. The UV region (< 380 nm) of all light sources shall be cut off. Additional sources may also be used, depending on the intended application. For spectral measurements, if it can be demonstrated that the display does not exhibit significant PL (< 1 % PL, see Annex A) for the selected reference source spectra, then a spectrally smooth broadband source (such as an approximation to CIE Standard Illuminant A) may be used to measure the spectral reflectance. Without significant PL, a measurement of the spectral reflectance using a broad source (like Illuminant A) enables the ambient contrast ratio and colour to be calculated later for the desired reference spectra (for example D65). The indoor room contrast ratio shall be calculated using 60 lx of uniform hemispherical illumination (with specular included) incident on the display surface for a typical TV viewing room, and 300 lx for an office environment.[3] The actual hemispherical diffuse reflectance measurement may require higher illumination levels for better measurement accuracy. The results are then scaled to the required illumination level.

2) Directional illumination – The same source spectra shall be used as with uniform hemispherical diffuse illumination. If a different spectral source is used, it shall be noted in the ambient performance report. The presence of significant PL (see Annex A) shall also be determined for the measured source, and the preceding limitations be applied when PL is present. The indoor room contrast ratio or colour shall be calculated using directional illumination of 40 lx incident on the display surface for a typical TV viewing room, and 200 lx for an office environment with the display in the vertical orientation. The actual reflectance factor measurement may require higher illumination levels for better measurement accuracy. The directed source shall be 45° above the surface normal (θ_s= 45°, θ_d= 0°; see Figure 3) and have an angular subtense of no more than 8°. The angular subtense is defined as the full angle span of the light source from the centre of the display's measurement area.

Other illumination levels may be used in addition to those defined above for calculating the ambient contrast ratio under indoor illumination conditions. However, approximately 60 % of the total illuminance should be uniform hemispherical diffuse and 40 % directional illumination.

b) Daylight illumination conditions:

1) Uniform hemispherical diffuse illumination – Use a light source closely approximating skylight with the spectral distribution of CIE Illuminant D75.[4] Additional CIE daylight illuminants may also be used, depending on the intended application. An infrared-blocking filter is recommended to minimize sample heating. The UV region (< 380 nm) of the light source shall be cut off. For spectral measurements, if it can be demonstrated that the display does not exhibit significant PL for a 7 500 K correlated colour temperature (CCT) source, then spectral reflectance factor measurements can be made using a spectrally smooth broadband source (such as an approximation to CIE Standard Illuminant A). The contrast ratio or colour can be calculated later for the D75 illuminant spectra. The daylight contrast ratio and colour shall be calculated using 15 000 lx of uniform hemispherical diffuse illumination (with specular included) incident

AVA Documents
Document Sharing Hub
Full document details: IEC 62341-6-2 2015

on a display surface in a vertical orientation.[4],[5] The actual hemispherical diffuse reflectance measurement may be taken at lower illumination levels.

2) Directional illumination – The directional light source shall approximate CIE daylight Illuminant D50.[4] Additional CIE daylight illuminants may also be used, depending on the intended application. The use of an infrared-blocking filter is recommended to minimize sample heating. The UV region (< 380 nm) of the light source shall be cut off. If it can be demonstrated that the display does not exhibit significant PL for a source approximating Illuminant D50, then a spectrally smooth broadband source (such as an approximation to CIE Standard Illuminant A) may be used for the reflectance factor measurement. The ambient contrast ratio or colour can be calculated later with the D50 Illuminant spectra. The daylight contrast ratio or colour shall be calculated using 65 000 lx for a directed source at an inclination angle of θ_s = 45° to the display surface (see Figure 3).[4],[5] The actual reflectance factor measurement may be taken at lower illumination levels, and the contrast ratio and colour calculated for the correct illuminance. The directed source shall have an angular subtense of approximately 0,5°.

   For daylight contrast ratio and colour calculations from spectral reflectance factor measurements, the relative spectral distributions of CIE Illuminants A, D65, D50 and D75 tabulated in CIE 15:2004 shall be used. Additional CIE daylight illuminants shall be determined using the appropriate eigenfunctions, as defined in CIE 15:2004.

5.2.2.3 Uniform hemispherical diffuse illumination

An integrating sphere, sampling sphere, or hemisphere shall be used to implement uniform hemispherical illumination conditions. Two possible examples of the measurement geometry are shown in Figure 2. If an integrating sphere that is at least seven times the physical outer diagonal of the display is available, the display can be mounted in the centre of the sphere (Figure 2, configuration A). For large displays, a sampling sphere (configuration B) or hemisphere would be more suitable. In all cases, the configuration shall follow the standard *di*/8° to *di*/10° illumination/detection geometry, where *di* is the standard notation for diffuse with specular included.

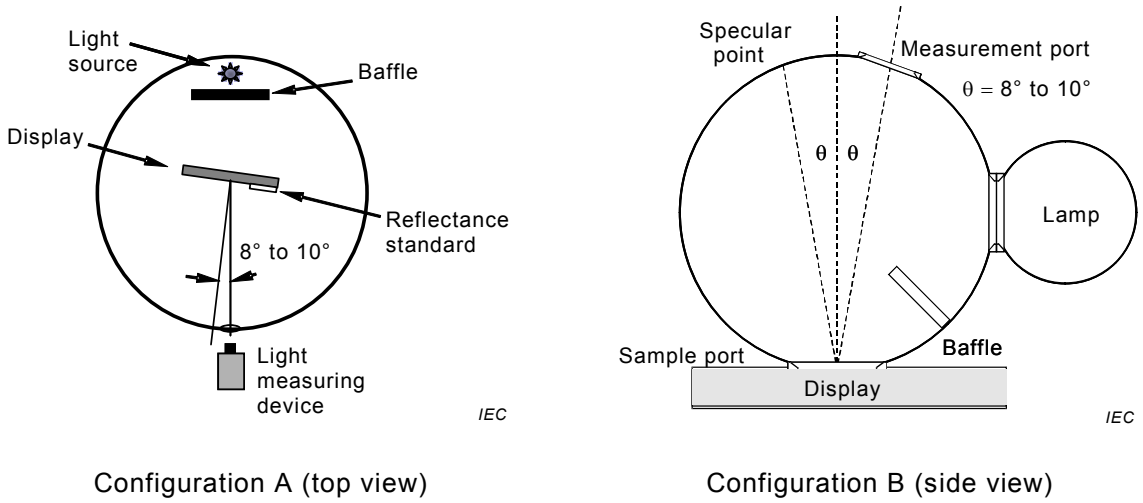

Configuration A (top view) Configuration B (side view)

Figure 2 –Example of measurement geometries for a uniform hemispherical diffuse illumination condition using an integrating sphere and sampling sphere

1) The display is placed in the centre of an integrating sphere/hemisphere, or against the sample port of a sampling sphere. The reflected luminance off the display from the sphere shall be much greater (> 10) than the luminance from the display-generated light. For displays without significant PL, the reflected luminance from the sphere can be estimated with the display turned OFF.

2) For daylight measurements with an approximate 7 500 K CCT light source, an infrared-blocking filter is recommended to minimize sample heating. The colour temperature and illumination spectra can be measured from the reflected light of a white diffuse reflectance standard near the display measurement area (Figure 2, configuration A), or the sampling

Documents
Document Sharing Hub
Full document details: IEC 62341-6-2 2015