IEC 63033-1

Edition 1.0 2022-04

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Multimedia systems and equipment for vehicles – Surround view system – Part 1: General

Systèmes et équipements multimédias pour véhicules – Système de vision panoramique – Partie 1: Généralités

IEC 63033-1:2022-04en-fr)

AVA Documents
Document Sharing Hub

Full document details: IEC 63033-1-2022

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC
La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC
Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform
La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, …). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished
Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc
Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org
Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Documents
Document Sharing Hub

Full document details: IEC 63033-1-2022

IEC 63033-1

Edition 1.0 2022-04

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Multimedia systems and equipment for vehicles – Surround view system – Part 1: General

Systèmes et équipements multimédias pour véhicules – Système de vision panoramique – Partie 1: Généralités

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 33.160.99; 43.040.15

ISBN 978-2-8322-1095-0

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

AVA Documents
Document Sharing Hub

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

Full document details: IEC 63033-1-2022

CONTENTS

FOREWORD 4
INTRODUCTION 6
1 Scope 7
2 Normative references 7
3 Terms, definitions and abbreviated terms 7
3.1 Terms and definitions 7
3.2 Abbreviated terms 7
4 System model 7
4.1 General 7
4.2 Number of cameras and camera field of view 8
4.3 Method for projecting visual image to 3D projection surface 9
4.4 Visualizing the projection image at free eye point 11
4.5 Free eye point capability 11
5 Camera configuration 11
5.1 Camera 11
5.2 Lens distortion data 11
5.2.1 General 11
5.2.2 Distortion data of rotationally symmetric lens 12
5.2.3 Distortion data of non-rotationally symmetric lens 12
5.3 Optical axis shift data 13
6 Rendering 14
6.1 General 14
6.2 Composite view data 14
6.2.1 3D projection surface data 14
6.2.2 Capture size 14
6.2.3 Conversion of eye point parameter 15
6.2.4 Virtual 3D image car model data 16
6.2.5 Guide line and bitmap data 16
6.2.6 Layout data and layer setting data 17
Annex A (informative) Camera mounting to the car 19
A.1 Camera mounting position 19
A.2 Camera mounting height 19
A.3 Camera mounting angle 19
Annex B (informative) Camera field of view 21
Annex C (informative) Camera calibration 22
Annex D (informative) Display 23
D.1 Display specification data 23
D.2 Composite view change mode 23
Annex E (informative) Time behaviour 24
E.1 Start-up time 24
E.2 Frame rate 24
E.3 Latency 24
Bibliography 25

Figure 1 – System model for surround view system 8

AVA Documents
Document Sharing Hub

Full document details: IEC 63033-1-2022

Figure 2 – Horizontal angle of view of the camera 9
Figure 3 – Vertical angles of view at the camera 9
Figure 4 – 3D projection surface 10
Figure 5 – Projecting to 3D projection surface 11
Figure 6 – Distortion data of a rotationally symmetric lens 12
Figure 7 – Distortion data format of rotationally symmetric lens 12
Figure 8 – Distortion data of a non-rotationally symmetric lens 12
Figure 9 – Distortion data format of a non-rotationally symmetric lens 13
Figure 10 – Texture normalization coordinate at the centre of each optical axis 13
Figure 11 – The format of optical shift data 14
Figure 12 – 3D projection surface data 14
Figure 13 – Capture specification data format 15
Figure 14 – Camera angle in conversion of eye point 15
Figure 15 – Camera position/scaling in conversion of eye point 15
Figure 16 – Virtual 3D image car model at original dimensions 16
Figure 17 – Virtual 3D image car model at real dimensions 16
Figure 18 – Guide line and bitmap data 17
Figure 19 – Camera image coordinate system 17
Figure 20 – Screen coordinate system 18
Figure 21 – Object coordinate system 18
Figure 22 – Layout data and layer setting data 18
Figure A.1 – Camera mounting position 19
Figure A.2 – Camera mounting height 19
Figure A.3 – Camera mounting angle 20
Figure C.1 – Camera calibration 22

Documents
Document Sharing Hub
Full document details: IEC 63033-1-2022

INTERNATIONAL ELECTROTECHNICAL COMMISSION

MULTIMEDIA SYSTEMS AND EQUIPMENT FOR VEHICLES – SURROUND VIEW SYSTEM –

Part 1: General

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 63033-1 has been prepared by technical area 17: Multimedia systems and equipment for vehicles, of IEC technical committee 100: Audio, video and multimedia systems and equipment. It is an International Standard.

This first edition cancels and replaces IEC TS 63033-1 published in 2017. This edition constitutes a technical revision.

The text of this International Standard is based on the following documents:

Draft	Report on voting
100/3728/FDIS	100/3751/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

Documents
Document Sharing Hub

Full document details: IEC 63033-1-2022

The language used for the development of this International Standard is English.

A list of all parts in the IEC 63033 series, published under the general title *Multimedia systems and equipment for vehicles – Surround view system*, can be found on the IEC website.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC 63033-1-2022

INTRODUCTION

The purpose of this document is to specify the model for generating the surrounding visual image of the surround view system, which provides drivers with an image of the car's surroundings. The surround view system is characterised by audio-visual monitoring and recording, which is part of the car's multimedia equipment.

When manoeuvring, the driver relies on the images provided by the rear-view monitor for parking assistance, the blind spot monitor for displaying views of the blind spots at intersections with poor visibility, and the bird's-eye view monitor. But each surround view system provides a different viewpoint to the driver. It's a heavy burden for a car driver to switch between these systems and quickly recognize the multiple fields of view. And the fields of view are limited to these camera systems, and they cannot freely change the viewpoint depending on the driving situation. Thus, the usage range of these systems is limited to such manoeuvres as parking assistance. Furthermore, on commercial vehicles such as trucks and buses, and special vehicles such as construction machinery and agricultural machinery, the usage range of these systems is even more limited. Nobody can assist drivers of large vehicles in ensuring the car's correct position.

With a surround view system, it is possible to quickly ensure the car's proper positioning in various driving situations. And not only for passenger cars, but good positioning can also be quickly ensured for commercial vehicles and special vehicles.

This document specifies the model for generating the surrounding visual image of the surround view system. IEC 63033-2 specifies the information sets that are provided by the surround view system, and recording methods for that information and visual images. IEC 63033-3 specifies the measurement methods of surrounding visual images for the surround view system.

Documents
Document Sharing Hub

Full document details: IEC 63033-1-2022

MULTIMEDIA SYSTEMS AND EQUIPMENT FOR VEHICLES – SURROUND VIEW SYSTEM –

Part 1: General

1 Scope

This part of IEC 63033 specifies the model for generating the surrounding visual image of the surround view system.

2 Normative references

There are no normative references in this document.

3 Terms, definitions and abbreviated terms

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1 Terms and definitions

3.1.1
car
powered wheeled vehicle of any kind

3.2 Abbreviated terms

3D	three dimensional
camera ECU	camera electronic control unit
CAN	controller area network
GUI	graphical user interface
AD	analogue-to-digital
DA	digital-to-analogue

4 System model

4.1 General

The system model of the surround view system is described in Figure 1. Cameras, which are mounted on the outside of the car, capture the visual image of the area surrounding the car and these visual data are projected onto a 3D projection surface. The visual image can then be displayed as a composite image. The images can be rendered from various viewpoints with the parameters for capture. The number of cameras required on vehicles other than automobiles can be more than four depending on the size and shape of the car. This model defines a system with four cameras for general application. The number of cameras actually used for each composite image changes depending on the viewpoint. The mounting positions and angles for the four cameras should be calibrated in accordance with the data described in 4.2 and 4.3.

AVA Documents
Document Sharing Hub

See Annex D for information about display attributes and Annex E for information about the reactivity of the system.

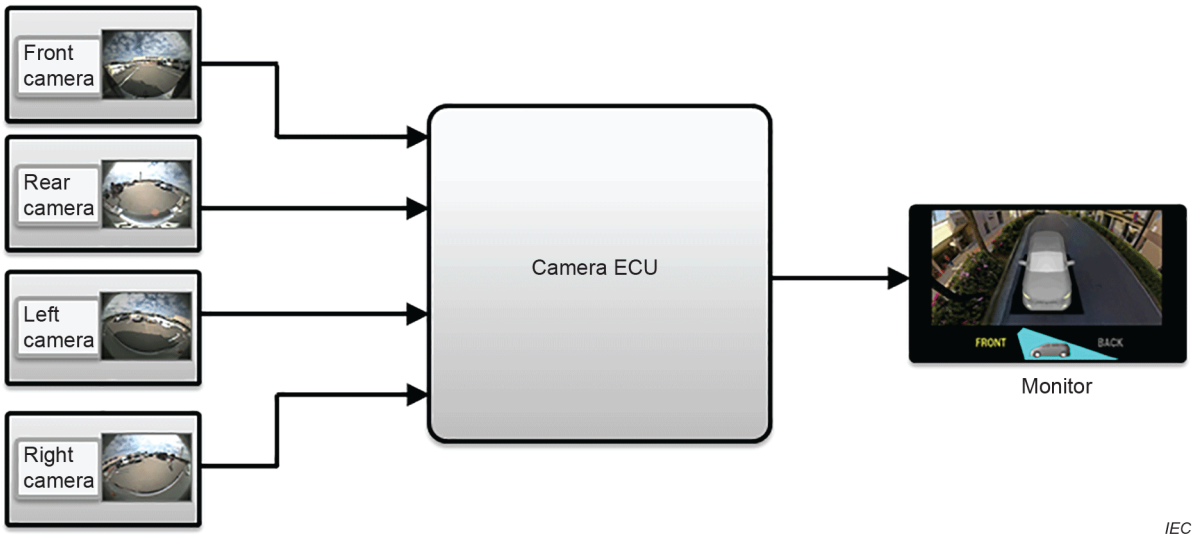

Figure 1 – System model for surround view system

4.2 Number of cameras and camera field of view

The horizontal angle of view of the camera is described in Figure 2. Overlapping areas and blind spots on the horizontal field of view change depending on the number of cameras and the horizontal angle of view of the camera. Overlapping areas should be wide for getting better composite views. The number of cameras and the horizontal angle of view of the camera shall be determined to ensure that there are no blind spots.

The vertical angle of view and the tilt angle ψ_{Front} of the front camera and the vertical angle of view and the tilt angle ψ_{Rear} of the rear camera are described in Figure 3. The blind spot of the vertical field of view changes depending on the vertical angle of view of the camera and the tilt angle ψ. The vertical angle of view of the camera and the tilt angle ψ shall be chosen to ensure that no blind spots are generated. The details are described in Annex A.

Documents
Document Sharing Hub
Full document details: IEC 63033-1-2022

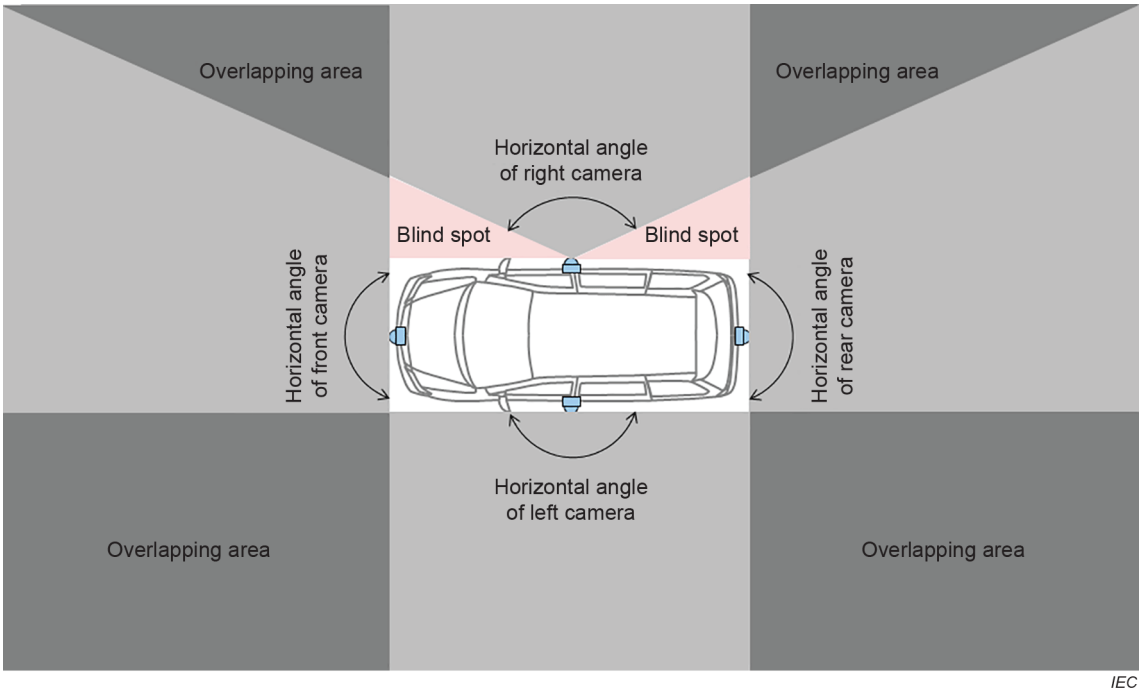

Figure 2 – Horizontal angle of view of the camera

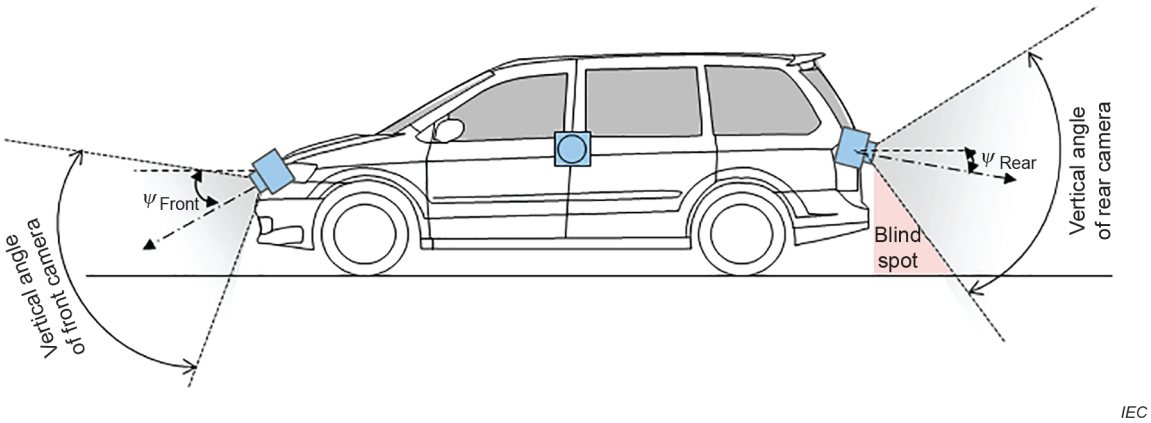

Figure 3 – Vertical angles of view at the camera

4.3 Method for projecting visual image to 3D projection surface

Following the right-handed coordinate system, the length of the car is the Y_{car} axis, the width direction of the car is X_{car} axis, and the direction of the height of the car is the Z_{car} axis. The projection surface of the camera video image is $Z_V = 0$, the road surface. The 3D projection surface that shall be used is shown in Figure 4. Projecting to a 3D projection surface is described in Figure 5. The 3D projection surface should cover the 3D surface as the polygon model is similar to a polyhedron. The coordinate P_V of the one point of the 3D projection surface is converted to the coordinate P_C according to the camera's coordinate system based on the origin of the optics of the car's cameras. This coordinate conversion is defined as:

$$P_C = M_{V \to C} \times P_V$$

Documents
Document Sharing Hub
Full document details: IEC 63033-1-2022

$M_{V \to C}$ is the coordinate conversion matrix to the car's coordinate system, which is determined by the camera's mounting position and the angle. The incident vector V_i when the car's camera photographs the subject at position P_C is defined as:

$$V_i = -\frac{P_C}{|P_C|}$$

The coordinates of the car's camera image record the subject of incident vector V_i calculated by the internal parameter of the car's camera. Projecting the car's cameras to a 3D projection surface is realized by arranging the pixels of four cameras with the relations mentioned above.

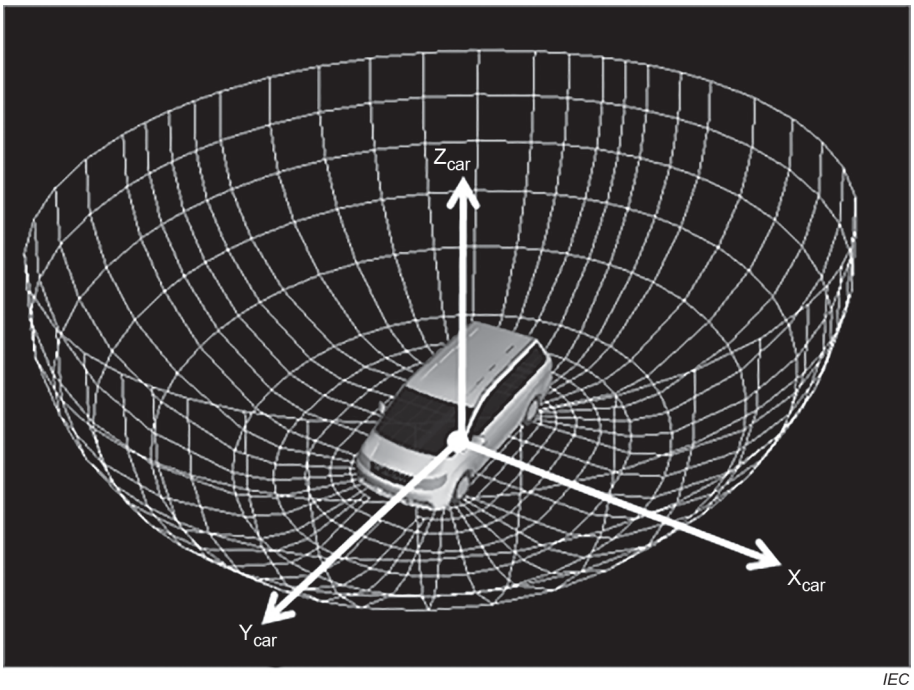

Figure 4 – 3D projection surface

Documents
Document Sharing Hub
Full document details: IEC 63033-1-2022

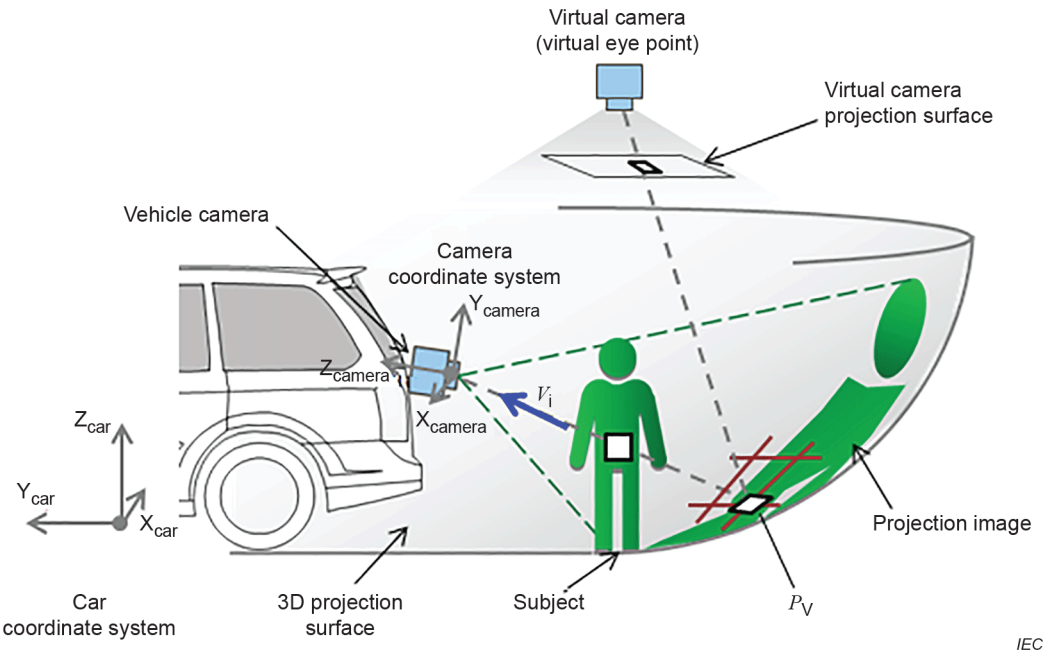

Figure 5 – Projecting to 3D projection surface

4.4 Visualizing the projection image at free eye point

The polygon model constituting the 3D projection surface can be visualized from any virtual eye point. Visualizing the polygon model uses 3D computer graphics technology. The texture image is the car's camera image updated at the system's video rate. The wrap-around view image is composed by performing the polygon rendering and the texture coordinate is the car's camera image coordinate that corresponds to the top of the polygon.

4.5 Free eye point capability

The parameters of the eye point, direction and field of view of the virtual camera are freely changed during polygon rendering. The eye point can be changed by changing the parameters of the virtual cameras, the car's surroundings and the driving situation for the same 3D projection surface. The animated image tied between individual eye points is smoothly adjusted by changing these parameters continually.

5 Camera configuration

5.1 Camera

The lens of the camera should be isotropic and have a rotary symmetric distortion characteristic in an optical axis. The details are described in Annex B.

5.2 Lens distortion data

5.2.1 General

Lens distortion data should be used during calibration. Lens distortion data should be arranged according to the coordinate data of the height of the real image corresponding to the incidence angle value in ascending order. The type of lens distortion data is either of rotationally symmetric lenses or of non-rotationally symmetric lenses.

Documents
Document Sharing Hub
Full document details: IEC 63033-1-2022

5.2.2 Distortion data of rotationally symmetric lens

Distortion data of rotationally symmetric lenses is described in Figure 6. It is composed of the angles of incidence a_1 and a_2 between the optical axis's centre and their distances d_1 and d_2 from the centre. The distortion data format of a rotationally symmetric lens is described in Figure 7.

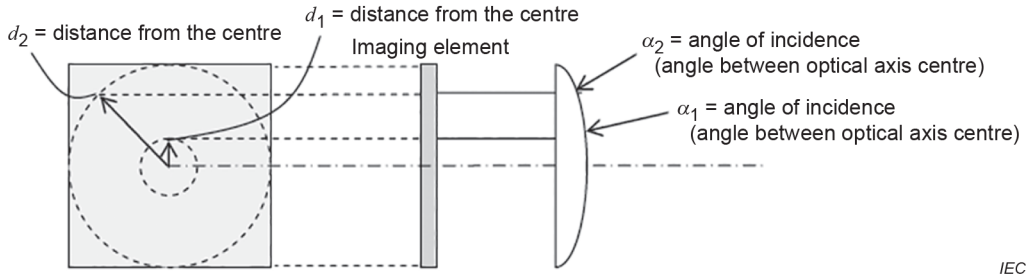

Figure 6 – Distortion data of a rotationally symmetric lens

```
File identifier              : [#        ]
Camera element size          : [Width, height]
Camera element dot pitch     : [Dot pitch X, dot pitch Y]
Number of array data         : [ n ]
Array definition             : [Angle of incidence, height of real image]
                                (unit: degree)      (unit: mm)
                               [a0                  ,:                  ]
                               [a0                  ,:                  ]
                               [a0                  ,:                  ]
                               [:                   ,:                  ]
                               [:                   ,:                  ]
                               [:                   ,:                  ]
                               [:                   ,:                  ]
                               [an−2                ,:                  ]
                               [an−1                ,:                  ]
                                                                    IEC
```

Figure 7 – Distortion data format of rotationally symmetric lens

5.2.3 Distortion data of non-rotationally symmetric lens

Distortion data of non-rotationally symmetric lenses is described in Figure 8. It is composed of an angle of incidence (pan angle and tilt angle) and the location (x,y) on the imaging element. The distortion data format of a non-rotationally symmetric lens is described in Figure 9.

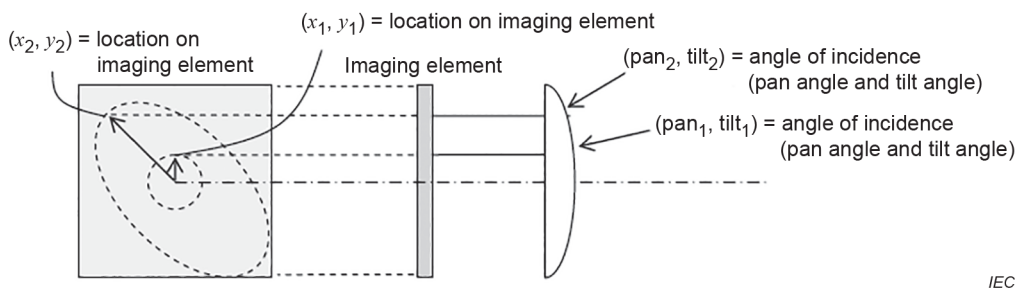

Figure 8 – Distortion data of a non-rotationally symmetric lens

Documents
Document Sharing Hub

File identifier : [#]
Camera element size : [Width, height]
Camera element dot pitch : [Dot pitch X, dot pitch Y]
Number of array data (lines, rows) : [n, m]
Array definition : [Pan angle of incidence, tilt angle of incidence, real image x coordinate, real image y coordinate]

(unit: degree)	(unit: degree)	(unit: mm)	(unit: mm)	
[$p,t_{(0,0)}$	,:	,:	,:	]
[$p,t_{(0,1)}$	,:	,:	,:	]
[$p,t_{(0,2)}$	,:	,:	,:	]
[:	,:	,:	,:	]
[:	,:	,:	,:	]
[$p,t_{(0,m-1)}$	,:	,:	,:	]
[$p,t_{(1,0)}$	,:	,:	,:	]
[:	,:	,:	,:	]
[:	,:	,:	,:	]
[:	,:	,:	,:	]
[:	,:	,:	,:	]
[$p,t_{(n-2,m-1)}$	,:	,:	,:	]
[$p,t_{(n-1,0)}$	,:	,:	,:	]
[:	,:	,:	,:	]
[:	,:	,:	,:	]
[$p,t_{(n-1,m-2)}$	,:	,:	,:	]
[$p,t_{(n-1,m-1)}$	,:	,:	,:	]

IEC

Figure 9 – Distortion data format of a non-rotationally symmetric lens

5.3 Optical axis shift data

Optical axis shift data should be used at calibration. Optical axis shift includes optical axis shift of camera, shift by AD or DA conversion, and shift from the ideal captured image. The optical axis shift adjusts the shift from the central coordinates and the captured image's width and height as an input. Optical shift data that should be matched on the texture coordinate is described in Figure 10. The format of optical shift data is described in Figure 11.

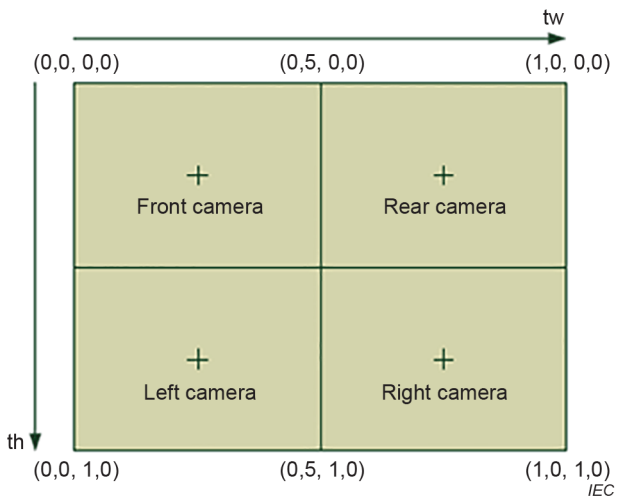

Figure 10 – Texture normalization coordinate at the centre of each optical axis

Documents
Document Sharing Hub
Full document details: IEC 63033-1-2022

File identifier	:[#]			
Front camera	:[(Texture normalization tw coordinate at each camera optical axis centre),	(Texture normalization th coordinate at each camera optical axis centre),	(Pixel expansion rate at horizontal direction),	(Pixel expansion rate] at vertical direction)
Rear camera	:[,	,	,	]
Left camera	:[,	,	,	]
Right camera	:[,	,	,	]

IEC

Figure 11 – The format of optical shift data

6 Rendering

6.1 General

The composite view data should be designed by the camera ECU manufacturer beforehand. In real time, the composite view is to be rendered using the camera parameter generated in 5.2 and 5.3 based on the composite view data designed beforehand. For every composite view data, the following data and parameters should be set:

– 3D projection surface data,
– capture specification data,
– conversion of eye point parameter,
– virtual 3D image car model data,
– guide lines and bitmap data,
– layout data and layer setting data.

6.2 Composite view data

6.2.1 3D projection surface data

3D projection surface examples are described in Figure 12. They should be designed depending on the car's size, the car's shape and the virtual eye point in every composite view data.

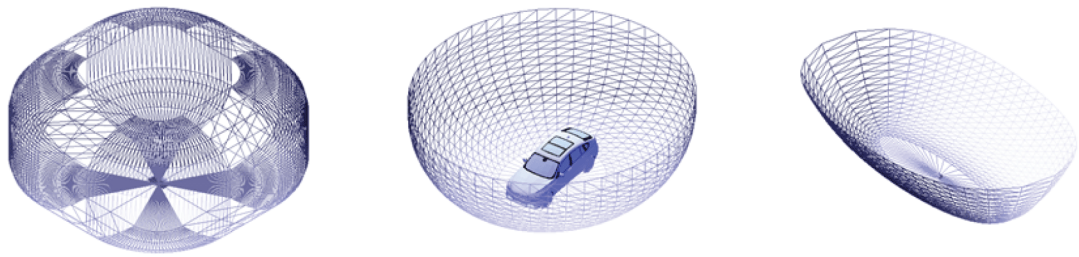

IEC

Figure 12 – 3D projection surface data

6.2.2 Capture size

Capture size indicates an effective pixel size of each camera actually used. The capture specification data format is described in Figure 13. Capture size should be determined depending on the camera's resolution.

Documents
Document Sharing Hub
Full document details: IEC 63033-1-2022

```
File identifier     :[#        ]
Camera format       :[ (color space) ]
Front camera        :[ (effective horizontal pixel size) × (effective vertical pixel size) ]
Rear camera         :[                                                                      ]
Left camera         :[                                                                      ]
Right camera        :[                                                                      ]
                                                                                        IEC
```

Figure 13 – Capture specification data format

6.2.3 Conversion of eye point parameter

The eye point should be fixed in every composite view depending on camera angle, position and scaling. The position of the point of view, the direction of view, and the scope of the field of view are interpolated before and after changing the point of view. Therefore, the driver can instantly recognize from what position the car is being viewed, and quickly ensure correct positioning on the road. The camera angle in the conversion of the eye point is described in Figure 14. Camera position/scaling in the conversion of the eye point is described in Figure 15.

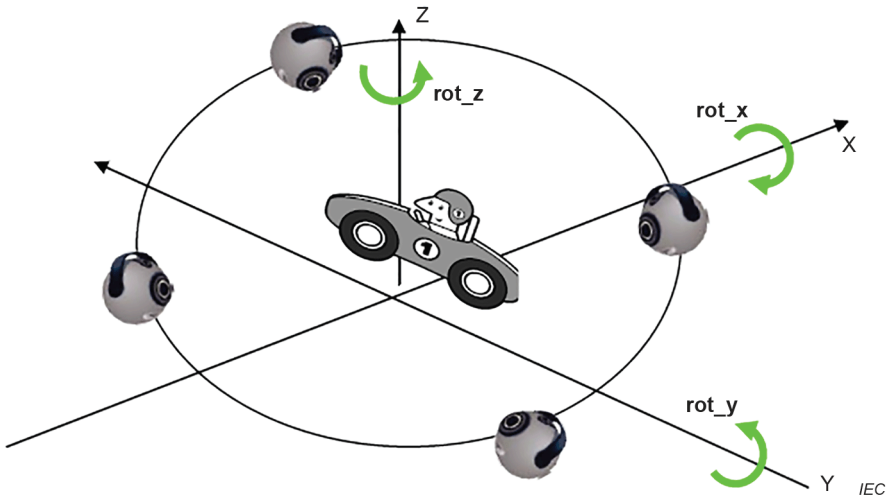

Figure 14 – Camera angle in conversion of eye point

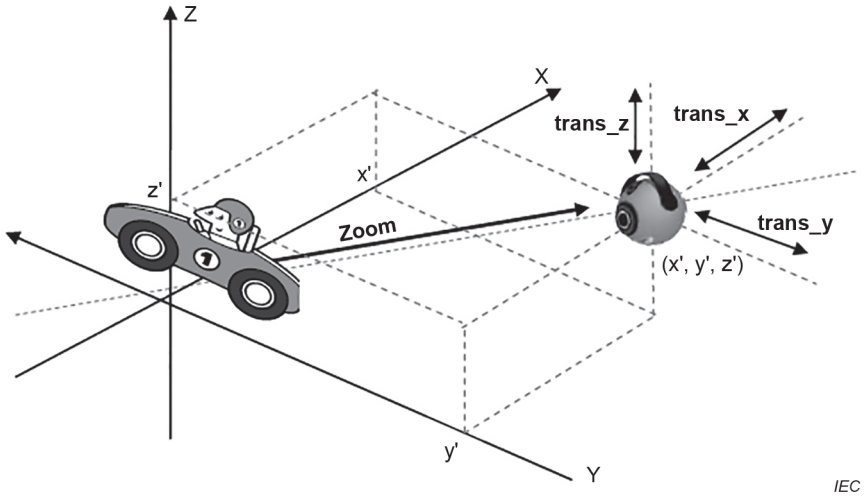

Figure 15 – Camera position/scaling in conversion of eye point

Documents
Document Sharing Hub
Full document details: IEC 63033-1-2022