IEC TR 62691

Edition 2.0 2016-06

TECHNICAL REPORT

colour inside

Optical fibre cables –
Guidelines to the installation of optical fibre cables

IEC TR 62691:2016-06(en)

Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue
The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,…). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org
The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary
65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

AVA Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

IEC TR 62691

Edition 2.0 2016-06

TECHNICAL REPORT

colour inside

Optical fibre cables –
Guidelines to the installation of optical fibre cables

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.10

ISBN 978-2-8322-3497-6

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

CONTENTS

FOREWORD 5
INTRODUCTION 7
1 Scope 8
2 Normative references 8
3 Installation planning 8
3.1 Installation specification 8
3.2 Route considerations 9
3.3 Cable installation – Tension considerations 9
3.4 Duct installations – Cable tension predictions 10
3.5 Maximum tension or compression force exerted on cable 10
3.5.1 General 10
3.5.2 Total cable tension – pulling applications 10
3.5.3 Total cable tension – pushing, blowing, or pulling applications 12
3.6 Installation temperature 17
3.7 Information and training 17
4 Cable installation methods 18
4.1 General considerations 18
4.2 Safety in confined spaces 18
4.3 FTTX installation 18
4.4 Pre-installation procedures 19
4.5 Installation of optical cables in underground ducts 19
4.5.1 Application 19
4.5.2 Installation using trenchless technique 20
4.5.3 Cable overload protection methods 20
4.5.4 Cable bending and guiding systems 20
4.5.5 Winching equipment and ropes 20
4.5.6 Cable friction and lubrication 21
4.5.7 Cable handling methods to maximise installed lengths 22
4.5.8 Jointing length allowance 23
4.5.9 Blowing techniques for the installation of fiber optic cables into ducts 23
4.5.10 Optical fibre cable installation by floating technique 23
4.6 Installation of aerial optical cables 23
4.6.1 Application 23
4.6.2 Installation methods 26
4.6.3 Cable protection methods 26
4.6.4 Winching and guiding systems 27
4.6.5 Methods to maximise lengths 27
4.6.6 Jointing length allowance 27
4.6.7 In-service considerations 27
4.6.8 Lashed aerial applications 28
4.7 Installation of buried cable 31
4.7.1 Installation methods 31
4.7.2 Cables in trenches 31
4.7.3 Installing cables by ploughing 33
4.7.4 Methods to maximise lengths 33
4.7.5 Jointing length allowance 33

AVA Documents
Document Sharing Hub
Full document details: IEC TR 62691 2016

4.8 Installation in special situations 33
4.8.1 Tunnel and building lead-in 33
4.8.2 Bridges 33
4.8.3 Underwater 33
4.8.4 Storm and sanitary sewers 34
4.8.5 High pressure gas pipes (fiber-in-gas) 38
4.8.6 Drinking water pipes 39
4.8.7 Industrial environments 41
4.9 Installation of indoor cables 41
4.9.1 General considerations 41
4.9.2 Cable routing 41
4.9.3 Confined spaces 42
4.9.4 Installation of cables in the vertical riser area of buildings 42
4.10 Blown systems 42
4.10.1 General considerations 42
4.10.2 Tube installation 43
4.10.3 Fibre and cable installation 43
4.11 Cable location 44
5 Lightning protection 44
Bibliography 45

Figure 1 – Cable tension calculations (Equations (1) to (3)) 11
Figure 2 – Cable tension calculations (Equations (4) to (9)) 14
Figure 3 – Cable tension calculations 17
Figure 4 – FTTX applications 19
Figure 5 – Cable with fitted sock-type grip 21
Figure 6 – The "figure-8" system 22
Figure 7 – Optical fibre cabling in an underground duct 23
Figure 8 – Aerial cable parameters 24
Figure 9 – Analysis of forces acting on an aerial cable with ice formation 25
Figure 10 – Example of calculated forces for an aerial operation cable design 26
Figure 11 – Aerial cable joint point 27
Figure 12 – Aerial cable applications 28
Figure 13 – Drive-off (moving reel) method 28
Figure 14 – Stationary reel method 29
Figure 15 – Minimum bend radius for the optical cable at dead ends (single fixing) and at directional changes (double anchorage) situations 31
Figure 16 – Conduit robotized installation 35
Figure 17 – Spring loaded stainless-steel ring – Conduit fastening 35
Figure 18 – Schematic drawing robotized installation – Drilling 36
Figure 19 – Schematic drawing – Spanning of optical fibre cables within sewers 37
Figure 20 – Schematic drawing – Laying on the ground of optical fibre cables within sewers 37
Figure 21 – Picture of an the I/O-port 38
Figure 22 – Schematic drawing of cable installation within gas pipe 39
Figure 23 – I/O-port for optical fibre installation in water drinking pipes 40

AVA Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

Figure 24 – Schematic drawing of OF cable installation within drinking water lines 40
Figure 25 – Installation of I/O-ports on high pressure PE drinking water pipes.....41
Figure 26 – Cable installation by cascade blowing 44

Table 1 – Calculation for total tension 12
Table 2 – Calculation for pulling force in Figure 2 14
Table 3 – Calculation for pushing force in Figure 2 15
Table 4 – Calculation for blowing force in Figure 2.....16
Table 5 – Minimum installation depths.....32

Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL FIBRE CABLES –

Guidelines to the installation of optical fibre cables

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC TR 62691, which is a Technical Report, has been prepared by subcommittee 86A: Fibres and cables, of IEC technical committee 86: Fibre optics.

This second edition cancels and replaces the first edition published in 2011. It constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) more details have been added on cables for lashed applications (transferred from IEC 60794-3-10);
b) more details have been added on cables for storm and sanitary sewer applications (transferred from IEC 60794-3-40);
c) more details have been added on cables for high pressure gas pipe applications (transferred from IEC 60794-3-50);

Documents
Document Sharing Hub
Full document details: IEC TR 62691 2016

d) more details have been added on cables for drinking water pipe applications (transferred from IEC 60794-3-60);

e) a reference to IEC TR 62263 has been included, concerning optical cables installation on high voltage power lines;

f) a revision, and an update when applicable, has been done on the referred documents.

The text of this Technical Report is based on the following documents:

Enquiry draft	Report on voting
86A/1721/DTR	86A/1730/RVC

Full information on the voting for the approval of this Technical Report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

INTRODUCTION

Optical fibre cabling provides a high performance communications pathway whose characteristics can be degraded by inadequate installation. This Technical Report provides guidance to assist the user and installer with regard to the general aspects of the installation of optical fibre cables covered by the IEC 60794 series, and the particular aspects of the "blowing" technique.

Optical fibre cables are designed so that normal installation practices and equipment can be used wherever possible. They do, however, generally have a strain limit rather lower than metallic conductor cables and, in some circumstances, special care and arrangements can be needed to ensure successful installation.

It is important to pay particular attention to the cable manufacturer's recommendations and stated physical limitations and not exceed the given cable tensile load rating for a particular cable. Damage caused by overloading during installation may not be immediately apparent but can lead to failure later in its service life.

This document does not supersede the additional relevant standards and requirements applicable to certain hazardous environments, for example electricity supply and railways.

Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

OPTICAL FIBRE CABLES –

Guidelines to the installation of optical fibre cables

1 Scope

IEC TR 62691, which is a Technical Report, gives recommendations for handling and installing optical fibre cables on metropolitan communication networks. Installation methods covered by this document include underground ducts, trenchless technique, blowing in microducts, aerial installation on poles, lashed aerial in metropolitan networks, direct buried and use of trenches.

Special installation situations such as tunnelling and lead-in installations, on-bridges, underwater, use of sanitary sewers, high pressure gas pipes and drinking water pipes are commented and detailed.

Installation and maintenance of optical fibre cables on overhead power lines including the following are not covered by this document and are referred to in IEC TR 62263:

- optical ground wire (OPGW) fibre cable;
- optical phase conductor (OPPC) fibre cable;
- optical attached fibre cable (OPAC);
- all dielectric self-supporting (ADSS) optical fibre cable.

IEC TR 62263 includes an extensive coverage on recommendations to ensure the safety of personnel and equipment when installing or maintaining these types of optical fibre cables on overhead power lines.

2 Normative references

There are no normative references in this document.

3 Installation planning

3.1 Installation specification

The successful installation of an optical fibre cable can be influenced significantly by careful planning and assisted by the preparation of an installation specification by the user. The installation specification should address the cabling infrastructure, cable routes, potential hazards and installation environment and provide a bill of materials and technical requirements for cables, connectors and closures.

The installation specification should also detail any civil works, route preparation (including drawpits, ductwork, traywork and trunking) and surveying that are necessary, together with a clear indication of responsibilities and contractual interfaces, especially if there are any site or access limitations.

Post-installation requirements for reinstatement, spares, ancillary services and regulatory issues should also be addressed.

Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

3.2 Route considerations

Whilst optical fibre cables are lighter and installed in longer lengths than conventional metallic cables, the same basic route considerations apply.

Route planning and cable handling methods shall carefully take into account the specified minimum bending radius and maximum tensile loading of the particular optical fibre cable being installed so that fibre damage, giving rise to latent faults, can be avoided.

Some of the most difficult situations for the installation of optical fibre cables are in underground ducts, and the condition and geometry of duct routes are of great importance. Where the infrastructure includes ducts in poor condition, excessive curvature, or ducts already containing cables or access points with abrupt changes of direction, the maximum pull distance will be reduced accordingly.

As provision of long cable lengths in underground duct or aerial situations may involve installation methods that require access to the cable at intermediate points for additional winching or blowing effort, or "figure-8" techniques, these sites should be chosen with care. Consideration should also be given to factors of time and disturbance. Installation equipment may be required to run for long periods of time, and the time of day, noise levels, and vehicular traffic disruption should be taken into account.

Because the condition of underground ducts intended for optical fibre cable is of particular importance, care should always be taken to ensure that ducts are in sound condition and as clean and clear as possible. Consideration can also be given to the provision of a subduct system, either in single or multiple form, to provide a good environment for installation, segregation of cables, extra mechanical protection and improved maintenance procedures. Subducts can be more difficult to rope and cable than normal size ducts, particularly over long lengths, and the diameter ratio between the cable and subduct should be considered. Note that in ducts or subducts, bundles of microducts can also be installed, for example by pulling or blowing.

For overhead route sections, a very important consideration is the need to minimise in-service cable movement. Movement of the cable produced by thermal changes, cable weight, ice loading, wind, etc. may have a detrimental effect. A stable pole route, with all poles set as rigidly as possible, is therefore an important element in reducing possible movement, and consideration should be given to purpose-designed, optical fibre-compatible, pole top fittings and attachments.

Although optical fibre cables are generally light in weight, their addition to an existing suspension member can take the optical fibre beyond its recommended strain limit, and the added dip and extension should be calculated before installation.

Where it is planned for long lengths of optical fibre cable to be directly buried or ploughed, those sections involving ploughing can, with advantage, be pre-prepared using specialised slitting or trenching equipment.

3.3 Cable installation – Tension considerations

The potential for providing very long lengths of optical fibre cable can lead to the need for confidence that a particular installation operation will be successfully achieved, particularly in underground ducts, and a good indication can be provided, in some cases, by calculating the maximum cable tension. This maximum tension can be compared with the stated mechanical performance of the cable and, where these values are close, consideration can be given to methods for providing a greater margin of safety such as an alternative cable design, shortening the route, changing the route or direction of cabling, provision of intermediate winches, or by taking special precautions at particular locations. Calculation considerations are indicated in 3.4 and 3.5.

Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

Cable tensions in ploughing or trenching are generally minimal, much smaller than the rated tension of the cable. Momentary tensions and jerking due to cable reel inertia when paying off cables, which result in tensions in the immediate area being installed, should be considered. In ploughing, frictional tension through the plough chute shall be considered, but is generally small.

Cable compression and buckling in pushing and blowing should also be considered. Cable compression less than a critical maximum value generally has no effect on cable performance. Excessive pushing – either due to pushing or blowing – may cause the cable to corkscrew in the duct or fold over, which will damage the fibre. Considerations to be taken in account are:

- cable with smaller diameters will require a lower maximum push force;
- the maximum cable push force will also decrease with larger duct inside diameters.

In either case, a crash test per the cable and installation equipment manufacturers' procedures should be performed to determine the maximum push force.

See 3.5 and 3.6 for guidance on friction forces consideration during installation.

3.4 Duct installations – Cable tension predictions

It should be noted that the tension calculations for duct installations are of inexact necessity since the actual geometry and characteristics of the ducts are seldom well known. The calculations, therefore, should be utilized with regard to experience and empirical data from similar installations.

Two sets of equations are presented below. The first, presented in 3.5.2, is used to calculate cable tension in pulling applications. The second, presented in 3.5.3, is used to calculate cable tension in cable pushing and blowing applications; it may also be used for pulling. Note that the first set, for pulling only, is much simpler and neglects cable weight in Equation (3). The second set, for any of the duct installation methods, comprises very complex equations involving much more data, including amplitude and frequency of innerduct undulations. Much of this data is generally not known and shall be estimated from cable experiments and empirical data from similar installations.

3.5 Maximum tension or compression force exerted on cable

3.5.1 General

The following main contributory functions need to be considered when calculating cable forces-tensions or compression:

- the mass per unit length of cable;
- the diameter of the cable;
- the stiffness of the cable;
- the coefficient of friction between cable sheath and surfaces with which it will come in contact;
- the inner diameter of the duct;
- deviations (bends and undulations) and inclinations.

3.5.2 Total cable tension – pulling applications

The calculated cable tension or compression force should be evaluated with respect to the maximum rated cable tension (for pulling) or the maximum pushing force or crash force (for pushing or blowing) for the cable being installed according to the cable specification or the manufacturer's declared rating.

Documents
Document Sharing Hub

Full document details: IEC TR 62691 2016

Figure 1 shows an example of routes and common tension formulae (see Equations (1) to (3)):

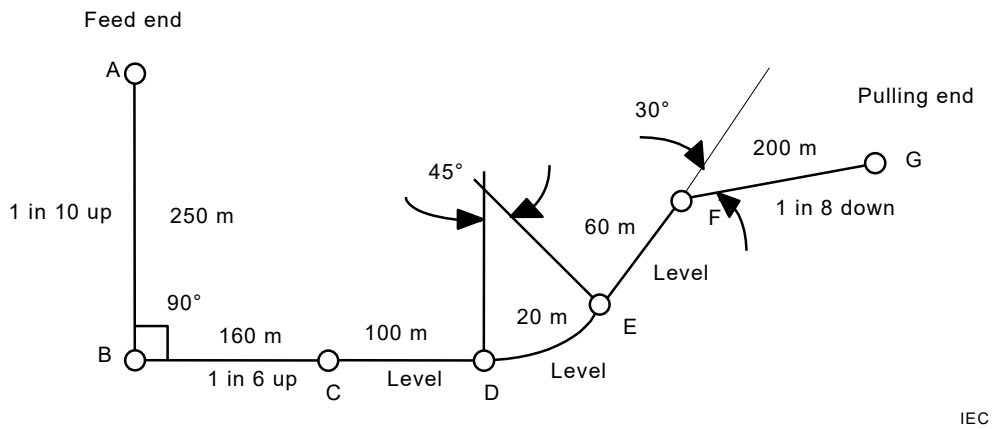

Figure 1 – Cable tension calculations (Equations (1) to (3))

Equation (1) is used for straight sections, Equation (2) for inclined sections and Equation (3) for deviated sections and bends.

$$T = T_i + \mu l w g \tag{1}$$

$$T = T_i + l w g\,(\mu \cos\theta + \sin\theta) \tag{2}$$

$$T = T_i \exp(\mu\theta) \tag{3}$$

where

T is the tension at end of section (N);

T_i is the tension at beginning of section (N);

μ is the coefficient of friction (between cable and duct or guide);

l is the length of section (m);

w is the cable specific mass (kg/m);

θ is the inclination (radians, + up, – down) or deviation (radians, horizontal plane);

g is the acceleration due to gravity (9,81 m/s^2);

The resulting total tensions calculations are shown in Table 1:

Documents
Document Sharing Hub
Full document details: IEC TR 62691 2016

Table 1 – Calculation for total tension

Section	Length	Tension at beginning of section T_i	Inclination	Deviation	Equation	Tension at end of section (cumulative) T
	m	N	rad	rad		N
A	–	0	–	–	–	0
A – B	250	0	0,100	–	2	1 460
B	–	1 460	–	1,571	3	3 464
B – C	160	3 464	0,165	–	2	4 484
C	–	4 484	–	–	–	4 484
C – D	100	4 484	–	–	1	4 980
D	–	4 980	–	–	–	4 980
D – E	20	4 980		0,785	3	7 669
E	–	7 669	–	–	–	7 669
E – F	60	7 669	–	–	1	7 967
F	–	7 967		0,524	3	10 628
F – G	200	10 628	0,124	–	2	11 390
Where more than one cable per duct is installed, tension can be greatly raised, and it is necessary to take account of this by applying a factor before the deviation calculation. Factors vary with the number of cables, sheath/cable materials, cable/duct sizes, cable flexibility, etc. Values can be in the order of 1,5 to 2 for two cables, 2 to 4 for three cables and 4 to 9 for four cables.						

3.5.3 Total cable tension – pushing, blowing, or pulling applications

3.5.3.1 General

Total tension can be calculated on a cumulative basis working through each section from one end of the route to the other. Calculation is done using the common tension and blowing formulae listed below:

$$F = \frac{WP^2}{8\pi A}\sinh\left[\frac{8\pi Afl}{P^2} + \sinh^{-1}\left(\frac{8\pi A}{WP^2}F_i + \frac{3AB}{2W(P/4)^4}\right)\right] - \frac{48B}{\pi P^2} \quad \text{(4) (horizontal pulling)}$$

$$F = \left(F_i \pm \frac{WP^2}{8\pi fA} + \frac{48B}{\pi P^2}\right)e^{\frac{8\pi fA}{P^2}l} \mp \frac{WP^2}{8\pi fA} - \frac{48B}{\pi P^2} \text{ (+ .. – for upwards)} \quad \text{(5) (vertical pulling)}$$

$$F = F_i e^{f\theta} + \frac{2Bf}{\sqrt{6\left(D_d - D_c\right)R_b^3}} \quad \text{(6) (deviations and bends)}$$

$$\frac{dF}{dx} = f\sqrt{(W\cos\alpha)^2 + \left[\frac{3AB}{2(P/4)^4} + \frac{8\pi A}{P^2}F\right]^2} + W\sin\alpha \quad \text{(7) (inclined pulling)}$$

$$\frac{dF}{dx} = f\sqrt{(W\cos\alpha)^2 + \left[\frac{3AB}{2(P/4)^4} + \frac{8\pi A}{P^2}F\right]^2 + \left(\frac{D_d - D_c}{\pi^2 B}F^2\right)^2} + W\sin\alpha \quad \text{(8) (inclined pushing)}$$

AVA Documents
Document Sharing Hub

$$\frac{dF}{dx} = f\sqrt{(W\cos\alpha)^2 + \left[\frac{3AB}{2(P/4)^4} + \frac{8\pi A}{P^2}F\right]^2 + \left(\frac{D_d - D_c}{\pi^2 B}F^2\right)^2} + W\sin\alpha - \frac{\pi D_c D_d\left(p_i^2 - p^2\right)}{8l\sqrt{p_i^2 - \left(p_i^2 - p^2\right)\frac{x}{l}}}$$

(9) (blowing; inclined)

where

F is the force at end of section (N);

F_i is the force at beginning of section (N);

f is the coefficient of friction, COF (between cable and duct or guide);

m is the cable specific mass (kg/m);

l is the length of duct (m);

W is the cable specific weight = gm (N/m);

g is the acceleration of gravity (9,81 m/s^2);

B is the cable stiffness (Nm^2);

D_c is the cable diameter (m);

D_d is the duct inner diameter (m);

A is the amplitude of duct-undulations (m);

P is the period of duct-undulations (m);

R_b is the bending radius of bend (m);

θ is the deviation of bend (radians, horizontal plane);

α is the inclination (radians, + up, – down);

p_i is the air pressure (absolute) at beginning of section (N/m^2);

p is the air pressure (absolute) at end of section (N/m^2);

x is the position in the section (m).

Equations (4), (5) and (6) are analytical solutions; Equations (7), (8) and (9) have to be solved numerically.

Figure 2 shows an example of a cable with diameter of 18 mm, weight of 2 N/m and stiffness 5 Nm^2, which is installed in a 40/33 mm duct of 2 000 m total length laid in the trajectory below (the red sections are vertical):

Documents
Document Sharing Hub
Full document details: IEC TR 62691 2016