IEC/TS 60349-3

Edition 2.0 2010-03

TECHNICAL SPECIFICATION

SPÉCIFICATION TECHNIQUE

Electric traction – Rotating electrical machines for rail and road vehicles – Part 3: Determination of the total losses of converter-fed alternating current motors by summation of the component losses

Traction électrique – Machines électriques tournantes des véhicules ferroviaires et routiers – Partie 3: Détermination des pertes totales des moteurs à courant alternatif alimentés par convertisseur par sommation des pertes élémentaires

IEC/TS 60349-3:2010

Documents
Document Sharing Hub

Full document details: IEC TS 60349-3 2010

THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.
If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.
Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub
The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,…). It also gives information on projects, withdrawn and replaced publications.
- IEC Just Published: www.iec.ch/online_news/justpub
Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.
- Electropedia: www.electropedia.org
The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.
- Customer Service Centre: www.iec.ch/webstore/custserv
If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:
Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

- Catalogue des publications de la CEI: www.iec.ch/searchpub/cur_fut-f.htm
Le Catalogue en-ligne de la CEI vous permet d'effectuer des recherches en utilisant différents critères (numéro de référence, texte, comité d'études,…). Il donne aussi des informations sur les projets et les publications retirées ou remplacées.
- Just Published CEI: www.iec.ch/online_news/justpub
Restez informé sur les nouvelles publications de la CEI. Just Published détaille deux fois par mois les nouvelles publications parues. Disponible en-ligne et aussi par email.
- Electropedia: www.electropedia.org
Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International en ligne.
- Service Clients: www.iec.ch/webstore/custserv/custserv_entry-f.htm
Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions, visitez le FAQ du Service clients ou contactez-nous:
Email: csc@iec.ch
Tél.: +41 22 919 02 11
Fax: +41 22 919 03 00

Documents
Document Sharing Hub

Full document details: IEC TS 60349-3 2010

IEC/TS 60349-3

Edition 2.0 2010-03

TECHNICAL SPECIFICATION

SPÉCIFICATION TECHNIQUE

Electric traction – Rotating electrical machines for rail and road vehicles – Part 3: Determination of the total losses of converter-fed alternating current motors by summation of the component losses

Traction électrique – Machines électriques tournantes des véhicules ferroviaires et routiers – Partie 3: Détermination des pertes totales des moteurs à courant alternatif alimentés par convertisseur par sommation des pertes élémentaires

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

Q

ICS 45.060

ISBN 978-2-88910-173-3

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

Documents
Document Sharing Hub

Full document details: IEC TS 60349-3 2010

CONTENTS

FOREWORD 3
1 Scope and object 5
2 Instrumentation 5
3 Summation of losses 6
3.1 The total losses are the sum of the following component losses. 6
3.2 Determination of the component losses 7
3.2.1 Asynchronous motors 7
3.2.2 Synchronous motors 8
Annex A (informative) The equivalent circuit of an asynchronous motor 10
Annex B (informative) Stray load loss 16

Figure 1 – Derivation of equivalent 50 Hz rated power input 8
Figure A.1 – Equivalent circuit of an asynchronous motor on no-load 10
Figure A.2 – Equivalent circuit of an asynchronous motor on load 13
Figure A.3 – Graphical method for determining friction and windage loss 15

Table 1 – Accuracy of external attenuators 6
Table 2 – Overall accuracy of power measurement 6
Table A.1 – Determination of parameters of the equivalent circuit 11
Table A.2 – Definition of parameters 14

Documents
Document Sharing Hub

Full document details: IEC TS 60349-3 2010

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ELECTRIC TRACTION – ROTATING ELECTRICAL MACHINES FOR RAIL AND ROAD VEHICLES –

Part 3: Determination of the total losses of converter-fed alternating current motors by summation of the component losses

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.

2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.

3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.

4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.

5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.

6) All users should ensure that they have the latest edition of this publication.

7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.

8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- the subject is still under technical development or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

AVA Documents
Document Sharing Hub

Full document details: IEC TS 60349-3 2010

IEC 60349-3, which is a technical specification, has been prepared by IEC technical committee 9: Electrical equipment and systems for railways.

This second edition cancels and replaces the first edition, issued in 1995, and constitutes a technical revision.

The main technical changes with regard to the previous edition are as follows:

– Omissions in some formulas in 3.2.1.2 and Table A.2 were fixed.

The text of this technical specification is based on the following documents:

Enquiry draft	Report on voting
9/1267/DTS	9/1342/RVC

Full information on the voting for the approval of this technical specification can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be be

- transformed into an International standard,
- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

Documents
Document Sharing Hub

Full document details: IEC TS 60349-3 2010

ELECTRIC TRACTION – ROTATING ELECTRICAL MACHINES FOR RAIL AND ROAD VEHICLES –

Part 3: Determination of the total losses of converter-fed alternating current motors by summation of the component losses

1 Scope and object

This technical specification applies to machines complying with IEC 60349-2.

The total losses of a converter-fed motor may be determined by summation of the component losses derived from no-load and load tests. The total input power is the sum of the power at the fundamental frequency and at all other frequencies. In all practical cases the latter input includes the losses resulting from the voltage and current harmonics in the converter supply by using suitable instrumentation it can be derived from measurement of the total and fundamental frequency power inputs when the machine is on load.

The losses supplied at the fundamental frequency cannot be measured directly and so are derived from measurement of the fundamental frequency load current and the fundamental frequency no-load power input.

2 Instrumentation

The extra loss due to operation on a converter supply is obtained from the difference of the total and fundamental frequency power input on load.

The power inputs shall be measured simultaneously on each phase by a digital sampling instrument. Measurement on all three phases is preferred but the two wattmeter method is permissible as an alternative.

The total power is obtained from the product of voltage and current over a period of time and the fundamental power from a Fourier transform using the same sampling.

It is necessary to consider the accuracy of the whole instrument chain taking into account both amplification and phase shift errors over the desired frequency range. As the power factor of the harmonics is generally very low (less than 0,1 for voltage imposed asynchronous systems) particular attention is drawn to the need for minimum phase angle errors.

At the time of publication of this technical specification, wattmeters accurate within the following limits, at 0,08 power factor, were available:

below 2 kHz	±0,5 %;
between 2 kHz and 20 kHz	±1,0 %;
between 20 kHz and 50 kHz	±2,0 %.

Instruments often contain attenuators compensated and adapted to them, but if an external attenuator is used, it is desirable that it be accurate within the following limits given in Table 1.

Documents
Document Sharing Hub
Full document details: IEC TS 60349-3 2010

Table 1 – Accuracy of external attenuators

Frequency kHz	Ratio error %	Phase shift error degrees
< 2	±0,5	±0,1
2 to 20	±1,0	±0,2
20 to 50	±2,0	±0,5

Taking all factors into account, Table 2 lists the highest overall accuracy of power measurement which it is considered could be achieved at the time of publication of this specification.

Table 2 – Overall accuracy of power measurement

Frequency kHz	Power factor >0,8 %	Power factor 0,4 %	Power factor <0,1 %
< 2	±1	±2	±10
2 to 20	±2	±5	±14
20 to 50	±4	±8	±20

NOTE The frequency range over which measurements are necessary depends on the harmonic content of the output from the particular converter used and should therefore be decided for each individual case. With the instrumentation presently available, the overall accuracy of the total harmonic loss measurement is likely to be of the order of ±10 %, but as the loss is unlikely to exceed 3 % of the total power input, this will result in only 0,3 % error in the calculated torque, which is well within the permitted tolerance of –5 % specified in IEC 60349-2.

At the time of publication of this technical specification, current transformers are significantly less accurate at the low power factors and high harmonic frequencies involved than non-inductive shunts, which can have a ratio accuracy within ±1 % and a phase shift within ±0,2°.

3 Summation of losses

3.1 The total losses are the sum of the following component losses.

3.1.1 Losses supplied at the fundamental frequency on no-load (no-load losses):

– losses in the active iron and other metal parts;

– losses due to friction and windage including the power absorbed by integral fans.

3.1.2 Losses which occur when the motor is supplied at the fundamental frequency and which vary with load (load dependent losses):

– I^2R losses in the stator windings;

– I^2R losses in the rotor winding of asynchronous motors;

– additional load losses (load loss) consisting of:

- losses in the active iron and metal parts other than the conductors;
- eddy current losses in the stator and rotor windings arising from current dependent flux pulsation.

3.1.3 Losses supplied at other than the fundamental frequency.

3.1.4 I^2R and brush contact losses in the excitation circuit of synchronous motors

AVA Documents Document Sharing Hub

Full document details: IEC TS 60349-3 2010

3.2 Determination of the component losses

3.2.1 Asynchronous motors

3.2.1.1 No-load losses supplied at the fundamental frequency

The losses shall be determined by running the motor on no-load at the voltage and fundamental frequency of the point on the specified characteristic for which they are being determined. The losses shall be taken as the fundamental frequency power input minus the I^2R loss in the stator. The no-load I^2R loss in the rotor shall be neglected.

3.2.1.2 Load dependent losses supplied at the fundamental frequency

The fundamental frequency I^2R losses in the stator shall be calculated from the fundamental frequency current in each winding at the point for which the losses are being determined and from the measured resistance of the winding corrected to the temperature of reference.

The I^2R loss in the rotor winding shall be taken as:

$$s \times [\ P_f - (I^2R_{pf} + P_{of} - P_{fw})\ ]$$

where

s is the slip;

P_f is the fundamental frequency input power;

I^2R_{pf} is the stator fundamental frequency I^2R loss;

P_{of} are the fundamental frequency no-load losses;

P_{fw} is the friction and windage loss.

NOTE 1 The friction and windage loss should be determined either by driving the motor on open circuit by a calibrated machine or by the graphical method described in Annex A. The drive may be through a transmission system of known efficiency.

Unless otherwise specified, the additional load losses at current I and fundamental frequency f (in Hz) shall be taken as:

$$P_s = P_{50} \times (I\ /\ I_r)^2 \times (f\ /\ 50)^{1,5} \times 0,01$$

where

P_s is the additional load losses;

P_{50} is the equivalent 50 Hz rated input power;

I_r is the total current at the guaranteed rating.

The equivalent 50 Hz rated input power is based on the assumption that the rated current is independent of frequency and that the motor voltage and input power are both proportional to frequency over the range of operation with full flux (see Figure 1), that is:

$$P_{50} = P_m \times 50\ /\ f_m$$

where

P_m is the assumed input power at maximum voltage, rated current and full flux;

f_m is the fundamental frequency (in Hz) at input power P_m.

NOTE 2 At the time of publication of this specification, the validity of the formula in all cases had not been fully established by experience. Additional information may be obtained by carrying out a low power test described in Annex B.

NOTE 3 This calculation may be applied not only at 50 Hz but also similarly at 60 Hz.

Documents
Document Sharing Hub

Full document details: IEC TS 60349-3 2010

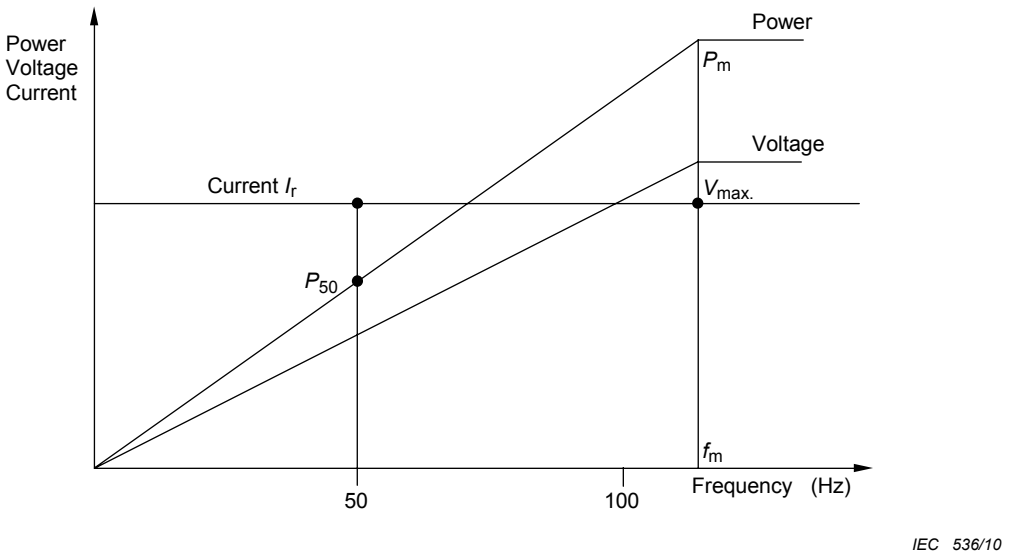

Figure 1 – Derivation of equivalent 50 Hz rated power input

3.2.1.3 Losses supplied at other than the fundamental frequency

The losses arising from the supply harmonics are the difference between the total and fundamental frequency power inputs to the motor when on load with the stator windings at approximately the temperature of reference.

NOTE If the converter is a voltage source type and its modulation pattern is independent of load, the difference may be measured on no-load.

3.2.2 Synchronous motors

3.2.2.1 No-load losses supplied at the fundamental frequency

The motor shall be driven on open circuit by a calibrated machine at the speed for which the losses are being determined and shall be excited by an independent source to generate the voltage shown on the specified characteristic at the same speed. The losses are equal to the mechanical power input to the motor shaft.

3.2.2.2 Load dependent losses supplied at the fundamental frequency

The fundamental frequency I^2R losses in the stator shall be calculated from the fundamental frequency current in each winding at the point for which the losses are being determined and from the measured resistance of the winding corrected to the temperature of reference.

Unless otherwise specified, the additional load losses shall be determined by driving the machine with the stator windings short-circuited at the speed of the point on the specified characteristic for which the losses are being determined. The excitation shall be adjusted to give the fundamental frequency stator winding currents for the same point. The losses shall be taken as the power supplied to the machine shaft minus the sum of the total stator I^2R losses and the power supplied when the machine is driven unexcited at the same speed.

3.2.2.3 Losses supplied at other than the fundamental frequency

The losses arising from the supply harmonics are the difference between the total and fundamental frequency power inputs to the motor when on load with the windings at approximately the temperature of reference.

Documents
Document Sharing Hub
Full document details: IEC TS 60349-3 2010

3.2.2.4 Loss in the excitation circuit

The loss in the excitation circuit shall be the product of the current in the winding and the total excitation voltage at the point for which the losses are being determined. The voltage shall be the value required to supply the excitation current with the winding at the temperature of reference. Account shall be taken of any ripple in the excitation current.

NOTE The specified characteristic may state that the excitation power is not included in the calculated motor losses as it is accounted for elsewhere, for example as part of the vehicle auxiliary load.

Documents
Document Sharing Hub

Full document details: IEC TS 60349-3 2010

Annex A
(informative)

The equivalent circuit of an asynchronous motor

A.1 Circuit description

An asynchronous motor on no-load can be represented by the equivalent circuit illustrated in Figure A.1. The circuit parameters are obtained from no-load and impedance (locked rotor) tests on a sinusoidal supply voltage, the quantities measured being voltage, current and power.

If the circuit parameters and no-load losses are determined for a number of voltages and frequencies covering the range of operation of the motor, curves can be plotted which enable the motor torque and input current to be calculated for chosen values of voltage, frequency and slip.

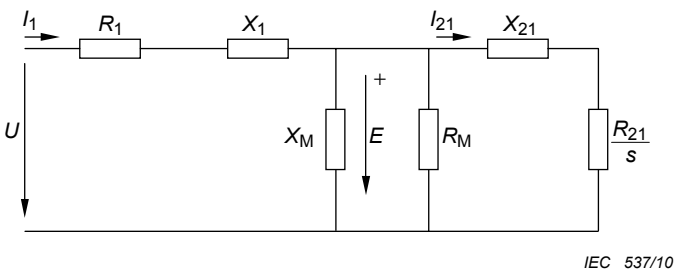

Key

f	frequency (Hz);
U	phase voltage (V);
I_1	stator current (A);
I_{21}	rotor current transformed to the stator side (A);
X_1	stator reactance (Ω);
X_{21}	rotor reactance transformed to the stator side (Ω);
R_1	stator resistance (Ω);
R_{21}	rotor resistance transformed to the stator side (Ω);
X_M	magnetizing reactance (Ω);
R_M	magnetizing resistance (Ω);
E	induced electromotive force (e.m.f.) (V);
s	slip (-);
P_{10}	input power on no-load (W);
P_{Cu1}	stator resistance losses (W);
P_{Fe}	core loss (W);
P_{fw}	friction and windage loss (W);
Q_{10}	total reactive power on no-load (VAr);
Q_{1L}	total reactive power with locked rotor (VAr).

Figure A.1 – Equivalent circuit of an asynchronous motor on no-load

Documents
Document Sharing Hub
Full document details: IEC TS 60349-3 2010