

IEEE Standard for Information technology—
Telecommunications and information exchange between systems
Local and metropolitan area networks—
Specific requirements

Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications

IEEE Computer Society

Sponsored by the
LAN/MAN Standards Committee

IEEE
3 Park Avenue
New York, NY 10016-5997
USA

IEEE Std 802.11™-2016
(Revision of
IEEE Std 802.11-2012)

**IEEE Standard for Information technology—
Telecommunications and information exchange between systems
Local and metropolitan area networks—
Specific requirements**

**Part 11: Wireless LAN Medium Access Control
(MAC) and Physical Layer (PHY) Specifications**

Prepared by the 802.11 Working Group of the
LAN/MAN Standards Committee
of the
IEEE Computer Society

Approved 7 December 2016
IEEE-SA Standards Board

Abstract: Technical corrections and clarifications to IEEE Std 802.11 for wireless local area networks (WLANs) as well as enhancements to the existing medium access control (MAC) and physical layer (PHY) functions are specified in this revision. Amendments 1 to 5 published in 2012 and 2013 have also been incorporated into this revision.

Keywords: 2.4 GHz, 256-QAM, 3650 MHz, 4.9 GHz, 5 GHz, 5.9 GHz, 60 GHz, advanced encryption standard, AES, audio, beamforming, carrier sense multiple access/collision avoidance, CCMP, channel switching, clustering, contention based access period, Counter mode with Cipher-block chaining Message authentication code Protocol, confidentiality, CSMA/CA, DFS, direct link, directional multi-gigabit, dynamic allocation of service period, dynamic extension of service period, dynamic frequency selection, dynamic truncation of service period, E911, EDCA, emergency alert system, emergency services, fast session transfer, forwarding, GCMP, generic advertisement service, high throughput, IEEE 802.11™, international roaming, interworking, interworking with external networks, LAN, local area network, MAC, management, measurement, medium access control, media-independent handover, medium access controller, mesh, MIH, millimeter-wave, MIMO, MIMO-OFDM, multi-band operation, multi-hop, multi-user MIMO, multiple input multiple output, network advertisement, network discovery, network management, network selection, noncontiguous frequency segments, OCB, path-selection, personal basic service set, PHY, physical layer, power saving, QoS, quality of service, quality-of-service management frame, radio, radio frequency, RF, radio resource, radio management, relay operation, spatial sharing, SSPN, subscriber service provider, television white spaces, TPC, transmit power control, video, wireless access in vehicular environments, wireless LAN, wireless local area network, WLAN, wireless network management, zero-knowledge proof

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2016 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 14 December 2016. Printed in the United States of America.

IEEE is a registered trademark in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 978-1-5044-3646-5 STD22369
PDF: ISBN 978-1-5044-3645-8 STDPD22369

*IEEE Prohibits discrimination, harassment, and bullying.
For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.
No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.*

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notices and Disclaimers Concerning IEEE Standards Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. IEEE Standards are documents developed through scientific, academic, and industry-based technical working groups. Volunteers in IEEE working groups are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE Standards do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers and users of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE-SA Website at <http://ieeexplore.ieee.org> or contact IEEE at the address listed previously. For more information about the IEEE SA or IEEE's standards development process, visit the IEEE-SA Website at <http://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

At the time this revision was sent to sponsor ballot, the IEEE 802.11 Working Group (WG) had the following officers:

Adrian P. Stephens, *Chair*
Jon W. Rosdahl, *1st Vice Chair*
Dorothy V. Stanley, *2nd Vice Chair*
Stephen McCann, *Secretary*

The officers of the WG Task Group mc and the members of the WG ballot group for this revision are as follows:

Dorothy V. Stanley, *Chair*
Mark A. Hamilton, *Vice Chair*
Jon W. Rosdahl, *Secretary*
Adrian P. Stephens, *Technical Editor*

Osama S. Aboulmagd
Santosh P. Abraham
Roberto Aiello
Thomas Alexander
Peiman Amini
Sirikiat Lek Ariyavisitakul
Lee R. Armstrong
Yusuke Asai
Alex Ashley
Kwok Shum Au
Vijay Auluck
Stefan Aust
David Bagby
Eugene Baik
Gabor Bajko
Raja Banerjee
Phillip Barber
Anuj Batra
Tuncer Baykas
Alan Berkema
Nehru Bhandaru
Philippe Boucachard
Andre Bourdoux
John Buffington
Lin Cai
George Calcev
Chris Calvert
Radhakrishna Canchi
Laurent Cariou
William Carney
Jaesun Cha
Romana Challans
Kim Chang
Kuor-Hsin Chang
Xin Chang
Clint F. Chaplin
Bin Chen
Jiamin Chen
Jixin Chen
Lidong Chen
Qian Chen
Xi Chen
Minho Cheong
George Cherian
Francois Chin

Rojan Chitrakar
Jinsoo Choi
Sangsung Choi
Li Chia Chia Choo
Sayantan Choudhury
Liwen Chu
Jinyoung Chun
John Coffey
Kenneth Coop
Carlos Cordeiro
Neiyer Correal
Subir Das
Hendricus De Ruijter
Rolf J. de Vegt
Yohannes Demessie
Michael Denson
Ting Dong
Xiandong Dong
Klaus Doppler
Roger P. Durand
Donald E. Eastlake
Peter Ecclesine
Richard Edgar
Amal Ekbal
Marc Emmelmann
Vinko Erceg
Ping Fang
Yonggang Fang
Qin Fei
Stanislav Filin
Norman Finn
Matthew J. Fischer
George Flammer
Chittabrata Ghosh
James P. K. Gilb
Reinhard Gloger
Daning Gong
David Goodall
Elad Gottlib
Sudheer A. Grandhi
Stephen Grau
Michael Grigat
David Halasz
Christopher J. Hansen
Peng Hao

Hiroshi Harada
Daniel N. Harkins
Brian D. Hart
Ahmadreza Hedayat
Robert F. Heile
Jerome Henry
Chin Keong Ho
Anh Tuan Hoang
Dien Hoang
Wei Hong
Ying-Chuan Hsiao
Jing-Rong Hsieh
David Hunter
Yasuhiko Inoue
Mitsuru Iwaoka
Wuncheol Jeong
Yangseok Jeong
Sunggeun Jin
ZhongYi Jin
Nihar Jindal
V. K. Jones
Jari Junell
Padam Kafle
Carl W. Kain
Hyunduk Kang
Mika Kasslin
Richard H. Kennedy
Stuart J. Kerry
Eunkyoung Kim
Jeongki Kim
Jinho Kim
Joo Young Kim
Joonsuk Kim
Suhwook Kim
Taejoon Kim
Youhan Kim
Youngsoo Kim
Shoichi Kitazawa
Jarkko Knecht
Gwangzeen Ko
Fumihide Kojima
Tom Kolze
Timo Koskela
Bruce P. Kraemer
Jin-Sam Kwak
Joseph Kwak

Hyoungjin Kwon
 Young Hoon Kwon
 Paul Lambert
 Zhou Lan
 Leonardo Lanante
 James Lansford
 Jean-Pierre Le Rouzic
 Anseok Lee
 Donghun Lee
 Jae Seung Lee
 Wookbong Lee
 Zhongding Lei
 Wai Kong Leung
 Joseph Levy
 Feng Li
 Huan-Bang Li
 Liang Li
 Lingjie Li
 Yunbo Li
 Yunzhou Li
 Zhiqiang Li
 Erik Lindskog
 Jianhan Liu
 Pei Liu
 Yong Liu
 Zongru Liu
 Peter Loc
 Su Lu
 Long Luo
 Yi Luo
 Zhendong Luo
 Kaiying Lv
 Michael Lynch
 Jouni K. Malinen
 Hiroshi Mano
 Simone Merlin
 James Miller
 Keiichi Mizutani
 Apurva Mody
 Michael Montemurro
 Kenichi Mori
 Hitoshi Morioka
 Ronald Murias
 Andrew Myles
 Yukimasa Nagai
 Yuhei Nagao
 Hiroki Nakano
 Chiu Ngo
 Paul Nikolich
 Hiroyo Ogawa
 Minseok Oh
 Min-Seok Oh
 David Olson
 Satoshi Oyama
 Michael J. Paljug
 Santos Ghanshyam Pandey
 Anna Pantelidou
 Giwon Park
 Minyoung Park
 Seung-Hoon Park
 Jaya Shankar Pathmasuntharam

Sandhya Patil
 Xiaoming Peng
 Eldad Perahia
 James E. Petranovich
 Albert Petrick
 John Petro
 Xu Ping
 Juho Pirskanen
 Khiam Boon Png
 Vishakan Ponnampalam
 Ron Porat
 Henry S. Ptasinski
 Rethnakaran Pulikkoonattu
 Chang-Woo Chang Pyo
 Emily H. Qi
 Huyu Qu
 Harish Ramamurthy
 Jayaram Ramasastry
 Ivan Reede
 Edward Reuss
 Maximilian Riegel
 Mark Rison
 Zhigang Rong
 Cheol Ryu
 Kiseon Ryu
 Kazuyuki Sakoda
 Ruben E. Salazar Cardozo
 Hemanth Sampath
 Sigurd Schelstraete
 Jean Schwoerer
 Jonathan Segev
 Cristina Seibert
 Yongho Seok
 Kunal Shah
 Huairong Shao
 Zhenhai Shao
 Stephen J. Shellhammer
 Ian Sherlock
 Wei Shi
 Nobuhiko Shibagaki
 Shusaku Shimada
 Chang Sub Shin
 Thomas M. Siep
 Michael Sim
 Dwight Smith
 Graham Kenneth Smith
 Myung Sun Song
 Sudhir Srinivasa
 Robert Stacey
 Lawrence Stefani
 Rene Struik
 Jung Hoon Suh
 Chin-Sean Sum
 Bo Sun
 Chen Sun
 Sheng Sun
 Kazuaki Takahashi
 Mineo Takai
 Sagar Tamhane
 Joseph Teo
 Thomas Tetzlaff
 Jerry Thrasher

Tong Tian
 Jens Tingleff
 Fei Tong
 Ha Nguyen Tran
 Kazuyoshi Tsukada
 Masahiro Umehira
 Richard D. J. Van Nee
 Allert Van Zelst
 Prabodh Varshney
 Sameer Vermani
 Dalton T. Victor
 Gabriel Villardi
 George A. Vlantis
 Chao Chun Wang
 Haiguang Wang
 Haiming Wang
 James June Wang
 Lei Wang
 Lin Wang
 Qi Wang
 Xiang Wang
 Xuehuan Wang
 Lisa Ward
 Zou Wei-Xia
 Lei Wen
 Menzo M. Wentink
 Harya Wicaksana
 Eric Wong
 Harry R. Worstell
 Tianyu Wu
 Zhanji Wu
 Zhenyu Xiao
 Dongmei Xu
 Quanping Xu
 Guang-Qi Yang
 Lin Yang
 Xun Yang
 Yunsong Yang
 Fan Ye
 James Yee
 Peter Yee
 Wai-Leong Yeow
 Kaoru Yokoo
 Su Khiong Khiong Yong
 Christopher Young
 Heejung Yu
 Zhan Yu
 Tevfik Yucek
 Guangrong Yue
 Katsuo D. A. Yunoki
 Hongyuan Zhang
 Hui Zhang
 Junjian Zhang
 Nianzu Zhang
 Xin Zhang
 Mu Zhao
 Jun Zheng
 Shoukang Zheng
 Mingtuo Zhou
 Yan Zhuang
 Lan Zhuo

Major contributions were received from the following individuals:

Carlos Aldana	Mitsuru Iwaoka	Kazuyuki Sakoda
Yaron Alpert	Assaf Kasher	Amichai Sanderovich
Edward Au	Peter Khoury	Sigurd Schelstraete
Gabor Bajko	Youhan Kim	Yongho Seok
Sean Coffey	Wookbong Lee	Graham Kenneth Smith
Daniel Cohn	Erik Lindskog	Dorothy V. Stanley
Carlos Cordeiro	Jouni K. Malinen	Adrian P. Stephens
Peter Ecclesine	Stephen McCann	Bo Sun
Vinko Erceg	Michael Montemurro	Fei Tong
Matthew J. Fischer	Hiroiyuki Motozuka	Payam Torab
Michael Fischer	Andrew Myles	Solomon Trainin
Mark A. Hamilton	Eldad Perahia	Ganesh Venkatesan
Daniel N. Harkins	Emily H. Qi	Qi Wang
Brian D. Hart	Mark Rison	Gaius Wee
Guido R. Hiertz	Jon W. Rosdahl	Menzo M. Wentink
Wei Hong	Dick Roy	Mingguang Xu
David Hunter		Chen Yanming

The following members of the individual balloting committee voted on this revision. Balloters may have voted for approval, disapproval, or abstention.

Osama S. Aboulmagd	David Evans	Assaf Kasher
Tomoko Adachi	Zhong Fan	Ruediger Kays
Iwan Adhicandra	Liu Fangfang	Stuart J. Kerry
Thomas Alexander	Matthew J. Fischer	Yongbum Kim
Richard Alfvén	Michael Fischer	Youhan Kim
Nobumitsu Amachi	Avraham Freedman	Patrick Kinney
Carol Ansley	Dan Gal	Bruce P. Kraemer
Butch Anton	Devon Gayle	Yasushi Kudoh
Yusuke Asai	James P. K. Gilb	Thomas Kurihara
Alfred Asterjadhi	Tim Godfrey	Paul Lambert
Stefan Aust	Joel Goergen	Jeremy Landt
Michael Bahr	Randall Groves	Mark Laubach
Gabor Bajko	Robert Grow	Hyeong Ho Lee
Phillip Barber	Michael Gundlach	Wookbong Lee
Tuncer Baykas	Chris Guy	James Lepp
Mathilde Benveniste	Gloria Gwynne	Joseph Levy
Harry Bims	Rainer Hach	Arthur H. Light
Gennaro Boggia	Russell Haines	William Lumpkins
Nancy Bravin	Mark A. Hamilton	Chris Lyttle
Theodore Brillhart	Christopher J. Hansen	Elvis Maculuba
John Buffington	Jerome Henry	Jouni K. Malinen
William Byrd	Marco Hernandez	James Marin
Brent Cain	Guido Hiertz	Roger Marks
Radhakrishna Canchi	Ronald Hochnadel	Jeffery Masters
Fengming Cao	Werner Hoelzl	Stephen McCann
William Carney	David Hunter	Michael McInnis
Juan Carreon	Tetsushi Ikegami	Filip Mestanov
Minho Cheong	Noriyuki Ikeuchi	Apurva Mody
Keith Chow	Yasuhiko Inoue	Jose Morales
Jinyoung Chun	Sergiu Iordanescu	Ronald Murias
Charles Cook	Akio Iso	Rick Murphy
Todor Cooklev	Atsushi Ito	Andrew Myles
Carlos Cordeiro	Raj Jain	Juichi Nakada
Steven Crowley	Michael Johas Teener	Nabil Nasser
Yezid Donoso	Adri Jovin	Michael Newman
Sourav Dutta	Joe Natharaj Juisai	Chiu Ngo
Donald E. Eastlake	Naveen Kakani	Nicks Nikjoo
Peter Ecclesine	Shinkyō Kaku	Paul Nikolich
Richard Edgar	Hyunjeong Kang	Satoshi Obara
Marc Emmelmann	Piotr Karocki	Robert O'Hara
		Yoshihiro Ohba

Satoshi Oyama
 Stephen Palm
 Glenn Parsons
 Arumugam Paventhan
 Brian Phelps
 Walter Pienciak
 Subburajan Ponnuswamy
 Clinton Powell
 Venkatesha Prasad
 Emily H. Qi
 R. K. Rannow
 Maximilian Riegel
 Mark Rison
 Robert Robinson
 Benjamin Rolfe
 Jon W. Rosdahl
 Kazuyuki Sakoda
 Osman Sakr
 Amichai Sanderovich
 John Santhoff
 Naotaka Sato
 Bartien Sayogo
 Sigurd Schelstraete

Andy Scott
 Yongho Seok
 Kunal Shah
 Ian Sherlock
 Shusaku Shimada
 Robert Slater
 Di Dieter Smely
 Graham Kenneth Smith
 Daniel Smolinski
 Kapil Sood
 Robert Stacey
 Dorothy V. Stanley
 Thomas Starai
 Adrian P. Stephens
 Rene Struik
 Walter Struppler
 Mark Sturza
 Rakesh Taori
 David Tepen
 Patricia Thaler
 David Thompson
 Edward Tiedemann
 Jens Tingleff

Keat Beng Toh
 Payam Torab
 Solomon Trainin
 Ha Nguyen Tran
 Kazuyoshi Tsukada
 Mark-Rene Uchida
 Lorenzo Vangelista
 Allert Van Zelst
 Dmitri Varsanofiev
 Prabodh Varshney
 Ganesh Venkatesan
 George A. Vlantis
 Khurram Waheed
 Haiming Wang
 Lei Wang
 Stephen Webb
 Hung-Yu Wei
 Menzo M. Wentink
 Chun Yu Charles Wong
 Forrest Wright
 James Yee
 Oren Yuen
 Daidi Zhong
 Zhen Zhou

When the IEEE-SA Standards Board approved this revision on 7 December 2016, it had the following membership:

Jean-Philippe Faure, *Chair*
Ted Burse, *Vice Chair*
John D. Kulick, *Past Chair*
Konstantinos Karachalios, *Secretary*

Chuck Adams
 Masayuki Ariyoshi
 Stephen Dukes
 Jianbin Fan
 J. Travis Griffith
 Gary Hoffman

Ronald W. Hotchkiss
 Michael Janezic
 Joseph L. Koepfinger*
 Hung Ling
 Kevin Lu
 Annette D. Reilly
 Gary Robinson

Mehmet Ulema
 Yingli Wen
 Howard Wolfman
 Don Wright
 Yu Yuan
 Daidi Zhong

*Member Emeritus

Introduction

This introduction is not part of IEEE Std 802.11-2016, IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area network—Specific requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications.

This revision gives users, in one document, the IEEE 802.11 standard for wireless local area networks (WLANs) with all of the amendments that have been published to date.

Incorporating published amendments

The original standard was published in 1997, revised in 1999 with MIB changes, and reaffirmed in 2003.

A revision was published in 2007, which incorporated into the 1999 edition the following amendments:

- IEEE Std 802.11a™-1999: High-speed Physical Layer in the 5 GHz Band (Amendment 1)
- IEEE Std 802.11b™-1999: Higher-Speed Physical Layer Extension in the 2.4 GHz Band (Amendment 2)
- IEEE Std 802.11b-1999/Corrigendum 1-2001: Higher-speed Physical Layer (PHY) extension in the 2.4 GHz band (Corrigendum 1 to Amendment 2)
- IEEE Std 802.11d™-2001: Specification for operation in additional regulatory domains (Amendment 3)
- IEEE Std 802.11g™-2003: Further Higher Data Rate Extension in the 2.4 GHz Band (Amendment 4)
- IEEE Std 802.11h™-2003: Spectrum and Transmit Power Management Extensions in the 5 GHz band in Europe (Amendment 5)
- IEEE Std 802.11i™-2004: Medium Access Control (MAC) Security Enhancements (Amendment 6)
- IEEE Std 802.11j™-2004: 4.9 GHz–5 GHz Operation in Japan (Amendment 7)
- IEEE Std 802.11e™-2005: Medium Access Control (MAC) Quality of Service Enhancements (Amendment 8)

A revision was published in 2012, which incorporated into the 2007 revision the following amendments:

- IEEE Std 802.11k™-2008: Radio Resource Measurement of Wireless LANs (Amendment 1)
- IEEE Std 802.11r™-2008: Fast Basic Service Set (BSS) Transition (Amendment 2)
- IEEE Std 802.11y™-2008: 3650–3700 MHz Operation in USA (Amendment 3)
- IEEE Std 802.11w™-2009: Protected Management Frames (Amendment 4)
- IEEE Std 802.11n™-2009: Enhancements for Higher Throughput (Amendment 5)
- IEEE Std 802.11p™-2010: Wireless Access in Vehicular Environments (Amendment 6)
- IEEE Std 802.11z™-2010: Extensions to Direct-Link Setup (DLS) (Amendment 7)
- IEEE Std 802.11v™-2011: Wireless Network Management (Amendment 8)
- IEEE Std 802.11u™-2011: Interworking with External Networks (Amendment 9)
- IEEE Std 802.11s™-2011: Mesh Networking (Amendment 10)

This revision is based on IEEE Std 802.11-2012, into which the following amendments have been incorporated:

- IEEE Std 802.11ae™-2012: Prioritization of Management Frames (Amendment 1)
- IEEE Std 802.11aa™-2012: MAC Enhancements for Robust Audio Video Streaming (Amendment 2)

- IEEE Std 802.11ad™-2012: Enhancements for Very High Throughput in the 60 GHz Band (Amendment 3)
- IEEE Std 802.11ac™-2013: Enhancements for Very High Throughput for Operation in Bands below 6 GHz (Amendment 4)
- IEEE Std 802.11af™-2013: Television White Spaces (TVWS) Operation (Amendment 5)

Technical corrections, clarifications, and enhancements

In addition, this revision specifies technical corrections and clarifications to IEEE Std 802.11 as well as enhancements to the existing medium access control (MAC) and physical layer (PHY) functions. In addition, this revision removes some features previously marked as obsolete and adds new indications of other obsolete features.

Renumbering of clauses and annexes

The numbering of certain clauses and annexes has been modified since IEEE Std 802.11-2012.

The evolution of this numbering is shown in Figure i.

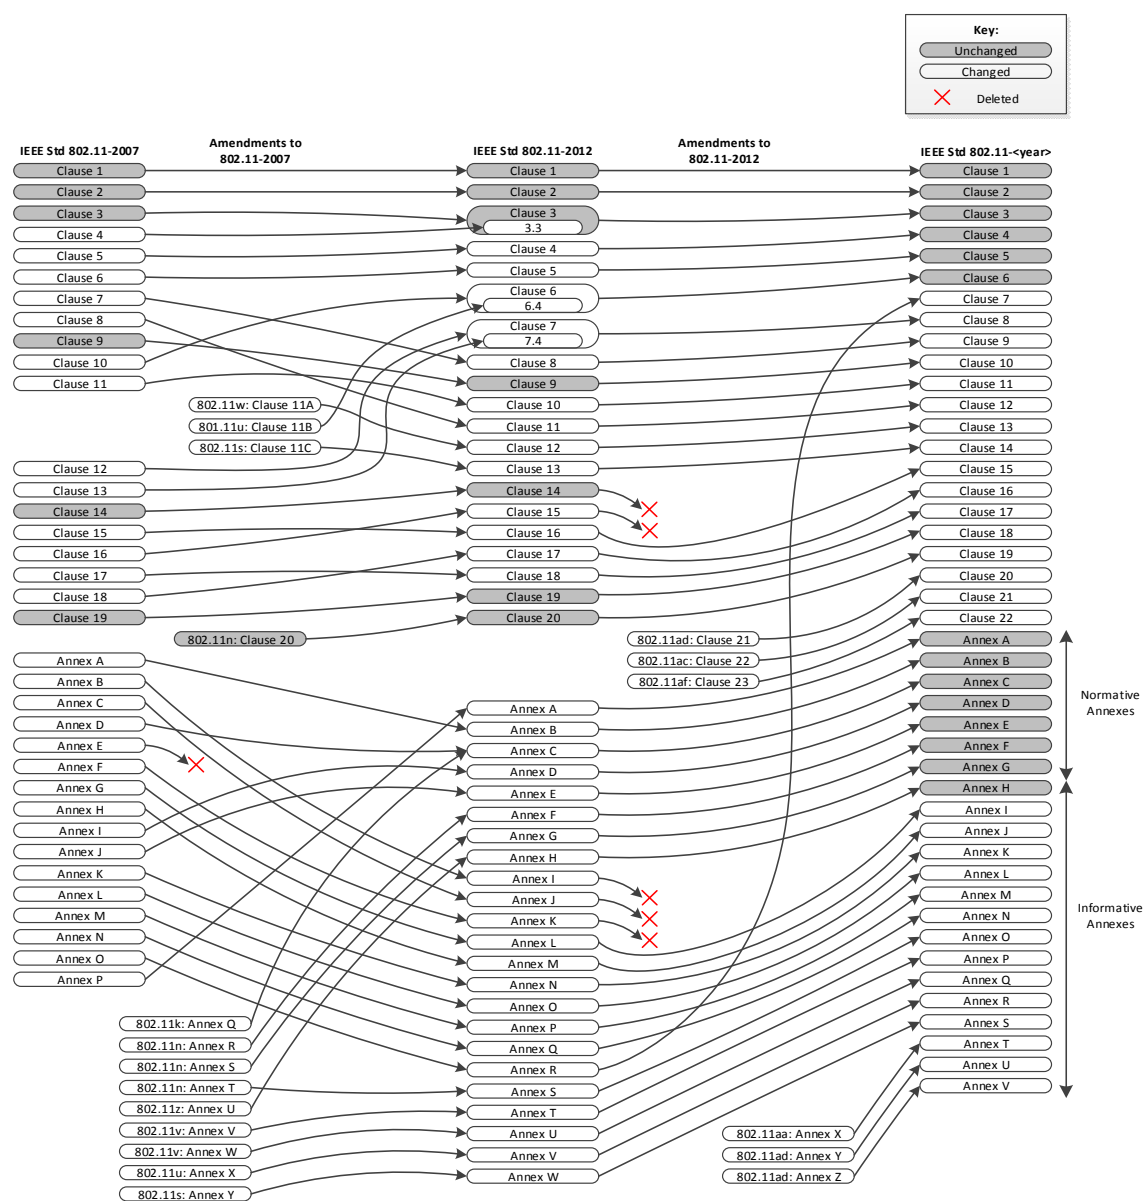


Figure i—The evolution of numbering in IEEE Std 802.11

Contents

1.	Overview.....	122
1.1	Scope.....	122
1.2	Purpose.....	122
1.3	Supplementary information on purpose.....	122
1.4	Word usage	123
1.5	Terminology for mathematical, logical, and bit operations.....	124
2.	Normative references.....	125
3.	Definitions, acronyms, and abbreviations.....	128
3.1	Definitions	128
3.2	Definitions specific to IEEE Std 802.11	143
3.3	Definitions specific to IEEE 802.11 operation in some regulatory domains.....	170
3.4	Abbreviations and acronyms	170
3.5	Abbreviations and acronyms in some regulatory domains.....	182
4.	General description	183
4.1	General description of the architecture	183
4.2	How wireless local area networks (WLANs) are different.....	183
4.2.1	Introduction.....	183
4.2.2	Wireless station (STA).....	183
4.2.3	Media impact on design and performance.....	183
4.2.4	The impact of handling mobile STAs.....	184
4.2.5	Interaction with other IEEE 802® layers.....	184
4.2.6	Interaction with non-IEEE-802 protocols.....	184
4.3	Components of the IEEE 802.11 architecture	184
4.3.1	General.....	184
4.3.2	The independent BSS (IBSS)	185
4.3.3	The personal BSS (PBSS).....	185
4.3.4	STA membership in a BSS is dynamic.....	185
4.3.5	Distribution system (DS) concepts	186
4.3.5.1	Overview	186
4.3.5.2	Extended service set (ESS): the large coverage network.....	187
4.3.6	Area concepts.....	188
4.3.7	Integration with non-IEEE-802.11 LANs.....	189
4.3.8	Robust security network association (RSNA)	190
4.3.9	Centralized coordination service set (CCSS) and extended centralized AP or PCP clustering (ECAPC).....	190
4.3.10	QoS BSS	192
4.3.11	Wireless LAN radio measurements	193
4.3.11.1	General	193
4.3.11.2	Beacon.....	194
4.3.11.3	Measurement pilot.....	194
4.3.11.4	Frame	194
4.3.11.5	Channel load	195
4.3.11.6	Noise histogram	195
4.3.11.7	STA statistics	195
4.3.11.8	Location	195
4.3.11.9	Measurement pause.....	195

4.3.11.10	Neighbor report.....	195
4.3.11.11	Link measurement.....	195
4.3.11.12	Transmit stream/category measurement	195
4.3.12	Operation in licensed frequency bands.....	196
4.3.12.1	General	196
4.3.12.2	Dynamic STA enablement (DSE) in licensed bands	196
4.3.12.3	Contention based protocol (CBP) in nonexclusively licensed bands	196
4.3.12.4	Using DSE STA identification to resolve interference.....	196
4.3.12.5	Further coexistence enhancements in nonexclusively licensed bands	196
4.3.13	High-throughput (HT) STA.....	196
4.3.14	Very high throughput (VHT) STA	197
4.3.15	Television very high throughput (TVHT) STA.....	198
4.3.16	STA transmission of Data frames outside the context of a BSS	199
4.3.17	Tunneled direct-link setup	200
4.3.18	Wireless network management.....	200
4.3.18.1	Overview	200
4.3.18.2	BSS max idle period management.....	201
4.3.18.3	BSS transition management.....	201
4.3.18.4	Channel usage	201
4.3.18.5	Collocated interference reporting.....	201
4.3.18.6	Diagnostic reporting.....	201
4.3.18.7	Directed multicast service (DMS).....	201
4.3.18.8	Event reporting.....	202
4.3.18.9	Flexible multicast service (FMS).....	202
4.3.18.10	Location services.....	202
4.3.18.11	Multicast Diagnostic report.....	202
4.3.18.12	Multiple BSSID capability.....	202
4.3.18.13	Proxy ARP	202
4.3.18.14	QoS traffic capability	202
4.3.18.15	SSID list	203
4.3.18.16	Triggered STA statistics.....	203
4.3.18.17	TIM broadcast.....	203
4.3.18.18	Timing measurement.....	203
4.3.18.19	Fine timing measurement.....	203
4.3.18.20	Traffic filtering service	203
4.3.18.21	U-APSD coexistence.....	203
4.3.18.22	WNM notification	203
4.3.18.23	WNM sleep mode	204
4.3.19	Subscription service provider network (SSPN) interface	204
4.3.20	Mesh BSS	205
4.3.20.1	General	205
4.3.20.2	Overview of the mesh BSS	205
4.3.20.3	Mesh STA	205
4.3.20.4	IEEE 802.11 components and mesh BSS	206
4.3.20.5	Introduction to mesh functions	207
4.3.21	DMG STA.....	210
4.3.22	DMG relay	211
4.3.23	Robust audio video (AV) streaming	211
4.3.23.1	Groupcast with retries (GCR)	211
4.3.23.2	Stream classification service (SCS)	212
4.3.23.3	Overlapping BSS (OBSS) management	212
4.3.23.4	Interworking with IEEE 802.1Q™ Stream Reservation Protocol (SRP).....	212
4.3.23.5	Intra-access category prioritization	212

4.3.24	Operation under geolocation database (GDB) control	213
4.4	Logical service interfaces	215
4.4.1	General	215
4.4.2	SS	215
4.4.3	PBSS control point service (PCPS)	216
4.4.4	DSS	216
4.5	Overview of the services	217
4.5.1	General	217
4.5.2	Distribution of MSDUs within a DS	218
4.5.2.1	Distribution	218
4.5.2.2	Integration	219
4.5.2.3	QoS traffic scheduling	219
4.5.3	Services that support the distribution service and the PCP service	220
4.5.3.1	General	220
4.5.3.2	Mobility types	220
4.5.3.3	Association	220
4.5.3.4	Reassociation	221
4.5.3.5	Disassociation	221
4.5.4	Access control and data confidentiality services	222
4.5.4.1	General	222
4.5.4.2	Authentication	222
4.5.4.3	Deauthentication	223
4.5.4.4	Data confidentiality	223
4.5.4.5	Key management	224
4.5.4.6	Data origin authenticity	224
4.5.4.7	Replay detection	224
4.5.4.8	Fast BSS transition	225
4.5.4.9	Robust management frame protection	225
4.5.5	Spectrum management services	225
4.5.5.1	General	225
4.5.5.2	TPC	225
4.5.5.3	DFS	225
4.5.6	Traffic differentiation and QoS support	226
4.5.6.1	General	226
4.5.6.2	Quality-of-service management frame support	226
4.5.7	Support for higher layer timer synchronization	226
4.5.8	Radio measurement service	227
4.5.9	Interworking with external networks	227
4.5.10	Generic advertisement service (GAS)	228
4.6	Multiple logical address spaces	228
4.7	Differences among ESS, PBSS, and IBSS LANs	229
4.8	Differences between ESS and MBSS LANs	231
4.9	Reference model	231
4.9.1	General	231
4.9.2	Interworking reference model	231
4.9.3	Reference model for supporting multiple MAC sublayers	233
4.9.4	Reference model for multi-band operation	234
4.10	IEEE Std 802.11 and IEEE Std 802.1X-2010	236
4.10.1	General	236
4.10.2	IEEE 802.11 usage of IEEE Std 802.1X-2010	236
4.10.3	Infrastructure functional model overview	237
4.10.3.1	General	237
4.10.3.2	AKM operations with AS	237
4.10.3.3	AKM operations with a password or PSK	239

4.10.3.4	Alternate operations with PSK.....	240
4.10.3.5	Disassociation	241
4.10.4	IBSS functional model description	241
4.10.4.1	General	241
4.10.4.2	Key usage.....	241
4.10.4.3	Sample IBSS 4-way handshakes.....	241
4.10.4.4	IBSS IEEE 802.1X example	243
4.10.5	PBSS functional model description	244
4.10.6	Authenticator-to-AS protocol	245
4.10.7	PMKSA caching	245
4.10.8	Protection of group addressed robust Management frames.....	245
5.	MAC service definition	246
5.1	Overview of MAC services	246
5.1.1	Data service.....	246
5.1.1.1	General	246
5.1.1.2	Determination of UP	246
5.1.1.3	Interpretation of priority parameter in MAC service primitives.....	246
5.1.1.4	Interpretation of service class parameter in MAC service primitives in a STA	247
5.1.2	Security services	248
5.1.3	MSDU ordering	248
5.1.4	MSDU format	249
5.1.5	MAC data service architecture	250
5.1.5.1	General	250
5.1.5.2	Non-AP STA role.....	253
5.1.5.3	AP role	253
5.1.5.4	Mesh STA role	253
5.1.5.5	Mesh gate role.....	254
5.2	MAC data service specification	254
5.2.1	General.....	254
5.2.2	MA-UNITDATA.request	254
5.2.2.1	Function	254
5.2.2.2	Semantics of the service primitive	255
5.2.2.3	When generated.....	255
5.2.2.4	Effect of receipt.....	255
5.2.3	MA-UNITDATA.indication	257
5.2.3.1	Function	257
5.2.3.2	Semantics of the service primitive	257
5.2.3.3	When generated.....	257
5.2.3.4	Effect of receipt.....	258
5.2.4	MA-UNITDATA-STATUS.indication.....	259
5.2.4.1	Function	259
5.2.4.2	Semantics of the service primitive	259
5.2.4.3	When generated.....	261
5.2.4.4	Effect of receipt.....	261
6.	Layer management.....	262
6.1	Overview of management model	262
6.2	Generic management primitives	263
6.3	MLME SAP interface	263
6.3.1	Introduction.....	263

6.3.2	Power management.....	264
6.3.2.1	Introduction	264
6.3.2.2	MLME-POWERMGT.request	264
6.3.2.3	MLME-POWERMGT.confirm	264
6.3.3	Scan.....	265
6.3.3.1	Introduction	265
6.3.3.2	MLME-SCAN.request	265
6.3.3.3	MLME-SCAN.confirm	267
6.3.4	Synchronization	276
6.3.4.1	Introduction	276
6.3.4.2	MLME-JOIN.request	276
6.3.4.3	MLME-JOIN.confirm	278
6.3.5	Authenticate	279
6.3.5.1	Introduction	279
6.3.5.2	MLME-AUTHENTICATE.request	279
6.3.5.3	MLME-AUTHENTICATE.confirm	280
6.3.5.4	MLME-AUTHENTICATE.indication	282
6.3.5.5	MLME-AUTHENTICATE.response	283
6.3.6	Deauthenticate	284
6.3.6.1	Introduction	284
6.3.6.2	MLME-DEAUTHENTICATE.request	284
6.3.6.3	MLME-DEAUTHENTICATE.confirm	285
6.3.6.4	MLME-DEAUTHENTICATE.indication	285
6.3.7	Associate.....	286
6.3.7.1	Introduction	286
6.3.7.2	MLME-ASSOCIATE.request	286
6.3.7.3	MLME-ASSOCIATE.confirm	288
6.3.7.4	MLME-ASSOCIATE.indication	292
6.3.7.5	MLME-ASSOCIATE.response	295
6.3.8	Reassociate.....	297
6.3.8.1	Introduction	297
6.3.8.2	MLME-REASSOCIATE.request	297
6.3.8.3	MLME-REASSOCIATE.confirm	299
6.3.8.4	MLME-REASSOCIATE.indication	303
6.3.8.5	MLME-REASSOCIATE.response	306
6.3.9	Disassociate	309
6.3.9.1	MLME-DISASSOCIATE.request	309
6.3.9.2	MLME-DISASSOCIATE.confirm	309
6.3.9.3	MLME-DISASSOCIATE.indication	310
6.3.10	Reset.....	310
6.3.10.1	Introduction	310
6.3.10.2	MLME-RESET.request	311
6.3.11	Start.....	311
6.3.11.1	Introduction	311
6.3.11.2	MLME-START.request	311
6.3.11.3	MLME-START.confirm	317
6.3.12	Stop	317
6.3.12.1	General	317
6.3.12.2	MLME-STOP.request	317
6.3.13	Protocol layer model for spectrum management and radio measurement.....	318
6.3.14	Measurement request	321
6.3.14.1	Introduction	321
6.3.14.2	MLME-MREQUEST.request	321
6.3.14.3	MLME-MREQUEST.indication	322

6.3.15	Channel measurement.....	323
6.3.15.1	Introduction	323
6.3.15.2	MLME-MEASURE.request.....	323
6.3.15.3	MLME-MEASURE.confirm.....	324
6.3.16	Measurement report.....	325
6.3.16.1	Introduction	325
6.3.16.2	MLME-MREPORT.request.....	325
6.3.16.3	MLME-MREPORT.indication	326
6.3.17	Channel switch.....	327
6.3.17.1	MLME-CHANNELSWITCH.request	327
6.3.17.2	MLME-CHANNELSWITCH.confirm	328
6.3.17.3	MLME-CHANNELSWITCH.indication.....	328
6.3.17.4	MLME-CHANNELSWITCH.response	329
6.3.18	TPC request.....	331
6.3.18.1	Introduction	331
6.3.18.2	MLME-TPCADAPT.request	331
6.3.18.3	MLME-TPCADAPT.confirm	331
6.3.19	SetKeys	332
6.3.19.1	MLME-SETKEYS.request	332
6.3.20	DeleteKeys.....	333
6.3.20.1	MLME-DELETEKEYS.request	333
6.3.21	MIC (michael) failure event	334
6.3.21.1	MLME-MICHAELMICFAILURE.indication.....	334
6.3.22	EAPOL.....	335
6.3.22.1	MLME-EAPOL.request.....	335
6.3.22.2	MLME-EAPOL.confirm	336
6.3.23	MLME-PEERKEY-START	336
6.3.23.1	MLME-PEERKEY-START.request.....	336
6.3.24	SetProtection	337
6.3.24.1	MLME-SETPROTECTION.request.....	337
6.3.25	MLME-PROTECTEDFRAMEDROPPED	338
6.3.25.1	MLME- PROTECTEDFRAMEDROPPED.indication	338
6.3.26	TS management interface	338
6.3.26.1	General	338
6.3.26.2	MLME-ADDTS.request	339
6.3.26.3	MLME-ADDTS.confirm	341
6.3.26.4	MLME-ADDTS.indication	344
6.3.26.5	MLME-ADDTS.response	346
6.3.26.6	MLME-DELTS.request	349
6.3.26.7	MLME-DELTS.indication.....	350
6.3.26.8	MLME-ADDTSRESERVE.request	351
6.3.26.9	MLME-ADDTSRESERVE.confirm.....	352
6.3.26.10	MLME-ADDTSRESERVE.indication	353
6.3.26.11	MLME-ADDTSRESERVE.response	354
6.3.27	Management of direct links	354
6.3.27.1	Introduction	354
6.3.27.2	MLME-DLS.request	355
6.3.27.3	MLME-DLS.confirm	355
6.3.27.4	MLME-DLS.indication.....	356
6.3.27.5	MLME-DLS.response.....	357
6.3.27.6	MLME-DLS-TEARDOWN.request	358
6.3.27.7	MLME-DLS-TEARDOWN.indication.....	359
6.3.28	Higher layer synchronization support.....	360
6.3.28.1	Introduction	360

	6.3.28.2	MLME-HL-SYNC.request	360
	6.3.28.3	MLME-HL-SYNC.indication	361
6.3.29	Block Ack		361
	6.3.29.1	General	361
	6.3.29.2	MLME-ADDBA.request	361
	6.3.29.3	MLME-ADDBA.confirm	363
	6.3.29.4	MLME-ADDBA.indication	364
	6.3.29.5	MLME-ADDBA.response	365
	6.3.29.6	MLME-DELBA.request	367
	6.3.29.7	MLME-DELBA.indication	368
6.3.30	Schedule element management		369
	6.3.30.1	Introduction	369
	6.3.30.2	MLME-SCHEDULE.request	369
	6.3.30.3	MLME-SCHEDULE.indication	369
6.3.31	Vendor-specific action		370
	6.3.31.1	Introduction	370
	6.3.31.2	MLME-VSPECIFIC.request	370
	6.3.31.3	MLME-VSPECIFIC.indication	371
6.3.32	Neighbor report request		372
	6.3.32.1	General	372
	6.3.32.2	MLME-NEIGHBORPREP.request	372
	6.3.32.3	MLME-NEIGHBORPREP.indication	373
6.3.33	Neighbor report response		374
	6.3.33.1	General	374
	6.3.33.2	MLME-NEIGHBORPRESP.request	374
	6.3.33.3	MLME-NEIGHBORPRESP.indication	375
6.3.34	Link Measure Request		376
	6.3.34.1	General	376
	6.3.34.2	MLME-LINKMEASURE.request	376
	6.3.34.3	MLME-LINKMEASURE.confirm	377
6.3.35	MLME SAP interface for resource request		378
	6.3.35.1	MLME-RESOURCE-REQUEST.request	378
	6.3.35.2	MLME-RESOURCE-REQUEST.indication	379
	6.3.35.3	MLME-RESOURCE-REQUEST.response	380
	6.3.35.4	MLME-RESOURCE-REQUEST.confirm	380
	6.3.35.5	MLME-RESOURCE-REQUEST-LOCAL.request	381
	6.3.35.6	MLME-RESOURCE-REQUEST-LOCAL.confirm	382
6.3.36	MLME SAP interface for remote requests		382
	6.3.36.1	MLME-REMOTE-REQUEST.request	382
	6.3.36.2	MLME-REMOTE-REQUEST.indication	383
6.3.37	Extended channel switch announcement		383
	6.3.37.1	General	383
	6.3.37.2	MLME-EXTCHANNELSWITCH.request	384
	6.3.37.3	MLME-EXTCHANNELSWITCH.confirm	385
	6.3.37.4	MLME-EXTCHANNELSWITCH.indication	385
	6.3.37.5	MLME-EXTCHANNELSWITCH.response	387
6.3.38	DSE power constraint announcement		388
	6.3.38.1	General	388
	6.3.38.2	MLME-DSETPC.request	388
	6.3.38.3	MLME-DSETPC.confirm	389
	6.3.38.4	MLME-DSETPC.indication	390
	6.3.38.5	MLME-DSETPC.response	390
6.3.39	Enablement		391
	6.3.39.1	General	391

6.3.39.2	MLME-ENABLEMENT.request	391
6.3.39.3	MLME-ENABLEMENT.confirm	392
6.3.39.4	MLME-ENABLEMENT.indication	393
6.3.39.5	MLME-ENABLEMENT.response	394
6.3.40	Deenablement	395
6.3.40.1	MLME-DEENABLEMENT.request	395
6.3.40.2	MLME-DEENABLEMENT.indication	396
6.3.41	SA Query support	397
6.3.41.1	MLME-SA-QUERY.request	397
6.3.41.2	MLME-SA-QUERY.confirm	398
6.3.41.3	MLME-SA-QUERY.indication	398
6.3.41.4	MLME-SA-QUERY.response	399
6.3.42	Get TSF timer	400
6.3.42.1	General	400
6.3.42.2	MLME-GETTSFTIME.request	400
6.3.42.3	MLME-GETTSFTIME.confirm	400
6.3.43	Timing Advertisement	401
6.3.43.1	General	401
6.3.43.2	MLME-TIMING-ADVERTISEMENT.request	401
6.3.43.3	MLME-TIMING-ADVERTISEMENT.indication	402
6.3.44	TDLS Discovery	403
6.3.44.1	General	403
6.3.44.2	MLME-TDLSDISCOVERY.request	403
6.3.44.3	MLME-TDLSDISCOVERY.confirm	404
6.3.44.4	MLME-TDLSDISCOVERY.indication	405
6.3.44.5	MLME-TDLSDISCOVERY.response	405
6.3.45	TDLS direct-link establishment	406
6.3.45.1	General	406
6.3.45.2	MLME-TDLSSETUPREQUEST.request	406
6.3.45.3	MLME-TDLSSETUPREQUEST.indication	407
6.3.45.4	MLME-TDLSSETUPRESPONSE.request	408
6.3.45.5	MLME-TDLSSETUPRESPONSE.indication	409
6.3.45.6	MLME-TDLSSETUPCONFIRM.request	409
6.3.45.7	MLME-TDLSSETUPCONFIRM.indication	410
6.3.45.8	MLME-TDLSPOTENTIALPEERSTA.request	410
6.3.45.9	MLME-TDLSPOTENTIALPEERSTA.confirm	411
6.3.46	TDLS direct-link teardown	412
6.3.46.1	General	412
6.3.46.2	MLME-TDLSTEARDOWN.request	412
6.3.46.3	MLME-TDLSTEARDOWN.indication	413
6.3.47	TDLS peer U-APSD (TPU)	413
6.3.47.1	General	413
6.3.47.2	MLME-TDLSPTI.request	414
6.3.47.3	MLME-TDLSPTI.confirm	415
6.3.47.4	MLME-TDLSPTI.indication	415
6.3.47.5	MLME-TDLSPTI.response	416
6.3.48	TDLS channel switching	417
6.3.48.1	General	417
6.3.48.2	MLME-TDLSCHANNELSWITCH.request	417
6.3.48.3	MLME-TDLSCHANNELSWITCH.confirm	418
6.3.48.4	MLME-TDLSCHANNELSWITCH.indication	419
6.3.48.5	MLME-TDLSCHANNELSWITCH.response	419
6.3.49	TDLS peer PSM	420
6.3.49.1	General	420

6.3.49.2	MLME-TDLSPEERPSM.request	420
6.3.49.3	MLME-TDLSPEERPSM.confirm	421
6.3.49.4	MLME-TDLSPEERPSM.indication	422
6.3.49.5	MLME-TDLSPEERPSM.response	422
6.3.50	Event request	423
6.3.50.1	General	423
6.3.50.2	MLME-EVLREQUEST.request	423
6.3.50.3	MLME-EVLREQUEST.indication	424
6.3.51	Event report	425
6.3.51.1	General	425
6.3.51.2	MLME-EVLREPORT.request	425
6.3.51.3	MLME-EVLREPORT.indication	426
6.3.52	Event	427
6.3.52.1	General	427
6.3.52.2	MLME-EVLOG.request	427
6.3.52.3	MLME-EVLOG.confirm	427
6.3.53	Diagnostic request	428
6.3.53.1	General	428
6.3.53.2	MLME-DIAGREQUEST.request	428
6.3.53.3	MLME-DIAGREQUEST.indication	429
6.3.54	Diagnostic report	430
6.3.54.1	MLME-DIAGREPORT.request	430
6.3.54.2	MLME-DIAGREPORT.indication	431
6.3.55	Location configuration request	431
6.3.55.1	General	431
6.3.55.2	MLME-LOCATIONCFG.request	432
6.3.55.3	MLME-LOCATIONCFG.confirm	433
6.3.55.4	MLME-LOCATIONCFG.indication	433
6.3.55.5	MLME-LOCATIONCFG.response	434
6.3.56	Location track notification	435
6.3.56.1	General	435
6.3.56.2	MLME-LOCATIONTRACKNOTIF.request	435
6.3.56.3	MLME-LOCATIONTRACKNOTIF.indication	436
6.3.57	Timing measurement	437
6.3.57.1	General	437
6.3.57.2	MLME-TIMINGMSMT.request	438
6.3.57.3	MLME-TIMINGMSMT.confirm	439
6.3.57.4	MLME-TIMINGMSMT.indication	440
6.3.58	Fine timing measurement (FTM)	441
6.3.58.1	General	441
6.3.58.2	MLME-FINETIMINGMSMT.request	442
6.3.58.3	MLME-FINETIMINGMSMT.confirm	443
6.3.58.4	MLME-FINETIMINGMSMT.indication	444
6.3.59	BSS transition management	446
6.3.59.1	BSS transition management procedure	446
6.3.59.2	MLME-BTMQUERY.request	446
6.3.59.3	MLME-BTMQUERY.indication	448
6.3.59.4	MLME-BTM.request	449
6.3.59.5	MLME-BTM.indication	450
6.3.59.6	MLME-BTM.response	451
6.3.59.7	MLME-BTM.confirm	452
6.3.60	FMS setup	453
6.3.60.1	General	453
6.3.60.2	MLME-FMS.request	454

6.3.60.3	MLME-FMS.confirm.....	454
6.3.60.4	MLME-FMS.indication	455
6.3.60.5	MLME-FMS.response	456
6.3.61	Collocated Interference request	456
6.3.61.1	General	456
6.3.61.2	MLME-CLINTERFERENCEREQUEST.request	457
6.3.61.3	MLME-CLINTERFERENCEREQUEST.indication.....	458
6.3.62	Collocated Interference report	459
6.3.62.1	General	459
6.3.62.2	MLME-CLINTERFERENCEREPORT.request.....	459
6.3.62.3	MLME-CLINTERFERENCEREPORT.indication	460
6.3.63	TFS setup	460
6.3.63.1	General	460
6.3.63.2	MLME-TFS.request.....	461
6.3.63.3	MLME-TFS.confirm	462
6.3.63.4	MLME-TFS.indication	462
6.3.63.5	MLME-TFS.response	463
6.3.64	WNM sleep mode request.....	464
6.3.64.1	General	464
6.3.64.2	MLME-SLEEPMODE.request	465
6.3.64.3	MLME-SLEEPMODE.indication	465
6.3.64.4	MLME-SLEEPMODE.response	466
6.3.64.5	MLME-SLEEPMODE.confirm	467
6.3.65	TIM broadcast setup	468
6.3.65.1	General	468
6.3.65.2	MLME-TIMBROADCAST.request	469
6.3.65.3	MLME-TIMBROADCAST.confirm	469
6.3.65.4	MLME-TIMBROADCAST.indication.....	470
6.3.65.5	MLME-TIMBROADCAST.response.....	471
6.3.66	QoS traffic capability update	471
6.3.66.1	General	471
6.3.66.2	MLME-QOSTRAFFICCAPUPDATE.request.....	472
6.3.66.3	MLME-QOSTRAFFICCAPUPDATE.indication	473
6.3.67	Channel Usage request.....	473
6.3.67.1	General	473
6.3.67.2	MLME-CHANNELUSAGE.request	474
6.3.67.3	MLME-CHANNELUSAGE.confirm	475
6.3.67.4	MLME-CHANNELUSAGE.indication	476
6.3.67.5	MLME-CHANNELUSAGE.response	477
6.3.68	DMS or GCR request and response procedure	478
6.3.68.1	General	478
6.3.68.2	MLME-GATS.request	478
6.3.68.3	MLME-GATS.confirm	479
6.3.68.4	MLME-GATS.indication	480
6.3.68.5	MLME-GATS.response	480
6.3.68.6	MLME-GATS-TERM.request	481
6.3.68.7	MLME-GATS-TERM.indication	482
6.3.69	Timing measurement request.....	483
6.3.69.1	General	483
6.3.69.2	MLME-TIMINGMSMTRQ.request	483
6.3.69.3	MLME-TIMINGMSMTRQ.indication.....	483
6.3.70	Fine timing measurement request.....	484
6.3.70.1	General	484
6.3.70.2	MLME-FINETIMINGMSMTRQ.request	484

	6.3.70.3	MLME-FINETIMINGMSMTRQ.indication.....	485
6.3.71		WNM notification request	486
	6.3.71.1	General	486
	6.3.71.2	MLME-WNMNOTIFICATIONREQUEST.request	486
	6.3.71.3	MLME-WNMNOTIFICATIONREQUEST.indication	487
6.3.72		WNM notification response.....	488
	6.3.72.1	MLME-WNMNOTIFICATIONRESPONSE.request	488
	6.3.72.2	MLME-WNMNOTIFICATIONRESPONSE.indication	488
6.3.73		Network discovery and selection support.....	489
	6.3.73.1	General	489
	6.3.73.2	MLME-GAS.request.....	489
	6.3.73.3	MLME-GAS.confirm.....	490
	6.3.73.4	MLME-GAS.indication	492
	6.3.73.5	MLME-GAS.response	493
6.3.74		QoS Map element management.....	494
	6.3.74.1	General	494
	6.3.74.2	MLME-QOS-MAP.request.....	495
	6.3.74.3	MLME-QOS-MAP.indication	495
6.3.75		Mesh peering management	496
	6.3.75.1	Introduction	496
	6.3.75.2	MLME-MESHPEERINGMANAGEMENT.request.....	496
	6.3.75.3	MLME-MESHPEERINGMANAGEMENT.confirm.....	497
	6.3.75.4	MLME-MESHPEERINGMANAGEMENT.indication	498
	6.3.75.5	MLME-MESHPEERINGMANAGEMENT.response	498
6.3.76		Mesh power management	499
	6.3.76.1	Introduction	499
	6.3.76.2	MLME-MESHPOWERMGT.request.....	499
	6.3.76.3	MLME-MESHPOWERMGT.confirm.....	500
6.3.77		Mesh neighbor offset synchronization.....	500
	6.3.77.1	Introduction	500
	6.3.77.2	MLME-MESHNEIGHBOROFFSETSINCSYNCSTART.request	501
	6.3.77.3	MLME-MESHNEIGHBOROFFSETSINCSYNCSTART.confirm	501
	6.3.77.4	MLME-MESHNEIGHBOROFFSETCALCULATE.request.....	502
	6.3.77.5	MLME-MESHNEIGHBOROFFSETCALCULATE.confirm.....	502
	6.3.77.6	MLME-MESHNEIGHBOROFFSETSINCSYNCSSTOP.request	503
	6.3.77.7	MLME-MESHNEIGHBOROFFSETSINCSYNCSSTOP.confirm	503
6.3.78		Mesh TBTT adjustment	504
	6.3.78.1	Introduction	504
	6.3.78.2	MLME-MESHTBTTADJUSTMENT.request	504
	6.3.78.3	MLME-MESHTBTTADJUSTMENT.confirm	505
	6.3.78.4	MLME-MESHTBTTADJUSTMENT.indication	506
	6.3.78.5	MLME-MESHTBTTADJUSTMENT.response	506
6.3.79		MCCA management interface	507
	6.3.79.1	Introduction	507
	6.3.79.2	MLME-ACTIVATEMCCA.request.....	507
	6.3.79.3	MLME-MCCASETUP.request.....	508
	6.3.79.4	MLME-MCCASETUP.confirm.....	509
	6.3.79.5	MLME-MCCASETUP.indication	510
	6.3.79.6	MLME-MCCASETUP.response	511
	6.3.79.7	MLME-MCCAADVERTISEMENT.request	512
	6.3.79.8	MLME-MCCAADVERTISEMENT.confirm	512
	6.3.79.9	MLME-MCCAADVERTISEMENT.indication	513
	6.3.79.10	MLME-MCCAADVERTISEMENT.response	514
	6.3.79.11	MLME-MCCATEARDOWN.request	514

	6.3.79.12	MLME-MCCATEARDOWN.indication.....	515
6.3.80		MBSS congestion control	516
	6.3.80.1	Introduction	516
	6.3.80.2	MLME-MBSSCONGESTIONCONTROL.request.....	516
	6.3.80.3	MLME-MBSSCONGESTIONCONTROL.indication	516
6.3.81		MBSS proxy update.....	517
	6.3.81.1	Introduction	517
	6.3.81.2	MLME-MBSSPROXYUPDATE.request.....	517
	6.3.81.3	MLME-MBSSPROXYUPDATE.confirm.....	518
	6.3.81.4	MLME-MBSSPROXYUPDATE.indication	519
	6.3.81.5	MLME-MBSSPROXYUPDATE.response	519
6.3.82		MBSS mesh gate announcement	520
	6.3.82.1	Introduction	520
	6.3.82.2	MLME-MBSSGATEANNOUNCEMENT.request.....	520
	6.3.82.3	MLME-MBSSGATEANNOUNCEMENT.indication	521
6.3.83		Mesh link metric	522
	6.3.83.1	Introduction	522
	6.3.83.2	MLME-MESHLINKMETRICREAD.request	522
	6.3.83.3	MLME-MESHLINKMETRICREAD.confirm	522
	6.3.83.4	MLME-MESHLINKMETRICREPORT.request.....	523
	6.3.83.5	MLME-MESHLINKMETRICREPORT.indication	524
6.3.84		HWMP mesh path selection	525
	6.3.84.1	Introduction	525
	6.3.84.2	MLME-HWMPMESHPATHSELECTION.request	525
	6.3.84.3	MLME-HWMPMESHPATHSELECTION.indication.....	526
6.3.85		QMF policy.....	527
	6.3.85.1	Introduction	527
	6.3.85.2	MLME-QMFPOLICY.request.....	527
	6.3.85.3	MLME-QMFPOLICY.indication	528
	6.3.85.4	MLME-QMFPOLICYCHANGE.request	528
	6.3.85.5	MLME-QMFPOLICYCHANGE.confirm.....	529
	6.3.85.6	MLME-QMFPOLICYCHANGE.indication.....	530
	6.3.85.7	MLME-QMFPOLICYCHANGE.response.....	530
	6.3.85.8	MLME-QMFPOLICYSET.request.....	531
6.3.86		SCS request and response procedure	532
	6.3.86.1	General	532
	6.3.86.2	MLME-SCS.request.....	532
	6.3.86.3	MLME-SCS.confirm.....	533
	6.3.86.4	MLME-SCS.indication	534
	6.3.86.5	MLME-SCS.response	535
	6.3.86.6	MLME-SCS-TERM.request	535
	6.3.86.7	MLME-SCS-TERM.indication.....	536
6.3.87		QLoad report management	537
	6.3.87.1	General	537
	6.3.87.2	MLME-QLOAD.request.....	537
	6.3.87.3	MLME-QLOAD.confirm.....	538
	6.3.87.4	MLME-QLOAD.indication	539
	6.3.87.5	MLME-QLOAD.response	539
6.3.88		HCCA TXOP advertisement management	540
	6.3.88.1	General	540
	6.3.88.2	MLME-TXOPADVERTISEMENT.request.....	540
	6.3.88.3	MLME-TXOPADVERTISEMENT.confirm.....	541
	6.3.88.4	MLME-TXOPADVERTISEMENT.indication	542
	6.3.88.5	MLME-TXOPADVERTISEMENT.response	543

6.3.89	GCR group membership management.....	544
6.3.89.1	General	544
6.3.89.2	MLME-GROUP-MEMBERSHIP.request.....	544
6.3.89.3	MLME-GROUP-MEMBERSHIP.confirm.....	545
6.3.89.4	MLME-GROUP-MEMBERSHIP.indication	546
6.3.89.5	MLME-GROUP-MEMBERSHIP.response	546
6.3.90	AP PeerKey management	547
6.3.90.1	General	547
6.3.90.2	MLME-APPEERKEY.request.....	547
6.3.90.3	MLME-APPEERKEY.indication	548
6.3.91	On-channel Tunneling operation	549
6.3.91.1	General	549
6.3.91.2	MLME-OTunnel.request.....	550
6.3.91.3	MLME-OTunnel.indication	550
6.3.92	Multi-band operation	551
6.3.92.1	General	551
6.3.92.2	MLME-FST-SETUP.request	551
6.3.92.3	MLME-FST-SETUP.indication.....	552
6.3.92.4	MLME-FST-SETUP.response	552
6.3.92.5	MLME-FST-SETUP.confirm	553
6.3.92.6	MLME-FST-ACK.request	554
6.3.92.7	MLME-FST-ACK.indication.....	554
6.3.92.8	MLME-FST-ACK.response.....	555
6.3.92.9	MLME-FST-ACK.confirm	555
6.3.92.10	MLME-FST-TEARDOWN.request.....	556
6.3.92.11	MLME-FST-TEARDOWN.indication	556
6.3.92.12	MLME-FST-INCOMING.request	557
6.3.93	DMG relay operation	558
6.3.93.1	General	558
6.3.93.2	MLME-RELAY-SEARCH.request	558
6.3.93.3	MLME-RELAY-SEARCH.confirm	559
6.3.93.4	MLME-RELAY-SEARCH.indication	559
6.3.93.5	MLME-RELAY-SEARCH.response.....	560
6.3.93.6	MLME-RLS.request	560
6.3.93.7	MLME-RLS.confirm	561
6.3.93.8	MLME-RLS.indication	562
6.3.93.9	MLME-RLS.response	563
6.3.93.10	MLME-RLS-TEARDOWN.request	563
6.3.93.11	MLME-RLS-TEARDOWN.indication.....	564
6.3.94	Quieting adjacent BSS operation	564
6.3.94.1	General	564
6.3.94.2	MLME-QAB.request	565
6.3.94.3	MLME-QAB.confirm	565
6.3.94.4	MLME-QAB.indication	566
6.3.94.5	MLME-QAB.response	567
6.3.95	DMG beamforming.....	568
6.3.95.1	General	568
6.3.95.2	MLME-BF-TRAINING.request	568
6.3.95.3	MLME-BF-TRAINING.confirm	569
6.3.95.4	MLME-BF-TRAINING.indication.....	569
6.3.96	PN event report	570
6.3.96.1	General	570
6.3.96.2	MLME-PN-EXHAUSTION.indication	570
6.3.96.3	MLME-PN-WARNING.indication.....	571

6.3.97	Channel Availability Query	571
6.3.97.1	Introduction	571
6.3.97.2	MLME-CHANNELAVAILABILITYQUERY.request	571
6.3.97.3	MLME-CHANNELAVAILABILITYQUERY.confirm	572
6.3.97.4	MLME-CHANNELAVAILABILITYQUERY.indication	573
6.3.97.5	MLME-CHANNELAVAILABILITYQUERY.response	574
6.3.98	Channel schedule management.....	575
6.3.98.1	Introduction	575
6.3.98.2	MLME-CHANNELSCHEDULEMANAGEMENT.request.....	575
6.3.98.3	MLME-CHANNELSCHEDULEMANAGEMENT.confirm.....	576
6.3.98.4	MLME-CHANNELSCHEDULEMANAGEMENT.indication	577
6.3.98.5	MLME-CHANNELSCHEDULEMANAGEMENT.response	578
6.3.99	Contact verification signal	579
6.3.99.1	Introduction	579
6.3.99.2	MLME-CVS.request	579
6.3.99.3	MLME-CVS.indication.....	580
6.3.100	GDD Enablement.....	581
6.3.100.1	Introduction	581
6.3.100.2	MLME-GDDENABLEMENT.request.....	581
6.3.100.3	MLME-GDDENABLEMENT.confirm	582
6.3.100.4	MLME-GDDENABLEMENT.indication.....	583
6.3.100.5	MLME-GDDENABLEMENT.response.....	583
6.3.101	Network channel control management	584
6.3.101.1	Introduction	584
6.3.101.2	MLME-NETWORKCHANNELCONTROL.request.....	584
6.3.101.3	MLME-NETWORKCHANNELCONTROL.confirm.....	585
6.3.101.4	MLME-NETWORKCHANNELCONTROL.indication	586
6.3.101.5	MLME-NETWORKCHANNELCONTROL.response	587
6.3.102	White space map (WSM).....	588
6.3.102.1	Introduction	588
6.3.102.2	MLME-WSM.request	588
6.3.102.3	MLME-WSM.indication	589
6.3.103	Estimated Throughput (ESTT)	589
6.3.103.1	General	589
6.3.103.2	MLME-ESTIMATED-THROUGHPUT.request.....	589
6.3.103.3	MLME-ESTIMATED-THROUGHPUT.confirm.....	591
6.3.104	Get authentication/association state.....	591
6.3.104.1	General	591
6.3.104.2	MLME-GETAUTHASSOCSTATE.request.....	592
6.3.104.3	MLME-GETAUTHASSOCSTATE.confirm	592
6.4	MAC state generic convergence function (MSGCF)	593
6.4.1	Overview of the convergence function.....	593
6.4.2	Overview of convergence function state machine.....	593
6.4.3	Convergence function state list.....	594
6.4.3.1	ESS_CONNECTED.....	594
6.4.3.2	ESS_DISCONNECTED	594
6.4.3.3	ESS_DISENGAGING	594
6.4.3.4	STANDBY	594
6.4.4	Convergence function state transitions	594
6.4.4.1	Transitions to ESS_CONNECTED	594
6.4.4.2	Transitions to ESS_DISCONNECTED	595
6.4.4.3	Transitions to ESS_DISENGAGING	595
6.4.4.4	Transitions to STANDBY.....	595
6.4.5	Convergence function informational events	595

6.4.6	MAC state generic convergence SAP	595
6.4.7	ESS status reporting	596
6.4.7.1	MSGCF-ESS-LINK-UP.indication	596
6.4.7.2	MSGCF-ESS-LINK-DOWN.indication	597
6.4.7.3	MSGCF-ESS-LINK-GOING-DOWN.indication	598
6.4.7.4	MSGCF-ESS-LINK-EVENT-ROLLBACK.indication	599
6.4.7.5	MSGCF-ESS-LINK-DETECTED.indication	600
6.4.7.6	MSGCF-ESS-LINK-SCAN.request	601
6.4.7.7	MSGCF-ESS-LINK-SCAN.confirm	602
6.4.8	Network configuration	602
6.4.8.1	MSGCF-ESS-LINK-CAPABILITY.request	602
6.4.8.2	MSGCF-ESS-LINK-CAPABILITY.confirm	603
6.4.8.3	MSGCF-ESS-LINK-PARAMETERS.request	604
6.4.8.4	MSGCF-ESS-LINK-PARAMETERS.confirm	606
6.4.8.5	MSGCF-GET-ESS-LINK-PARAMETERS.request	606
6.4.8.6	MSGCF-GET-ESS-LINK-PARAMETERS.confirm	607
6.4.9	Network events	607
6.4.9.1	MSGCF-ESS-LINK-THRESHOLD-REPORT.indication	607
6.4.10	Network command interface	608
6.4.10.1	MSGCF-ESS-LINK-COMMAND.request	608
6.4.11	MAC state SME SAP—mobility management	609
6.4.11.1	MSSME-ESS-LINK-GOING-DOWN.indication	609
6.5	PLME SAP interface	610
6.5.1	General	610
6.5.2	PLME-RESET.request	610
6.5.2.1	Function	610
6.5.2.2	Semantics of the service primitive	610
6.5.2.3	When generated	610
6.5.2.4	Effect of receipt	610
6.5.3	PLME-CHARACTERISTICS.request	611
6.5.3.1	Function	611
6.5.3.2	Semantics of the service primitive	611
6.5.3.3	When generated	611
6.5.3.4	Effect of receipt	611
6.5.4	PLME-CHARACTERISTICS.confirm	611
6.5.4.1	Function	611
6.5.4.2	Semantics of the service primitive	611
6.5.4.3	When generated	614
6.5.4.4	Effect of receipt	614
6.5.5	PLME-TXTIME.request	614
6.5.5.1	Function	614
6.5.5.2	Semantics of the service primitive	614
6.5.5.3	When generated	614
6.5.5.4	Effect of receipt	614
6.5.6	PLME-TXTIME.confirm	615
6.5.6.1	Function	615
6.5.6.2	Semantics of the service primitive	615
6.5.6.3	When generated	615
6.5.6.4	Effect of receipt	615
7.	DS SAP specification	616
7.1	Introduction	616
7.2	SAP primitives	616

7.2.1	General	616
7.2.2	MSDU transfer	617
7.2.2.1	General	617
7.2.2.2	DS-UNITDATA.request	617
7.2.2.3	DS-UNITDATA.indication	617
7.2.3	Mapping updates	618
7.2.3.1	General	618
7.2.3.2	DS-STA-NOTIFY.request	618
8.	PHY service specification	620
8.1	Scope	620
8.2	PHY functions	620
8.3	Detailed PHY service specifications	620
8.3.1	Scope and field of application	620
8.3.2	Overview of the service	620
8.3.3	Overview of interactions	620
8.3.4	Basic service and options	620
8.3.4.1	PHY SAP peer-to-peer service primitives	620
8.3.4.2	PHY SAP inter-(sub)layer service primitives	621
8.3.4.3	PHY SAP service primitives parameters	621
8.3.4.4	Vector descriptions	622
8.3.5	PHY SAP detailed service specification	623
8.3.5.1	Introduction	623
8.3.5.2	PHY-DATA.request	623
8.3.5.3	PHY-DATA.indication	623
8.3.5.4	PHY-DATA.confirm	624
8.3.5.5	PHY-TXSTART.request	624
8.3.5.6	PHY-TXSTART.confirm	625
8.3.5.7	PHY-TXEND.request	626
8.3.5.8	PHY-TXEND.confirm	626
8.3.5.9	PHY-TXHEADEREND.indication	627
8.3.5.10	PHY-CCARESET.request	627
8.3.5.11	PHY-CCARESET.confirm	628
8.3.5.12	PHY-CCA.indication	628
8.3.5.13	PHY-RXSTART.indication	632
8.3.5.14	PHY-RXEND.indication	632
8.3.5.15	PHY-CONFIG.request	633
8.3.5.16	PHY-CONFIG.confirm	634
8.3.5.17	PHY-TXBUSY.indication	634
8.4	PHY management	635
9.	Frame formats	636
9.1	General requirements	636
9.2	MAC frame formats	636
9.2.1	Basic components	636
9.2.2	Conventions	636
9.2.3	General frame format	637
9.2.4	Frame fields	638
9.2.4.1	Frame Control field	638
9.2.4.2	Duration/ID field	644
9.2.4.3	Address fields	645
9.2.4.4	Sequence Control field	646

	9.2.4.5	QoS Control field	647
	9.2.4.6	HT Control field	654
	9.2.4.7	Frame Body field	661
	9.2.4.8	FCS field	665
9.2.5		Duration/ID field (QoS STA)	665
	9.2.5.1	General	665
	9.2.5.2	Setting for single and multiple protection under enhanced distributed channel access (EDCA)	665
	9.2.5.3	Setting for QoS CF-Poll frames	667
	9.2.5.4	Setting for frames sent by a TXOP holder under HCCA	668
	9.2.5.5	Settings within a PSMP sequence	668
	9.2.5.6	Settings within a dual CTS sequence	668
	9.2.5.7	Setting for control response frames	669
	9.2.5.8	Setting for other response frames	669
9.3		Format of individual frame types	669
	9.3.1	Control frames	669
	9.3.1.1	Format of Control frames	669
	9.3.1.2	RTS frame format	670
	9.3.1.3	CTS frame format	670
	9.3.1.4	Ack frame format	671
	9.3.1.5	PS-Poll frame format	671
	9.3.1.6	CF-End frame format	672
	9.3.1.7	CF-End +CF-Ack frame format	672
	9.3.1.8	BlockAckReq frame format	672
	9.3.1.9	BlockAck frame format	676
	9.3.1.10	Control Wrapper frame	680
	9.3.1.11	Poll frame format	681
	9.3.1.12	Service period request (SPR) frame format	681
	9.3.1.13	Grant frame format	682
	9.3.1.14	DMG CTS frame format	683
	9.3.1.15	DMG DTS frame format	683
	9.3.1.16	Sector sweep (SSW) frame format	683
	9.3.1.17	Sector sweep feedback (SSW-Feedback) frame format	684
	9.3.1.18	Sector sweep Ack (SSW-Ack) frame format	684
	9.3.1.19	Grant Ack frame format	685
	9.3.1.20	VHT NDP Announcement frame format	685
	9.3.1.21	Beamforming Report Poll frame format	687
9.3.2		Data frames	687
	9.3.2.1	Format of Data frames	687
	9.3.2.2	Aggregate MSDU (A-MSDU) format	690
9.3.3		Management frames	692
	9.3.3.1	Terminology of Management frames and MMPDUs	692
	9.3.3.2	Format of Management frames	692
	9.3.3.3	Beacon frame format	694
	9.3.3.4	ATIM frame format	698
	9.3.3.5	Disassociation frame format	698
	9.3.3.6	Association Request frame format	699
	9.3.3.7	Association Response frame format	700
	9.3.3.8	Reassociation Request frame format	702
	9.3.3.9	Reassociation Response frame format	704
	9.3.3.10	Probe Request frame format	706
	9.3.3.11	Probe Response frame format	708
	9.3.3.12	Authentication frame format	712
	9.3.3.13	Deauthentication	715

	9.3.3.14	Action frame format.....	715
	9.3.3.15	Action No Ack frame format	716
	9.3.3.16	Timing Advertisement frame format	716
9.3.4		Extension frames.....	716
	9.3.4.1	Format of Extension frames.....	716
	9.3.4.2	DMG Beacon	717
9.3.5		Frame addressing in an MBSS.....	721
9.4		Management and Extension frame body components	723
9.4.1		Fields that are not elements	723
	9.4.1.1	Authentication Algorithm Number field.....	723
	9.4.1.2	Authentication Transaction Sequence Number field	724
	9.4.1.3	Beacon Interval field.....	724
	9.4.1.4	Capability Information field.....	724
	9.4.1.5	Current AP Address field.....	727
	9.4.1.6	Listen Interval field.....	727
	9.4.1.7	Reason Code field	728
	9.4.1.8	AID field	731
	9.4.1.9	Status Code field	731
	9.4.1.10	Timestamp field	736
	9.4.1.11	Action field	736
	9.4.1.12	Dialog Token field	738
	9.4.1.13	DLS Timeout Value field.....	738
	9.4.1.14	Block Ack Parameter Set field.....	738
	9.4.1.15	Block Ack Timeout Value field	739
	9.4.1.16	DELBA Parameter Set field.....	739
	9.4.1.17	QoS Info field.....	739
	9.4.1.18	Measurement Pilot Interval field.....	741
	9.4.1.19	Max Transmit Power field	741
	9.4.1.20	Transmit Power Used field	741
	9.4.1.21	Channel Width field.....	741
	9.4.1.22	Operating Class and Channel field.....	742
	9.4.1.23	SM Power Control field	742
	9.4.1.24	PCO Phase Control field	743
	9.4.1.25	PSMP Parameter Set field.....	743
	9.4.1.26	PSMP STA Info field.....	744
	9.4.1.27	MIMO Control field.....	745
	9.4.1.28	CSI Report field	746
	9.4.1.29	Noncompressed Beamforming Report field	748
	9.4.1.30	Compressed Beamforming Report field	750
	9.4.1.31	Antenna Selection Indices field	753
	9.4.1.32	Organization Identifier field.....	753
	9.4.1.33	Rate Identification field	754
	9.4.1.34	GAS Query Response Fragment ID field	755
	9.4.1.35	Venue Info field	756
	9.4.1.36	Target Channel	759
	9.4.1.37	Operating Class	759
	9.4.1.38	Send-Confirm field	759
	9.4.1.39	Anti-Clogging Token field.....	759
	9.4.1.40	Scalar field	760
	9.4.1.41	Finite field element (FFE) field	760
	9.4.1.42	Confirm field.....	760
	9.4.1.43	Finite Cyclic Group field	760
	9.4.1.44	TXOP Reservation field.....	760
	9.4.1.45	Relay Capable STA Info field.....	761

9.4.1.46	Band ID field.....	761
9.4.1.47	DMG Parameters field	761
9.4.1.48	VHT MIMO Control field.....	763
9.4.1.49	VHT Compressed Beamforming Report field	764
9.4.1.50	TVHT Compressed Beamforming Report field.....	773
9.4.1.51	MU Exclusive Beamforming Report field	774
9.4.1.52	TVHT MU Exclusive Beamforming Report field	778
9.4.1.53	Operating Mode field	778
9.4.1.54	Membership Status Array field	782
9.4.1.55	User Position Array field	782
9.4.1.56	Device Location Information Body field	782
9.4.1.57	WSM Type field and WSM Information field	783
9.4.2	Elements.....	784
9.4.2.1	General	784
9.4.2.2	SSID element	790
9.4.2.3	Supported Rates and BSS Membership Selectors element	790
9.4.2.4	DSSS Parameter Set element	792
9.4.2.5	CF Parameter Set element.....	792
9.4.2.6	TIM element.....	792
9.4.2.7	IBSS Parameter Set element	795
9.4.2.8	Challenge Text element	795
9.4.2.9	Country element.....	795
9.4.2.10	Request element	798
9.4.2.11	Extended Request element.....	798
9.4.2.12	ERP element.....	799
9.4.2.13	Extended Supported Rates and BSS Membership Selectors element.....	799
9.4.2.14	Power Constraint element	800
9.4.2.15	Power Capability element	800
9.4.2.16	TPC Request element.....	801
9.4.2.17	TPC Report element.....	801
9.4.2.18	Supported Channels element.....	802
9.4.2.19	Channel Switch Announcement element	802
9.4.2.20	Secondary Channel Offset element.....	803
9.4.2.21	Measurement Request element	804
9.4.2.22	Measurement Report element	835
9.4.2.23	Quiet element	881
9.4.2.24	IBSS DFS element	881
9.4.2.25	RSNE	882
9.4.2.26	Vendor Specific element.....	890
9.4.2.27	Extended Capabilities element.....	890
9.4.2.28	BSS Load element.....	896
9.4.2.29	EDCA Parameter Set element.....	897
9.4.2.30	TSPEC element.....	899
9.4.2.31	TCLAS element	906
9.4.2.32	TS Delay element.....	914
9.4.2.33	TCLAS Processing element.....	914
9.4.2.34	Schedule element	915
9.4.2.35	QoS Capability element	916
9.4.2.36	AP Channel Report element.....	916
9.4.2.37	Neighbor Report element.....	916
9.4.2.38	RCPI element	923
9.4.2.39	BSS Average Access Delay element	923
9.4.2.40	Antenna element	924
9.4.2.41	RSNI element.....	925

9.4.2.42	Measurement Pilot Transmission element	925
9.4.2.43	BSS Available Admission Capacity element	926
9.4.2.44	BSS AC Access Delay element	927
9.4.2.45	RM Enabled Capabilities element	929
9.4.2.46	Multiple BSSID element	931
9.4.2.47	Mobility Domain element (MDE)	933
9.4.2.48	Fast BSS Transition element (FTE)	933
9.4.2.49	Timeout Interval element (TIE)	936
9.4.2.50	RIC Data element (RDE)	936
9.4.2.51	RIC Descriptor element	937
9.4.2.52	DSE Registered Location element	937
9.4.2.53	Extended Channel Switch Announcement element	939
9.4.2.54	Supported Operating Classes element	939
9.4.2.55	Management MIC element	941
9.4.2.56	HT Capabilities element	941
9.4.2.57	HT Operation element	950
9.4.2.58	20/40 BSS Intolerant Channel Report element	954
9.4.2.59	Overlapping BSS Scan Parameters element	955
9.4.2.60	20/40 BSS Coexistence element	955
9.4.2.61	Time Advertisement element	956
9.4.2.62	Link Identifier element	958
9.4.2.63	Wakeup Schedule element	958
9.4.2.64	Channel Switch Timing element	959
9.4.2.65	PTI Control element	959
9.4.2.66	TPU Buffer Status element	960
9.4.2.67	Event Request element	961
9.4.2.68	Event Report element	967
9.4.2.69	Diagnostic Request element	973
9.4.2.70	Diagnostic Report element	984
9.4.2.71	Location Parameters element	986
9.4.2.72	Nontransmitted BSSID Capability element	994
9.4.2.73	SSID List element	994
9.4.2.74	Multiple BSSID-Index element	995
9.4.2.75	FMS Descriptor element	995
9.4.2.76	FMS Request element	996
9.4.2.77	FMS Response element	998
9.4.2.78	QoS Traffic Capability element	1000
9.4.2.79	BSS Max Idle Period element	1001
9.4.2.80	TFS Request element	1002
9.4.2.81	TFS Response element	1004
9.4.2.82	WNM Sleep Mode element	1005
9.4.2.83	TIM Broadcast Request element	1006
9.4.2.84	TIM Broadcast Response element	1007
9.4.2.85	Collocated Interference Report element	1008
9.4.2.86	Channel Usage element	1009
9.4.2.87	Time Zone element	1010
9.4.2.88	DMS Request element	1011
9.4.2.89	DMS Response element	1013
9.4.2.90	Destination URI element	1016
9.4.2.91	U-APSD Coexistence element	1017
9.4.2.92	Interworking element	1017
9.4.2.93	Advertisement Protocol element	1019
9.4.2.94	Expedited Bandwidth Request element	1021
9.4.2.95	QoS Map element	1022

9.4.2.96	Roaming Consortium element	1023
9.4.2.97	Emergency Alert Identifier element.....	1024
9.4.2.98	Mesh Configuration element.....	1024
9.4.2.99	Mesh ID element.....	1028
9.4.2.100	Mesh Link Metric Report element.....	1029
9.4.2.101	Congestion Notification element	1029
9.4.2.102	Mesh Peering Management element.....	1030
9.4.2.103	Mesh Channel Switch Parameters element	1031
9.4.2.104	Mesh Awake Window element.....	1032
9.4.2.105	Beacon Timing element	1032
9.4.2.106	MCCAOP Setup Request element.....	1033
9.4.2.107	MCCAOP Setup Reply element	1034
9.4.2.108	MCCAOP Advertisement Overview element.....	1035
9.4.2.109	MCCAOP Advertisement element.....	1036
9.4.2.110	MCCAOP Teardown element.....	1038
9.4.2.111	GANN element	1039
9.4.2.112	RANN element.....	1039
9.4.2.113	PREQ element.....	1040
9.4.2.114	PREP element	1042
9.4.2.115	PERR element.....	1044
9.4.2.116	PXU element.....	1045
9.4.2.117	PXUC element	1046
9.4.2.118	Authenticated Mesh Peering Exchange element.....	1047
9.4.2.119	MIC element	1047
9.4.2.120	Quality-of-Service Management Frame Policy element.....	1048
9.4.2.121	Intra-Access Category Priority element.....	1049
9.4.2.122	SCS Descriptor element.....	1050
9.4.2.123	QLoad Report element	1051
9.4.2.124	HCCA TXOP Update Count element	1053
9.4.2.125	Higher Layer Stream ID element	1054
9.4.2.126	GCR Group Address element	1054
9.4.2.127	DMG BSS Parameter Change element.....	1055
9.4.2.128	DMG Capabilities element.....	1055
9.4.2.129	DMG Operation element	1063
9.4.2.130	DMG Beam Refinement element.....	1064
9.4.2.131	DMG Wakeup Schedule element.....	1066
9.4.2.132	Extended Schedule element	1067
9.4.2.133	STA Availability element	1069
9.4.2.134	DMG TSPEC element.....	1070
9.4.2.135	Next DMG ATI element	1073
9.4.2.136	Channel Measurement Feedback element.....	1074
9.4.2.137	Awake Window element.....	1076
9.4.2.138	Multi-band element.....	1076
9.4.2.139	ADDBA Extension element	1079
9.4.2.140	Next PCP List element	1079
9.4.2.141	PCP Handover element	1080
9.4.2.142	DMG Link Margin element	1080
9.4.2.143	DMG Link Adaptation Acknowledgment element.....	1081
9.4.2.144	Switching Stream element	1082
9.4.2.145	Session Transition element	1083
9.4.2.146	Dynamic Tone Pairing (DTP) Report element	1084
9.4.2.147	Cluster Report element	1085
9.4.2.148	Relay Capabilities element.....	1086
9.4.2.149	Relay Transfer Parameter Set element.....	1087

9.4.2.150	Quiet Period Request element.....	1088
9.4.2.151	Quiet Period Response element	1089
9.4.2.152	BeamLink Maintenance element	1089
9.4.2.153	Multiple MAC Sublayers (MMS) element	1090
9.4.2.154	U-PID element	1091
9.4.2.155	ECAPC Policy element	1092
9.4.2.156	Cluster Time Offset element	1093
9.4.2.157	Antenna Sector ID Pattern element.....	1094
9.4.2.158	VHT Capabilities element.....	1095
9.4.2.159	VHT Operation element.....	1102
9.4.2.160	Extended BSS Load element.....	1104
9.4.2.161	Wide Bandwidth Channel Switch element	1105
9.4.2.162	Transmit Power Envelope element	1106
9.4.2.163	Channel Switch Wrapper element.....	1108
9.4.2.164	AID element.....	1109
9.4.2.165	Quiet Channel element.....	1109
9.4.2.166	Operating Mode Notification element	1110
9.4.2.167	UPSIM element.....	1110
9.4.2.168	Fine Timing Measurement Parameters element.....	1111
9.4.2.169	Device Location element	1115
9.4.2.170	White Space Map element	1115
9.4.2.171	Reduced Neighbor Report element.....	1115
9.4.2.172	TVHT Operation element	1117
9.4.2.173	FTM Synchronization Information element	1118
9.4.2.174	Estimated service parameters element	1118
9.4.2.175	Future Channel Guidance element.....	1120
9.4.3	Subelements.....	1121
9.4.4	TLV encodings	1122
9.4.4.1	General	1122
9.4.4.2	Common TLVs	1122
9.4.5	Access network query protocol (ANQP) elements.....	1127
9.4.5.1	General	1127
9.4.5.2	Query List ANQP-element.....	1128
9.4.5.3	Capability List ANQP-element.....	1128
9.4.5.4	Venue Name ANQP-element.....	1129
9.4.5.5	Emergency Call Number ANQP-element.....	1130
9.4.5.6	Network Authentication Type ANQP-element.....	1130
9.4.5.7	Roaming Consortium ANQP-element	1132
9.4.5.8	Vendor Specific ANQP-element.....	1132
9.4.5.9	IP Address Type Availability ANQP-element.....	1133
9.4.5.10	NAI Realm ANQP-element	1134
9.4.5.11	3GPP Cellular Network ANQP-element.....	1137
9.4.5.12	AP Geospatial Location ANQP-element	1138
9.4.5.13	AP Civic Location ANQP-element.....	1138
9.4.5.14	AP Location Public Identifier URI/FQDN ANQP-element	1139
9.4.5.15	Domain Name ANQP-element	1139
9.4.5.16	Emergency Alert URI ANQP-element	1140
9.4.5.17	Emergency NAI ANQP-element	1140
9.4.5.18	TDLS Capability ANQP-element	1140
9.4.5.19	Neighbor Report ANQP-element.....	1141
9.4.5.20	Venue URL ANQP-element	1141
9.4.5.21	Advice of Charge ANQP-element	1142
9.4.5.22	Local Content ANQP-element	1143
9.4.5.23	Network Authentication Type with Timestamp ANQP-element.....	1144

9.4.6	Registered location query protocol (RLQP) elements	1144
9.4.6.1	General	1144
9.4.6.2	Channel Availability Query RLQP-element	1145
9.4.6.3	Channel Schedule Management RLQP-element.....	1147
9.4.6.4	Network Channel Control RLQP-element.....	1147
9.4.6.5	Vendor Specific RLQP-element	1148
9.5	Fields used in Management and Extension frame bodies and Control frames	1149
9.5.1	Sector Sweep field	1149
9.5.2	Dynamic Allocation Info field	1149
9.5.3	Sector Sweep Feedback field	1150
9.5.4	BRP Request field.....	1151
9.5.5	Beamforming Control field.....	1152
9.5.6	Beamformed Link Maintenance field	1154
9.6	Action frame format details	1155
9.6.1	Introduction.....	1155
9.6.2	Spectrum management Action frames	1155
9.6.2.1	General	1155
9.6.2.2	Measurement Request frame format	1156
9.6.2.3	Measurement Report frame format	1156
9.6.2.4	TPC Request frame format	1156
9.6.2.5	TPC Report frame format	1157
9.6.2.6	Channel Switch Announcement frame format.....	1157
9.6.3	QoS Action frame details.....	1158
9.6.3.1	General	1158
9.6.3.2	Basic and DMG ADDTS Request frame format	1159
9.6.3.3	Basic and DMG ADDTS Response frame format	1161
9.6.3.4	DELTS frame format	1163
9.6.3.5	Schedule frame format	1164
9.6.3.6	QoS Map Configure frame format.....	1165
9.6.3.7	ADDTS Reserve Request frame format.....	1165
9.6.3.8	ADDTS Reserve Response frame format	1166
9.6.4	DLS Action frame details	1166
9.6.4.1	General	1166
9.6.4.2	DLS Request frame format	1167
9.6.4.3	DLS Response frame format.....	1167
9.6.4.4	DLS Teardown frame format.....	1168
9.6.5	Block Ack Action frame details.....	1169
9.6.5.1	General	1169
9.6.5.2	ADDBA Request frame format.....	1169
9.6.5.3	ADDBA Response frame format	1170
9.6.5.4	DELBA frame format	1171
9.6.6	Vendor-specific action details	1172
9.6.7	Radio Measurement action details.....	1173
9.6.7.1	General	1173
9.6.7.2	Radio Measurement Request frame format	1173
9.6.7.3	Radio Measurement Report frame format	1174
9.6.7.4	Link Measurement Request frame format	1174
9.6.7.5	Link Measurement Report frame format	1175
9.6.7.6	Neighbor Report Request frame format.....	1175
9.6.7.7	Neighbor Report Response frame format	1176
9.6.8	Public Action details	1177
9.6.8.1	Public Action frames.....	1177
9.6.8.2	20/40 BSS Coexistence Management frame format	1178
9.6.8.3	Measurement Pilot frame format	1179

9.6.8.4	DSE Enablement frame format	1180
9.6.8.5	DSE Deenablement frame format	1181
9.6.8.6	DSE Registered Location Announcement frame format	1182
9.6.8.7	Extended Channel Switch Announcement frame format	1182
9.6.8.8	DSE Measurement Request frame format	1183
9.6.8.9	DSE Measurement Report frame format	1183
9.6.8.10	DSE Power Constraint frame format	1185
9.6.8.11	Vendor Specific Public Action frame format	1186
9.6.8.12	GAS Initial Request frame format	1186
9.6.8.13	GAS Initial Response frame format	1187
9.6.8.14	GAS Comeback Request frame format	1188
9.6.8.15	GAS Comeback Response frame format	1189
9.6.8.16	TDLS Discovery Response frame format	1190
9.6.8.17	Location Track Notification frame format	1191
9.6.8.18	QMF Policy frame format	1192
9.6.8.19	QMF Policy Change frame format	1193
9.6.8.20	QLoad Request frame format	1193
9.6.8.21	QLoad Report frame format	1194
9.6.8.22	HCCA TXOP Advertisement frame	1194
9.6.8.23	HCCA TXOP Response frame	1195
9.6.8.24	Public Key frame	1196
9.6.8.25	Channel Availability Query frame format	1197
9.6.8.26	Channel Schedule Management frame format	1197
9.6.8.27	Contact Verification Signal frame format	1199
9.6.8.28	GDD Enablement Request frame format	1199
9.6.8.29	GDD Enablement Response frame format	1200
9.6.8.30	Network Channel Control frame format	1200
9.6.8.31	White Space Map Announcement frame format	1201
9.6.8.32	Fine Timing Measurement Request frame format	1201
9.6.8.33	Fine Timing Measurement frame format	1202
9.6.8.34	QAB Request frame format	1205
9.6.8.35	QAB Response frame format	1205
9.6.9	FT Action frame details	1206
9.6.9.1	General	1206
9.6.9.2	FT Request frame	1207
9.6.9.3	FT Response frame	1207
9.6.9.4	FT Confirm frame	1208
9.6.9.5	FT Ack frame	1209
9.6.10	SA Query Action frame details	1209
9.6.10.1	General	1209
9.6.10.2	SA Query Request frame	1210
9.6.10.3	SA Query Response frame	1210
9.6.11	Protected Dual of Public Action frames	1211
9.6.12	HT Action frame details	1212
9.6.12.1	HT Action field	1212
9.6.12.2	Notify Channel Width frame format	1212
9.6.12.3	SM Power Save frame format	1213
9.6.12.4	PSMP frame format	1213
9.6.12.5	Set PCO Phase frame format	1214
9.6.12.6	CSI frame format	1214
9.6.12.7	Noncompressed Beamforming frame format	1215
9.6.12.8	Compressed Beamforming frame format	1215
9.6.12.9	Antenna Selection Indices Feedback frame format	1216
9.6.13	TDLS Action field formats	1216

9.6.13.1	General	1216
9.6.13.2	TDLS Setup Request Action field format.....	1217
9.6.13.3	TDLS Setup Response Action field format	1218
9.6.13.4	TDLS Setup Confirm Action field format	1220
9.6.13.5	TDLS Teardown Action field format.....	1221
9.6.13.6	TDLS Peer Traffic Indication Action field format	1221
9.6.13.7	TDLS Channel Switch Request Action field format	1222
9.6.13.8	TDLS Channel Switch Response Action field format	1222
9.6.13.9	TDLS Peer PSM Request Action field format.....	1223
9.6.13.10	TDLS Peer PSM Response Action field format	1223
9.6.13.11	TDLS Peer Traffic Response Action field format	1224
9.6.13.12	TDLS Discovery Request Action field format	1224
9.6.14	WNM Action details	1225
9.6.14.1	WNM Action fields.....	1225
9.6.14.2	Event Request frame format	1226
9.6.14.3	Event Report frame format	1226
9.6.14.4	Diagnostic Request frame format	1227
9.6.14.5	Diagnostic Report frame format	1227
9.6.14.6	Location Configuration Request frame format	1228
9.6.14.7	Location Configuration Response frame format.....	1229
9.6.14.8	BSS Transition Management Query frame format	1230
9.6.14.9	BSS Transition Management Request frame format	1230
9.6.14.10	BSS Transition Management Response frame format	1232
9.6.14.11	FMS Request frame format.....	1233
9.6.14.12	FMS Response frame format	1234
9.6.14.13	Collocated Interference Request frame format	1234
9.6.14.14	Collocated Interference Report frame format	1235
9.6.14.15	TFS Request frame format.....	1236
9.6.14.16	TFS Response frame format	1236
9.6.14.17	TFS Notify frame format	1237
9.6.14.18	TFS Notify Response frame format.....	1237
9.6.14.19	WNM Sleep Mode Request frame format	1237
9.6.14.20	WNM Sleep Mode Response frame format.....	1238
9.6.14.21	TIM Broadcast Request frame format	1240
9.6.14.22	TIM Broadcast Response frame format	1240
9.6.14.23	QoS Traffic Capability Update frame format	1241
9.6.14.24	Channel Usage Request frame format	1241
9.6.14.25	Channel Usage Response frame format	1242
9.6.14.26	DMS Request frame format	1243
9.6.14.27	DMS Response frame format.....	1243
9.6.14.28	Timing Measurement Request frame format	1243
9.6.14.29	WNM Notification Request frame format	1244
9.6.14.30	WNM Notification Response frame format.....	1245
9.6.15	Unprotected WNM Action details	1245
9.6.15.1	Unprotected WNM Action fields	1245
9.6.15.2	TIM frame format	1246
9.6.15.3	Timing Measurement frame format	1246
9.6.16	Self-protected Action frame details	1247
9.6.16.1	Self-protected Action fields	1247
9.6.16.2	Mesh Peering Open frame format.....	1248
9.6.16.3	Mesh Peering Confirm frame format	1249
9.6.16.4	Mesh Peering Close frame format	1251
9.6.16.5	Mesh Group Key Inform frame format.....	1251
9.6.16.6	Mesh Group Key Acknowledge frame format.....	1252

9.6.17	Mesh Action frame details.....	1253
9.6.17.1	Mesh Action fields.....	1253
9.6.17.2	Mesh Link Metric Report frame format.....	1253
9.6.17.3	HWMP Mesh Path Selection frame format.....	1254
9.6.17.4	Gate Announcement frame format.....	1254
9.6.17.5	Congestion Control Notification frame format.....	1255
9.6.17.6	MCCA Setup Request frame format.....	1255
9.6.17.7	MCCA Setup Reply frame format.....	1256
9.6.17.8	MCCA Advertisement Request frame format.....	1256
9.6.17.9	MCCA Advertisement frame format.....	1257
9.6.17.10	MCCA Teardown frame format.....	1257
9.6.17.11	TBTT Adjustment Request frame format.....	1258
9.6.17.12	TBTT Adjustment Response frame format.....	1258
9.6.18	Multihop Action frame details.....	1259
9.6.18.1	Multihop Action fields.....	1259
9.6.18.2	Proxy Update frame format.....	1259
9.6.18.3	Proxy Update Confirmation frame format.....	1260
9.6.19	Robust AV Streaming Action frame details.....	1260
9.6.19.1	General.....	1260
9.6.19.2	SCS Request frame format.....	1261
9.6.19.3	SCS Response frame format.....	1261
9.6.19.4	Group Membership Request frame format.....	1262
9.6.19.5	Group Membership Response frame format.....	1262
9.6.20	DMG Action frame details.....	1263
9.6.20.1	DMG Action field.....	1263
9.6.20.2	Power Save Configuration Request frame format.....	1263
9.6.20.3	Power Save Configuration Response frame format.....	1264
9.6.20.4	Information Request frame format.....	1265
9.6.20.5	Information Response frame format.....	1265
9.6.20.6	Handover Request frame format.....	1266
9.6.20.7	Handover Response frame format.....	1267
9.6.20.8	DTP Request frame format.....	1267
9.6.20.9	DTP Report frame format.....	1268
9.6.20.10	Relay Search Request frame format.....	1268
9.6.20.11	Relay Search Response frame format.....	1269
9.6.20.12	Multi-relay Channel Measurement Request frame format.....	1269
9.6.20.13	Multi-relay Channel Measurement Report frame format.....	1270
9.6.20.14	RLS Request frame format.....	1271
9.6.20.15	RLS Response frame format.....	1272
9.6.20.16	RLS Announcement frame format.....	1272
9.6.20.17	RLS Teardown frame format.....	1273
9.6.20.18	Relay Ack Request frame format.....	1274
9.6.20.19	Relay Ack Response frame format.....	1274
9.6.20.20	TPA Request frame format.....	1275
9.6.20.21	TPA Response frame format.....	1275
9.6.20.22	TPA Report frame format.....	1276
9.6.20.23	ROC Request frame format.....	1276
9.6.20.24	ROC Response frame format.....	1277
9.6.21	FST Action frame details.....	1278
9.6.21.1	FST Action field.....	1278
9.6.21.2	FST Setup Request frame format.....	1278
9.6.21.3	FST Setup Response frame format.....	1279
9.6.21.4	FST Teardown frame format.....	1280
9.6.21.5	FST Ack Request frame format.....	1281

9.6.21.6	FST Ack Response frame format.....	1281
9.6.21.7	On-channel Tunnel Request frame format.....	1282
9.6.22	Unprotected DMG Action frame details.....	1283
9.6.22.1	Unprotected DMG Action field	1283
9.6.22.2	Announce frame format	1283
9.6.22.3	BRP frame format	1284
9.6.23	VHT Action frame details.....	1285
9.6.23.1	VHT Action field	1285
9.6.23.2	VHT Compressed Beamforming frame format	1286
9.6.23.3	Group ID Management frame format	1286
9.6.23.4	Operating Mode Notification frame format.....	1287
9.7	Aggregate MPDU (A-MPDU).....	1287
9.7.1	A-MPDU format.....	1287
9.7.2	MPDU delimiter CRC field	1290
9.7.3	A-MPDU contents	1290
10.	MAC sublayer functional description.....	1295
10.1	Introduction.....	1295
10.2	MAC architecture	1295
10.2.1	General.....	1295
10.2.2	DCF.....	1296
10.2.3	PCF	1297
10.2.4	Hybrid coordination function (HCF)	1297
10.2.4.1	General	1297
10.2.4.2	HCF contention based channel access (EDCA).....	1297
10.2.4.3	HCF controlled channel access (HCCA)	1300
10.2.5	Mesh coordination function (MCF).....	1301
10.2.6	Combined use of DCF, PCF, and HCF.....	1301
10.2.7	Fragmentation/defragmentation overview	1301
10.2.8	MAC data service	1302
10.3	DCF.....	1303
10.3.1	General.....	1303
10.3.2	Procedures common to the DCF and EDCAF	1305
10.3.2.1	CS mechanism.....	1305
10.3.2.2	MAC-level acknowledgments.....	1305
10.3.2.3	IFS	1306
10.3.2.4	Setting and resetting the NAV	1310
10.3.2.5	RTS/CTS with fragmentation	1311
10.3.2.6	VHT RTS procedure	1313
10.3.2.7	CTS and DMG CTS procedure.....	1313
10.3.2.8	Dual CTS protection	1314
10.3.2.9	Acknowledgment procedure	1316
10.3.2.10	MU acknowledgment procedure.....	1317
10.3.2.11	Duplicate detection and recovery.....	1319
10.3.2.12	NAV distribution.....	1322
10.3.2.13	Operation of aSlotTime.....	1323
10.3.3	Random backoff time.....	1323
10.3.4	DCF access procedure	1324
10.3.4.1	Introduction	1324
10.3.4.2	Basic access.....	1324
10.3.4.3	Backoff procedure for DCF	1325
10.3.4.4	Recovery procedures and retransmit limits.....	1328
10.3.4.5	Control of the channel.....	1329

10.3.5	Individually addressed MPDU transfer procedure	1330
10.3.6	Group addressed MPDU transfer procedure	1330
10.3.7	DCF timing relations	1331
10.3.8	Signal extension	1334
10.3.9	Determination of PLME aCWmin characteristics	1334
10.4	PCF	1334
10.4.1	General	1334
10.4.2	CFP structure and timing	1335
10.4.3	PCF access procedure	1337
10.4.3.1	General	1337
10.4.3.2	Fundamental access	1337
10.4.3.3	NAV operation during the CFP	1337
10.4.4	PCF transfer procedure	1338
10.4.4.1	General	1338
10.4.4.2	PCF transfers when the PC STA is transmitter or recipient	1338
10.4.4.3	Operation with overlapping point-coordinated BSSs	1340
10.4.4.4	CFPMaxDuration limit	1340
10.4.4.5	CF usage rules	1340
10.4.5	CF polling list	1341
10.4.5.1	General	1341
10.4.5.2	Polling list processing	1341
10.4.5.3	Polling list update procedure	1341
10.5	Fragmentation	1342
10.6	Defragmentation	1342
10.7	Multirate support	1343
10.7.1	Overview	1343
10.7.2	Basic HT-MCS Set field	1344
10.7.3	Basic STBC MCS	1344
10.7.4	Basic rate set, basic HT-MCS set, and basic VHT-MCS and NSS set for mesh STA	1345
10.7.5	Rate selection for Data and Management frames	1345
10.7.5.1	Rate selection for non-STBC Beacon and non-STBC PSMP frames	1345
10.7.5.2	Rate selection for STBC group addressed Data and Management frames	1345
10.7.5.3	Rate selection for other group addressed Data and Management frames	1345
10.7.5.4	Rate selection for polling frames	1346
10.7.5.5	Rate selection for +CF-Ack frames	1346
10.7.5.6	Rate selection for Data frames sent within an FMS stream	1346
10.7.5.7	Rate selection for other individually addressed Data and Management frames	1346
10.7.6	Rate selection for Control frames	1348
10.7.6.1	General rules for rate selection for Control frames	1348
10.7.6.2	Rate selection for Control frames that initiate a TXOP	1349
10.7.6.3	Rate selection for CF-End frames	1349
10.7.6.4	Rate selection for Control frames that are not control response frames	1350
10.7.6.5	Rate selection for control response frames	1351
10.7.6.6	Channel Width selection for Control frames	1355
10.7.6.7	Control frame TXVECTOR parameter restrictions	1356
10.7.7	Multirate support for DMG STAs	1356
10.7.7.1	Usage of DMG Control modulation class	1356

10.7.7.2	Rate selection rules for Control frames transmitted by DMG STAs	1356
10.7.7.3	Rate selection for group addressed Data and Management frames transmitted by DMG STAs	1357
10.7.7.4	Rate selection for individually addressed Data and Management frames transmitted by DMG STAs	1358
10.7.7.5	Rate selection for BRP packets	1358
10.7.8	Multiple BSSID Rate Selection	1358
10.7.9	Modulation classes	1358
10.7.10	Non-HT basic rate calculation	1359
10.7.11	Channel Width in non-HT and non-HT duplicate PPDU's	1360
10.7.12	Rate selection constraints for VHT STAs	1361
10.7.12.1	Rx Supported VHT-MCS and NSS Set	1361
10.7.12.2	Tx Supported VHT-MCS and NSS Set	1361
10.7.12.3	Additional rate selection constraints for VHT PPDU's	1362
10.8	MSDU transmission restrictions	1363
10.9	HT Control field operation	1364
10.10	Control Wrapper operation	1364
10.11	MSDU processing	1364
10.12	A-MSDU operation	1365
10.13	A-MPDU operation	1367
10.13.1	A-MPDU contents	1367
10.13.2	A-MPDU length limit rules	1367
10.13.3	Minimum MPDU Start Spacing field	1367
10.13.4	A-MPDU aggregation of group addressed Data frames	1368
10.13.5	Transport of A-MPDU by the PHY data service	1369
10.13.6	A-MPDU padding for VHT PPDU	1369
10.13.7	Setting the EOF field of the MPDU delimiter	1370
10.13.8	Transport of VHT single MPDU's	1370
10.14	PPDU duration constraint	1371
10.15	DMG A-PPDU operation	1371
10.16	LDPC operation	1371
10.17	STBC operation	1372
10.18	Short GI operation	1372
10.19	Greenfield operation	1373
10.20	Group ID and partial AID in VHT PPDU's	1373
10.21	Operation across regulatory domains	1375
10.21.1	General	1375
10.21.2	Operation upon entering a regulatory domain	1375
10.21.3	Operation with operating classes	1375
10.21.4	Operation with the Transmit Power Envelope element	1376
10.21.5	Operation with coverage classes	1376
10.22	HCF	1377
10.22.1	General	1377
10.22.2	HCF contention based channel access (EDCA)	1377
10.22.2.1	Reference model	1377
10.22.2.2	EDCA backoff procedure	1379
10.22.2.3	EDCA TXOPs	1380
10.22.2.4	Obtaining an EDCA TXOP	1380
10.22.2.5	EDCA channel access in a VHT or TVHT BSS	1383
10.22.2.6	Sharing an EDCA TXOP	1384
10.22.2.7	Multiple frame transmission in an EDCA TXOP	1384
10.22.2.8	TXOP limits	1387
10.22.2.9	Truncation of TXOP	1388

10.22.2.10	Termination of TXOP	1389
10.22.2.11	Retransmit procedures.....	1390
10.22.3	HCF controlled channel access (HCCA)	1392
10.22.3.1	General	1392
10.22.3.2	HCCA procedure.....	1393
10.22.3.3	HCCA TXOP structure and timing	1396
10.22.3.4	NAV operation of a TXOP under HCCA	1397
10.22.3.5	HCCA transfer rules.....	1397
10.22.4	Admission control at the HC	1400
10.22.4.1	General	1400
10.22.4.2	Contention based admission control procedures.....	1400
10.22.4.3	Controlled-access admission control	1402
10.23	Mesh coordination function (MCF)	1404
10.23.1	General	1404
10.23.2	MCF contention based channel access	1404
10.23.3	MCF controlled channel access (MCCA).....	1404
10.23.3.1	General	1404
10.23.3.2	MCCA activation	1405
10.23.3.3	MCCAOP reservations	1405
10.23.3.4	Neighborhood MCCAOP periods at a mesh STA	1406
10.23.3.5	MCCA access fraction (MAF).....	1407
10.23.3.6	MCCAOP setup procedure	1407
10.23.3.7	MCCAOP advertisement	1408
10.23.3.8	MCCAOP teardown.....	1413
10.23.3.9	Access during MCCAOPs	1414
10.23.3.10	Interaction with time synchronization.....	1415
10.24	Block acknowledgment (block ack)	1415
10.24.1	Introduction.....	1415
10.24.2	Setup and modification of the block ack parameters	1416
10.24.3	Data and acknowledgment transfer using immediate block ack policy and delayed block ack policy.....	1418
10.24.4	Receive buffer operation.....	1420
10.24.5	Teardown of the block ack mechanism	1421
10.24.6	Selection of BlockAck and BlockAckReq variants.....	1421
10.24.7	HT-immediate block ack extensions.....	1422
10.24.7.1	Introduction to HT-immediate block ack extensions.....	1422
10.24.7.2	HT-immediate block ack architecture.....	1422
10.24.7.3	Scoreboard context control during full-state operation.....	1423
10.24.7.4	Scoreboard context control during partial-state operation.....	1424
10.24.7.5	Generation and transmission of BlockAck frames by an HT STA or DMG STA	1425
10.24.7.6	Receive reordering buffer control operation.....	1426
10.24.7.7	Originator's behavior	1428
10.24.7.8	Maintaining block ack state at the originator.....	1429
10.24.7.9	Originator's support of recipient's partial state	1429
10.24.8	HT-delayed block ack extensions	1430
10.24.8.1	Introduction	1430
10.24.8.2	HT-delayed block ack negotiation	1430
10.24.8.3	Operation of HT-delayed block ack.....	1430
10.24.9	Protected block ack agreement	1430
10.24.10	GCR block ack.....	1431
10.24.10.1	Introduction	1431
10.24.10.2	Scoreboard context control during GCR block ack	1431
10.24.10.3	GCR block ack BlockAckReq and BlockAck frame exchanges	1432

10.24.11	DMG block ack with flow control.....	1434
10.24.11.1	General	1434
10.24.11.2	DMG block ack architecture with flow control	1434
10.24.11.3	Scoreboard context control with flow control.....	1435
10.24.11.4	Receive Reordering Buffer with flow control operation	1435
10.24.11.5	Generation and transmission of BlockAck frame by a STA with flow control	1437
10.24.11.6	Originator's behavior with flow control support	1438
10.25	No Acknowledgment (No Ack)	1438
10.26	Protection mechanisms	1438
10.26.1	Introduction.....	1438
10.26.2	Protection mechanism for non-ERP receivers	1438
10.26.3	Protection mechanisms for transmissions of HT PPDU's	1440
10.26.3.1	General	1440
10.26.3.2	Protection rules for HT STA operating a direct link.....	1443
10.26.3.3	RIFS protection	1443
10.26.3.4	Use of OBSS Non-HT STAs Present field	1443
10.26.3.5	Protection rules for an HT mesh STA.....	1444
10.26.4	L_LENGTH and L_DATARATE parameter values for HT-mixed format PPDU's.....	1445
10.26.5	L-SIG TXOP protection.....	1446
10.26.5.1	General rules	1446
10.26.5.2	L-SIG TXOP protection rules at the TXOP holder.....	1447
10.26.5.3	L-SIG TXOP protection rules at the TXOP responder	1449
10.26.5.4	L-SIG TXOP protection NAV update rule	1449
10.26.6	Protection rules for VHT STAs	1449
10.27	MAC frame processing	1449
10.27.1	Introduction.....	1449
10.27.2	Revision level field processing	1449
10.27.3	Duration/ID field processing	1449
10.27.4	Response to an invalid Action frame	1450
10.27.5	Operation of the Dialog Token field	1450
10.27.6	Element parsing	1450
10.27.7	Vendor specific element parsing.....	1450
10.27.8	Extensible element parsing	1450
10.27.9	Extensible subelement parsing.....	1450
10.27.10	Extensible TLV parsing	1451
10.28	Reverse direction protocol	1451
10.28.1	General	1451
10.28.2	Reverse direction (RD) exchange sequence	1451
10.28.3	Rules for RD initiator	1452
10.28.4	Rules for RD responder	1453
10.29	PSMP operation	1454
10.29.1	General	1454
10.29.2	Frame transmission mechanism during PSMP	1454
10.29.2.1	PSMP frame transmission (PSMP-DTT and PSMP-UTT).....	1454
10.29.2.2	PSMP downlink transmission (PSMP-DTT)	1455
10.29.2.3	PSMP uplink transmission (PSMP-UTT).....	1455
10.29.2.4	PSMP burst	1456
10.29.2.5	Resource allocation within a PSMP burst.....	1458
10.29.2.6	PSMP-UTT retransmission	1459
10.29.2.7	PSMP acknowledgment rules	1460
10.29.2.8	PSMP group addressed transmission rules	1461
10.29.3	Scheduled PSMP.....	1462

10.29.4	Unscheduled PSMP	1462
10.30	Sounding PPDUs	1462
10.31	Link adaptation	1463
10.31.1	Introduction.....	1463
10.31.2	Link adaptation using the HT variant HT Control field	1464
10.31.3	Link adaptation using the VHT variant HT Control field	1466
10.32	Transmit beamforming	1468
10.32.1	HT steering matrix calculations	1468
10.32.2	HT transmit beamforming with implicit feedback	1469
10.32.2.1	General	1469
10.32.2.2	Unidirectional implicit transmit beamforming	1470
10.32.2.3	Bidirectional implicit transmit beamforming.....	1471
10.32.2.4	Calibration.....	1472
10.32.3	Explicit feedback beamforming.....	1477
10.32.4	VHT MU beamforming	1481
10.33	Antenna selection (ASEL)	1481
10.33.1	Introduction.....	1481
10.33.2	Procedure	1482
10.34	Null data packet (NDP) sounding.....	1485
10.34.1	HT NDP sounding protocol	1485
10.34.2	Transmission of an HT NDP	1487
10.34.3	Determination of HT NDP destination	1487
10.34.4	Determination of HT NDP source	1487
10.34.5	VHT sounding protocol	1488
10.34.5.1	General	1488
10.34.5.2	Rules for VHT sounding protocol sequences	1488
10.34.5.3	Rules for fragmented feedback in VHT sounding protocol sequences	1492
10.34.6	Transmission of a VHT NDP.....	1493
10.35	Mesh forwarding framework	1493
10.35.1	General.....	1493
10.35.2	Forwarding information.....	1494
10.35.3	Addressing and forwarding of individually addressed mesh Data frames	1494
10.35.3.1	At source mesh STAs (individually addressed).....	1494
10.35.3.2	At intermediate and destination mesh STAs (individually addressed).....	1495
10.35.4	Addressing and forwarding of group addressed mesh Data frames	1496
10.35.4.1	At source mesh STAs (group addressed).....	1496
10.35.4.2	At recipient mesh STAs (group addressed)	1497
10.35.5	Addressing of Management frames and MMPDU forwarding	1497
10.35.5.1	General	1497
10.35.5.2	MMPDU forwarding using individually addressed Multihop Action frames.....	1498
10.35.5.3	MMPDU forwarding using group addressed Multihop Action frames.....	1498
10.35.6	Detection of duplicate MSDUs/MMPDUs	1499
10.35.7	Mesh STAs that do not forward.....	1499
10.35.8	MSDU forwarding and unknown destination	1499
10.36	DMG channel access	1500
10.36.1	General.....	1500
10.36.2	Access periods within a beacon interval.....	1500
10.36.3	ATI transmission rules.....	1501
10.36.4	DTI transmission rules.....	1503
10.36.5	Contention based access period (CBAP) transmission rules	1504

10.36.6	Channel access in scheduled DTI	1505
10.36.6.1	General	1505
10.36.6.2	Service period (SP) allocation.....	1506
10.36.6.3	Contention based access period (CBAP) allocation	1507
10.36.6.4	Pseudo-static allocations	1508
10.36.6.5	Guard time.....	1508
10.36.6.6	DMG protected period	1509
10.36.6.7	Service period recovery	1513
10.36.7	Dynamic allocation of service period	1513
10.36.7.1	General	1513
10.36.7.2	Polling period (PP).....	1515
10.36.7.3	Grant period (GP).....	1516
10.36.8	Dynamic truncation of service period.....	1517
10.36.9	Dynamic extension of service period.....	1518
10.36.10	Updating multiple NAVs	1519
10.37	DMG AP or PCP clustering	1521
10.37.1	General	1521
10.37.2	Cluster formation	1522
10.37.2.1	Decentralized AP or PCP cluster formation	1522
10.37.2.2	Centralized AP or PCP cluster formation	1524
10.37.3	Cluster maintenance.....	1527
10.37.3.1	General cluster maintenance	1527
10.37.3.2	Decentralized AP or PCP cluster maintenance	1527
10.37.3.3	Centralized AP or PCP cluster maintenance.....	1528
10.37.3.4	Centralized AP or PCP cluster MAC requirements	1529
10.37.4	Cluster report and re-scheduling.....	1530
10.37.5	Decentralized AP or PCP cluster request	1532
10.38	DMG beamforming.....	1532
10.38.1	General	1532
10.38.2	Sector-level sweep (SLS) phase	1535
10.38.2.1	General	1535
10.38.2.2	Initiator sector sweep (ISS).....	1537
10.38.2.3	Responder sector sweep (RSS)	1539
10.38.2.4	Sector sweep (SSW) feedback	1541
10.38.2.5	SSW ack	1542
10.38.3	Beam Refinement Protocol (BRP) phase.....	1543
10.38.3.1	General	1543
10.38.3.2	BRP setup subphase	1545
10.38.4	Beamforming in BTI.....	1547
10.38.5	Beamforming in A-BFT	1548
10.38.5.1	Allocation of A-BFT	1548
10.38.5.2	Operation during the A-BFT	1548
10.38.5.3	STA Beamforming after A-BFT	1552
10.38.5.4	Beamforming in A-BFT with multiple DMG antennas	1553
10.38.6	Beamforming in DTI	1553
10.38.6.1	General	1553
10.38.6.2	SLS phase execution	1554
10.38.6.3	Multiple sector ID capture (MIDC) subphase	1555
10.38.6.4	BRP phase execution	1563
10.38.7	Beam tracking	1566
10.38.8	State machines	1568
10.39	DMG link adaptation	1570
10.39.1	General	1570
10.39.2	DMG TPC.....	1570

10.39.3	Fast link adaptation	1571
10.40	DMG dynamic tone pairing (DTP)	1572
10.41	DMG relay operation	1573
10.41.1	General	1573
10.41.2	Link switching	1573
10.41.2.1	General	1573
10.41.2.2	SP request and allocation	1573
10.41.2.3	Usage of RDS	1574
10.41.2.4	Relay frame exchange rules	1574
10.41.2.5	Link monitoring	1577
10.41.3	Link cooperation	1577
10.41.3.1	TPA procedure	1577
10.41.3.2	Frame exchange operation	1579
10.41.4	Relay link adaptation	1580
11.	MLME	1581
11.1	Synchronization	1581
11.1.1	General	1581
11.1.2	Basic approach	1581
11.1.2.1	TSF for an infrastructure BSS or a PBSS	1581
11.1.2.2	TSF for an IBSS	1582
11.1.2.3	TSF for an MBSS	1582
11.1.3	Maintaining synchronization	1582
11.1.3.1	General	1582
11.1.3.2	Beacon generation in non-DMG infrastructure networks	1582
11.1.3.3	Beacon generation in a DMG infrastructure BSS and in a PBSS	1583
11.1.3.4	DMG beacon generation before establishment of a BSS	1585
11.1.3.5	Beacon generation in an IBSS	1586
11.1.3.6	Beacon generation in an MBSS	1586
11.1.3.7	Beacon reception	1587
11.1.3.8	Multiple BSSID procedure	1588
11.1.3.9	TSF timer accuracy	1589
11.1.4	Acquiring synchronization, scanning	1589
11.1.4.1	General	1589
11.1.4.2	Passive scanning	1591
11.1.4.3	Active scanning	1591
11.1.4.4	Initializing a BSS	1596
11.1.4.5	Synchronizing with a BSS	1597
11.1.4.6	Operation of Supported Rates and BSS Membership Selectors element and Extended Supported Rates and BSS Membership Selectors element	1597
11.1.5	Adjusting STA timers	1598
11.1.6	Terminating a BSS	1599
11.1.7	Supported rates and extended supported rates advertisement	1599
11.2	Power management	1599
11.2.1	General	1599
11.2.2	Bufferable MMPDUs	1600
11.2.3	Power management in a non-DMG infrastructure network	1600
11.2.3.1	General	1600
11.2.3.2	STA power management modes	1601
11.2.3.3	AP TIM transmissions	1602
11.2.3.4	TIM types	1602
11.2.3.5	Power management with APSD	1603

11.2.3.6	AP operation during the CP	1607
11.2.3.7	AP operation during the CFP	1610
11.2.3.8	Receive operation for STAs in PS mode during the CP	1611
11.2.3.9	Receive operation for STAs in PS mode during the CFP	1612
11.2.3.10	Receive operation using APSD	1612
11.2.3.11	STAs operating in the active mode	1613
11.2.3.12	AP aging function	1613
11.2.3.13	PSMP power management	1613
11.2.3.14	TDLS peer power save mode	1614
11.2.3.15	TDLS peer U-APSD (TPU)	1616
11.2.3.16	FMS power management	1618
11.2.3.17	TIM Broadcast	1621
11.2.3.18	WNM sleep mode	1623
11.2.3.19	VHT TXOP power save	1625
11.2.4	Power management in an IBSS	1626
11.2.4.1	Introduction	1626
11.2.4.2	Basic approach	1626
11.2.4.3	Initialization of power management within an IBSS	1628
11.2.4.4	STA power state transitions	1628
11.2.5	Power management in an MBSS	1629
11.2.6	SM power save	1629
11.2.7	Power management in a PBSS and DMG infrastructure BSS	1630
11.2.7.1	General	1630
11.2.7.2	Non-AP and non-PCP STA power management mode	1632
11.2.7.3	PCP power management mode	1636
11.2.7.4	ATIM frame usage for power management of non-AP STAs	1639
11.2.8	ATIM frame and frame transmission in IBSS, DMG infrastructure BSS, and PBSS	1641
11.3	STA authentication and association	1642
11.3.1	State variables	1642
11.3.2	State transition diagram for nonmesh STAs	1643
11.3.3	Frame filtering based on STA state	1643
11.3.4	Authentication and deauthentication	1646
11.3.4.1	General	1646
11.3.4.2	Authentication—originating STA	1646
11.3.4.3	Authentication—destination STA	1647
11.3.4.4	Deauthentication—originating STA	1647
11.3.4.5	Deauthentication—destination STA	1648
11.3.5	Association, reassociation, and disassociation	1648
11.3.5.1	General	1648
11.3.5.2	Non-AP and non-PCP STA association initiation procedures	1649
11.3.5.3	AP or PCP association receipt procedures	1651
11.3.5.4	Non-AP and non-PCP STA reassociation initiation procedures	1652
11.3.5.5	AP or PCP reassociation receipt procedures	1655
11.3.5.6	Non-AP and non-PCP STA disassociation initiation procedures	1657
11.3.5.7	Non-AP and non-PCP STA disassociation receipt procedure	1657
11.3.5.8	AP or PCP disassociation initiation procedure	1658
11.3.5.9	AP or PCP disassociation receipt procedure	1658
11.3.5.10	PBSS procedures for nonassociated STAs	1659
11.3.6	Additional mechanisms for an AP collocated with a mesh STA	1659
11.3.7	Communicating PBSS information	1659
11.3.8	Neighbor report information upon rejection with suggested BSS transition	1659
11.4	TS operation	1660
11.4.1	Introduction	1660

11.4.2	TSPEC construction.....	1662
11.4.3	TS life cycle.....	1662
11.4.4	TS setup.....	1664
11.4.4.1	General.....	1664
11.4.4.2	Non-AP-STA-initiated TS setup.....	1664
11.4.4.3	AP-initiated TS setup.....	1665
11.4.4.4	TS setup procedures for both AP and non-AP STA initiation.....	1666
11.4.4.5	TS renegotiation.....	1669
11.4.5	TS setup by resource request during a fast BSS transition.....	1669
11.4.6	PSMP management.....	1669
11.4.7	Failed TS setup.....	1670
11.4.8	Data transfer.....	1671
11.4.9	TS deletion.....	1672
11.4.9.1	Deletion of a TS established between an HC, DMG AP, or PCP and a non-AP and non-PCP STA.....	1672
11.4.9.2	Peer-to-peer TS deletion and deletion of an allocation.....	1673
11.4.10	TS timeout.....	1675
11.4.11	TS suspension.....	1676
11.4.12	TS reinstatement.....	1676
11.4.13	DMG allocation formats.....	1678
11.4.13.1	General.....	1678
11.4.13.2	Isochronous allocations.....	1678
11.4.13.3	Asynchronous allocations.....	1678
11.4.14	PTP TS operation.....	1679
11.5	Block ack operation.....	1679
11.5.1	Introduction.....	1679
11.5.2	Setup and modification of the block ack parameters.....	1679
11.5.2.1	General.....	1679
11.5.2.2	Procedure at the originator.....	1680
11.5.2.3	Procedure at the recipient.....	1681
11.5.2.4	Procedure common to both originator and recipient.....	1681
11.5.3	Teardown of the block ack mechanism.....	1682
11.5.3.1	General.....	1682
11.5.3.2	Procedure at the initiator of the block ack teardown.....	1682
11.5.3.3	Procedure at the recipient of the DELBA frame.....	1682
11.5.4	Error recovery upon a peer failure.....	1683
11.6	Higher layer timer synchronization.....	1684
11.6.1	Introduction.....	1684
11.6.2	Procedure at the STA.....	1685
11.7	DLS operation.....	1685
11.7.1	General.....	1685
11.7.2	DLS procedures.....	1686
11.7.2.1	General.....	1686
11.7.2.2	Setup procedure at the QoS STA.....	1687
11.7.2.3	Setup procedure at the AP.....	1687
11.7.2.4	Operation of the DLS Timeout Value field.....	1687
11.7.3	Data transfer after setup.....	1688
11.7.4	DLS teardown.....	1688
11.7.4.1	General.....	1688
11.7.4.2	STA-initiated DLS teardown procedure.....	1688
11.7.4.3	Teardown procedure at the AP.....	1689
11.7.4.4	AP-initiated DLS teardown procedure.....	1689
11.7.5	Error recovery upon a peer failure.....	1690
11.7.6	Secure DLS operation.....	1690

11.8	TPC procedures.....	1690
11.8.1	General.....	1690
11.8.2	Association based on transmit power capability.....	1691
11.8.3	Peering based on transmit power capability	1692
11.8.4	Interpretation of transmit power capability	1692
11.8.5	Specification of regulatory and local maximum transmit power levels	1693
11.8.6	Transmit power selection.....	1694
11.8.7	Transmit power adaptation	1694
11.9	DFS procedures.....	1694
11.9.1	General.....	1694
11.9.2	Association based on supported channels.....	1696
11.9.2.1	Association based on supported channels in a non-DMG BSS	1696
11.9.2.2	Providing supported channels upon association in a DMG BSS	1696
11.9.3	Quieting channels for testing	1696
11.9.4	Testing channels for radar.....	1697
11.9.5	Discontinuing operations after detecting radar	1698
11.9.6	Detecting radar.....	1698
11.9.7	Requesting and reporting of measurements.....	1698
11.9.8	Selecting and advertising a new channel	1699
11.9.8.1	General	1699
11.9.8.2	Selecting and advertising a new channel in a non-DMG infrastructure BSS	1700
11.9.8.3	Selecting and advertising a new channel in an IBSS	1700
11.9.8.4	MBSS channel switching	1702
11.9.8.5	HT-greenfield transmissions in operating classes that include a behavior limit of DFS_50_100_Behavior.....	1704
11.9.8.6	Selecting and advertising a new channel in a DMG BSS	1705
11.9.9	Channel Switch Announcement element operation.....	1705
11.9.10	Future Channel Guidance operation	1705
11.10	Extended channel switching (ECS)	1706
11.10.1	General.....	1706
11.10.2	Advertising supported operating classes.....	1706
11.10.3	Selecting and advertising a new channel and/or operating class	1706
11.10.3.1	General	1706
11.10.3.2	Selecting and advertising a new channel in an infrastructure BSS ...	1707
11.10.3.3	Selecting and advertising a new channel in an IBSS	1708
11.10.3.4	Selecting and advertising a new channel in an MBSS.....	1708
11.11	Radio measurement procedures	1709
11.11.1	General.....	1709
11.11.2	Measurement on operating and nonoperating channels.....	1709
11.11.3	Measurement start time.....	1709
11.11.4	Measurement Duration	1710
11.11.5	Station responsibility for conducting measurements	1711
11.11.6	Requesting and reporting of measurements.....	1711
11.11.7	Repeated Measurement Request frames	1714
11.11.8	Triggered autonomous reporting	1714
11.11.9	Specific measurement usage	1716
11.11.9.1	Beacon report	1716
11.11.9.2	Frame report.....	1719
11.11.9.3	Channel load report.....	1720
11.11.9.4	Noise Histogram report.....	1720
11.11.9.5	STA Statistics report	1721
11.11.9.6	LCI report (Location configuration information report).....	1723
11.11.9.7	Measurement Pause.....	1724