

IEEE Standard for Local and metropolitan area networks—

Bridges and Bridged Networks

Amendment 23: Application Virtual Local Area Network (VLAN) Type, Length, Value (TLV)

IEEE Computer Society

Sponsored by the
LAN/MAN Standards Committee

IEEE
3 Park Avenue
New York, NY 10016-5997
USA

IEEE Std 802.1Qcd™-2015
(Amendment to
IEEE Std 802.1Q™-2014)

**IEEE Standard for
Local and metropolitan area networks—**

Bridges and Bridged Networks

**Amendment 23: Application Virtual Local Area
Network (VLAN) Type, Length, Value (TLV)**

Sponsor

**LAN/MAN Standards Committee
of the
IEEE Computer Society**

Approved 16 February 2015

IEEE SA-Standards Board

Abstract: Enhancements to the set of TLVs used by the Data Center Bridging eXchange protocol (DCBX) for the purpose of simplifying the management of networks utilizing Data Center Bridging (DCB) features are defined in this amendment to IEEE Std 802.1Q-2014.

Keywords: Bridged Networks, Data Center Bridging (DCB), Data Center Bridging eXchange protocol (DCBX), IEEE 802[®], IEEE 802.1Q[™], IEEE 802.1Qcd[™], local area networks (LANs), MAC Bridges, metropolitan area networks, Virtual Bridged Networks (virtual LANs), VLAN Bridges

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2015 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 13 March 2015. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 978-0-7381-9565-0 STD20128
PDF: ISBN 978-0-7381-9566-7 STDPD20128

IEEE prohibits discrimination, harassment, and bullying.

For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Standards Documents.”

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE-SA Website at <http://ieeexplore.ieee.org/xpl/standards.jsp> or contact IEEE at the address listed previously. For more information about the IEEE-SA or IOWA's standards development process, visit the IEEE-SA Website at <http://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

At the time this standard was submitted to the IEEE-SA Standards Board for approval, the IEEE 802.1 Working Group had the following membership:

Glenn Parsons, *Working Group Chair*
John Messenger, *Working Group Vice Chair*
Patricia Thaler, *Chair, Data Center Bridging Task Group*
Eric Multanen, *Editor*

Ting Ao
Christian Boiger
Paul Bottorff
David Chen
Feng Chen
Weiyang Cheng
Diego Crupnicoff
Rodney Cummings
Patrick Diamond
Aboubacar Kader Diarra
Janos Farkas
Norman Finn
Geoffrey Garner
Anoop Ghanwani
Mark Gravel
Craig Gunther

Hitosh Hayakawa
Jeremy Hitt
Rahil Hussain
Anthony Jeffree
Peter Jones
Hal Keen
Marcel Kiessling
Yongbum Kim
Philippe Klein
Jouni Korhonen
Jeff Lynch
Ben Mack-Crane
Christophe Mangin
James McIntosh
Eric Multanen
Donald Pannell

Karen Randall
Dan Romascanu
Jessy V. Rouyer
Panagiotis Saltsidis
Behcet Sarikaya
Daniel Sexton
Johannes Specht
Kevin B. Stanton
Wilfried Steiner
Vahid Tabatabaee
Jeremy Touve
Karl Weber
Yuehua Wei
Brian Weis
Jordon Woods
Juan-Carlos Zuniga

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

Thomas Alexander
Nancy Bravin
William Byrd
Juan Carreon
Rodney Cummings
Yezid Donoso
Richard Edgar
Yukihiro Fujimoto
Devon Gayle
Anoop Ghanwani
Joel Goergen
Randall Groves
Michael Gundlach
Werner Hoelzl
C. Huntley
Noriyuki Ikeuchi
Atsushi Ito
Raj Jain

Anthony Jeffree
Shinkyō Kaku
Piotr Karocki
Stuart Kerry
Morteza Khodaie
Bruce Kraemer
Yasushi Kudoh
Michael Lynch
Elvis Maculuba
Richard Mellitz
Jose Morales
Eric Multanen
Michael Newman
Nick S.A. Nikjoo
Satoshi Obara
Jean Pierre Picard
R. K. Rannow
Alon Regev

Maximilian Riegel
Robert Robinson
Dan Romascanu
Jessy V. Rouyer
Peter Saunderson
Veselin Skendzic
Kapil Sood
Thomas Starai
Eugene Stoudenmire
Walter Struppler
Patricia Thaler
Dmitri Varsanofiev
Prabodh Varshney
George Vlantis
Hung-Yu Wei
Andreas Wolf
Oren Yuen
Daidi Zhong

When the IEEE-SA Standards Board approved this standard on 16 February 2015, it had the following membership:

John Kulick, *Chair*
Jon Walter Rosdahl, *Vice Chair*
Richard H. Hulett, *Past Chair*
Konstantinos Karachalios, *Secretary*

Peter Balma
Farooq Bari
Ted Burse
Clint Chaplain
Stephen Dukes
Jean-Phillippe Faure
Gary Hoffman

Michael Janezic
Jeffrey Katz
Joseph L. Koepfinger*
David J. Law
Hung Ling
Oleg Logvinov
T. W. Olsen
Glenn Parsons

Ron Peterson
Adrian Stephens
Peter Sutherland
Yatin Trivedi
Phil Winston
Don Wright
Yu Yuan

*Member Emeritus

Also included are the following nonvoting IEEE-SA Standards Board liaisons:

Richard DeBlasio, *DOE Representative*
Michael Janezic, *NIST Representative*

Michelle Turner
IEEE-SA Content Production and Management

Kathryn Bennett
IEEE-SA Technical Program Operations

Introduction

This introduction is not part of IEEE Std 802.1Qcd™-2015, IEEE Standard for Local and metropolitan area networks—Bridges and Bridged Networks—Amendment 23: Application Virtual Local Area Network (VLAN) Type, Length, Value (TLV).

This amendment specifies the protocols, procedures, and management objects for an Application Virtual Local Area Network (VLAN) identifier (ID) Type, Length, Value (TLV) within the Data Center Bridging eXchange protocol (DCBX) defined in IEEE Std 802.1Q. This standard also specifies minor extensions and editorial corrections to the Application Priority TLV.

This standard contains state-of-the-art material. The area covered by this standard is undergoing evolution. Revisions are anticipated within the next few years to clarify existing material, to correct possible errors, and to incorporate new related material. Information on the current revision state of this and other IEEE 802 standards may be obtained from

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854-4141
USA

Contents

2.	Normative references	2
5.	Conformance	3
38.	Data Center Bridging eXchange protocol (DCBX)	4
38.1	Overview	4
Annex A (normative)	PICS proforma—Bridge implementations	5
A.35	Data Center Bridging eXchange protocol (DCBX)	5
Annex B (normative)	PICS proforma—End station implementations	6
B.14	Data Center Bridging eXchange protocol (DCBX)	6
Annex D (normative)	IEEE 802.1 Organizationally Specific TLV	7
D.1	Requirements of the IEEE 802.1 Organizationally Specific TLV sets	7
D.2	Organizationally Specific TLV definitions	8
D.4	PICS proforma for IEEE 802.1 Organizationally Specific TLV extensions	12
D.5	IEEE 802.1/LLDP extension MIB	12

List of figures

Figure D-12—Application Priority TLV format	8
Figure D-15—Application VLAN TLV format	9

List of tables

Table D-1— IEEE 802.1 Organizationally Specific TLVs specified in this standard 7

Table D-8—Application Priority Table Entry format 8

Table D-9—Sel field values 9

Table D-12—Application VLAN Table Entry format 10

Table D-13—Sel field values 11

Table D-14—IEEE 802.1 extension MIB object group conformance requirements..... 12

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference..... 12

IEEE Standard for Local and metropolitan area networks—

Bridges and Bridged Networks

Amendment 23: Application Virtual Local Area Network (VLAN) Type, Length, Value (TLV)

IMPORTANT NOTICE: IEEE Standards documents are not intended to ensure safety, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.

(This amendment is based on IEEE Std 802.1Q™-2014.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.¹

The editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~striketrough~~ (to remove old material) and underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. ***Replace*** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.

¹Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

2. Normative references

Insert the following reference after IETF RFC 2205 and before IETF RFC 2578 in the list in Clause 2.

IETF RFC 2474, Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers, Nichols, K., Blake, S., Baker, F. and Black, D.

5. Conformance

5.4.1.7 DCBX Bridge requirements

Insert item g) into the lettered list in 5.4.1.7 as follows:

A device supporting DCBX shall

- a) Support Link Layer Discovery Protocol (LLDP) transmit and receive mode (IEEE Std 802.1AB).
- b) Support the DCBX ETS Configuration Type, Length, Value (TLV) (D.2.9).
- c) Support the ETS Recommendation TLV (D.2.10).
- d) Support the Priority-based Flow Control Configuration TLV (D.2.11).
- e) Support the Application Priority TLV (D.2.12).
- f) Support the asymmetric and symmetric DCBX state machines (38.4).
- g) Support the Application VLAN TLV (D.2.15).

38. Data Center Bridging eXchange protocol (DCBX)

Change items e) and f) and insert a new item g), as follows:

38.1 Overview

This clause details DCBX, which is used by DCB devices to exchange configuration information with directly connected peers. The protocol may also be used for misconfiguration detection and for configuration of the peer.

This standard describes the base protocol, which comprises state machines and TLVs for capability exchange. For each feature that is supported by DCBX, the attributes that are to be exchanged specify

- a) The attributes to be exchanged;
- b) How the attributes are used for detecting misconfiguration; and
- c) What action needs to be taken when a misconfiguration is detected.

The information listed above is specified for the following:

- d) ETS;
- e) PFC; ~~and~~
- f) ~~Application Priority Configuration TLV;~~ and
- g) Application VLAN TLV.

Annex A

(normative)

PICS proforma—Bridge implementations²

A.35 Data Center Bridging eXchange protocol (DCBX)

Insert the following entry for the Application VLAN TLV at the end of the table in A.35.

Item	Feature	Status	References	Support
DCBX-8	Support the Application VLAN TLV	DCBX:M	D.2.15	Yes []

²*Copyright release for PICS proformas:* Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Annex B

(normative)

PICS proforma—End station implementations³

B.14 Data Center Bridging eXchange protocol (DCBX)

Insert the following entry for the Application VLAN TLV at the end of the table in B.14.

Item	Feature	Status	References	Support
DCBX-8	Support the Application VLAN TLV	DCBX:M	D.2.15	Yes []

³Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Annex D

(normative)

IEEE 802.1 Organizationally Specific TLVs

D.1 Requirements of the IEEE 802.1 Organizationally Specific TLV sets

The IEEE 802.1 Organizationally Specific TLVs may be supported in conjunction with any of the destination MAC addresses identified in 7.1 of IEEE Std 802.1AB-2009.

If any IEEE 802.1 Organizationally Specific TLV set is supported, all IEEE 802.1 Organizationally Specific TLVs that are identified as members of that TLV set shall be supported. All IEEE 802.1 Organizationally Specific TLVs shall conform to the LLDPDU bit and octet ordering conventions of 8.1 of IEEE Std 802.1AB-2009.

The currently defined IEEE 802.1 Organizationally Specific TLVs specified in this standard are listed in Table D-1. Other standards can also define IEEE 802.1 Organizationally Specific TLVs. The “TLV set name” column identifies the TLV set to which each TLV belongs. Any additions or changes to these TLVs will be included in this annex.

Insert the following entry for the Application VLAN TLV at the end of Table D-1.

Table D-1— IEEE 802.1 Organizationally Specific TLVs specified in this standard

IEEE 802.1 subtype	TLV name	TLV set name	TLV reference	Feature clause reference
10	Application VLAN TLV	dcbxSet	D.2.15	Clause 38

D.2 Organizationally Specific TLV definitions

Change D.2.12 as follows:

D.2.12 Application Priority TLV

The TLV illustrated in Figure D-12 is encoded into each IEEE Std 802.1AB-2009 LLDP message and may be transmitted by a system in order to indicate the application priority table. This TLV is informational and used to indicate to a peer station the local configuration.

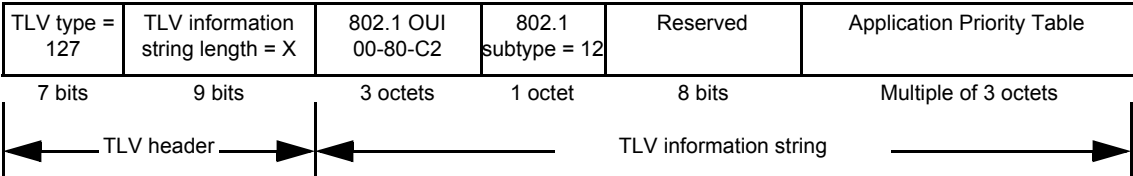


Figure D-12—Application Priority TLV format

D.2.12.1 TLV type

A 7-bit integer value occupying the most-significant bits of the first octet of the TLV. Always contains the value 127.

D.2.12.2 TLV information string length

A 9-bit unsigned integer, occupying the LSB of the first octet of the TLV (the MSB of the TLV information string length) and the entire second octet of the TLV, containing the total number of octets in the TLV information string of the Application Priority TLV. This does not count the TLV type and TLV information string length fields. The length for the Application Priority TLV is variable depending on the number of Application Priorities specified. The length shall be 5 plus a multiple of 3 octets.

D.2.12.3 Application Priority Table

Table D-8 shows the layout of a 3 octet entry in the Application Priority Table.

Table D-8—Application Priority Table Entry format

Octets:	1					2	3
	Priority		Reserved		Sel	Protocol ID	
Bits:	8	6	5	4	3	1	8

The priority field is a 3-bit unsigned integer indicating the priority for which the Protocol ID is being used.

The meaning of the Protocol ID field is determined by the Sel field. Allowed values for the Sel field are shown in Table D-9.

Table D-9—Sel field values

Sel Value	Protocol ID value
0	Reserved
1	0: Default <u>application</u> priority. For use when <u>application</u> priority is not otherwise specified. 1–1535: Reserved 1536–65535: An EtherType.
2	Well Known Port number over TCP, or Stream Control Transmission Protocol (SCTP).
3	Well Known Port number over UDP, or Datagram Congestion Control Protocol (DCCP).
4	Well Known Port number over TCP, SCTP, UDP, or DCCP.
5	<u>Differentiated Services Code Point (DSCP) value. The 6-bit DSCP value is stored in bits 1–6 of the low order octet of the Protocol ID field (octet 3 of the Application Priority Table Entry). Bits 7 and 8 and the high order octet of the Protocol ID field are set to zero.</u> (See IETF RFC 2474 for the definition of the DSCP value.)
56–7	Reserved

NOTE—The port numbers shown are for identification (i.e., as assigned by IANA) instead of the actual port numbers being used in a particular deployment.

Insert a new subclause D.2.15 after D.2.14. Renumber subsequent tables and figures appropriately.

D.2.15 Application VLAN TLV

The TLV illustrated in Figure D-15 is encoded into each IEEE Std 802.1AB-2009 LLDP message and may be transmitted by a system in order to indicate the application VLAN table. This TLV is informational and used to indicate to a peer station the local configuration.

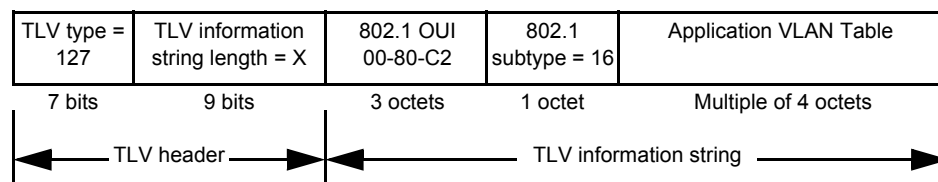


Figure D-15—Application VLAN TLV format

D.2.15.1 TLV type

A 7-bit integer value occupying the most significant bits of the first octet of the TLV. Always contains the value 127.

D.2.15.2 TLV information string length

A 9-bit unsigned integer, occupying the LSB of the first octet of the TLV (the MSB of the TLV information string length) and the entire second octet of the TLV, containing the total number of octets in the TLV information string of the Application VLAN TLV. This does not count the TLV type and TLV information string length fields. The length for the Application VLAN TLV is variable depending on the number of Application VLANs specified. The length shall be 4 plus a multiple of 4 octets.

D.2.15.3 Application VLAN Table

Table D-12 shows the layout of a 4 octet entry in the Application VLAN Table.

Table D-12—Application VLAN Table Entry format

Octets:	1		2				3		4	
	VID				Reserved	Sel	Protocol ID			
	8	1	8	5	4	3	1	8	1	

The VID field is a 12-bit unsigned integer indicating the VID of the VLAN for which the Protocol ID is being used.

The meaning of the Protocol ID field is determined by the Sel field. Allowed values for the Sel field are shown in Table D-13.

The Application VLAN TLV may be exchanged between EVB station ERs (5.24.1) and EVB Bridges (5.23) with LLDP using the Nearest Customer Bridge address. This allows ERs sharing a LAN using S-channels (40.2) to use different VLANs for the same application.

NOTE 1—The Application VLAN TLV allows multiple VLANs to be associated with an application on a port. Issues involved with using multiple VLANs for an application on a port, such as resolving which IP subnetwork corresponds to which VLAN, are beyond the scope of this standard.

NOTE 2—Selection of different IEEE 802.1 paths may use different VLANs, which could be associated with different quality of service levels. This TLV may not apply to deployment cases where the VID is implied by other attributes of the frame, for example, by the IP subnet of the source IP address.

Table D-13—Sel field values

Sel Value	Protocol ID value
0	Reserved
1	0: PVID. For use when an application VLAN is not otherwise specified. 1–1535: Reserved 1536–65535: An EtherType.
2	Well Known Port number over TCP, or SCTP.
3	Well Known Port number over UDP, or DCCP.
4	Well Known Port number over TCP, SCTP, UDP, or DCCP.
5	Differentiated Services Code Point (DSCP) value. The 6-bit DSCP value is stored in bits 1–6 of the low order octet of the Protocol ID field (octet 4 of the Application VLAN Table Entry). Bits 7 and 8 and the high order octet of the Protocol ID field are set to zero. (See IETF RFC 2474 for the definition of the DSCP value.)
6–7	Reserved

D.4 PICS proforma for IEEE 802.1 Organizationally Specific TLV extensions

D.4.3 Major capabilities and options

Change the dcbx tlv entry in the table in D.4.3 as follows:

Item	Feature	Status	References	Support
dcbx tlv	Is each TLV in the IEEE 802.1 DCBX TLV set implemented?			
	ETS Configuration TLV	dcbxSet:M	D.2.9	Yes []
	ETS Recommendation TLV	dcbxSet:M	D.2.10	Yes []
	Priority-based Flow Control Configuration TLV	dcbxSet:M	D.2.11	Yes []
	Application Priority TLV	dcbxSet:M	D.2.12	Yes []
	Application VLAN TLV	dcbxSet:M	D.2.15	Yes []

D.5 IEEE 802.1/LLDP extension MIB

D.5.2 Structure of the IEEE 802.1/LLDP extension MIB

Insert the following entry at the end of Table D-14 (renumbered from Table D-12) for the MIB group lldpXdot1dcbxApplicationVlanGroup.

Table D-14—IEEE 802.1 extension MIB object group conformance requirements

MIB group	Rx mode	Tx mode	Tx/Rx mode
lldpXdot1dcbxApplicationVlanGroup	DCBX:M	DCBX:M	DCBX:M

Change Table D-15 (renumbered from Table D-13) by adding the following entries for the Application VLAN TLV MIB objects at the end of each dcbx extension group section as shown. (Only the dcbx extension group sections of the table are shown here.)

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference

MIB table	MIB object	LLDP reference
lldpXdot1dcbxConfig extension group ^a		
lldpXdot1dcbxConfigETSConfigurationEntry		
	lldpXdot1dcbxConfigETSConfigurationTxEnable	D.2.9
lldpXdot1dcbxConfigETSRecommendationTable		
	lldpXdot1dcbxConfigETSRecommendationTxEnable	D.2.10
lldpXdot1dcbxConfigPFCTable		
	lldpXdot1dcbxConfigPFCTxEnable	D.2.11
lldpXdot1dcbxConfigApplicationPriorityTable		

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference (continued)

MIB table	MIB object	LLDP reference
	lldpXdot1dcbxConfigApplicationPriorityTxEnable	
lldpXdot1dcbxConfigApplicationVlanTable		
	lldpXdot1dcbxConfigApplicationVlanTxEnable	D.2.15
<i>lldpXdot1dcbxLocalData extension group^a</i>		
lldpXdot1dcbxLocETSTBasicConfigurationTable		
	lldpXdot1dcbxLocETSTConCreditBasedShaperSupport	D.2.9.4
	lldpXdot1dcbxLocETSTConMaxTC	D.2.9.5
	lldpXdot1dcbxLocETSTConWilling	D.2.9.3
	lldpXdot1dcbxLocETSTConTrafficClassBandwidthTable	D.2.9.7
	lldpXdot1dcbxLocETSTConTrafficSelectionAlgorithmTable	D.2.9.8
lldpXdot1dcbxLocETSTConPriorityAssignmentTable		
	lldpXdot1dcbxLocETSTConPriority	D.2.9.6
	lldpXdot1dcbxLocETSTConTrafficClass	D.2.9.6
lldpXdot1dcbxLocETSRecommendationTable		
	lldpXdot1dcbxLocETSRecoTrafficClassBandwidthTable	D.2.10.4
lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmTable		
	lldpXdot1dcbxLocETSRecoTSAPriority	D.2.10.5
	lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithm	D.2.10.5
lldpXdot1dcbxLocPFCBasicTable		
	lldpXdot1dcbxLocPFCWilling	D.2.11.3
	lldpXdot1dcbxLocPFCMBC	D.2.11.4
	lldpXdot1dcbxLocPFCCap	D.2.11.5
lldpXdot1dcbxLocPFCEnableTable		
	lldpXdot1dcbxLocPFCEnablePriority	D.2.11.6
	lldpXdot1dcbxLocPFCEnableEnabled	D.2.11.6
lldpXdot1dcbxLocApplicationPriorityAppTable		
	lldpXdot1dcbxLocApplicationPriorityAESelector	D.2.12.3
	lldpXdot1dcbxLocApplicationPriorityAEProtocol	D.2.12.3
	lldpXdot1dcbxLocApplicationPriorityAEPriority	D.2.12.3
lldpXdot1dcbxLocApplicationVlanAppTable		
	<u>lldpXdot1dcbxLocApplicationVlanAESelector</u>	<u>D.2.15.3</u>
	<u>lldpXdot1dcbxLocApplicationVlanAEProtocol</u>	<u>D.2.15.3</u>

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference (continued)

MIB table	MIB object	LLDP reference
	<u>lldpXdot1dcbxLocApplicationVlanAEVlanId</u>	<u>D.2.15.3</u>
<i>lldpXdot1dcbxRemoteData extension group^a</i>		
	lldpXdot1dcbxRemETSTBasicConfigurationTable	
	lldpXdot1dcbxRemETSTConCreditBasedShaperSupport	D.2.9.4
	lldpXdot1dcbxRemETSTConMaxTC	D.2.9.5
	lldpXdot1dcbxRemETSTConWilling	D.2.9.3
	lldpXdot1dcbxRemETSTConTrafficClassBandwidthTable	D.2.9.7
	lldpXdot1dcbxRemETSTConTrafficSelectionAlgorithm-Table	D.2.9.8
	lldpXdot1dcbxRemETSTConPriorityAssignmentTable	
	lldpXdot1dcbxRemETSTConPriority	D.2.9.6
	lldpXdot1dcbxRemETSTConTrafficClass	D.2.9.6
	lldpXdot1dcbxRemETSRecoRecommendationTable	
	lldpXdot1dcbxRemETSRecoTrafficClassBandwidthTable	D.2.10.4
	lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmTable	
	lldpXdot1dcbxRemETSRecoTSAPriority	D.2.10.5
	lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithm	D.2.10.5
	lldpXdot1dcbxRemPFCBasicTable	
	lldpXdot1dcbxRemPFCWilling	D.2.11.3
	lldpXdot1dcbxRemPFCMBC	D.2.11.4
	lldpXdot1dcbxRemPFCCap	D.2.11.5
	lldpXdot1dcbxRemPFCEnableTable	
	lldpXdot1dcbxRemPFCEnablePriority	D.2.11.6
	lldpXdot1dcbxRemPFCEnableEnabled	D.2.11.6
	lldpXdot1dcbxRemApplicationPriorityAppTable	
	lldpXdot1dcbxRemApplicationPriorityAESelector	D.2.12.3
	lldpXdot1dcbxRemApplicationPriorityAEProtocol	D.2.12.3
	lldpXdot1dcbxRemApplicationPriorityAEPriority	D.2.12.3
	lldpXdot1dcbxRemApplicationVlanAppTable	
	<u>lldpXdot1dcbxRemApplicationVlanAESelector</u>	<u>D.2.15.3</u>
	<u>lldpXdot1dcbxRemApplicationVlanAEProtocol</u>	<u>D.2.15.3</u>
	<u>lldpXdot1dcbxRemApplicationVlanAEVlanId</u>	<u>D.2.15.3</u>
<i>lldpXdot1dcbxAdminData extension group^a</i>		

Table D-15—IEEE 802.1/LLDP extension MIB object cross reference (continued)

MIB table	MIB object	LLDP reference
lldpXdot1dcbxAdminETSTrafficClassBandwidthTable		
	lldpXdot1dcbxAdminETSTrafficClassBandwidthSupport	D.2.9.4
	lldpXdot1dcbxAdminETSTrafficClassMaxTC	D.2.9.5
	lldpXdot1dcbxAdminETSTrafficClassWilling	D.2.9.3
	lldpXdot1dcbxAdminETSTrafficClassBandwidthTable	D.2.9.7
	lldpXdot1dcbxAdminETSTrafficSelectionAlgorithm-Table	D.2.9.8
lldpXdot1dcbxAdminETSTrafficPriorityAssignmentTable		
	lldpXdot1dcbxAdminETSTrafficPriority	D.2.9.6
	lldpXdot1dcbxAdminETSTrafficClass	D.2.9.6
lldpXdot1dcbxAdminETSTrafficRecommendationTable		
	lldpXdot1dcbxAdminETSTrafficRecoTrafficClassBandwidth-Table	D.2.10.4
lldpXdot1dcbxAdminETSTrafficRecoTrafficSelectionAlgorithmTable		
	lldpXdot1dcbxAdminETSTrafficRecoTSAPriority	D.2.10.5
	lldpXdot1dcbxAdminETSTrafficRecoTrafficSelectionAlgorithm	D.2.10.5
lldpXdot1dcbxAdminPFCBasicTable		
	lldpXdot1dcbxAdminPFCWilling	D.2.11.3
	lldpXdot1dcbxAdminPFCMBC	D.2.11.4
	lldpXdot1dcbxAdminPFCCap	D.2.11.5
lldpXdot1dcbxAdminPFCEnableTable		
	lldpXdot1dcbxAdminPFCEnablePriority	D.2.11.6
	lldpXdot1dcbxAdminPFCEnableEnabled	D.2.11.6
lldpXdot1dcbxAdminApplicationPriorityAppTable		
	lldpXdot1dcbxAdminApplicationPriorityAESelector	D.2.12.3
	lldpXdot1dcbxAdminApplicationPriorityAEProtocol	D.2.12.3
	lldpXdot1dcbxAdminApplicationPriorityAEPriority	D.2.12.3
lldpXdot1dcbxAdminApplicationVlanAppTable		
	lldpXdot1dcbxAdminApplicationVlanAESelector	<u>D.2.15.3</u>
	lldpXdot1dcbxAdminApplicationVlanAEProtocol	<u>D.2.15.3</u>
	lldpXdot1dcbxAdminApplicationVlanAEVlanId	<u>D.2.15.3</u>

^aThe term Extension Group is used here to be consistent with LLDP (see IEEE Std 802.1AB).

D.5.4 Security considerations for IEEE 802.1 LLDP extension MIB module

Insert the following objects into the numbered list of objects under item g):

- 22) lldpXdot1dcbxLocApplicationPriorityAppTable
- 23) lldpXdot1dcbxLocApplicationVlanAppTable
- 24) lldpXdot1dcbxAdminApplicationPriorityAppTable
- 25) lldpXdot1dcbxAdminApplicationVlanAppTable

Insert the following objects into the numbered list of objects under item h):

- 22) lldpXdot1dcbxRemApplicationPriorityAppTable
- 23) lldpXdot1dcbxRemApplicationVlanAppTable
- 24) lldpXdot1dcbxAdminApplicationPriorityAppTable
- 25) lldpXdot1dcbxAdminApplicationVlanAppTable

D.5.5 IEEE 802.1 LLDP extension MIB module—version 2^{4,5}

Change the MIB by adding Application VLAN TLV entries as shown:

In the following MIB definition, should any discrepancy between the DESCRIPTION text and the corresponding definition in D.2.1 through D.5 occur, the definition in D.2.1 through D.5 shall take precedence.

```
LLDP-EXT-DOT1-V2-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY,
    OBJECT-TYPE,
    Unsigned32
        FROM SNMPv2-SMI
    TruthValue,
    TEXTUAL-CONVENTION
        FROM SNMPv2-TC
    SnmpAdminString
        FROM SNMP-FRAMEWORK-MIB
    MODULE-COMPLIANCE,
    OBJECT-GROUP
        FROM SNMPv2-CONF
    ifGeneralInformationGroup
        FROM IF-MIB
    lldpV2Extensions,
    lldpV2LocPortIfIndex,
    lldpV2RemTimeMark,
    lldpV2RemLocalIfIndex,
    lldpV2RemLocalDestMACAddress,
    lldpV2RemIndex,
    lldpV2PortConfigEntry
        FROM LLDP-V2-MIB
    VlanId
        FROM Q-BRIDGE-MIB
    LldpV2LinkAggStatusMap
        FROM LLDP-V2-TC-MIB
    IEEE8021PriorityValue
        FROM IEEE8021-TC-MIB;

lldpV2Xdot1MIB MODULE-IDENTITY
    LAST-UPDATED "201502160000Z" -- February 16, 2015
    ORGANIZATION "IEEE 802.1 Working Group"
    CONTACT-INFO
        "WG-URL: http://grouper.ieee.org/groups/802/1/index.html
        WG-EMail: STDS-802-1-L@LISTSERV.IEEE.ORG

        Contact: IEEE 802.1 Working Group Chair
        Postal: C/O IEEE 802.1 Working Group
              IEEE Standards Association
              445 Hoes Lane
              P.O. Box 1331
              Piscataway
```

⁴Copyright release for MIBs: Users of this standard may freely reproduce the MIB contained in this subclause so that it can be used for its intended purpose.

⁵An ASCII version of this MIB module can be obtained by Web browser from the IEEE 802.1 Website at <http://www.ieee802.org/1/pages/MIBS.html>.