

Information technology—
Telecommunications and information exchange between systems—
Local and metropolitan area networks—
Specific requirements—

Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications

Sponsor

LAN MAN Standards Committee
of the
IEEE Computer Society

Abstract: The media access control characteristics for the Carrier Sense Multiple Access with Collision Detection (CSMA/CD) access method for shared medium local area networks are described. The control characteristics for full duplex dedicated channel use are also described. Specifications are provided for MAU types 1BASE5 at 1 Mb/s; Attachment Unit Interface (AUI) and MAU types 10BASE5, 10BASE2, FOIRL (fiber optic inter-repeater link), 10BROAD36, 10BASE-T, 10BASE-FL, 10BASE-FB, and 10BASE-FP at 10 Mb/s; Media Independent Interface (MII) and PHY types 100BASE-T4, 100BASE-TX, 100BASE-FX, and 100BASE-T2 at 100 Mb/s; and the Gigabit MII (GMII) and 1000BASE-X PHY types, 1000BASE-SX, 1000BASE-LX, and 1000BASE-CX, which operate at 1000 Mb/s (Gigabit Ethernet). Repeater specifications are provided at each speed. Full duplex specifications are provided at the Physical Layer for 10BASE-T, 10BASE-FL, 100BASE-TX, 100BASE-FX, 100BASE-T2, and Gigabit Ethernet. System considerations for multisegment networks at each speed and management information base (MIB) specifications are also provided.

Keywords: data processing; Ethernet; information interchange, local area networks; local area networks, management; mode of data transmission; network interconnection; models; repeater; type field

The Institute of Electrical and Electronics Engineers, Inc.
345 East 47th Street, New York, NY 10017-2394, USA

Copyright © 1998 by the Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 1998. Printed in the United States of America.

ISBN 0-7381-0330-6

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. Members of the committees serve voluntarily and without compensation. They are not necessarily members of the Institute. The standards developed within IEEE represent a consensus of the broad expertise on the subject within the Institute as well as those activities outside of IEEE that have expressed an interest in participating in the development of the standard.

Use of an IEEE Standard is wholly voluntary. The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least every five years for revision or reaffirmation. When a document is more than five years old and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of all concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration.

Comments on standards and requests for interpretations should be addressed to:


Secretary, IEEE-SA Standards Board
445 Hoes Lane
P.O. Box 1331
Piscataway, NJ 08855-1331
USA

Note: Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying patents for which a license may be required by an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention.

Authorization to photocopy portions of any individual standard for internal or personal use is granted by the Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; (978) 750-8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Introduction to IEEE Std 802.3, 1998 Edition

This standard is part of a family of standards for local and metropolitan area networks. The relationship between the standard and other members of the family is shown below. (The numbers in the figure refer to IEEE standard numbers.)

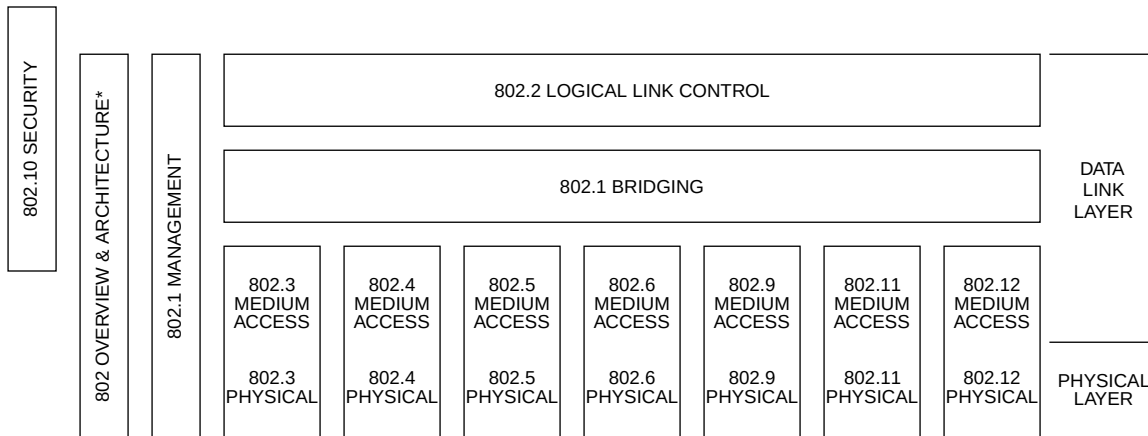

* Formerly IEEE Std 802.1A.

This family of standards deals with the Physical and Data Link layers as defined by the International Organization for Standardization (ISO) Open Systems Interconnection (OSI) Basic Reference Model (ISO/IEC 7498-1 : 1994). The access standards define seven types of medium access technologies and associated physical media, each appropriate for particular applications or system objectives. Other types are under investigation.

The standards defining the technologies noted above are as follows:

- IEEE Std 802 *Overview and Architecture.* This standard provides an overview to the family of IEEE 802 Standards.
- ANSI/IEEE Std 802.1B and 802.1k [ISO/IEC 15802-2] *LAN/MAN Management.* Defines an OSI management-compatible architecture, and services and protocol elements for use in a LAN/MAN environment for performing remote management.
- ANSI/IEEE Std 802.1D [ISO/IEC 15802-3] *Media Access Control (MAC) Bridges.* Specifies an architecture and protocol for the interconnection of IEEE 802 LANs below the MAC service boundary.
- ANSI/IEEE Std 802.1E [ISO/IEC 15802-4] *System Load Protocol.* Specifies a set of services and protocol for those aspects of management concerned with the loading of systems on IEEE 802 LANs.
- ANSI/IEEE Std 802.1F *Common Definitions and Procedures for IEEE 802 Management Information*
- ANSI/IEEE Std 802.1G [ISO/IEC 15802-5] *Remote Media Access Control (MAC) Bridging.* Specifies extensions for the interconnection, using non-LAN communication technologies, of geographically separated IEEE 802 LANs below the level of the logical link control protocol.
- ANSI/IEEE Std 802.2 [ISO/IEC 8802-2] *Logical Link Control*
- ANSI/IEEE Std 802.3 [ISO/IEC 8802-3] *CSMA/CD Access Method and Physical Layer Specifications*
- ANSI/IEEE Std 802.4 [ISO/IEC 8802-4] *Token Passing Bus Access Method and Physical Layer Specifications*

- ANSI/IEEE Std 802.5 [ISO/IEC 8802-5] *Token Ring Access Method and Physical Layer Specifications*
- ANSI/IEEE Std 802.6 [ISO/IEC 8802-6] *Distributed Queue Dual Bus Access Method and Physical Layer Specifications*
- ANSI/IEEE Std 802.9 [ISO/IEC 8802-9] *Integrated Services (IS) LAN Interface at the Medium Access Control (MAC) and Physical (PHY) Layers*
- ANSI/IEEE Std 802.10 *Interoperable LAN/MAN Security*
- ANSI/IEEE Std 802.11 [ISO/IEC DIS 8802-11] *Wireless LAN Medium Access Control (MAC) and Physical Layer Specifications*
- ANSI/IEEE Std 802.12 [ISO/IEC DIS 8802-12] *Demand Priority Access Method, Physical Layer and Repeater Specifications*

In addition to the family of standards, the following is a recommended practice for a common Physical Layer technology:

- IEEE Std 802.7 *IEEE Recommended Practice for Broadband Local Area Networks*

The following additional working group has authorized standards projects under development:

- IEEE 802.14 *Standard Protocol for Cable-TV Based Broadband Communication Network*

Conformance test methodology

An additional standards series, identified by the number 1802, has been established to identify the conformance test methodology documents for the 802 family of standards. Thus the conformance test documents for 802.3 are numbered 1802.3.

IEEE Std 802.3, 1998 Edition

This standard contains state-of-the-art material. The area covered by this standard is undergoing evolution. Revisions are anticipated to this standard within the next few years to clarify existing material, to correct possible errors, and to incorporate new related material. Details on the contents of this standard are provided on the following pages.

The IEEE 802.3 Working Group acknowledges and appreciates that many concepts embodied in this standard are based largely upon the CSMA/CD access method earlier described in *The Ethernet* specification as written jointly by individuals from Xerox Corporation, Digital Equipment Corporation, and Intel Corporation. Appreciation is also expressed to Robert M. Metcalfe and David R. Boggs for their pioneering work in establishing the original concepts.

IEEE Std 802.3z-1998

When the IEEE 802.3 Working Group approved IEEE Std 802.3z, it had the following membership:

Geoffrey O. Thompson, Chair

David J. Law, Vice Chair

Andy J. Luque, Secretary

Howard M. Frazier, Jr., Chair, 802.3z Task Force

Howard W. Johnson, Editor, 802.3z Task Force

Keven M. Elliff, Assistant Editor, 802.3z Task Force

Robert M. Grow, *Chair GMII sub task force*
Rich Taborek, *Chair, PCS/AN sub task force*
Stephen Haddock, *Chair, repeater sub task force*
R. Jonathan Thatcher, *Chair, PMD sub task force*

Del Hanson, *Chair, PMD sub task force*
Schelto van Doorn, *Vice Chair, PMD sub task force*
Edward Grivna, *Editor, PMD sub task force*
Sumesh Kaul, *Editor, Management sub task force*

Menachem Abraham	Daniel Essig	Chan-De Lin	Khosrow Sadeghi
Oscar Agazzi	Rebecca Farley	Ray Lin	Dalit Sagi
Nand Aggarwal	Mark Feuerstraeter	Larry Lomelino	Michael M. Salzman
Alan Albrecht	Dave Fifield	Brian MacLeod	Bill Sarles
Don Alderrou	Farzin Firoozmand	Kenneth MacLeod	David Schwartz
Abe Ali	Alan Flatman	Rabih Makarem	Rich Seifert
Khaled Amer	Ken Friedenbach	Jim Mangin	Koichiro Seto
Steve Augusta	Richard Froke	Scott Mason	Cheng-Chung Shih
Kameron Azadet	Judy Fuess	Thomas Mathey	Ramin Shirani
Denis Beaudoin	Robin Gangopadhya	Joseph Mazor	Bharat Singh
Miles Benson	Mark Gerhold	Kelly McClellan	Paramjeet Singh
John Bowerman	Tom Grasmehr	John McCool	David Smith
Richard Bowers	Martin Green	Grahame Measor	Michael Smith
Dave Brier	Bryan Gregory	Vince Melendy	Walter Sotelo
Benjamin Brown	Richard Grenier	Steve Metzger	Ben Speiser
Daniel J. Brown	Johannes Hansen	Tremont Miao	Margit Stearns
Bill Bunch	Mehdi Hatamian	Colin Mick	Rick Strohmayr
Ed Cady	Kirk Hayden	Chris Di Minico	Steve Swanson
John Cagle	Claude Hayek	Fanny Mlinarsky	Andre Szczepanek
Richard Cam	Gaby Hecht	Mart L. Molle	Tad Szostak
Bob Campbell	Ariel Hendel	Octavio Morales	Wen-Tsung Tang
J. Scott Carter	Henry Hinrichs	Shankar Mukherjee	Sadry Tavana
Edward Chang	Charlie Hochstedler	Shimon Muller	Ken Taylor
Linda Cheng	Henry Hsiaw	Denis Murphy	Vivek Telang
Hon Wah Chin	Jacob Hsu	Samba Murthy	Pat Thaler
Henry Choy	Todd Hudson	Robert Musk	Walter Thirion
George Chu	David J. VanGoor	Ken Naganuma	Douglas Thomson
Kelly B. Coffey	Scott Johnson	Kristian Nelson	Carlos Tomaszewski
Ian Crayford	Jayant Kadambi	Paul Nikolich	Hiep Tran
David Cunningham	Vic Kairis	Mark Nowell	Todd Vafiades
Robert Curtis	Shinkyō Kaku	Satoshi Obara	Iain Verigin
Bruce D. Miller	Mohan Kalkunte	Mitsuji Okada	Greg Wang
Robert Dahlgren	Amrit Kalla	Paul Pace	Yun-Che Wang
Bernard Daines	Tuan Khuu	Jim Parker	Jeff Warren
Kevin Daines	Richard Knight	John Payne	Moti Weizman
Subrata Datta	Paul Kolesar	Joe Pelissier	Jim Welch
Moshe De-Leon	Kishan Rao Konda	Gideon Prat	Mike Witkowski
Tom Debiec	Josef Kozilek	William Quackenbush	John Wolcott
Sanjay Desai	John L. Bestel	Sreen Raghavan	Don Wong
Thomas Dineen	Richard LaCerte	Brian Ramelson	Robert Wu
Hans Peter Dittler	Bruce LaVigne	Sailesh K. Rao	Stefan M. Wurster
Dan Dove	Hans Lackner	Peter Rautenberg	Michael Yam
James Doyle	Gadi Lahat	Gary Robinson	Igor Zhovnirovsky
George Eisler	Gordon Langlands	Carlos Rodriguez	
Michael Elswick	Fu-Ho Lee	Floyd Ross	
Nick Esser	Tommy Leung	Archana Roy	

The following persons were on the balloting committee of IEEE Std 802.3z:

William B. Adams	Robert Fink	Lanse M. Leach	James A. Renfro
Don Aelmore	Michael A. Fischer	Jai Yong Lee	Everett Riggsbee, III
Oscar E. Agazzi	Howard M. Frazier	Ray Lin	Gary S. Robinson
Khaled Amer	Harvey A. Freeman	Yoseph L. Linde	Edouard Y. Rocher
Corey Anderson	Ken J. Friedenbach	Randolph S. Little	James W. Romlein
Jack S. Andresen	Gautam Garai	Chang-Chi Liu	Floyd E. Ross
Kit Athul	Isaac Ghansah	Jahan B. Lotfi	Christoph Ruland
Thomas W. Bailey	Joel R. Goergen	Rabih Makarem	Dalit Sagi
Brad J. Booth	Patrick S. Gonia	Peter Martini	Ravi Sankar
Steve Brewer	Julio Gonzalez-Sanz	Kathleen M. McMillan	Mark A. Sankey
Kathleen L. Briggs	Robert M. Grow	Milan Merhar	Norman Schneidewind
Benjamin J. Brown	Chris G. Guy	John L. Messenger	Frederick Scholl
Peter K. Campbell	Stephen R. Haddock	Bennett Meyer	James E. Schuessler
James T. Carlo	Delon Hanson	Tremont Miao	Rich Seifert
David E. Carlson	Allen W. Hathaway	Colin K. Mick	Adarshpal S. Sethi
George S. Carson	J. Scott Haugdahl	David S. Millman	Donald A. Sheppard
Brian J. Casey	Donald N. Heirman	W. Melody Moh	Joseph S. Skorupa
Paul Chen	Jacob J. Hsu	Warren Monroe	Michael A. Smith
Albert C. Chiang	Walter K. Hurwitz	John E. Montague	William R. Smith
Ian S. Crayford	Benny I. Iggland	Wayne D. Moyers	Robert K. Southard
Robert S. Crowder	Richard J. Iliff	Shimon Muller	Jim A. Tatum
David Cunningham	Raj Jain	Ken Naganuma	Patricia Thaler
Simon Cushin	Anura P. Jayasumana	Mark Nowell	R. Jonathan Thatcher
Bob Dahlgren	Howard Johnson	Robert O'Hara	Geoffrey O. Thompson
Alan Deikman	Peter M. Kelly	Donal O'Mahony	Hiep Tran
Thomas J. Dineen	Gary C. Kessler	Charles Oestereicher	Mark-Rene Uchida
Christos Douligeris	Yongbum Kim	Sedat Olcer	Lourens Van Der Jagt
Daniel Dove	Hemant Kishan	Roger Pandanda	Emmanuel Van Lil
Peter Ecclesine	Donald L. Knasel	Lalit Mohan Patnaik	Sarosh N. Vesuna
George Eisler	Thaddeus Kobylarz	John L. Payne	John Viaplana
John E. Emrich	Henricus Koeman	Lucy W. Person	Barry M. Vornbrock
Philip H. Enslow	Paul F. Kolesar	Vikram Punj	Elfed T. Weaver
Changxin Fan	Stephen Barton Kruger	Andris Putnins	Alan J. Weissberger
Robert L. Faulk	Kenneth C. Kung	William L. Quackenbush	Willem F. Wery
John W. Fendrich	William G. Lane	Sreen Raghavan	David A. Wilson
Mark R. M. Ferguson	Bruce E. LaVigne	Sailesh K. Rao	Qian-li Yang
David Fifield	David J. Law	Dan L. Ray	Oren Yuen

When the IEEE-SA Standards Board approved IEEE Std 802.3z on 25 June 1998, it had the following membership:

Richard J. Holleman, Chair

Donald N. Heirman, Vice Chair

Judith Gorman, Secretary

Satish K. Aggarwal
Clyde R. Camp
James T. Carlo
Gary R. Engmann
Harold E. Epstein
Jay Forster*
Thomas F. Garritty
Ruben D. Garzon

James H. Gurney
Jim D. Isaak
Lowell G. Johnson
Robert Kennelly
E. G. "Al" Kiener
Joseph L. Koepfinger*
Stephen R. Lambert
Jim Logothetis
Donald C. Loughry

L. Bruce McClung
Louis-François Pau
Ronald C. Petersen
Gerald H. Peterson
John B. Posey
Gary S. Robinson
Hans E. Weinrich
Donald W. Zipse

*Member Emeritus

Kristin M. Dittmann
IEEE Standards Project Editor

Past participants

Working group members

The following individuals participated in the 802.3 working group during various stages of the standard's development. The superscripted letters by each name indicate the document(s) each participant worked on (a = 802.3a, b = 802.3b, etc.). The superscripted letter "o" indicates the original standard (ANSI/IEEE Std 802.3-1985). Complete identification of the documents is included in the officer listing on pages xi–xii. Note that working group participation for maintenance revisions 2, 3, 4, and 5 (802.3m, n, s, and aa) is not included in this listing.

Fazal Abbas^{tv}
Menachem Abraham^{acdehi}
Martin Adams^{uv}
Luc Adriaenssensⁱ
Don Aelmore^{uv}
John R. Agee^{hi}
Paul Ahrens^{iu}
Vish Akella^u
Alan Albrecht^{tv}
Keith Albright^{bcd}
Abe Ali^{uxy}
David Allen^{xy}
John Allenⁱ
Karen Amavisca^{kpqr}
Nitish Amin^{uv}
Keith Amundsen^{dehijkl}
Paul Anderson^{iv}
Richard Anderson^{hijkl}
Stephen J. Anderson^{ijklr}
Jack S. Andresen^k
Ekkehard Antz^{hijk}
Mike Armstrong^{klpqrtuvxy}
Susie Armstrong^{hi}
Phil L. Arst^o
Jean-Pierre Astorg^{de}
R. V. Balakrishnan^{abcdehi}
Mogens Cash Balsby^{ikpqr}
Ian Barker^e
Yoram Barzilai^v
Denis Beaudoin^{uvxy}
William Belknap^{ac}
Richard Bennett^{bcd}
Roberto Bertoldiⁱ
Dave Bethuneⁱ
James Binder^{xy}
Larry Birenbaum^{tuvxy}
Mark Bohrer^{hiltuvxy}
Paul Booth^{uxy}
Samuel Bourche^{uv}
David Bourque^{uv}
Sidney Bouzaglo^{uv}
Richard Bowers^{klpqruvxy}

Richard Brand^{hijklpqrtuv}
Richard S. Brehove^{ijkl}
Robert F. Bridge^o
Charles Brill^{oabcdetuvxy}
Jack Brown^{kpqr}
Suzy Brown^{ijkl}
Juan Bulnes^{abcde}
Bill Bunch^{uxy}
Thomas T. Butler^{hijkl}
Luca Cafiero^{hit}
Peter Campbell^{uvxy}
Robert R. Campbell^{dilxy}
Luigi Canavese^{dehijkl}
J. Scott Carter^{xy}
Jeffrey D. Catlin^{xy}
Kiwon Chang^{uv}
Samuel Chang^{uv}
Howard Charney^{uv}
Giovanni Cherubini^{xy}
Albert Chiang^{xy}
Hon Wah Chin^{uvxy}
Francis Choi^{xy}
Henry Choy^{xy}
Jacques Christ^{htuvxy}
Yue-Der Chzh^v
Albert Claessen^{de}
G. J. Clancy^o
Brice Clark^{tv}
Susan Roden Clarke^{xy}
Michael Coden^{ei}
Kevin Coneⁱ
Patrick Conlon^{tv}
Robert Conte^{hi}
Ronald J. Cooper^{tuv}
Stephen Cooper^{abc}
Neil Cooteⁱ
Ronald Crane^{abtuvsxy}
Ian Crayford^{hikltuvxy}
John Creigh^{xy}
Bill Cronin^{ehi}
Peter Cross^{hijkl}
David Cullerot^{tv}

David Cunningham^{tv}
Joe Curcio^{itv}
Robert A. Curtis^{ijkluvxy}
Saleem Dahmouh^v
Bernard Daines^{uvxy}
Nabil Damouny^{hi}
Mark Darbyⁱ
John Davidson^{oab}
David Davies^{xy}
Edward Davis^{xy}
Peter Dawe^{de}
John DeCramer^{hil}
Steve Deffley^{xy}
Kathryn de Graaf^{flkpqr}
Gerald de Grace^v
Moshe De Leon^{xy}
Ralph DeMent^o
Tazio M. DeNicolò^{il}
Peter Desaulniers^{de}
Mark Devon^{ab}
Sanjay Dhawan^{hijklpqr}
Sean Dingman^{uv}
Thuyen Dinh^{tuv}
Hans Peter Dittler^{xy}
Hank (H. N.) Dorris^o
Dan Dove^{tuvxy}
James Doyle^{uvxy}
Scott Dredge^{ijkl}
Raymond S. Duley^{deh}
Paul Eastman^{bch}
Jeff Ebeling^{de}
Peter Ecclesine^{tuvxy}
Phil Edholm^{abc}
Tom Edsallⁱ
Dean Edwards^{uv}
George Eisler^{uvxy}
Paul "Skip" Elyⁱ
Richard Ely^{hijklv}
Gregory Ennis^{abc}
Gianfranco Enrico^{de}
Norman Erbacher^{hikl}
Nick Esser^{tuvxy}

Judith Estrin^{oab}
 Jim Everitt^u
 Steve Evitts^{hijklpqrt}
 Richard Fabbri^o
 Eldon Feistⁱ
 Severn Ferdun^{jk}
 Mark Feuerstraeter^{xy}
 Dave Fifield^t
 Farzin Firoozmand^{xy}
 Juan Figueroa^{tv}
 David Fischer^{tuv}
 Alan V. Flatman^{abcdehiuv}
 Steve Flickinger^{jklpqr}
 Christian G. Folting^{uv}
 Richard Fransen^{abcde}
 Howard Frazier^{tuvxy}
 Ken Friedenbach^{xy}
 Ingrid Fromm^{oabcdei}
 Atsuhisa Fukuoka^{tuv}
 Mel Gable^{hil}
 Robert Galin^{abcdehi}
 Sharad Gandhi^{bc}
 Tom Gandy^{xy}
 Robin Gangopadhya^{xy}
 Clete Gardenhour^{tv}
 Keith Gerhardt^{xy}
 Mark Gerhold^{deijkl}
 Adi Golbert^{de}
 Steve Goody^{tv}
 Rich Graham^{abceh}
 Robert Gudztv^{tv}
 Andreas Gulle^{hi}
 Karunakar Gulukota^v
 Richard Gumpertz^{bcdehi}
 Sudhir Guptaⁱ
 Stephen Haddock^v
 Clive Hallatt^{hi}
 Kevin Hamilton^h
 Benny Hanigal^{hijkl}
 Mogens Hansenⁱ
 Hacene Hariti^{bcde}
 Guy Harkins^{abc}
 Milton C. Harper^o
 G. R. Hartley^{ijkl}
 Lloyd Hasley^{deh}
 W. B. Hatfield^{hil}
 Stephen Haughey^{hi}
 Haw Ming Haung^{de}
 Kirk Hayden^{xy}
 Carl G. Hayssen^{hil}
 Gaby Hecht^{xy}
 Chris Heegard^{jklpqr}
 Wolfgang Heidasch^{jklpqrtuv}
 Ariel Hendel^{hxy}

Susan Hennenfent^{xy}
 John Hickey^{xy}
 Chip Hicks^h
 William Hingston^h
 Charles Hoffner^{deh}
 Bryan Hoover^o
 Gregory Hopkins^{ab}
 Steven E. Horowitz^{jklpqr}
 Fred Huang^b
 Michael Hughes^{etv}
 Walter Hurwitz^{uxy}
 Stephen Janshego^{bc}
 Jonathan Jedwab^{tv}
 George D. Jelatis^o
 Ernie Jensen^{hituv}
 Ni Jie^{xy}
 Clarence Joh^{hijklpqrtuvxy}
 Richard John^{klv}
 Donald C. Johnson^{bcdehil}
 Howard Johnson^{tuvxy}
 Mize Johnson^{dehi}
 Nick Jones^v
 Anthony Jordan^{uvxy}
 Imre Juhász^{jklpqr}
 Jason Julyan^{xy}
 Kwi-Yung Jung^{bcde}
 Dieter W. Junkers^{hijklpqrtuv}
 Jayant Kadambi^{tv}
 Vic Kairis^{xy}
 Omer Kal^{tuvxy}
 Joel S. Kalmanⁱ
 Matt Kaltenbach^{de}
 Ron Kao^{uv}
 Rainer Kaps^{ijkl}
 Harold W. Katz^o
 Paul Kellam^{bcde}
 Joe Kennedy^{ab}
 Scott Kesler^{deh}
 Tuan Khuu^{xy}
 Gary Kidwell^v
 Bob Kilgore^{hi}
 Yongbum Kim^{hijklrtuv}
 John Kincaid^{hi}
 Bill Kind^{htv}
 Tadayoshi Kitayama^{hi}
 Hiroshi Kobayashi^{abcde}
 Srinivas Kola^u
 Steven Koller^{il}
 Kishan Rao Konda^{xy}
 Paul Kopera^{hi}
 Leonid Koshevoyⁱ
 Donald E. Kotas^o
 William F. Kousⁱ
 Joseph Kozilek^{tuvxy}

Simon Kropveld^{xy}
 George Kubovcik^{tuv}
 Ted Kummertⁱ
 David Kung^{hi}
 Jeffrey Kuo^v
 David Kurcharczyk^{ijkl}
 Christopher Kurker^{xy}
 Hidetsune Kurokawa^{de}
 Lee LaBarre^{bcde}
 Adel Henry Labib^{jk}
 Hans Lackner^{jklpqrtuvxy}
 Gadi Lahat^{xy}
 Erik Lander^{uxy}
 Ed Lare^{bd}
 Tony Lau^{xy}
 Tony Lauck^{abc}
 David Law^{jklpqrtuvxy}
 John Laynor^{bc}
 My Le^v
 Michael Lebar^{ijklpqrtv}
 Chun-Tsung Lee^u
 Jack Lee^{tuvxy}
 Michael Lee^{ehijklpqr}
 Vincent Lefebvre^u
 Richard Lefkowitz^{ijkl}
 Richard Lena^{hil}
 Richard Lewis^u
 Sam Liang^{uvxy}
 William P. Lidinsky^o
 Chan-De Lin^{uv}
 Yoseph L. Linde^{hijklpqr}
 Wayne Lindquist^{dh}
 Laurie Lindsey^o
 Chang-Chi Liu^{uvxy}
 William D. Livingston^{oabc}
 Terry Lockyer^{bcdehijkltuv}
 Hugh Logan^{ab}
 Leland Long^{ab}
 Sherry J. Loreiⁱ
 Don Loughry^{oacdehi}
 Ken Lu^u
 James A. Lucas^{bcdeh}
 Andy J. Luque^{oabcdehijklpqrtuvxy}
 Mark Lynn^{ijkl}
 Ian Lyon^h
 Brian MacLeod^{tuvxy}
 Kenneth MacLeod^{hituv}
 Sam Madani^{tv}
 Randall Magliozi^l
 Daniel Maltbie^{oabc}
 Jim Mangin^{xy}
 Bob Marchetti^v
 Luciano Marchitto^{ehi}
 Charles Marsh^{hijkl}

Robert Marshall^v
 Bob Matthys^h
 Bret A. Matz^{ijkl}
 Joseph Mazor^{btuvxy}
 Mike McConnell^{uvxy}
 John McCool^{uvxy}
 Andy McDonald^v
 Jerry McDowell^o
 Keith McKechnie^{tv}
 Donna McMaster^{ijklpqr}
 Tim McShane^{tuv}
 Grahame Measor^{xy}
 Mukesh Mehta^v
 Avraham Menachem^v
 Mark Merrill^{ijklpqr}
 Yossi Meyouhas^{xy}
 Colin Mick^{uxy}
 Bruce D. Miller^{xy}
 C. Kenneth Miller^o
 Mart L. Molle^{uxy}
 Ray Mompoin^{ijkl}
 Robert L. Morrell^o
 Jack Moses^{tv}
 Steven Moustakas^{abcdehi}
 Shimon Muller^{tuvxy}
 Narayan Murthy^{bhivxy}
 Samba Murthy^{uvxy}
 Ken Naganuma^{xy}
 Wendell Nakamine^{oab}
 W. P. Neblett^o
 Darcy Nelson^{hi}
 James Nelson^o
 Thinh Nguyenphu^l
 Henry T. Nicholas^v
 Larry Nicholson^{tuvxy}
 Paul Nikolich^{ijklpqrtuvxy}
 Bob Norton^{hi}
 Ahmad Nouri^{uxy}
 J. Michael O'Connor^{hiluv}
 Guy P. Oliveira^{xy}
 Chris Oliver^{hijpq}
 Lloyd Oliver^{abcdehiklruxy}
 Keith Onodera^{hi}
 Tony O'Toole^{xy}
 Pat Overs^{tuv}
 Kazuyuki Ozawa^{hijkl}
 Charles Palanzo^l
 Jerry Pate^{tv}
 Piyush Patel^{xy}
 Sandeep Patel^{uvxy}
 Aidan Paul^{bcd}
 Prasun K. Paul^{adjklpqr}
 John Payne^{tuvxy}
 Tony Peatfield^{hijklpqrtuvxy}

Anthony Peck^{ijkl}
 Jim Pelster^t
 Brian Peterson^v
 Thomas L. Phinney^o
 Roy Pierce^{de}
 David Poisner^{ijkl}
 Bill Poston^e
 David Potter^{oabc}
 Kimberly Pottratz^{tv}
 Gideon Prat^{tvxy}
 Robert S. Printis^o
 William Quackenbush^{uvxy}
 Tomas J. Quigley^{uv}
 Mohammad Rajabzadeh^{uvxy}
 Shlomo Rakib^{uv}
 Brian Ramelson^{pqrtuv}
 Brian J. Ramsey^{jkpqrt}
 William Randle^{lpqrt}
 Sailesh K. Rao^{xy}
 Peter Rautenberg^{hijklpqrtuvxy}
 Eric Rawson^{bcde}
 Ivan Reede^l
 Dennis Rehm^{uvxy}
 Eugene Reilly^{ab}
 Jim Reinstedler^{ijklpqr}
 Andreas Rendel^{kl}
 Victor Renteria^{uvxy}
 Bill Reysen^{hi}
 Joseph Rickert^{abcde}
 Sean Riley^{uv}
 Paul Rivett^l
 Anthony Rizzolo^b
 Gary Robinson^{oabcdehijklpqrtuvxy}
 Steven Robinson^{hijkl}
 Timothy Rock^{bcde}
 A. Rodriguez^v
 Carlos Rodriguez^{xy}
 David Roos^{bcde}
 Robert Rosenthal^{oabc}
 Floyd Ross^{tv}
 Michael Rothenberg^{ijklpqrtv}
 Paul F. Russoⁱ
 Khosrow Sadeghi^{tuvxy}
 Joseph St. Amand^{abc}
 Ed Sakaguchi^e
 Moni Samaan^{hi}
 Fred Sammartino^h
 Henry Samueli^v
 F. Sarles^{hi}
 Stan Sassower^{hi}
 Dieter W. Schicketanz^{ijklpqr}
 Ronald Schmidt^{hi}
 Tom Schmitt^{hil}
 Frederick Scholl^{hijklpqrt}

Walter Schreuer^{abcde}
 David Schwartz^{tuvxy}
 Anthony Seaman^{tv}
 Stephn Sedio^{uv}
 Richard Seifert^{tuvxy}
 Koichiro Seto^{uvxy}
 Haim Shafir^{tv}
 Amit Shah^{tv}
 Ron Shani^{hi}
 Sam Shen^{ijkl}
 Paul Sherer^{tuv}
 Chen-Chung Shih^{uxy}
 Ramin Shirani^{xy}
 Martin Siegmund^{pqr}
 Som Sikdar^{tuv}
 Nathan Silberman^{ijkl}
 Charan J. Singh^u
 Paramjeet (P. J.) Singh^{tuvxy}
 Semir Sirazi^{bcdeh}
 Ramesh Sivakolundu^{xy}
 Joseph Skorupa^{hijklpqrtv}
 James P. Skoutas^v
 Dinah Sloan^{jkpqrtuv}
 Tom Slykhouse^{tuvxy}
 David A. Smith^{bcdehijklpqr}
 Eric Smith^{xy}
 Michael Smith^{tuvxy}
 Robert Smith^{vxy}
 Robert W. Smith^{hiv}
 Steve Smith^{hi}
 Robert Snyder^{hi}
 Dror Sofer^{tuv}
 Gregory Somer^{uxy}
 Walter Sotelo^{tuvxy}
 Stephen Soto^{abc}
 Gary Spencer^{ab}
 Michael Spratt^{tv}
 Graham Starkins^{hijkl}
 Peter Staub^{tuvxy}
 David E. Stein^{hijkpqr}
 Gary Stephens^o
 Daniel P. Stokesberry^o
 Steve Storozum^{jkpqrt}
 Rick Strohmayer^{xy}
 Ron Sulyma^{uv}
 Robert Summers^{abcde}
 Ken F. Sumner^o
 Daniel Sze^{ouv}
 Andre Szezepanek^v
 Martin Takessian^{uv}
 Wen-Tsung Tang^{uv}
 Sandray Tarana^{tv}
 Victor J. Tarassov^o
 Peter Tarrant^{ehikltuv}

Mark Taylor^{ehijkl}
 Tim Teckman^{uv}
 Pat Thaler^{abcdehijklpqrtv}
 Douglas Thomson^{hiltuv}
 Geoffrey Thompson^{abcdehijklpqrtuvxy}
 Nathan Tobol^{bdehijklpqr}
 John Todd^v
 Carlos A. Tomaszewski^{dehil}
 Wendell Turner^{abcd}
 Herbert Uhl^{hi}
 Jayshree Ullal^e
 Steven Ulrich^h
 Schelto van Doorn^{xy}
 Robert Verne^{tv}
 Nader Vije^{ijklpqrtuv}
 John Visser^{hi}
 Moshe Voloshin^{tuv}
 John von Voros^v
 William Wager^{il}

P. E. Wainwright^o
 Ikuo Wakayama^{pqrtuv}
 Chang Jung Wang^{tuv}
 Yun-Che Wang^{tuvxy}
 Ken Ward^u
 Jeff Warren^{xy}
 Marc Warshaw^{bc}
 Bruce Watson^{xy}
 Robert Watson^{ijkltuvwxyz}
 Lyle Weiman^o
 Andrew Weitzner^v
 Jim Welch^{tvxy}
 Alan Wetzel^{ijkl}
 David White^{ab}
 Hugh E. White^o
 Lawrence White^a
 Joseph A. Wiencko, Jr.^{dehil}
 Bruce Williams^{deh}
 Richard Williams^{ahi}

Roger Wilmarth^{hi}
 Izumi Wilson^l
 Mike Wincn^{hi}
 Mark Wingrove^{hi}
 Andrew Witzner^t
 David Wong^u
 Don Wong^{tv}
 Paul Woodruff^{ijklpqru}
 Choa-Ping Wu^o
 Shuntaro Yamazaki^{tv}
 Howard Yang^v
 Ronald Yara^{ac}
 Lee Chung Yiu^{xy}
 Nobushige Yokota^{hil}
 Nariman Yousefi^{tuvwxyz}
 Hong Yu^{lv}
 Nick Zades^o
 Jamie Zartman^{uv}
 Mo R. Zonoun^{oab}

Additional individuals who contributed actively in the development of the original standard (ANSI/IEEE Std 802.3-1985) throughout its elaboration were

Juan Bulnes
 Ronald Crane
 Dane Elliot
 Alan V. Flatman
 Maris Graube
 Guy Harkins

Tony Lauck
 Dean Lindsay
 Then T. Liu
 Robert Moles
 Joseph St. Amand
 Richard Seifert
 Nathan Tobol

Mark Townsend
 Roger Van Brunt
 Bo Vicklund
 Chris Wargo
 Richard Williams
 Ronald Yara

The ECMA TC24 Committee on Communication Protocols also provided helpful input in the development of the original standard. The IEC TC83 Committee on Information Technology Equipment also provided very helpful input to the development of the FOIRL standard (802.3d-1987, 9.9).

Officers

The following individuals served as officers of IEEE 802.3 during the development of the standard:

ANSI/IEEE Std 802.3 document	Date approved by IEEE and ANSI	Officers at the time of working group ballot
802.3-1985, Original 10 Mb/s standard, MAC, PLS, AUI, 10BASE5	23 June 1983 (IEEE) 31 December 1984 (ANSI)	Donald C. Loughry , <i>Working Group Chair</i>
802.3a-1988 (Clause 10), 10 Mb/s MAU 10BASE2	15 November 1985 (IEEE) 28 December 1987 (ANSI)	Donald C. Loughry , <i>Working Group Chair</i> Alan Flatman , <i>Task Force Chair</i>
802.3b-1985 (Clause 11), 10 Mb/s Broadband MAU, 10BROAD36	19 September 1985 (IEEE) 28 February 1986 (ANSI)	Donald C. Loughry , <i>Working Group Chair</i> Menachem Abraham , <i>Task Force Chair</i>
802.3c-1985 (9.1–9.8), 10 Mb/s Baseband Repeater	12 December 1985 (IEEE) 4 June 1986 (ANSI)	Donald C. Loughry , <i>Working Group Chair</i> Geoffrey O. Thompson , <i>Task Force Chair</i>
802.3d-1987 (9.9), 10 Mb/s Fiber MAU, FOIRL	10 December 1987 (IEEE) 9 February 1989 (ANSI)	Donald C. Loughry , <i>Working Group Chair</i> Steven Moustakas , <i>Task Force Chair</i>
802.3e-1987 (Clause 12), 1 Mb/s MAU and Hub 1BASE5	11 June 1987 (IEEE) 15 December 1987 (ANSI)	Donald C. Loughry , <i>Working Group Chair</i> Robert Galin , <i>Task Force Chair</i>
802.3h-1990 (Clause 5), 10 Mb/s Layer Management, DTEs	28 September 1990 (IEEE) 11 March 1991 (ANSI)	Donald C. Loughry , <i>Working Group Chair</i> Andy J. Luque , <i>Task Force Chair</i>
802.3i-1990 (Clauses 13 and 14), 10 Mb/s UTP MAU, 10 BASE-T	28 September 1990 (IEEE) 11 March 1991 (ANSI)	Donald C. Loughry , <i>Working Group Chair</i> Patricia Thaler , <i>Task Force Chair (initial)</i> Richard Anderson , <i>Task Force Chair (final)</i>
802.3j-1993 (Clauses 15–18), 10 Mb/s Fiber MAUs 10BASE-FP, FB, and FL	15 September 1993 (IEEE) 15 March 1994 (ANSI)	Patricia Thaler , <i>Working Group Chair</i> Keith Amundsen , <i>Task Force Chair (initial)</i> Frederick Scholl , <i>Task Force Chair (final)</i> Michael E. Lee , <i>Technical Editor</i>
802.3k-1993 (Clause 19), 10 Mb/s Layer Management, Repeaters	17 September 1992 (IEEE) 8 March 1993 (ANSI)	Patricia Thaler , <i>Working Group Chair</i> Joseph S. Skorupa , <i>Task Force Chair</i> Geoffrey O. Thompson , <i>Vice Chair and Editor</i>
802.3l-1992 (14.10), 10 Mb/s PICS Proforma 10BASE-T MAU	17 September 1992 (IEEE) 23 February 1993 (ANSI)	Patricia Thaler , <i>Working Group Chair</i> Mike Armstrong , <i>Task Force Chair and Editor</i> Paul Nikolich , <i>Vice Chair</i> William Randle , <i>Editorial Coordinator</i>
802.3m-1995, Maintenance 2	21 September 1995 (IEEE) 16 July 1996 (ANSI)	Patricia Thaler , <i>Working Group Chair</i> Gary Robinson , <i>Maintenance Chair</i>
802.3n-1995, Maintenance 3	21 September 1995 (IEEE) 4 April 1996 (ANSI)	Patricia Thaler , <i>Working Group Chair</i> Gary Robinson , <i>Maintenance Chair</i>
802.3p-1993 (Clause 20), Management, 10 Mb/s Integrated MAUs	17 June 1993 (IEEE) 4 January 1994 (ANSI)	Patricia Thaler , <i>Working Group Chair</i> Joseph S. Skorupa , <i>Task Force Chair</i> Geoffrey O. Thompson , <i>Vice Chair and Editor</i>

ANSI/IEEE Std 802.3 document	Date approved by IEEE and ANSI	Officers at the time of working group ballot
802.3q-1993 (Clause 5), 10 Mb/s Layer Management, GDMO Format	17 June 1993 (IEEE) 4 January 1994 (ANSI)	Patricia Thaler , <i>Working Group Chair</i> Joseph S. Skorupa , <i>Task Force Chair</i> Geoffrey O. Thompson , <i>Vice Chair and Editor</i>
802.3r-1996 (8.8), Type 10BASE5 Medium Attachment Unit PICS proforma	29 July 1996 (IEEE) 6 January 1997 (ANSI)	Patricia Thaler , <i>Working Group Chair</i> Imre Juhász , <i>Task Force Chair</i> William Randle , <i>Task Force Editor</i>
802.3s-1995, Maintenance 4	21 September 1995 (IEEE) 8 April 1996 (ANSI)	Geoffrey O. Thompson , <i>Working Group Chair</i> Gary Robinson , <i>Maintenance Chair</i>
802.3t-1995, 120 Ω informative annex to 10BASE-T	14 June 1995 (IEEE) 12 January 1996 (ANSI)	Geoffrey O. Thompson , <i>Working Group Chair</i> Jacques Christ , <i>Task Force Chair</i>
802.3u-1995 (Clauses 21–30), Type 100BASE-T MAC parameters, Physical Layer, MAUs, and Repeater for 100 Mb/s Operation	14 June 1995 (IEEE) 4 April 1996 (ANSI)	Geoffrey O. Thompson , <i>Working Group Chair</i> Peter Tarrant , <i>Task Force Chair (Phase 1)</i> Howard Frazier , <i>Task Force Chair (Phase 2)</i> Paul Sherer , <i>Editor-in-Chief (Phase 1)</i> Howard Johnson , <i>Editor-in-Chief (Phase 2)</i> Colin Mick , <i>Comment Editor</i>
802.3v-1995, 150 Ω informative annex to 10BASE-T	12 December 1995 (IEEE) 16 July 1996 (ANSI)	Geoffrey O. Thompson , <i>Working Group Chair</i> Larry Nicholson , <i>Task Force Chair</i>
802.3x-1997 and 802.3y-1997 (Revisions to 802.3, Clauses 31 and 32), Full Duplex Operation and Type 100BASE-T2	20 March 1997 (IEEE) 5 September 1997 (ANSI)	Geoffrey O. Thompson , <i>Chair</i> David J. Law , <i>Vice Chair</i> Rich Seifert , <i>Task Force Chair and Editor (802.3x)</i> J. Scott Carter , <i>Task Force Chair (802.3y)</i> Colin Mick , <i>Task Force Editor (802.3y)</i>
802.3z-1998 (Clauses 34–39, 41–42), Type 1000BASE-X MAC Parameters, Physical Layer, Repeater, and Management Parameters for 1000 Mb/s Operation	25 June 1998 (IEEE)	Geoffrey O. Thompson , <i>Chair</i> David J. Law , <i>Vice Chair</i> Howard M. Frazier, Jr. , <i>Task Force Chair and Editor</i> Howard W. Johnson , <i>Task Force Editor</i>
802.3aa-1998, Maintenance 5	25 June 1998 (IEEE)	Geoffrey O. Thompson , <i>Chair</i> Colin Mick , <i>Task Force Editor (100BASE-T Maintenance)</i>

Kristin Dittmann was the IEEE Standards Project Editor who prepared this edition.

ISO/IEC status

Certain portions of this standard have been approved at the international level and form standard ISO/IEC 8802-3: 1996. The remainder of IEEE Std 802.3 is in the process of ISO/IEC approval via the “fast-track” process. Any comments on the fast-track DIS will be handled in ISO/IEC JTC 1/SC 6. Details are provided below.

- Clauses 1–20 were previously published as ISO/IEC 8802-3: 1996.
- **ISO/IEC 8802-3 amendment project 20 (Maintenance #4)** was previously published as DAM 20 in the rear of ISO/IEC 8802-3: 1996. It is now integrated into the text of this document in Clauses 7 and 8.
- **ISO/IEC 8802-3 amendment project 21 (100BASE-T)** is integrated into the text of this document in Clauses 21 through 30.
- **ISO/IEC 8802-3 amendment project 23 (10BASE5 MAU PICS Proforma)** is integrated into the text of this document as subclause 8.8.
- **ISO/IEC 8802-3 amendment project 24 (Full Duplex Operation and 100BASE-T2)**. Full Duplex is integrated into the text of this document with changes to Clauses 1–4, 6, 7, 13–15, 18, 21–24, 27–30, and added Clause 31. 100BASE-T2 is specified in Clause 32.
- **ISO/IEC 8802-3 amendment project 25** was previously merged with DAM 24.
- **ISO/IEC 8802-3 amendment project 26 (Gigabit Ethernet, IEEE Std 802.3z)** is integrated into the text of this document as Clauses 34–42 with some changes to Clauses 4 and 28.
- **ISO/IEC 8802-3 amendment project 27 (Maint. #5, IEEE Std 802.3aa)** is integrated into the text of this document with changes to Clause 27.

The fully integrated text has been submitted to ISO/IEC for approval (Ref: ISO/IEC DIS 8802-3). For up-to-date information on the ISO/IEC approval status of this edition, see

<http://grouper.ieee.org/groups/802/3/ISO-status.html>

Contents

1.	Introduction.....	1
1.1	Overview.....	1
1.1.1	Basic concepts	1
1.1.2	Architectural perspectives	2
1.1.3	Layer interfaces	4
1.1.4	Application areas	4
1.2	Notation	4
1.2.1	State diagram conventions	4
1.2.2	Service specification method and notation	5
1.2.3	Physical Layer and media notation.....	6
1.2.4	Physical Layer message notation.....	7
1.3	Normative references	7
1.4	Definitions	11
1.5	Abbreviations.....	28
2.	Media Access Control (MAC) service specification	31
2.1	Scope and field of application	31
2.2	Overview of the service	31
2.2.1	General description of services provided by the layer.....	31
2.2.2	Model used for the service specification	31
2.2.3	Overview of interactions.....	32
2.2.4	Basic services and options	32
2.3	Detailed service specification	32
2.3.1	MA_DATA.request	32
2.3.2	MA_DATA.indication.....	33
2.3.3	MA_CONTROL.request.....	34
2.3.4	MA_CONTROL.indication	35
3.	Media access control frame structure	36
3.1	Overview.....	36
3.1.1	MAC frame format	36
3.2	Elements of the MAC frame.....	37
3.2.1	Preamble field	37
3.2.2	Start Frame Delimiter (SFD) field.....	37
3.2.3	Address fields	37
3.2.4	Destination Address field	38
3.2.5	Source Address field.....	38
3.2.6	Length/Type field	38
3.2.7	Data and PAD fields	38
3.2.8	Frame Check Sequence (FCS) field	39
3.3	Order of bit transmission	39
3.4	Invalid MAC frame.....	39
4.	Media Access Control.....	41
4.1	Functional model of the MAC method	41
4.1.1	Overview.....	41
4.1.2	CSMA/CD operation	42

4.1.3	Relationships to the MAC client and Physical Layers	44
4.1.4	CSMA/CD access method functional capabilities.....	45
4.2	CSMA/CD Media Access Control (MAC) method: Precise specification.....	46
4.2.1	Introduction.....	46
4.2.2	Overview of the procedural model	46
4.2.3	Frame transmission model	53
4.2.4	Frame reception model	57
4.2.5	Preamble generation	58
4.2.6	Start frame sequence.....	59
4.2.7	Global declarations	59
4.2.8	Frame transmission.....	62
4.2.9	Frame reception	69
4.2.10	Common procedures	72
4.3	Interfaces to/from adjacent layers.....	73
4.3.1	Overview.....	73
4.3.2	Services provided by the MAC sublayer	73
4.3.3	Services required from the physical layer	74
4.4	Specific implementations.....	76
4.4.1	Compatibility overview	76
4.4.2	Allowable implementations	77
4.4.3	Configuration guidelines	79
5.	Layer Management	80
5.1	Introduction.....	80
5.1.1	Systems Management overview	80
5.1.2	Layer Management model	80
5.1.3	Packages	81
5.1.4	Conformance requirements.....	81
5.2	Management facilities.....	81
5.2.1	Introduction.....	81
5.2.2	DTE MAC Sublayer Management facilities.....	81
5.2.3	DTE Physical Sublayer Management facilities	91
5.2.4	DTE Management procedural model.....	92
6.	Physical Signaling (PLS) service specifications.....	97
6.1	Scope and field of application	97
6.2	Overview of the service	97
6.2.1	General description of services provided by the layer.....	97
6.2.2	Model used for the service specification	97
6.2.3	Overview of interactions.....	97
6.2.4	Basic services and options	98
6.3	Detailed service specification	98
6.3.1	Peer-to-peer service primitives	98
6.3.2	Sublayer-to-sublayer service primitives	99
7.	Physical Signaling (PLS) and Attachment Unit Interface (AUI) specifications.....	101
7.1	Scope.....	101
7.1.1	Definitions	101
7.1.2	Summary of major concepts	101
7.1.3	Application	102
7.1.4	Modes of operation	102

7.1.5	Allocation of function.....	102
7.2	Functional specification.....	102
7.2.1	PLS–PMA (DTE–MAU) Interface protocol	102
7.2.2	PLS interface to MAC and management entities	109
7.2.3	Frame structure	111
7.2.4	PLS functions.....	112
7.3	Signal characteristics	115
7.3.1	Signal encoding	115
7.3.2	Signaling rate	120
7.3.3	Signaling levels.....	120
7.4	Electrical characteristics	120
7.4.1	Driver characteristics	120
7.4.2	Receiver characteristics	123
7.4.3	AUI cable characteristics.....	125
7.5	Functional description of interchange circuits.....	127
7.5.1	General.....	127
7.5.2	Definition of interchange circuits	127
7.6	Mechanical characteristics.....	129
7.6.1	Definition of mechanical interface	129
7.6.2	Line interface connector	129
7.6.3	Contact assignments	130
8.	Medium Attachment Unit and baseband medium specifications, type 10BASE5	133
8.1	Scope.....	133
8.1.1	Overview.....	133
8.1.2	Definitions	134
8.1.3	Application perspective: MAU and MEDIUM objectives	134
8.2	MAU functional specifications.....	135
8.2.1	MAU Physical Layer functions	135
8.2.2	MAU interface messages.....	138
8.2.3	MAU state diagrams	139
8.3	MAU–medium electrical characteristics	140
8.3.1	MAU-to-coaxial cable interface	140
8.3.2	MAU electrical characteristics	146
8.3.3	MAU–DTE electrical characteristics.....	146
8.3.4	MAU–DTE mechanical connection	146
8.4	Characteristics of the coaxial cable	147
8.4.1	Coaxial cable electrical parameters	147
8.4.2	Coaxial cable properties	148
8.4.3	Total segment dc loop resistance.....	149
8.5	Coaxial trunk cable connectors.....	150
8.5.1	Inline coaxial extension connector	150
8.5.2	Coaxial cable terminator.....	150
8.5.3	MAU-to-coaxial cable connection.....	150
8.6	System considerations	153
8.6.1	Transmission system model.....	153
8.6.2	Transmission system requirements.....	153
8.6.3	Labeling.....	154
8.7	Environmental specifications.....	154
8.7.1	General safety requirements	154
8.7.2	Network safety requirements.....	154
8.7.3	Electromagnetic environment.....	156
8.7.4	Temperature and humidity.....	157

8.7.5	Regulatory requirements.....	157
8.8	Protocol Implementation Conformance Statement (PICS) proforma for Clause 8, Medium Attachment Unit and baseband medium specifications, type 10BASE5	158
8.8.1	Overview.....	158
8.8.2	Abbreviations and special symbols	158
8.8.3	Instructions for completing the PICS proforma.....	158
8.8.4	Identification.....	160
8.8.5	Global statement of conformance.....	160
8.8.6	PICS proforma tables for MAU.....	161
8.8.7	PICS proforma tables for MAU AUI characteristics.....	168
8.8.8	PICS proforma tables for 10BASE5 coaxial cable.....	171
9.	Repeater unit for 10 Mb/s baseband networks.....	172
9.1	Overview.....	172
9.2	References.....	173
9.3	Definitions	173
9.4	Compatibility interface	173
9.4.1	AUI compatibility.....	173
9.4.2	Mixing segment compatibility.....	173
9.4.3	Link segment compatibility	174
9.5	Basic functions.....	174
9.5.1	Repeater set network properties.....	174
9.5.2	Signal amplification.....	174
9.5.3	Signal symmetry	174
9.5.4	Signal retiming.....	175
9.5.5	Data handling.....	175
9.5.6	Collision handling.....	176
9.5.7	Electrical isolation	177
9.6	Detailed repeater functions and state diagrams	178
9.6.1	State diagram notation	178
9.6.2	Data and collision handling	181
9.6.3	Preamble regeneration	182
9.6.4	Fragment extension.....	182
9.6.5	MAU Jabber Lockup Protection.....	182
9.6.6	Auto-Partitioning/Reconnection (optional)	182
9.7	Electrical isolation	183
9.7.1	Environment A requirements.....	185
9.7.2	Environment B requirements.....	185
9.7.3	Environment A requirements.....	185
9.7.4	Environment B requirements.....	185
9.8	Reliability	186
9.9	Medium attachment unit and baseband medium specification for a vendor-independent FOIRL.....	186
9.9.1	Scope.....	186
9.9.2	FOMAU functional specifications.....	188
9.9.3	FOMAU electrical characteristics	194
9.9.4	FOMAU/Optical medium interface	195
9.9.5	Characteristics of the optical fiber cable link segment.....	198
9.9.6	System requirements.....	199
9.9.7	Environmental specifications.....	200

10.	Medium attachment unit and baseband medium specifications, type 10BASE2	202
10.1	Scope.....	202
10.1.1	Overview.....	202
10.1.2	Definitions	203
10.1.3	Application perspective: MAU and medium objectives.....	203
10.2	References.....	204
10.3	MAU functional specifications.....	204
10.3.1	MAU Physical Layer functional requirements	204
10.3.2	MAU interface messages	207
10.3.3	MAU state diagrams	209
10.4	MAU–medium electrical characteristics	210
10.4.1	MAU-to-coaxial cable interface	210
10.4.2	MAU electrical characteristics	212
10.4.3	MAU–DTE electrical characteristics.....	213
10.5	Characteristics of coaxial cable system	213
10.5.1	Coaxial cable electrical parameters	213
10.5.2	Coaxial cable physical parameters.....	214
10.5.3	Total segment dc loop resistance	215
10.6	Coaxial trunk cable connectors.....	215
10.6.1	In-line coaxial extension connector	216
10.6.2	Coaxial cable terminator.....	217
10.6.3	MAU-to-coaxial cable connection.....	217
10.7	System considerations	217
10.7.1	Transmission system model.....	217
10.7.2	Transmission system requirements.....	219
10.8	Environmental specifications.....	220
10.8.1	Safety requirements	220
10.8.2	Electromagnetic environment.....	220
10.8.3	Regulatory requirements.....	220
11.	Broadband medium attachment unit and broadband medium specifications, type 10BROAD36.....	221
11.1	Scope.....	221
11.1.1	Overview.....	221
11.1.2	Definitions	223
11.1.3	MAU and medium objectives	223
11.1.4	Compatibility considerations	223
11.1.5	Relationship to PLS and AUI	224
11.1.6	Mode of operation.....	224
11.2	MAU functional specifications.....	224
11.2.1	MAU functional requirements.....	224
11.2.2	DTE PLS to MAU and MAU to DTE PLS messages	227
11.2.3	MAU state diagrams	228
11.3	MAU characteristics	231
11.3.1	MAU-to-coaxial cable interface	231
11.3.2	MAU frequency allocations.....	236
11.3.3	AUI electrical characteristics.....	237
11.3.4	MAU transfer characteristics.....	238
11.3.5	Reliability	244
11.4	System considerations	244
11.4.1	Delay budget and network diameter	244
11.4.2	MAU operation with packets shorter than 512 bits	245

11.5	Characteristics of the coaxial cable system	246
11.5.1	Electrical requirements	246
11.5.2	Mechanical requirements	246
11.5.3	Delay requirements	246
11.6	Frequency translator requirements for the single-cable version	247
11.6.1	Electrical requirements	247
11.6.2	Mechanical requirements	247
11.7	Environmental specifications	247
11.7.1	Safety requirements	247
11.7.2	Electromagnetic environment	248
11.7.3	Temperature and humidity	248
12.	Physical signaling, medium attachment, and baseband medium specifications, type 1BASE5	249
12.1	Introduction	249
12.1.1	Overview	249
12.1.2	Scope	249
12.1.3	Definitions	250
12.1.4	General characteristics	250
12.1.5	Compatibility	250
12.1.6	Objectives of type 1BASE5 specification	250
12.2	Architecture	250
12.2.1	Major concepts	250
12.2.2	Application perspective	252
12.2.3	Packet structure	252
12.3	DTE physical signaling (PLS) specification	253
12.3.1	Overview	253
12.3.2	Functional specification	254
12.4	Hub specification	261
12.4.1	Overview	261
12.4.2	Hub structure	262
12.4.3	Hub PLS functional specification	263
12.5	Physical medium attachment (PMA) specification	268
12.5.1	Overview	268
12.5.2	PLS–PMA interface	268
12.5.3	Signal characteristics	269
12.6	Medium Dependent Interface (MDI) specification	276
12.6.1	Line interface connector	276
12.6.2	Connector contact assignments	276
12.6.3	Labeling	277
12.7	Cable medium characteristics	277
12.7.1	Overview	277
12.7.2	Transmission parameters	277
12.7.3	Coupling parameters	278
12.7.4	Noise environment	279
12.8	Special link specification	281
12.8.1	Overview	281
12.8.2	Transmission characteristics	281
12.8.3	Permitted configurations	281
12.9	Timing	281
12.9.1	Overview	281
12.9.2	DTE timing	281
12.9.3	Medium timing	282
12.9.4	Special link timing	282

12.9.5	Hub timing	282
12.10	Safety	283
12.10.1	Isolation	283
12.10.2	Telephony voltages.....	283
13.	System considerations for multisegment 10 Mb/s baseband networks	284
13.1	Overview.....	284
13.1.1	Repeater usage	285
13.2	Definitions	285
13.3	Transmission System Model 1.....	285
13.4	Transmission System Model 2.....	290
13.4.1	Round-trip collision delay	290
13.4.2	Interpacket gap (IPG) shrinkage	291
13.5	Full duplex topology limitations.....	292
14.	Twisted-pair medium attachment unit (MAU) and baseband medium, type 10BASE-T.....	293
14.1	Scope.....	293
14.1.1	Overview.....	293
14.1.2	Definitions	294
14.1.3	Application perspective	294
14.1.4	Relationship to PLS and AUI	296
14.2	MAU functional specifications.....	296
14.2.1	MAU functions	297
14.2.2	PMA interface messages.....	301
14.2.3	MAU state diagrams	302
14.3	MAU electrical specifications	305
14.3.1	MAU-to-MDI interface characteristics.....	305
14.3.2	MAU-to-AUI specification.....	316
14.4	Characteristics of the simplex link segment	316
14.4.1	Overview.....	317
14.4.2	Transmission parameters	317
14.4.3	Coupling parameters	318
14.4.4	Noise environment.....	318
14.5	MDI specification	319
14.5.1	MDI connectors	319
14.5.2	Crossover function.....	319
14.6	System considerations	320
14.7	Environmental specifications.....	320
14.7.1	General safety	320
14.7.2	Network safety.....	320
14.7.3	Environment	322
14.8	MAU labeling.....	323
14.9	Timing summary.....	324
14.10	Protocol Implementation Conformance Statement (PICS) proforma for Clause 14, Twisted-pair medium attachment unit (MAU) and baseband medium, type 10BASE-T	325
14.10.1	Introduction.....	325
14.10.2	Identification of implementation	326
14.10.3	Identification of the protocol	326
14.10.4	PICS proforma for 10BASE-T	327

15.	Fiber optic medium and common elements of medium attachment units and star, type 10BASE-F	342
15.1	Scope.....	342
15.1.1	Overview.....	342
15.1.2	Definitions	343
15.1.3	Applications perspective: MAUs, stars, and fiber optic medium.....	343
15.2	MDI optical characteristics.....	347
15.2.1	Transmit optical parameters	347
15.2.2	Receive optical parameters.....	353
15.3	Characteristics of the fiber optic medium.....	353
15.3.1	Optical fiber and cable.....	354
15.3.2	Optical medium connector plug and socket.....	354
15.3.3	Fiber optic medium insertion loss.....	356
15.3.4	Electrical isolation	356
15.4	MAU reliability	356
15.5	MAU–AUI specification	356
15.5.1	MAU–AUI electrical characteristics	356
15.5.2	MAU–AUI mechanical connections.....	357
15.5.3	Power consumption	357
15.5.4	MAU–AUI messages.....	357
15.6	Environmental specifications.....	358
15.6.1	Safety requirements	358
15.6.2	Electromagnetic environment.....	358
15.6.3	Other environmental requirements	358
15.7	MAU labeling.....	359
15.7.1	10BASE-FP star labeling.....	359
15.8	Protocol implementation conformance statement (PICS) proforma for Clause 15, Fiber optic medium and common elements of medium attachment units and star, type 10BASE-F.....	360
15.8.1	Introduction.....	360
15.8.2	Abbreviations and special symbols	360
15.8.3	Instructions for completing the pics proforma.....	360
15.8.4	Identification.....	363
15.8.5	Major capabilities/options	364
15.8.6	PICS Proforma for the fiber optic medium.....	364
16.	Fiber optic passive star and medium attachment unit, type 10BASE-FP	366
16.1	Scope.....	366
16.1.1	Overview.....	366
16.2	PMA interface messages.....	367
16.2.1	PMA-to-MDI interface signal encodings	367
16.2.2	PMA-to-MDI OTD messages.....	367
16.2.3	MDI ORD-to-PMA messages.....	368
16.3	10BASE-FP MAU functional specifications.....	369
16.3.1	Transmit function requirements.....	369
16.3.2	Receive function requirements	371
16.3.3	Loopback function requirements	371
16.3.4	Collision presence function requirements	372
16.3.5	<i>signal_quality_error</i> Message (SQE) Test function requirements.....	373
16.3.6	Jabber function requirements.....	373
16.3.7	Link fault detection and low light function requirements	374
16.3.8	Interface message time references	375

16.3.9	MAU state diagram.....	375
16.4	Timing summary.....	383
16.5	10BASE-FP Star functional specifications.....	383
16.5.1	Star functions.....	383
16.5.2	Star optical characteristics	384
16.6	Protocol Implementation Conformance Statement (PICS) proforma for Clause 16, Fiber optic passive star and medium attachment unit, type 10BASE-FP	385
16.6.1	Introduction.....	385
16.6.2	Abbreviations and special symbols	385
16.6.3	Instructions for completing the PICS proforma.....	385
16.6.4	Identification.....	387
16.6.5	Major capabilities/options	388
16.6.6	PICS proforma for the type 10BASE-FP MAU	388
16.6.7	PICS proforma tables for 10BASE-FP stars.....	400
17.	Fiber optic medium attachment unit, type 10BASE-FB.....	402
17.1	Scope.....	402
17.1.1	Overview.....	402
17.1.2	Relationship to AUI.....	402
17.2	PMA interface messages.....	403
17.2.1	PMA-to-MDI interface signal encodings	403
17.2.2	PMA-to-MDI OTD messages.....	403
17.2.3	MDI ORD-to-PMA messages.....	404
17.2.4	Transitions between signals.....	405
17.2.5	Signaling rate	405
17.3	MAU functional specifications.....	405
17.3.1	Transmit function requirements.....	405
17.3.2	Receive function requirements	406
17.3.3	Collision function requirements	406
17.3.4	Loopback function requirements	407
17.3.5	Fault-handling function requirements.....	407
17.3.6	Jabber function requirements.....	407
17.3.7	Low light level detection function requirements	408
17.3.8	Synchronous qualification function requirements	408
17.3.9	Interface message time references	408
17.3.10	MAU state diagrams	409
17.4	Timing summary.....	412
17.5	Protocol implementation conformance statement (PICS) proforma for Clause 17, Fiber optic medium attachment unit, type 10BASE-FB.....	414
17.5.1	Introduction.....	414
17.5.2	Abbreviations and special symbols	414
17.5.3	Instructions for completing the PICS proforma.....	414
17.5.4	Identification.....	416
17.5.5	PICS proforma for the type 10BASE-FB MAU.....	417
17.5.6	PICS proforma for the type 10BASE-FB MAU.....	417
18.	Fiber optic medium attachment unit, type 10BASE-FL	427
18.1	Scope.....	427
18.1.1	Overview.....	427
18.2	PMA interface messages.....	427
18.2.1	PMA to fiber optic link segment messages	428
18.2.2	Fiber optic link segment to PMA messages	428

18.2.3	Interface message time references	429
18.3	MAU functional specifications	429
18.3.1	MAU functions	429
18.3.2	MAU state diagrams	433
18.4	Timing summary	440
18.5	Protocol implementation conformance statement (PICS) proforma for Clause 18, Fiber optic medium attachment unit, type 10BASE-FL	441
18.5.1	Introduction	441
18.5.2	Abbreviations and special symbols	441
18.5.3	Instructions for completing the PICS proforma	442
18.5.4	Identification	444
18.5.5	Major capabilities/options	445
18.5.6	PICS proforma tables for the type 10BASE-FL MAU	445
19.	Layer Management for 10 Mb/s baseband repeaters	457
19.1	Introduction	457
19.1.1	Scope	457
19.1.2	Relationship to objects in IEEE Std 802.1F-1993	457
19.1.3	Definitions	457
19.1.4	Symbols and abbreviations	457
19.1.5	Management model	458
19.2	Managed objects	459
19.2.1	Introduction	459
19.2.2	Overview of managed objects	459
19.2.3	Repeater managed object class	464
19.2.4	ResourceTypeID Managed Object Class	467
19.2.5	Group managed object class	467
19.2.6	Port managed object class	468
20.	Layer Management for 10 Mb/s baseband medium attachment units	474
20.1	Introduction	474
20.1.1	Scope	474
20.1.2	Management model	474
20.2	Managed objects	474
20.2.1	Text description of managed objects	474
20.2.2	MAU Managed object class	476
21.	Introduction to 100 Mb/s baseband networks, type 100BASE-T	480
21.1	Overview	480
21.1.1	Reconciliation Sublayer (RS) and Media Independent Interface (MII)	481
21.1.2	Physical Layer signaling systems	481
21.1.3	Repeater	481
21.1.4	Auto-Negotiation	481
21.1.5	Management	481
21.2	References	481
21.3	Definitions	481
21.4	Abbreviations	481
21.5	State diagrams	482
21.5.1	Actions inside state blocks	482
21.5.2	State diagram variables	482
21.5.3	State transitions	482

21.5.4	Operators.....	482
21.6	Protocol Implementation Conformance Statement (PICS) proforma.....	483
21.6.1	Introduction.....	483
21.6.2	Abbreviations and special symbols	483
21.6.3	Instructions for completing the PICS proforma.....	484
21.6.4	Additional information	484
21.6.5	Exceptional information	485
21.6.6	Conditional items.....	485
21.7	Relation of 100BASE-T to other standards	485
21.8	MAC delay constraints (exposed MII)	487
22.	Reconciliation Sublayer (RS) and Media Independent Interface (MII).....	488
22.1	Overview.....	488
22.1.1	Summary of major concepts	489
22.1.2	Application	489
22.1.3	Rates of operation.....	490
22.1.4	Allocation of functions	490
22.1.5	Relationship of MII and GMII.....	490
22.2	Functional specifications	490
22.2.1	Mapping of MII signals to PLS service primitives and Station Management.....	490
22.2.2	MII signal functional specifications	494
22.2.3	Frame structure	500
22.2.4	Management functions.....	503
22.3	Signal timing characteristics.....	514
22.3.1	Signals that are synchronous to TX_CLK	515
22.3.2	Signals that are synchronous to RX_CLK.....	515
22.3.3	Signals that have no required clock relationship	516
22.3.4	MDIO timing relationship to MDC	516
22.4	Electrical characteristics	516
22.4.1	Signal levels.....	517
22.4.2	Signal paths.....	517
22.4.3	Driver characteristics	518
22.4.4	Receiver characteristics	519
22.4.5	Cable characteristics	520
22.4.6	Hot insertion and removal	521
22.5	Power supply	521
22.5.1	Supply voltage	521
22.5.2	Load current.....	521
22.5.3	Short-circuit protection	521
22.6	Mechanical characteristics.....	522
22.6.1	Definition of mechanical interface	522
22.6.2	Shielding effectiveness and transfer impedance.....	522
22.6.3	Connector pin numbering	523
22.6.4	Clearance dimensions	523
22.6.5	Contact assignments	524
22.7	Protocol Implementation Conformance Statement (PICS) proforma for Clause 22, Reconciliation Sublayer (RS) and Media Independent Interface (MII)	525
22.7.1	Introduction.....	525
22.7.2	Identification.....	525
22.7.3	PICS proforma tables for reconciliation sublayer and media independent interface	526

23.	Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer and baseband medium, type 100BASE-T4.....	535
23.1	Overview.....	535
23.1.1	Scope.....	535
23.1.2	Objectives	535
23.1.3	Relation of 100BASE-T4 to other standards	535
23.1.4	Summary	535
23.1.5	Application of 100BASE-T4	538
23.2	PCS functional specifications	539
23.2.1	PCS functions	539
23.2.2	PCS interfaces.....	544
23.2.3	Frame structure	544
23.2.4	PCS state diagrams	545
23.2.5	PCS electrical specifications.....	553
23.3	PMA service interface	553
23.3.1	PMA_TYPE.indicate	554
23.3.2	PMA_UNITDATA.request	554
23.3.3	PMA_UNITDATA.indicate	555
23.3.4	PMA_CARRIER.indicate.....	556
23.3.5	PMA_LINK.indicate	556
23.3.6	PMA_LINK.request.....	557
23.3.7	PMA_RXERROR.indicate	558
23.4	PMA functional specifications	558
23.4.1	PMA functions.....	558
23.4.2	PMA interface messages.....	562
23.4.3	PMA state diagrams.....	563
23.5	PMA electrical specifications	566
23.5.1	PMA-to-MDI interface characteristics	566
23.5.2	Power consumption	578
23.6	Link segment characteristics.....	579
23.6.1	Cabling.....	579
23.6.2	Link transmission parameters	579
23.6.3	Noise	581
23.6.4	Installation practice.....	582
23.7	MDI specification	583
23.7.1	MDI connectors	583
23.7.2	Crossover function.....	584
23.8	System considerations	584
23.9	Environmental specifications.....	584
23.9.1	General safety	584
23.9.2	Network safety.....	584
23.9.3	Environment	586
23.10	PHY labeling	586
23.11	Timing summary.....	587
23.11.1	Timing references	587
23.11.2	Definitions of controlled parameters	588
23.11.3	Table of required timing values.....	590
23.12	Protocol Implementation Conformance Statement (PICS) proforma for Clause 23, Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer, and baseband medium, type 100BASE-T4	597
23.12.1	Introduction.....	597
23.12.2	Identification.....	597
23.12.3	Major capabilities/options	598

23.12.4	PICS proforma tables for the Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer and baseband medium, type 100BASE-T4	598
24.	Physical Coding Sublayer (PCS) and Physical Medium Attachment (PMA) sublayer, type 100BASE-X	611
24.1	Overview.....	611
24.1.1	Scope.....	611
24.1.2	Objectives	611
24.1.3	Relationship of 100BASE-X to other standards	611
24.1.4	Summary of 100BASE-X sublayers	612
24.1.5	Inter-sublayer interfaces	613
24.1.6	Functional block diagram	613
24.1.7	State diagram conventions	613
24.2	Physical Coding Sublayer (PCS).....	616
24.2.1	Service Interface (MII)	616
24.2.2	Functional requirements	616
24.2.3	State variables	621
24.2.4	State diagrams.....	623
24.3	Physical Medium Attachment (PMA) sublayer.....	627
24.3.1	Service interface	627
24.3.2	Functional requirements	632
24.3.3	State variables	633
24.3.4	Process specifications and state diagrams	635
24.4	Physical Medium Dependent (PMD) sublayer service interface.....	638
24.4.1	PMD service interface	638
24.4.2	Medium Dependent Interface (MDI).....	641
24.5	Compatibility considerations	641
24.6	Delay constraints	642
24.6.1	PHY delay constraints (exposed MII)	642
24.6.2	DTE delay constraints (unexposed MII).....	643
24.6.3	Carrier de-assertion/assertion constraint (half duplex mode only).....	643
24.7	Environmental specifications.....	643
24.8	Protocol Implementation Conformance Statement (PICS) proforma for Clause 24, Physical Coding Sublayer (PCS) and Physical Medium Attachment (PMA) sublayer, type 100BASE-X	644
24.8.1	Introduction.....	644
24.8.2	Identification.....	644
24.8.3	PICS proforma tables for the Physical Coding Sublayer (PCS) and Physical Medium Attachment (PMA) sublayer, type 100BASE-X	645
25.	Physical Medium Dependent (PMD) sublayer and baseband medium, type 100BASE-TX.....	647
25.1	Overview.....	647
25.2	Functional specifications	647
25.3	General exceptions.....	647
25.4	Specific requirements and exceptions	648
25.4.1	Change to 7.2.3.1.1, “Line state patterns”	648
25.4.2	Change to 7.2.3.3, “Loss of synchronization”	648
25.4.3	Change to Table 8-1, “Contact assignments for unshielded twisted pair”	648
25.4.4	Deletion of 8.3, “Station labelling”	648
25.4.5	Change to 9.1.9, “Jitter”	649
25.4.6	Replacement of 11.2, “Crossover function”	649

25.4.7	Change to A.2, “DDJ test pattern for baseline wander measurements”	649
25.4.8	Change to annex G, “Stream cipher scrambling function”	649
25.4.9	Change to annex I, “Common mode cable termination”	649
25.5	Protocol Implementation Conformance Statement (PICS) proforma for Clause 25, Physical Medium Dependent (PMD) sublayer and baseband medium, type 100BASE-TX.....	650
25.5.1	Introduction.....	650
25.5.2	Identification.....	650
25.5.3	Major capabilities/options	651
25.5.4	PICS proforma tables for the Physical Medium Dependent (PMD) sublayer and baseband medium, type 100BASE-TX.....	651
26.	Physical Medium Dependent (PMD) sublayer and baseband medium, type 100BASE-FX.....	652
26.1	Overview.....	652
26.2	Functional specifications	652
26.3	General exceptions.....	652
26.4	Specific requirements and exceptions	653
26.4.1	Medium Dependent Interface (MDI).....	653
26.4.2	Crossover function.....	653
26.5	Protocol Implementation Conformance Statement (PICS) proforma for Clause 26, Physical Medium Dependent (PMD) sublayer and baseband medium, type 100BASE-FX.....	654
26.5.1	Introduction.....	654
26.5.2	Identification.....	654
26.5.3	Protocol summary.....	654
26.5.4	Major capabilities/options	655
26.5.5	PICS proforma tables for Physical Medium Dependent (PMD) sublayer and baseband medium, type 100BASE-FX.....	655
27.	Repeater for 100 Mb/s baseband networks	656
27.1	Overview.....	656
27.1.1	Scope.....	656
27.1.2	Application perspective	657
27.1.3	Relationship to PHY	658
27.2	PMA interface messages.....	658
27.3	Repeater functional specifications.....	658
27.3.1	Repeater functions	659
27.3.2	Detailed repeater functions and state diagrams	663
27.4	Repeater electrical specifications	677
27.4.1	Electrical isolation	677
27.5	Environmental specifications.....	677
27.5.1	General safety	677
27.5.2	Network safety.....	677
27.5.3	Electrical isolation	678
27.5.4	Reliability	678
27.5.5	Environment	679
27.6	Repeater labeling	679
27.7	Protocol Implementation Conformance Statement (PICS) proforma for Clause 27, Repeater for 100 Mb/s baseband networks.....	680
27.7.1	Introduction.....	680
27.7.2	Identification.....	680
27.7.3	Major capabilities/options	681

27.7.4	PICS proforma tables for the repeater for 100 Mb/s baseband networks.....	681
28.	Physical Layer link signaling for 10 Mb/s and 100 Mb/s Auto-Negotiation on twisted pair	689
28.1	Overview.....	689
28.1.1	Scope.....	689
28.1.2	Application perspective/objectives.....	690
28.1.3	Relationship to ISO/IEC 8802-3.....	690
28.1.4	Compatibility considerations	691
28.2	Functional specifications	692
28.2.1	Transmit function requirements.....	693
28.2.2	Receive function requirements	696
28.2.3	Arbitration function requirements	698
28.2.4	Management function requirements	702
28.2.5	Absence of management function	707
28.2.6	Technology-Dependent Interface	707
28.3	State diagrams and variable definitions.....	709
28.3.1	State diagram variables.....	710
28.3.2	State diagram timers	714
28.3.3	State diagram counters.....	716
28.3.4	State diagrams.....	717
28.4	Electrical specifications	720
28.5	Protocol Implementation Conformance Statement (PICS) proforma for Clause 28, Physical Layer link signaling for 10 Mb/s and 100 Mb/s Auto-Negotiation on twisted pair.....	721
28.5.1	Introduction.....	721
28.5.2	Identification.....	721
28.5.3	Major capabilities/options	722
28.5.4	PICS proforma tables for Physical Layer link signaling for 10 Mb/s and 100 Mb/s Auto-Negotiation on twisted pair	722
28.6	Auto-Negotiation expansion.....	734
29.	System considerations for multisegment 100BASE-T networks.....	735
29.1	Overview.....	735
29.1.1	Single collision domain multisegment networks.....	736
29.1.2	Repeater usage	737
29.2	Transmission System Model 1.....	737
29.3	Transmission System Model 2.....	737
29.3.1	Round-trip collision delay	739
29.4	Full duplex 100 Mb/s topology limitations	742
30.	10 Mb/s, 100 Mb/s, and 1000 Mb/s Management	743
30.1	Overview.....	743
30.1.1	Scope.....	744
30.1.2	Relationship to objects in IEEE 802.1F.....	744
30.1.3	Systems management overview.....	744
30.1.4	Management model	745
30.2	Managed objects	746
30.2.1	Introduction.....	746
30.2.2	Overview of managed objects	746
30.2.3	Containment.....	751
30.2.4	Naming	752

30.2.5	Capabilities	752
30.3	Layer management for DTEs.....	759
30.3.1	MAC entity managed object class	759
30.3.2	PHY devicePHY device managed object class	767
30.3.3	MAC control entity object class	770
30.3.4	PAUSE entity managed object class.....	771
30.4	Layer management for 10, 100, and 1000 Mb/s baseband repeaters.....	772
30.4.1	Repeater managed object class	772
30.4.2	Group managed object class	775
30.4.3	Repeater port managed object class.....	776
30.5	Layer management for 10, 100, and 1000 Mb/s medium attachment units (MAUs).....	782
30.5.1	MAU managed object class	782
30.6	Management for link Auto-Negotiation	787
30.6.1	Auto-Negotiation managed object class	787
31.	MAC Control	791
31.1	Overview.....	791
31.2	Layer architecture	791
31.3	Support by interlayer interfaces.....	791
31.4	MAC Control frames	793
31.4.1	MAC Control frame format	793
31.5	Opcode-independent MAC Control sublayer operation	794
31.5.1	Frame parsing and data frame reception.....	794
31.5.2	Control frame reception.....	795
31.5.3	Opcode-independent MAC Control receive state diagram	795
31.6	Compatibility requirements	796
31.7	MAC Control client behavior	796
31.8	Protocol Implementation Conformance Statement (PICS) proforma for Clause 31, MAC Control	797
31.8.1	Introduction.....	797
31.8.2	Identification	797
31.8.3	PICS proforma for MAC Control frames	798
32.	Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer and baseband medium, type 100BASE-T2.....	799
32.1	Overview.....	799
32.1.1	Relation of 100BASE-T2 to other standards	799
32.1.2	Operation of 100BASE-T2	801
32.1.3	Application of 100BASE-T2	804
32.1.4	State diagram conventions	804
32.2	PHY Control functional specifications and service interface.....	804
32.2.1	PHY Control function.....	804
32.2.2	PHY Control Service interface	805
32.2.3	State diagram variables	807
32.2.4	State diagram timers	808
32.2.5	PHY Control state diagram.....	808
32.3	PCS functional specifications	809
32.3.1	PCS functions	809
32.3.2	PCS interfaces.....	816
32.3.3	Frame structure	816
32.3.4	State variables	817
32.3.5	State diagrams.....	819

32.3.6	PCS electrical specifications.....	820
32.4	PMA functional specifications and service interface	823
32.4.1	PMA functional specifications	823
32.4.2	PMA service interface	827
32.5	Management functions.....	830
32.5.1	100BASE-T2 Use of Auto-Negotiation and MII Registers 8, 9, and 10	830
32.5.2	Management functions.....	831
32.5.3	PHY specific registers for 100BASE-T2	832
32.5.4	Changes and additions to Auto-Negotiation (28)	835
32.6	PMA electrical specifications	838
32.6.1	PMA-to-MDI interface characteristics	838
32.6.2	Power consumption	861
32.7	Link segment characteristics.....	862
32.7.1	Cabling.....	862
32.7.2	Link transmission parameters	862
32.7.3	Noise	865
32.7.4	Installation practice.....	867
32.8	MDI specification	867
32.8.1	MDI connectors	867
32.8.2	Crossover function.....	867
32.9	System considerations	868
32.10	Environmental specifications.....	869
32.10.1	General safety	869
32.10.2	Network safety.....	869
32.10.3	Environment	870
32.10.4	Cabling specifications.....	870
32.11	PHY labeling	870
32.12	Delay constraints	870
32.12.1	PHY delay constraints (exposed MII)	871
32.12.2	DTE delay constraints (unexposed MII).....	871
32.13	Protocol Implementation Conformance Statement (PICS) proforma for Clause 32, Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer and baseband medium, type 100BASE-T2	872
32.13.1	Identification.....	872
32.13.2	Major capabilities/options	873
32.13.3	Compatibility considerations	873
32.13.4	PHY control function.....	874
32.13.5	Physical Coding Sublayer (PCS) or Physical Medium Attachment (PMA) sublayer.....	875
33.	Clause 33 is reserved for future use.....	892
34.	Introduction to 1000 Mb/s baseband network	893
34.1	Overview.....	893
34.1.1	Reconciliation Sublayer (RS) and Gigabit Media Independent Interface (GMII).....	893
34.1.2	Physical Layer signaling systems	894
34.1.3	Repeater	894
34.1.4	Auto-Negotiation, type 1000BASE-X.....	894
34.1.5	Physical Layer line signaling for 10 Mb/s and 100 Mb/s Auto-Negotiation on twisted pair.....	894
34.1.6	Management	895
34.2	State diagrams.....	895

34.3	Protocol Implementation Conformance Statement (PICS) proforma.....	895
34.4	Relation of Gigabit Ethernet to other standards	895
35.	Reconciliation Sublayer (RS) and Gigabit Media Independent Interface (GMII).....	896
35.1	Overview.....	896
35.1.1	Summary of major concepts	897
35.1.2	Application	897
35.1.3	Rate of operation.....	897
35.1.4	Allocation of functions	897
35.2	Functional specifications	897
35.2.1	Mapping of GMII signals to PLS service primitives and Station Management	898
35.2.2	GMII signal functional specifications	901
35.2.3	GMII data stream.....	909
35.2.4	MAC delay constraints (with GMII)	912
35.2.5	Management functions.....	912
35.3	Signal mapping	912
35.4	Electrical characteristics	912
35.4.1	DC characteristics.....	913
35.4.2	AC characteristics.....	914
35.5	Protocol Implementation Conformance Statement (PICS) proforma for Clause 35, Reconciliation Sublayer (RS) and Gigabit Media Independent Interface (GMII)	918
35.5.1	Introduction.....	918
35.5.2	Identification.....	918
35.5.3	PICS proforma tables for reconciliation sublayer and Gigabit Media Independent Interface	919
36.	Physical Coding Sublayer (PCS) and Physical Medium Attachment (PMA) sublayer, type 1000BASE-X	923
36.1	Overview.....	923
36.1.1	Scope.....	923
36.1.2	Objectives	923
36.1.3	Relationship of 1000BASE-X to other standards.....	923
36.1.4	Summary of 1000BASE-X sublayers.....	924
36.1.5	Inter-sublayer interfaces	924
36.1.6	Functional block diagram	925
36.1.7	State diagram conventions	925
36.2	Physical Coding Sublayer (PCS).....	926
36.2.1	PCS Interface (GMII)	926
36.2.2	Functions within the PCS	927
36.2.3	Use of code-groups.....	927
36.2.4	8B/10B transmission code	927
36.2.5	Detailed functions and state diagrams	940
36.3	Physical Medium Attachment (PMA) sublayer.....	953
36.3.1	Service Interface	953
36.3.2	Functions within the PMA.....	955
36.3.3	A physical instantiation of the PMA Service Interface	956
36.3.4	General electrical characteristics of the TBI	960
36.3.5	TBI transmit interface electrical characteristics	961
36.3.6	TBI receive interface electrical characteristics.....	961
36.3.7	Loopback mode	963
36.3.8	Test functions.....	963

36.4	Compatibility considerations	964
36.5	Delay constraints	964
36.5.1	MDI to GMII delay constraints	964
36.5.2	DTE delay constraints (half duplex mode)	965
36.5.3	Carrier de-assertion/assertion constraint (half duplex mode)	965
36.6	Environmental specifications.....	965
36.7	Protocol Implementation Conformance Statement (PICS) proforma for Clause 36, Physical Coding Sublayer (PCS) and Physical Medium Attachment (PMA) sublayer, type 1000BASE-X	966
36.7.1	Introduction.....	966
36.7.2	Identification.....	966
36.7.3	Major Capabilities/Options.....	967
36.7.4	PICS proforma tables for the PCS and PMA sublayer, type 1000BASE-X.....	967
37.	Auto-Negotiation function, type 1000BASE-X.....	970
37.1	Overview.....	970
37.1.1	Scope.....	970
37.1.2	Application perspective/objectives.....	970
37.1.3	Relationship to ISO/IEC 8802-3.....	971
37.1.4	Compatibility considerations	971
37.2	Functional specifications	972
37.2.1	Config_Reg encoding	972
37.2.2	Transmit function requirements.....	975
37.2.3	Receive function requirements	975
37.2.4	Arbitration process requirements.....	976
37.2.5	Management function requirements	980
37.2.6	Absence of management function	983
37.3	Detailed functions and state diagrams	983
37.3.1	State diagram variables.....	983
37.4	Environmental specifications.....	988
37.5	Protocol Implementation Conformance Statement (PICS) proforma for Clause 37, Auto- Negotiation function, type 1000BASE-X.....	990
37.5.1	Introduction.....	990
37.5.2	Identification.....	990
37.5.3	Major Capabilities/Options.....	991
37.5.4	PICS proforma tables for the Auto-Negotiation function, type 1000BASE-X	991
38.	Physical Medium Dependent (PMD) sublayer and baseband medium, type 1000BASE-LX (Long Wavelength Laser) and 1000BASE-SX (Short Wavelength Laser)	994
38.1	Overview.....	994
38.1.1	Physical Medium Dependent (PMD) sublayer service interface.....	994
38.1.2	Medium Dependent Interface (MDI).....	995
38.2	PMD functional specifications	995
38.2.1	PMD block diagram.....	996
38.2.2	PMD transmit function	996
38.2.3	PMD receive function.....	996
38.2.4	PMD signal detect function	996
38.3	PMD to MDI optical specifications for 1000BASE-SX.....	997
38.3.1	Transmitter optical specifications.....	998
38.3.2	Receive optical specifications.....	999
38.3.3	Worst-case 1000BASE-SX link power budget and penalties (informative)	999
38.4	PMD to MDI optical specifications for 1000BASE-LX	1000

38.4.1	Transmitter optical specifications.....	1000
38.4.2	Receive optical specifications.....	1001
38.4.3	Worst-case 1000BASE-LX link power budget and penalties (informative)	1001
38.5	Jitter specifications for 1000BASE-SX and 1000BASE-LX	1002
38.6	Optical measurement requirements	1003
38.6.1	Center wavelength and spectral width measurements	1003
38.6.2	Optical power measurements.....	1003
38.6.3	Extinction ratio measurements	1003
38.6.4	Relative Intensity Noise (RIN)	1003
38.6.5	Transmitter optical waveform (transmit eye)	1003
38.6.6	Transmit rise/fall characteristics.....	1004
38.6.7	Receive sensitivity measurements	1004
38.6.8	Total jitter measurements	1005
38.6.9	Deterministic jitter measurement (informative)	1005
38.6.10	Coupled Power Ratio (CPR) measurements.....	1005
38.6.11	Conformance test signal at TP3 for receiver testing.....	1006
38.6.12	Measurement of the receiver 3 dB electrical upper cutoff frequency	1007
38.7	Environmental specifications.....	1008
38.7.1	General safety	1008
38.7.2	Laser safety.....	1008
38.7.3	Installation	1008
38.8	Environment	1008
38.8.1	Electromagnetic emission.....	1009
38.8.2	Temperature, humidity, and handling.....	1009
38.9	PMD labeling requirements.....	1009
38.10	Fiber optic cabling model	1009
38.11	Characteristics of the fiber optic cabling.....	1010
38.11.1	Optical fiber and cable.....	1010
38.11.2	Optical fiber connection	1011
38.11.3	Medium Dependent Interface (MDI).....	1011
38.11.4	single-mode fiber offset-launch mode-conditioning patch cord for MMF operation of 1000BASE-LX	1012
38.12	Protocol Implementation Conformance Statement (PICS) proforma for Clause 38, Physical Medium Dependent (PMD) sublayer and baseband medium, type 1000BASE-LX (Long Wavelength Laser) and 1000BASE-SX (Short Wavelength Laser)	1014
38.12.1	Introduction.....	1014
38.12.2	Identification.....	1014
38.12.3	Major capabilities/options	1015
38.12.4	PICS proforma tables for Physical Medium Dependent (PMD) sublayer and baseband medium, type 1000BASE-LX (Long Wavelength Laser) and 1000BASE-SX (Short Wavelength Laser)	1016
39.	Physical Medium Dependent (PMD) sublayer and baseband medium, type 1000BASE-CX (short-haul copper).....	1021
39.1	Overview.....	1021
39.2	Functional specifications	1021
39.2.1	PMD transmit function	1021
39.2.2	PMD receive function.....	1021
39.2.3	PMD signal detect function	1021
39.3	PMD to MDI electrical specifications	1022
39.3.1	Transmitter electrical specifications	1023
39.3.2	Receiver electrical specifications	1025
39.3.3	Jitter specifications for 1000BASE-CX.....	1026

39.4	Jumper cable assembly characteristics	1027
39.4.1	Compensation networks.....	1027
39.4.2	Shielding	1027
39.5	MDI specification	1027
39.5.1	MDI connectors	1028
39.5.2	Crossover function.....	1030
39.6	Electrical measurement requirements.....	1031
39.6.1	Transmit rise/fall time.....	1031
39.6.2	Transmit skew measurement	1031
39.6.3	Transmit eye (normalized and absolute).....	1031
39.6.4	Through_connection impedance.....	1031
39.6.5	Jumper cable intra-pair differential skew	1031
39.6.6	Receiver link signal	1032
39.6.7	Near-End Cross Talk (NEXT).....	1032
39.6.8	Differential time-domain reflectometry (TDR) measurement procedure.....	1032
39.7	Environmental specifications.....	1033
39.8	Protocol Implementation Conformance Statement (PICS) proforma for Clause 39, Physical Medium Dependent (PMD) sublayer and baseband medium, type 1000BASE-CX	1034
39.8.1	Introduction.....	1034
39.8.2	Identification.....	1034
39.8.3	Major capabilities/options	1035
39.8.4	PICS proforma tables for Physical Medium Dependent (PMD) sublayer and baseband medium, type 1000BASE-CX (short-haul copper).....	1035
40.	Clause 40 is reserved for future use.....	1039
41.	Repeater for 1000 Mb/s baseband networks.....	1040
41.1	Overview.....	1040
41.1.1	Scope.....	1040
41.1.2	Application perspective	1041
41.1.3	Relationship to PHY	1041
41.2	Repeater functional specifications.....	1041
41.2.1	Repeater functions	1042
41.2.2	Detailed repeater functions and state diagrams	1046
41.3	Repeater electrical specifications	1054
41.3.1	Electrical isolation	1054
41.4	Environmental specifications.....	1054
41.4.1	General safety	1054
41.4.2	Network safety.....	1054
41.4.3	Electrical isolation	1055
41.4.4	Reliability	1055
41.4.5	Environment	1056
41.5	Repeater labeling	1056
41.6	Protocol Implementation Conformance Statement (PICS) proforma for Clause 41, Repeater for 1000 Mb/s baseband networks.....	1057
41.6.1	Introduction.....	1057
41.6.2	Identification.....	1057
41.6.3	Major capabilities/options	1058
41.6.4	PICS proforma tables for the Repeater for 1000 Mb/s baseband networks	1059

42.	System considerations for multisegment 1000 Mb/s networks	1066
42.1	Overview.....	1066
42.1.1	Single collision domain multisegment networks.....	1067
42.1.2	Repeater usage.....	1068
42.2	Transmission System Model 1.....	1068
42.3	Transmission System Model 2.....	1068
42.3.1	Round-trip collision delay	1068
42.4	Full duplex 1000 Mb/s topology limitations	1072
Annex A	(informative) Additional reference material	1073
Annex B	(informative) System guidelines.....	1075
B.1	Baseband system guidelines and concepts, 10 Mb/s	1075
B.1.1	Overall system objectives.....	1075
B.1.2	Analog system components and parameter values.....	1075
B.1.3	Minimum frame length determination	1077
B.1.4	System jitter budgets	1078
B.1.5	Systems consideration calculations.....	1080
B.2	System parameters and budgets for 1BASE5.....	1087
B.2.1	Delay budget	1087
B.2.2	Minimum frame length determination	1088
B.2.3	Jitter budget.....	1089
B.3	Example crosstalk computation for multiple disturbers, balanced-pair cable	1090
B.4	10BASE-T guidelines	1092
B.4.1	System jitter budget.....	1092
B.4.2	Filter characteristics	1092
B.4.3	Notes for conformance testing	1092
B.5	10BASE-F guidelines	1095
B.5.1	System jitter budget.....	1095
B.5.2	10BASE-FP fiber optic segment loss budget.....	1095
Annex C	(informative) State diagram, MAC sublayer	1097
Annex D	(informative) Application context, selected medium specifications.....	1098
D.1	Introduction.....	1098
D.2	Type 10BASE5 applications.....	1098
D.3	Type 10BASE2 applications.....	1098
D.4	Type FOIRL and 10BASE-F Applications; alternative fiber optic medium applications	1099
D.4.1	Alternative fiber types	1099
D.4.2	Type 10BASE-FP applications using 50/125 μm fiber.....	1100
D.5	10BASE-T use of cabling systems with a nominal differential characteristic impedance of 120 Ω	1102
D.6	10BASE-T use of cabling systems with a nominal differential characteristic impedance of 150 Ω	1104
Annex E	(informative) Receiver wavelength design considerations (FOIRL).....	1105

Annex F	(normative) Additional attributes required for systems	1106
F.1	Introduction.....	1106
F.1.1	Scope	1106
F.2	Objects/Attributes/Actions/Notifications	1106
F.2.1	TimeSinceSystemReset attribute.....	1106
F.2.2	RepeaterResetTimeStamp attribute.....	1107
F.2.3	ResetSystemAction action.....	1107
Annex G	(normative) Additional material required for conformance testing	1108
G.1	Introduction.....	1108
G.1.1	Material in support of the aDataRateMismatches attribute.....	1108
Annex H	(normative) GDMO specifications for CSMA/CD managed objects	1109
H.1	Use of MAC and PLS Sublayer Management Definitions with CMIS/CMIP and ISO/IEC 15802-2: 1995 Management Protocols	1109
H.1.1	DTE MAC sublayer managed object class	1109
H.1.2	ResourceTypeID managed object class.....	1118
H.1.3	DTE physical layer managed object class.....	1118
H.2	GDMO specification for Repeater Management Object Class.....	1119
H.2.1	Repeater managed object class.....	1120
H.2.2	ResourceTypeID managed object class.....	1123
H.2.3	Group managed object class.....	1124
H.2.4	Port managed object class	1125
H.2.5	Common Attributes Template	1129
H.3	GDMO specification for MAU Management Objects.....	1130
H.3.1	MAU Managed Object Class	1130
H.4	GDMO and ASN.1 definitions for management	1133
H.4.1	Common Attributes Template	1133
H.4.2	ASN.1 module	1134
NOTE—The remaining annexes in the standard are numbered in correspondence to their associated clauses; e.g., Annexes 22A, 22B, and 22C correspond to Clause 22.		
Annex 22A	(informative) MII output delay, setup, and hold time budget.....	1137
22A.1	System model.....	1137
22A.2	Signal transmission path characteristics	1138
22A.3	Budget calculation	1139
Annex 22B	(informative) MII driver ac characteristics	1140
22B.1	Implications of CMOS ASIC processes	1140
22B.2	R_0 (min) and V, I values for operation from 5 V $\pm$ 10% supply	1141
22B.3	R_0 (min) and V, I values for operation from 3.3 $\pm$ 0.3 V supply.....	1141
Annex 22C	(informative) Measurement techniques for MII signal timing characteristics.....	1142
22C.1	Measuring timing characteristics of source terminated signals.....	1142
22C.2	Measuring timing characteristics of transmit signals at the MII	1142
22C.3	Measuring timing characteristics of receive signals at the MII	1142
22C.4	Measuring timing characteristics of MDIO.....	1143

Annex 23A (normative) 6T code words.....	1144
Annex 23B (informative) Noise budget.....	1146
Annex 23C (informative) Use of cabling systems with a nominal differential characteristic impedance of 120 Ω	1147
Annex 27A (normative) Repeater delay consistency requirements	1148
Annex 28A (normative) Selector Field definitions	1149
Annex 28B (normative) IEEE 802.3 Selector Base Page definition.....	1150
28B.1 Selector field value	1150
28B.2 Technology Ability Field bit assignments.....	1150
28B.3 Priority resolution	1151
28B.4 Message Page transmission convention.....	1151
Annex 28C (normative) Next Page Message Code Field definitions	1152
28C.1 Message code #0—Auto-Negotiation reserved code 1	1152
28C.2 Message code #1—Null Message code	1152
28C.3 Message code #2—Technology Ability extension code 1	1153
28C.4 Message code #3—Technology Ability extension code 2	1153
28C.5 Message code #4—Remote fault number code	1153
28C.6 Message code #5—Organizationally Unique Identifier (OUI) tag code	1153
28C.7 Message code #6—PHY identifier tag code.....	1153
28C.8 Message code #2047—Auto-Negotiation reserved code 2	1153
28C.9 Message code #7—100BASE-T2 technology message code.....	1154
Annex 28D (normative) Description of extensions to Clause 28 and associated annexes.....	1155
28D.1 Introduction.....	1155
28D.2 Extensions to Clause 28.....	1155
28D.2.1 Extensions required for Clause 31 (full duplex)	1155
28D.2.2 Extensions required for Clause 32 (100BASE-T2).....	1155
28D.3 Extensions for Clause 31	1155
28D.4 Extensions for Clause 32 (100BASE-T2).....	1156
Annex 29A (informative) DTE and repeater delay components.....	1157
29A.1 DTE delay	1157
29A.2 Repeater delay	1157
Annex 29B (informative) Recommended topology documentation	1158
Annex 30A (normative) GDMO specification for 802.3 managed object classes.....	1159
30A.1 DTE MAC entity managed object class	1159
30A.1.1 DTE MAC entity formal definition.....	1159
30A.1.2 DTE MAC entity attributes	1161
30A.1.3 DTE MAC entity actions.....	1169
30A.2 DTE physical entity managed object class	1170

30A.2.1 DTE physical entity formal definition	1170
30A.2.2 DTE physical entity attributes.....	1171
30A.2.3 DTE physical entity actions	1173
30A.3 DTE MAC control entity managed object class.....	1173
30A.3.1 DTE MAC control entity formal definition	1173
30A.3.2 DTE MAC Control entity attributes.....	1174
30A.4 DTE MAC Control function entity managed object class.....	1175
30A.4.1 DTE MAC Control function entity formal definition	1175
30A.4.2 DTE MAC Control function entity attributes	1175
30A.5 Repeater managed object class.....	1176
30A.5.1 Repeater, formal definition	1176
30A.5.2 Repeater attributes.....	1177
30A.5.3 Repeater actions	1179
30A.5.4 Repeater notifications.....	1179
30A.6 Group managed object class	1180
30A.6.1 Group, formal definition	1180
30A.6.2 Group attributes.....	1181
30A.6.3 Group notifications.....	1182
30A.7 Repeater port managed object class.....	1182
30A.7.1 Port, formal definition	1182
30A.7.2 Port attributes	1183
30A.7.3 Port actions	1188
30A.8 MAU managed object class.....	1188
30A.8.1 MAU, formal definition	1188
30A.8.2 MAU attributes.....	1190
30A.8.3 MAU actions	1192
30A.8.4 MAU notifications.....	1193
30A.9 AutoNegotiation managed object class	1193
30A.9.1 AutoNegotiation, formal definition.....	1193
30A.9.2 Auto-Negotiation attributes.....	1194
30A.9.3 AutoNegotiation actions.....	1196
30A.10 ResourceTypeID managed object class	1197
30A.10.1 ResourceTypeID, formal definition.....	1197
Annex 30B (normative) GDMO and ASN.1 definitions for management	1198
30B.1 Common attributes template.....	1198
30B.2 ASN.1 module for CSMA/CD managed objects.....	1198
Annex 31A (normative) MAC Control opcode assignments	1205
Annex 31B (normative) MAC Control PAUSE operation.....	1206
31B.1 PAUSE description.....	1206
31B.2 Parameter semantics	1206
31B.3 Detailed specification of PAUSE operation	1207
31B.3.1 Transmit operation	1207
31B.3.2 Transmit state diagram for PAUSE operation.....	1207
31B.3.3 Receive operation.....	1210
31B.3.4 Receive state diagram for PAUSE operation	1210
31B.3.5 Status indication operation	1211
31B.3.6 Indication state diagram for pause operation	1211
31B.3.7 Timing considerations for PAUSE operation.....	1212

31B.4 Protocol Conformance Statement (PICS) proforma for MAC Control PAUSE operation	1213
31B.4.1 Introduction	1213
31B.4.2 Identification	1213
31B.4.3 Major capabilities/options	1214
31B.4.4 PAUSE command requirements.....	1214
31B.4.5 PAUSE command state diagram requirements	1214
31B.4.6 PAUSE command MAC timing considerations	1215
Annex 32A (informative) Use of cabling systems with nominal differential characteristic impedance of 120 Ω or 150 Ω	1216
Annex 36A (informative) Jitter test patterns	1217
36A.1 High-frequency test pattern	1217
36A.2 Low-frequency test pattern	1217
36A.3 Mixed frequency test pattern	1217
36A.4 Long continuous random test pattern	1217
36A.5 Short continuous random test pattern	1218
Annex 36B (informative) 8B/10B transmission code running disparity calculation examples.....	1220
Annex 38A (informative) Fiber launch conditions	1222
38A.1 Overfilled Launch.....	1222
38A.2 Radial Overfilled Launch (ROFL).....	1222

Information technology—

Telecommunications and information exchange between systems—

Local and metropolitan area networks— Specific requirements—

Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) access method and physical layer specifications

1. Introduction

1.1 Overview

This is a comprehensive International Standard for Local Area Networks (LANs) employing CSMA/CD as the access method. This International Standard is intended to encompass several media types and techniques for signal rates from 1 Mb/s to 1000 Mb/s. This edition of the standard provides the necessary specifications for the following families of systems: a 1 Mb/s baseband system, 10 Mb/s baseband and broadband systems, a 100 Mb/s baseband system, and a 1000 Mb/s baseband system.

1.1.1 Basic concepts

This standard provides for two distinct modes of operation: half duplex and full duplex. A given IEEE 802.3 instantiation operates in either half or full duplex mode at any one time. The term “CSMA/CD MAC” is used throughout this standard synonymously with “802.3 MAC,” and may represent an instance of either a half duplex or full duplex mode data terminal equipment (DTE), even though full duplex mode DTEs do not implement the CSMA/CD algorithms traditionally used to arbitrate access to shared-media LANs.

1.1.1.1 Half duplex operation

In half duplex mode, the CSMA/CD media access method is the means by which two or more stations share a common transmission medium. To transmit, a station waits (defers) for a quiet period on the medium (that is, no other station is transmitting) and then sends the intended message in bit-serial form. If, after initiating a transmission, the message collides with that of another station, then each transmitting station intentionally transmits for an additional predefined period to ensure propagation of the collision throughout the system. The station remains silent for a random amount of time (backoff) before attempting to transmit again. Each aspect of this access method process is specified in detail in subsequent clauses of this standard.

Half duplex operation can be used with all media and configurations allowed by this standard.

1.1.1.2 Full duplex operation

Full duplex operation allows simultaneous communication between a pair of stations using point-to-point media (dedicated channel). Full duplex operation does not require that transmitters defer, nor do they monitor or react to receive activity, as there is no contention for a shared medium in this mode. Full duplex mode can only be used when all of the following are true:

- a) The physical medium is capable of supporting simultaneous transmission and reception without interference.
- b) There are exactly two stations connected with a full duplex point-to-point link. Since there is no contention for use of a shared medium, the multiple access (i.e., CSMA/CD) algorithms are unnecessary.
- c) Both stations on the LAN are capable of, and have been configured to use, full duplex operation.

The most common configuration envisioned for full duplex operation consists of a central bridge (also known as a switch) with a dedicated LAN connecting each bridge port to a single device. Repeaters as defined in this standard are outside the scope of full duplex operation.

Full duplex operation constitutes a proper subset of the MAC functionality required for half duplex operation.

1.1.2 Architectural perspectives

There are two important ways to view local area network (LAN) design corresponding to

- a) *Architecture*. Emphasizing the logical divisions of the system and how they fit together.
- b) *Implementation*. Emphasizing actual components, their packaging, and interconnection.

This standard is organized along architectural lines, emphasizing the large-scale separation of the system into two parts: the Media Access Control (MAC) sublayer of the Data Link Layer and the Physical Layer. These layers are intended to correspond closely to the lowest layers of the ISO/IEC Model for Open Systems Interconnection (see Figure 1-1). (See ISO/IEC 7498-1: 1994.¹) The Logical Link Control (LLC) sublayer and MAC sublayer together encompass the functions intended for the Data Link Layer as defined in the OSI model.

1.1.2.1 Architectural rationale

An architectural organization of the standard has two main advantages:

- a) *Clarity*. A clean overall division of the design along architectural lines makes the standard clearer.
- b) *Flexibility*. Segregation of medium-dependent aspects in the Physical Layer allows the LLC and MAC sublayers to apply to a family of transmission media.

Partitioning the Data Link Layer allows various media access methods within the family of LAN standards.

The architectural model is based on a set of interfaces that may be different from those emphasized in implementations. One critical aspect of the design, however, shall be addressed largely in terms of the implementation interfaces: compatibility.

1.1.2.2 Compatibility interfaces

Five important compatibility interfaces are defined within what is architecturally the Physical Layer.

¹For information about references, see 1.3.

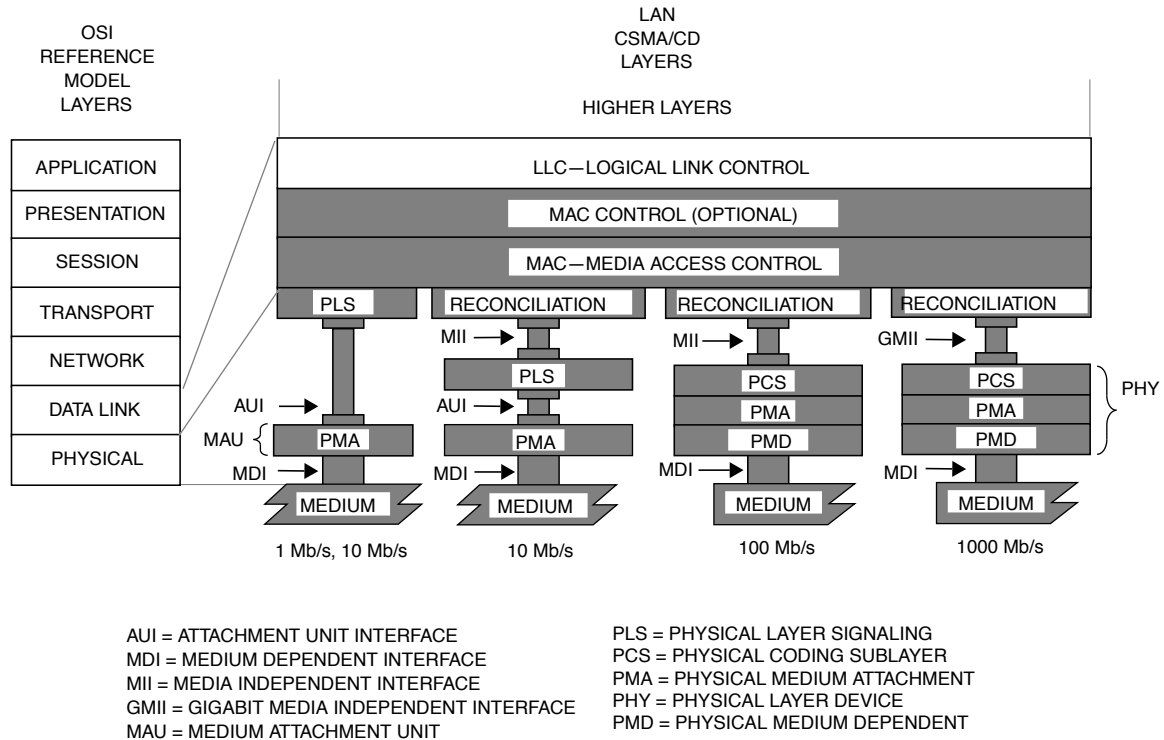


Figure 1-1—LAN standard relationship to the ISO/IEC Opens Systems Interconnection (OSI) reference model

- Medium Dependent Interfaces (MDI).** To communicate in a compatible manner, all stations shall adhere rigidly to the exact specification of physical media signals defined in clause 8 (and beyond) in this standard, and to the procedures that define correct behavior of a station. The medium-independent aspects of the LLC sublayer and the MAC sublayer should not be taken as detracting from this point; communication by way of the ISO/IEC 8802-3 [ANSI/IEEE Std 802.3] Local Area Network requires complete compatibility at the Physical Medium interface (that is, the physical cable interface).
- Attachment Unit Interface (AUI).** It is anticipated that most DTEs will be located some distance from their connection to the physical cable. A small amount of circuitry will exist in the Medium Attachment Unit (MAU) directly adjacent to the physical cable, while the majority of the hardware and all of the software will be placed within the DTE. The AUI is defined as a second compatibility interface. While conformance with this interface is not strictly necessary to ensure communication, it is highly recommended, since it allows maximum flexibility in intermixing MAUs and DTEs. The AUI may be optional or not specified for some implementations of this standard that are expected to be connected directly to the medium and so do not use a separate MAU or its interconnecting AUI cable. The PLS and PMA are then part of a single unit, and no explicit AUI implementation is required.
- Media Independent Interface (MII).** It is anticipated that some DTEs will be connected to a remote PHY, and/or to different medium dependent PHYs. The MII is defined as a third compatibility interface. While conformance with implementation of this interface is not strictly necessary to ensure communication, it is highly recommended, since it allows maximum flexibility in intermixing PHYs and DTEs. The MII is optional.
- Gigabit Media Independent Interface (GMII).** The GMII is designed to connect a gigabit-capable MAC or repeater unit to a gigabit PHY. While conformance with implementation of this interface is not strictly necessary to ensure communication, it is highly recommended, since it allows maximum

- flexibility in intermixing PHYs and DTEs at gigabit speeds. The GMII is intended for use as a chip-to-chip interface. No mechanical connector is specified for use with the GMII. The GMII is optional.
- e) *Ten-bit Interface (TBI)*. The TBI is provided by the 1000BASE-X PMA sublayer as a physical instantiation of the PMA service interface. The TBI is highly recommended for 1000BASE-X systems, since it provides a convenient partition between the high-frequency circuitry associated with the PMA sublayer and the logic functions associated with the PCS and MAC sublayers. The TBI is intended for use as a chip-to-chip interface. No mechanical connector is specified for use with the TBI. The TBI is optional.

1.1.3 Layer interfaces

In the architectural model used here, the layers interact by way of well-defined interfaces, providing services as specified in Clauses 2 and 6. In general, the interface requirements are as follows:

- a) The interface between the MAC sublayer and its client includes facilities for transmitting and receiving frames, and provides per-operation status information for use by higher-layer error recovery procedures.
- b) The interface between the MAC sublayer and the Physical Layer includes signals for framing (carrier sense, receive data valid, transmit initiation) and contention resolution (collision detect), facilities for passing a pair of serial bit streams (transmit, receive) between the two layers, and a wait function for timing.

These interfaces are described more precisely in 4.3. Additional interfaces are necessary to provide for MAC Control services, and to allow higher level network management facilities to interact with these layers to perform operation, maintenance, and planning functions. Network management functions will be discussed in Clause 30.

1.1.4 Application areas

The applications environment for the LAN is intended to be commercial and light industrial. Use of CSMA/CD LANs in home or heavy industrial environments, while not precluded, is not considered within the scope of this standard.

1.2 Notation

1.2.1 State diagram conventions

The operation of a protocol can be described by subdividing the protocol into a number of interrelated functions. The operation of the functions can be described by state diagrams. Each diagram represents the domain of a function and consists of a group of connected, mutually exclusive states. Only one state of a function is active at any given time (see Figure 1-2).

Each state that the function can assume is represented by a rectangle. These are divided into two parts by a horizontal line. In the upper part the state is identified by a name in capital letters. The lower part contains the name of any ON signal that is generated by the function. Actions are described by short phrases and enclosed in brackets.

All permissible transitions between the states of a function are represented graphically by arrows between them. A transition that is global in nature (for example, an exit condition from all states to the IDLE or RESET state) is indicated by an open arrow. Labels on transitions are qualifiers that must be fulfilled before the transition will be taken. The label UCT designates an unconditional transition. Qualifiers described by short phrases are enclosed in parentheses.

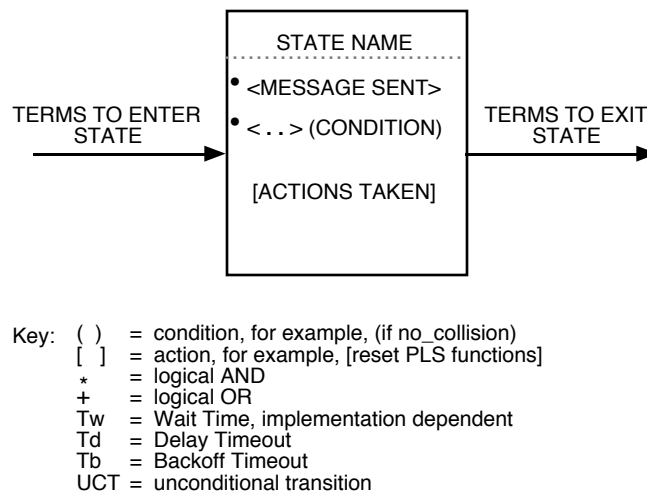


Figure 1-2—State diagram notation example

State transitions and sending and receiving of messages occur instantaneously. When a state is entered and the condition to leave that state is not immediately fulfilled, the state executes continuously, sending the messages and executing the actions contained in the state in a continuous manner.

Some devices described in this standard (e.g., repeaters) are allowed to have two or more ports. State diagrams capable of describing the operation of devices with an unspecified number of ports, required qualifier notation that allows testing for conditions at multiple ports. The notation used is a term that includes a description in parentheses of which ports must meet the term for the qualifier to be satisfied (e.g., ANY and ALL). It is also necessary to provide for term-assignment statements that assign a name to a port that satisfies a qualifier. The following convention is used to describe a term-assignment statement that is associated with a transition:

- a) The character “:” (colon) is a delimiter used to denote that a term assignment statement follows.
- b) The character “ $\Leftarrow$ ” (left arrow) denotes assignment of the value following the arrow to the term preceding the arrow.

The state diagrams contain the authoritative statement of the functions they depict; when apparent conflicts between descriptive text and state diagrams arise, the state diagrams are to take precedence. This does not override, however, any explicit description in the text that has no parallel in the state diagrams.

The models presented by state diagrams are intended as the primary specifications of the functions to be provided. It is important to distinguish, however, between a model and a real implementation. The models are optimized for simplicity and clarity of presentation, while any realistic implementation may place heavier emphasis on efficiency and suitability to a particular implementation technology. It is the functional behavior of any unit that must match the standard, not its internal structure. The internal details of the model are useful only to the extent that they specify the external behavior clearly and precisely.

1.2.2 Service specification method and notation

The service of a layer or sublayer is the set of capabilities that it offers to a user in the next higher (sub)layer. Abstract services are specified here by describing the service primitives and parameters that characterize each service. This definition of service is independent of any particular implementation (see Figure 1-3).

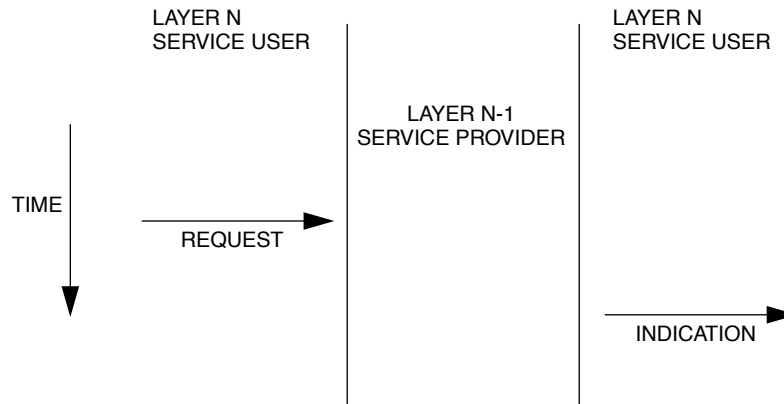


Figure 1-3—Service primitive notation

Specific implementations may also include provisions for interface interactions that have no direct end-to-end effects. Examples of such local interactions include interface flow control, status requests and indications, error notifications, and layer management. Specific implementation details are omitted from this service specification both because they will differ from implementation to implementation and because they do not impact the peer-to-peer protocols.

1.2.2.1 Classification of service primitives

Primitives are of two generic types:

- a) **REQUEST.** The request primitive is passed from layer N to layer N-1 to request that a service be initiated.
- b) **INDICATION.** The indication primitive is passed from layer N-1 to layer N to indicate an internal layer N-1 event that is significant to layer N. This event may be logically related to a remote service request, or may be caused by an event internal to layer N-1.

The service primitives are an abstraction of the functional specification and the user-layer interaction. The abstract definition does not contain local detail of the user/provider interaction. For instance, it does not indicate the local mechanism that allows a user to indicate that it is awaiting an incoming call. Each primitive has a set of zero or more parameters, representing data elements that shall be passed to qualify the functions invoked by the primitive. Parameters indicate information available in a user/provider interaction; in any particular interface, some parameters may be explicitly stated (even though not explicitly defined in the primitive) or implicitly associated with the service access point. Similarly, in any particular protocol specification, functions corresponding to a service primitive may be explicitly defined or implicitly available.

1.2.3 Physical Layer and media notation

Users of this standard need to reference which particular implementation is being used or identified. Therefore, a means of identifying each implementation is given by a simple, three-field, type notation that is explicitly stated at the beginning of each relevant clause. In general, the Physical Layer type is specified by these fields:

<data rate in Mb/s> <medium type> <maximum segment length (× 100 m)>

For example, the standard contains a 10 Mb/s baseband specification identified as “TYPE 10BASE5,” meaning a 10 Mb/s baseband medium whose maximum segment length is 500 m. Each successive Physical Layer specification will state its own unique TYPE identifier along similar lines.

1.2.4 Physical Layer message notation

Messages generated within the Physical Layer, either within or between PLS and the MAU (that is, PMA circuitry), are designated by an italic type to designate either form of physical or logical message used to execute the physical layer signaling process (for example, *input_idle* or *mau_available*).

1.3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ANSI T1.601-1992, Telecommunications—Integrated Services Digital Network (ISDN)—Basic Access Interface for Use on Metallic Loops for Application on the Network Side of the NT (Layer 1 Specification).²

ANSI T1.605-1991, Telecommunications—Integrated Services Digital Network (ISDN)—Basic Access Interface for S and T Reference Point (Layer 1 Specification).

ANSI X3.237-1995, Rev 2.1 (1 January 1995), FDDI Low-Cost Fibre Physical Layer—Medium Dependent (LCF-PMD) (ISO/IEC CD 9314-9).

ANSI X3.263: 1995, Revision 2.2 (1 March 1995), FDDI Twisted Pair—Physical Medium Dependent (TP-PMD) (ISO/IEC CD 9314-10).

CISPR 22: 1993, Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment.³

IEC 60060 (all parts), High-voltage test techniques.⁴

IEC 60068, Basic environmental testing procedures.

IEC 60096-1: 1986, Radio-frequency cables, Part 1: General requirements and measuring methods and Amd. 2: 1993.

IEC 60169-8: 1978 and -16: 1982, Radio-frequency connectors, Part 8: R.F. coaxial connectors with inner diameter of outer conductor 6.5 mm (0.256 in) with bayonet lock—Characteristic impedance 50 ohms (Type

²ANSI publications are available from the Sales Department, American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036, USA (www.ansi.org/).

³CISPR documents are available from the International Electrotechnical Commission, 3 rue de Varembe, Case Postale 131, CH 1211, Genève 20, Switzerland/Suisse (www.iec.ch/). CISPR documents are also available in the United States from the American National Standards Institute.

⁴In the 1998 edition of this standard, IEC publications have been renumbered in accordance with IEC's revised numbering system. In 1997, all existing publications were issued a designation in the 60000 series. Thus IEC 60 became IEC 60060, IEC 169-8 became IEC 60169-8, etc. IEC publications are available from IEC Sales Department, Case Postale 131, 3 rue de Varembe, CH-1211, Genève 20, Switzerland/Suisse (www.iec.ch/). IEC publications are also available in the United States from the American National Standards Institute.

BNC); Part 16: R.F. coaxial connectors with inner diameter of outer conductor 7 mm (0.276 in) with screw coupling—Characteristic impedance 50 ohms (75 ohms) (Type N).

IEC 60603-7: 1990, Connectors for frequencies below 3 MHz for use with printed boards, Part 7: Detail specification for connectors, 8-way, including fixed and free connectors with common mating features, with assessed quality.

IEC 60793-1: 1995, Optical fibres—Part 1: Generic specification.

IEC 60793-2: 1992, Optical fibres—Part 2: Product specifications.

IEC 60794-1: 1996, Optical fibre cables—Part 1: Generic specification.

IEC 60794-2: 1989, Optical fibre cables—Part 2: Product specifications.

IEC 60807-2: 1992, Rectangular connectors for frequencies below 3 MHz, Part 2: Detail specification for a range of connectors with assessed quality, with trapezoidal shaped metal shells and round contacts—Fixed solder contact types.

IEC 60807-3: 1990, Rectangular connectors for frequencies below 3 MHz, Part 3: Detail specification for a range of connectors with trapezoidal shaped metal shells and round contacts—Removable crimp contact types with closed crimp barrels, rear insertion/rear extraction.

IEC 60825-1: 1993, Safety of laser products—Part 1: Equipment classification, requirements and user's guide.

IEC 60825-2: 1993, Safety of laser products—Part 2: Safety of optical fibre communication systems.

IEC 60874-1: 1993, Connectors for optical fibres and cables—Part 1: Generic specification.

IEC 60874-2: 1993, Connectors for optical fibres and cables—Part 2: Sectional specification for fibre optic connector, Type F-SMA.

IEC 60874-10: 1992, Connectors for optical fibres and cables—Part 10: Sectional specification, Fibre optic connector type BFOC/2,5.

IEC 60950: 1991, Safety of information technology equipment.

IEC 61076-3-101: 1997, Connectors with assessed quality, for use in d.c., low-frequency analogue and in digital high-speed data applications—Part 3: Rectangular connectors—Section 101: Detail specification for a range of shielded connectors with trapezoidal shaped shells and non-removable rectangular contacts on a 1.27 mm × 2.54 mm centre-line.

IEC 61076-3-103 (48B/574/NP), Detail specification for rectangular connectors, with assessed quality, 6 and 8 way, fixed and free shielded connectors with ribbon contacts for high speed data applications.

IEC 61196-1: 1995, Radio-frequency cables—Part 1: Generic specification—General, definitions, requirements and test methods.

IEC 61754-4: 1997, Fibre optic connector interfaces—Part 4: Type SC connector family.

IEEE Std 802-1990, IEEE Standards for Local and Metropolitan Area Networks: Overview and Architecture.⁵

⁵IEEE publications are available from the Institute of Electrical and Electronics Engineers, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331, USA (standards.ieee.org/).

IEEE Std 802.1F-1993 (Reaff 1998), IEEE Standards for Local and Metropolitan Area Networks: Common Definitions and Procedures for IEEE 802 Management Information.

ISO/IEC 2382-9: 1995, Information technology—Vocabulary—Part 9: Data communication.⁶

ISO/IEC 7498-1: 1994, Information technology—Open Systems Interconnection—Basic Reference Model: The Basic Model.

ISO/IEC 7498-4: 1989, Information processing systems—Open Systems Interconnection—Basic Reference Model—Part 4: Management Framework.

ISO/IEC 8824: 1990, Information technology—Open Systems Interconnection—Specification of Abstract Syntax Notation One (ASN.1).

ISO/IEC 8825: 1990, Information technology—Open Systems Interconnection—Specification of basic encoding rules for Abstract Syntax Notation One (ASN.1).

ISO/IEC 8877: 1992, Information technology—Telecommunications and information exchange between systems—Interface connector and contact assignments for ISDN Basic Access Interface located at reference points S and T.

ISO/IEC 9314-1: 1989, Information processing systems—Fibre Distributed Data Interface (FDDI)—Part 1: Token Ring Physical Layer Protocol (PHY).

ISO/IEC 9314-2: 1989, Information processing systems—Fibre Distributed Data Interface (FDDI)—Part 2: Token Ring Media Access Control (MAC).

ISO/IEC 9314-3: 1990, Information processing systems—Fibre Distributed Data Interface (FDDI)—Part 3: Physical Layer Medium Dependent (PMD).

ISO/IEC 9646-1: 1994, Information technology—Open Systems Interconnection—Conformance testing methodology and framework—Part 1: General concepts.

ISO/IEC 9646-2: 1994, Information technology—Open Systems Interconnection—Conformance testing methodology and framework—Part 2: Abstract test suite specification.

ISO/IEC 10040: 1992, Information technology—Open Systems Interconnection—Systems management overview.

ISO/IEC 10164-1: 1993, Information technology—Open Systems Interconnection—Systems management—Part 1: Object Management Function.

ISO/IEC 10165-1: 1993, Information technology—Open Systems Interconnection—Management information services—Structure of management information—Part 1: Management Information Model.

ISO/IEC 10165-2: 1992, Information technology—Open Systems Interconnection—Structure of management information: Definition of management information.

⁶ISO publications are available from the ISO Central Secretariat, Case Postale 56, 1 rue de Varembe, CH-1211, Genève 20, Switzerland/Suisse (www.iso.ch/). ISO publications are also available in the United States from the Sales Department, American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036, USA.

ISO/IEC 10165-4: 1992, Information technology—Open Systems Interconnection—Management information services—Structure of management information—Part 4: Guidelines for the definition of managed objects.

ISO/IEC 10742: 1994, Information technology—Telecommunications and information exchange between systems—Elements of management information related to OSI Data Link Layer standards.

ISO/IEC 11801: 1995, Information technology—Generic cabling for customer premises.

ISO/IEC 15802-2: 1995 [ANSI/IEEE Std 802.1B-1992 and IEEE Std 802.1k-1993], Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Common specifications—Part 2: LAN/MAN Management.

ISO/IEC 15802-3: 1998 [IEEE Std 802.1D, 1998 Edition], Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Common specifications—Part 3: Media Access Control (MAC) bridges.⁷

ITU-T Recommendation G.957 (1995) Digital line systems—Optical interfaces for equipments and systems relating to the synchronous digital hierarchy.⁸

ITU-T Recommendation I.430 (1995), Basic user-network interface—Layer 1 specification.

NOTE—Local and national standards such as those supported by ANSI, EIA, IEEE, MIL, NPFA, and UL are not a formal part of this standard except where no international standard equivalent exists. A number of local and national standards are referenced as resource material; these bibliographical references are located in the bibliography in Annex A.

⁷As this standard goes to press, IEEE Std 802.1D-1998 is approved but not yet published. The draft standard is, however, available from the IEEE. It is being prepared as ISO/IEC 15802-3: 1998 [ANSI/IEEE Std 802.1D, 1998 Edition]. The anticipated publication date is no later than December 1998. Contact the IEEE Standards Department at 1 (732) 562-3800 for status information.

⁸ITU-T publications are available from the International Telecommunications Union, Place des Nations, CH-1211, Geneva 20, Switzerland (www.itu.int/).