

---

---

**Telecommunications and exchange  
between information technology  
systems — Requirements for local and  
metropolitan area networks —**

**Part 3:  
Standard for Ethernet**

**AMENDMENT 5: Physical layers  
specifications and management  
parameters for 10 Mb/s operation and  
associated power delivery over a single  
balanced pair of conductors**

*Télécommunications et échange entre systèmes informatiques —  
Exigences pour les réseaux locaux et métropolitains —*

*Partie 3: Norme pour Ethernet*

*AMENDEMENT 5: Spécifications des couches physiques et paramètres  
de gestion pour fonctionnement à 10 Mb/s et fourniture de puissance  
associée sur une paire symétrique unique de conducteurs*



Reference number  
ISO/IEC/IEEE 8802-3:2021/Amd.5:2021(E)



**Documents**

© IEEE 2020  
Document Sharing Hub



## **COPYRIGHT PROTECTED DOCUMENT**

© IEEE 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from IEEE at the address below.

Institute of Electrical and Electronics Engineers, Inc  
3 Park Avenue, New York  
NY 10016-5997, USA

Email: [stds.ipr@ieee.org](mailto:stds.ipr@ieee.org)  
Website: [www.ieee.org](http://www.ieee.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO/IEC documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives) or [www.iec.ch/members\\_experts/refdocs](http://www.iec.ch/members_experts/refdocs)).

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)) or the IEC list of patent declarations received (see [patents.iec.ch](http://patents.iec.ch)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html). In the IEC, see [www.iec.ch/understanding-standards](http://www.iec.ch/understanding-standards).

ISO/IEC/IEEE 8802-3:2021/Amd 5 was prepared by the LAN/MAN of the IEEE Computer Society (as [IEEE Std 802.3 cg™-2019]) and drafted in accordance with its editorial rules. It was adopted, under the “fast-track procedure” defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

A list of all parts in the ISO/IEC/IEEE 8802 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html) and [www.iec.ch/national-committees](http://www.iec.ch/national-committees).



# IEEE Standard for Ethernet

## **Amendment 5: Physical Layer Specifications and Management Parameters for 10 Mb/s Operation and Associated Power Delivery over a Single Balanced Pair of Conductors**

Developed by the  
**LAN/MAN Standards Committee**  
of the  
**IEEE Computer Society**

Approved 7 November 2019  
**IEEE SA Standards Board**

**Abstract:** This amendment to IEEE Std 802.3-2018 specifies additions and appropriate modifications to add 10 Mb/s Physical Layer (PHY) specifications and management parameters for operation, and associated optional provision of power, over a single balanced pair of conductors.

**Keywords:** 10BASE-T1L, 10BASE-T1S, amendment, copper, Ethernet, IEEE 802.3™, IEEE 802.3cg™, MASTER-SLAVE, medium dependent interface, physical coding sublayer, Physical Layer, Physical Layer Collision Avoidance, PLCA, physical medium attachment

---

The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2020 by The Institute of Electrical and Electronics Engineers, Inc.  
All rights reserved. Published 5 February 2020. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-1-5044-6420-8 STD24038  
Print: ISBN 978-1-5044-6421-5 STDPD24038

*IEEE prohibits discrimination, harassment and bullying.*

*For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.*

*No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.*

## Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notices and Disclaimers Concerning IEEE Standards Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/ipr/disclaimers.html>.

### Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. IEEE Standards are documents developed through scientific, academic, and industry-based technical working groups. Volunteers in IEEE working groups are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE Standards do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers and users of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

## Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

## Official statements

A statement, written or oral, that is not processed in accordance with the IEEE SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

## Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE SA Standards Board  
445 Hoes Lane  
Piscataway, NJ 08854 USA

## Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

## Copyrights

IEEE draft and approved standards are copyrighted by IEEE under US and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

## Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

## Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every 10 years. When a document is more than 10 years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit IEEE Xplore at <https://ieeexplore.ieee.org> or contact IEEE at the address listed previously. For more information about the IEEE SA or IEEE's standards development process, visit the IEEE SA Website at <http://standards.ieee.org>.

## Errata

Errata, if any, for IEEE standards can be accessed via <https://standards.ieee.org/standard/index.html>. Search for standard number and year of approval to access the web page of the published standard. Errata links are located under the Additional Resources Details section. Errata are also available in IEEE Xplore: <https://ieeexplore.ieee.org/browse/standards/collection/ieee/>. Users are encouraged to periodically check for errata.

## Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE SA Website at <https://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

## Participants

The following individuals were officers and members of the IEEE 802.3 Working Group at the beginning of the IEEE P802.3cg Working Group ballot.

**David J. Law**, *IEEE 802.3 Working Group Chair*  
**Adam Healey**, *IEEE 802.3 Working Group Vice-Chair*  
**Pete Anslow**, *IEEE 802.3 Working Group Secretary*  
**Steven B. Carlson**, *IEEE 802.3 Working Group Executive Secretary*  
**Valerie Maguire**, *IEEE 802.3 Working Group Treasurer*

**George Zimmerman**, *IEEE P802.3cg 10 Mb/s Single-Pair Ethernet Task Force Chair*  
**Valerie Maguire**, *IEEE P802.3cg 10 Mb/s Single-Pair Ethernet Task Force Editor-in-Chief*

|                      |                       |                         |
|----------------------|-----------------------|-------------------------|
| John Abbott          | Gerrit den Besten     | Gergely Huszak          |
| David Abramson       | Claudio DeSanti       | Yasuhiro Hyakutake      |
| Andrea Agnes         | Eric DiBiao           | Jonathan Ingham         |
| Dale Amason          | Chris Diminico        | Alessandro Ingrassia    |
| Richard Baca         | Hormoz Djahanshahi    | Kazuhiko Ishibe         |
| Amrik Bains          | Curtis Donahue        | Hideki Isono            |
| Thananya Baldwin     | Liang Du              | Tom Issenhuth           |
| Denis Beaudoin       | Mike Dudek            | Kenneth Jackson         |
| Francois Beauregard  | Frank Effenberger     | Andrew Jimenez          |
| Piergiorgio Beruto   | David Estes           | John Johnson            |
| Vipul Bhatt          | John Ewen             | Chad Jones              |
| Gao Bo               | Ramin Farjad          | Peter Jones             |
| Brad Booth           | Borhan Fathi Moghadam | Lokesh Kabra            |
| Martin Bouda         | Shahar Feldman        | Manabu Kagami           |
| David Brandt         | Vincent Ferretti      | Upen Kareti             |
| Ralf-Peter Braun     | Alan Flatman          | Yasuaki Kawatsu         |
| Theodore Brillhart   | Brian Franchuk        | Yong Kim                |
| Paul Brooks          | Matthias Fritsche     | Mark Kimber             |
| Alan Brown           | Richard Frosch        | Andrew Klaus            |
| Matthew Brown        | Mike Gardner          | Michael Klempa          |
| Phillip Brownlee     | Claude Gauthier       | Curtis Knittle          |
| Michal Brychta       | Ali Ghiasi            | Elizabeth Kochuparambil |
| Chris Bullock        | Joel Goergen          | Paul Kolesar            |
| Gary Burrell         | Zhigang Gong          | Taiji Kondo             |
| Jairo Bustos Heredia | Steven Gorshe         | Glen Kramer             |
| Adrian Butter        | Jens Gottron          | Olaf Krieger            |
| John Calvin          | Steffen Graber        | Hans Lackner            |
| Clark Carty          | Olaf Grau             | Jeffrey Lapak           |
| Craig Chabot         | Robert Grow           | Mark Laubach            |
| Mandeep Chadha       | Yong Guo              | Greg Le Cheminant       |
| David Chalupsky      | Mark Gustlin          | Han Hyub Lee            |
| Frank Chang          | Marek Hajduczenia     | June Hee Lee            |
| Xin Chang            | Akinori Hayakawa      | David Lewis             |
| Chan Chen            | Hayden Haynes         | Jon Lewis               |
| Weiying Cheng        | Howard Heck           | David Li                |
| Golam Choudhury      | Rajmohan Hegde        | Mike-Peng Li            |
| Keng Hua Chuang      | David Hess            | Jane Lim                |
| Keith Conroy         | Yasuo Hidaka          | Alex Lin                |
| John D'Ambrosia      | Brian Holden          | Robert Lingle           |
| Yair Darshan         | Rita Horner           | Dekun Liu               |
| Piers Dawe           | Bernd Hormmeyer       | Hai-Feng Liu            |
| Fred Dawson          | Xi Huang              | Karen Liu               |

|                    |                    |                      |
|--------------------|--------------------|----------------------|
| Zhenyu Liu         | Dino Pozzebon      | Stephen Trowbridge   |
| Miklos Lukacs      | Rick Rabinovich    | Ta Chin Tseng        |
| Kent Lusted        | Adee Ran           | Ed Ulrichs           |
| Zahy Madgar        | Alon Regev         | Daisuke Umeda        |
| Jeffery Maki       | Duane Remein       | Alexander Umnov      |
| David Malicoat     | Victor Renteria    | Sterling A. Vaden    |
| Arthur Marris      | Michael Ressler    | Paul Vanderlaan      |
| Takeo Masuda       | Salvatore Rotolo   | Ricky Vernickel      |
| Kirsten Matheus    | Alexander Rysin    | Marco Vitali         |
| Erdem Matoglu      | Toshiaki Sakai     | Robert Voss          |
| Marco Mazzini      | Sam Sambasivan     | Dylan Walker         |
| Mick McCarthy      | Edward Sayre       | Edward Walter        |
| Brett McClellan    | James Schuessler   | Haifei Wang          |
| Larry McMillan     | Steve Sekel        | Roy Wang             |
| Greg McSorley      | Masood Shariff     | Tongtong Wang        |
| Marcel Medina      | Ramin Shirani      | Xinyuan Wang         |
| Richard Mellitz    | Mizuki Shirao      | Christoph Wechsler   |
| Phil Miguelez      | Kapil Shrikhande   | Brian Welch          |
| Martin Miller      | Jeff Slavick       | Matthias Wendt       |
| Toshiyuki Moritake | Daniel Smith       | Natalie Wienckowski  |
| Harald Mueller     | Scott Sommers      | Ludwig Winkel        |
| Thomas Mueller     | Bryan Sparrowhawk  | James Withey         |
| Edward Nakamoto    | Edward Sprague     | Peter Wu             |
| Paul Neveux        | Peter Stassar      | Markus Wucher        |
| Gary Nicholl       | Heath Stewart      | Dayin Xu             |
| John Nolan         | David Stover       | Yu Xu                |
| Kevin Noll         | Junqing Sun        | Shuto Yamamoto       |
| Ronald Nordin      | Liyang Sun         | Adrian Young         |
| Mark Nowell        | Steve Swanson      | James Young          |
| David Ofelt        | Andre Szczepanek   | Lennart Yseboodt     |
| Josef Ohni         | Bharat Tailor      | Andrew Zambell       |
| Tom Palkert        | Tomoo Takahara     | Conrad Zerna         |
| Sujan Pandey       | Kohichi Tamura     | Richard (Yujia) Zhou |
| Earl Parsons       | Mehmet Tazebay     | Yan Zhuang           |
| Arkadiy Peker      | Ronald Tellas      | Martin Zielinski     |
| Gerald Pepper      | Geoffrey Thompson  | Pavel Zivny          |
| Phong Pham         | Pirooz Tooyserkani | Harald Zweck         |
| David Pichler      | Nathan Tracy       |                      |
| Rick Pimpinella    | Matthew Traverso   |                      |
| William Powell     | David Tremblay     |                      |

The following members of the individual balloting committee voted on this amendment. Individuals may have not voted, voted for approval, disapproval or abstained on this standard.

|                    |                      |                    |
|--------------------|----------------------|--------------------|
| Robert Aiello      | Theodore Brillhart   | Scott Griffiths    |
| Thomas Alexander   | Michal Brychta       | Randall Groves     |
| Richard Alfvén     | Demetrio Bucaneg     | Robert Grow        |
| Dale Amason        | Jairo Bustos Heredia | Marek Hajduczenia  |
| Hongming An        | William Byrd         | Adam Healey        |
| Pete Anslow        | Steven B. Carlson    | Marco Hernandez    |
| Butch Anton        | Clark Carty          | Werner Hoelzl      |
| Tim Baggett        | John Deandrea        | David Høglund      |
| Michael Bahr       | Chris Diminico       | Gergely Huszak     |
| Amrik Bains        | Brian Franchuk       | Yasuhiro Hyakutake |
| Gordon Bechtel     | Avraham Freedman     | Atsushi Ito        |
| Piergiorgio Beruto | Matthias Fritsche    | Raj Jain           |
| Burrell Best       | Claude Gauthier      | Sang Kwon Jeong    |
| Rich Boyer         | Devon Gayle          | Chad Jones         |
| David Brandt       | Joel Goergen         | Peter Jones        |
| Ralf-Peter Braun   | Zhigang Gong         | Lokesh Kabra       |
| Nancy Bravin       | Steffen Graber       | Manabu Kagami      |

Piotr Karocki  
Stuart Kerry  
Yongbum Kim  
Wojciech Koczwara  
Taiji Kondo  
Robert Landman  
Mark Laubach  
David J. Law  
Hyeong Ho Lee  
David Lewis  
Jon Lewis  
Michael Lynch  
Valerie Maguire  
Jeffery Maki  
Nicolai Malykh  
Arthur Marris  
Michael Maytum  
Mick McCarthy  
Brett McClellan  
Larry McMillan  
Richard Mellitz  
Martin Miller  
Jose Morales  
Henry Muysshondt  
Paul Neveux

Nick S. A. Nikjoo  
Paul Nikolich  
Mark Nowell  
Satoshi Obara  
Tom Palkert  
Carlos Pardo  
Bansi Patel  
David Piehler  
Rick Pimpinella  
Christopher Pohl  
William Quackenbush  
R. K. Rannow  
Alon Regev  
Thomas Rettig  
Maximilian Riegel  
Gary Robinson  
Robert Robinson  
Toshiaki Sakai  
Nicola Scantamburlo  
Dieter Schicketanz  
Michael Seaman  
Thomas Starai  
Heath Stewart  
Walter Struppler  
Mitsutoshi Sugawara

Junqing Sun  
Geoffrey Thompson  
Michael Thompson  
Nathan Tracy  
David Tremblay  
Mark-Rene Uchida  
Dmitri Varsanofiev  
George Vlantis  
Robert Voss  
Lisa Ward  
Keith Waters  
Karl Weber  
Matthias Wendt  
Scott Willy  
Ludwig Winkel  
James Withey  
Peter Wu  
Dayin Xu  
Lennart Yseboodt  
Oren Yuen  
Zhen Zhou  
Dirk Ziegelmeier  
Martin Zielinski  
George Zimmerman  
Pavel Zivny

When the IEEE SA Standards Board approved this amendment on 7 November 2019, it had the following membership:

**Gary Hoffman, *Chair***  
**Ted Burse, *Vice Chair***  
**Jean-Philippe Faure, *Past Chair***  
**Konstantinos Karachalios, *Secretary***

Masayuki Ariyoshi  
Stephen D. Dukes  
J. Travis Griffith  
Guido Hiertz  
Christel Hunter  
Joseph L. Koepfinger\*  
Thomas Koshy  
John D. Kulick

David J. Law  
Joseph Levy  
Howard Li  
Xiaohui Liu  
Kevin Lu  
Daleep Mohla  
Andrew Myles

Annette Reilly  
Dorothy Stanley  
Sha Wei  
Phil Wennblom  
Philip Winston  
Howard Wolfman  
Feng Wu  
Jingyi Zhou

\*Member Emeritus

## Introduction

This introduction is not part of IEEE Std 802.3cg-2019, IEEE Standard for Ethernet—Amendment 5: Physical Layer Specifications and Management Parameters for 10 Mb/s Operation and Associated Power Delivery over a Single Balanced Pair of Conductors.

IEEE Std 802.3™ was first published in 1985. Since the initial publication, many projects have added functionality or provided maintenance updates to the specifications and text included in the standard. Each IEEE 802.3 project/amendment is identified with a suffix (e.g., IEEE Std 802.3ba™-2010).

The half duplex Media Access Control (MAC) protocol specified in IEEE Std 802.3-1985 is Carrier Sense Multiple Access with Collision Detection (CSMA/CD). This MAC protocol was key to the experimental Ethernet developed at Xerox Palo Alto Research Center, which had a 2.94 Mb/s data rate. Ethernet at 10 Mb/s was jointly released as a public specification by Digital Equipment Corporation (DEC), Intel and Xerox in 1980. Ethernet at 10 Mb/s was approved as an IEEE standard by the IEEE Standards Board in 1983 and subsequently published in 1985 as IEEE Std 802.3-1985. Since 1985, new media options, new speeds of operation, and new capabilities have been added to IEEE Std 802.3. A full duplex MAC protocol was added in 1997.

Some of the major additions to IEEE Std 802.3 are identified in the marketplace with their project number. This is most common for projects adding higher speeds of operation or new protocols. For example, IEEE Std 802.3u™ added 100 Mb/s operation (also called Fast Ethernet), IEEE Std 802.3z added 1000 Mb/s operation (also called Gigabit Ethernet), IEEE Std 802.3ae added 10 Gb/s operation (also called 10 Gigabit Ethernet), IEEE Std 802.3ah™ specified access network Ethernet (also called Ethernet in the First Mile) and IEEE Std 802.3ba added 40 Gb/s operation (also called 40 Gigabit Ethernet) and 100 Gb/s operation (also called 100 Gigabit Ethernet). These major additions are all now included in and are superseded by IEEE Std 802.3-2018 and are not maintained as separate documents.

At the date of publication for IEEE Std 802.3cg-2019, IEEE Std 802.3 was composed of the following documents:

### IEEE Std 802.3-2018

Section One—Includes Clause 1 through Clause 20 and Annex A through Annex H and Annex 4A. Section One includes the specifications for 10 Mb/s operation and the MAC, frame formats and service interfaces used for all speeds of operation.

Section Two—Includes Clause 21 through Clause 33 and Annex 22A through Annex 33E. Section Two includes management attributes for multiple protocols and speed of operation as well as specifications for providing power over twisted pair cabling for multiple operational speeds. It also includes general information on 100 Mb/s operation as well as most of the 100 Mb/s Physical Layer specifications.

Section Three—Includes Clause 34 through Clause 43 and Annex 36A through Annex 43C. Section Three includes general information on 1000 Mb/s operation as well as most of the 1000 Mb/s Physical Layer specifications.

Section Four—Includes Clause 44 through Clause 55 and Annex 44A through Annex 55B. Section Four includes general information on 10 Gb/s operation as well as most of the 10 Gb/s Physical Layer specifications.

Section Five—Includes Clause 56 through Clause 77 and Annex 57A through Annex 76A. Clause 56 through Clause 67 and Clause 75 through Clause 77, as well as associated annexes, specify subscriber

access and other Physical Layers and sublayers for operation from 512 kb/s to 10 Gb/s, and defines services and protocol elements that enable the exchange of IEEE Std 802.3 format frames between stations in a subscriber access network. Clause 68 specifies a 10 Gb/s Physical Layer specification. Clause 69 through Clause 74 and associated annexes specify Ethernet operation over electrical backplanes at speeds of 1000 Mb/s and 10 Gb/s.

Section Six—Includes Clause 78 through Clause 95 and Annex 83A through Annex 93C. Clause 78 specifies Energy-Efficient Ethernet. Clause 79 specifies IEEE 802.3 Organizationally Specific Link Layer Discovery Protocol (LLDP) type, length, and value (TLV) information elements. Clause 80 through Clause 95 and associated annexes include general information on 40 Gb/s and 100 Gb/s operation as well the 40 Gb/s and 100 Gb/s Physical Layer specifications. Clause 90 specifies Ethernet support for time synchronization protocols.

Section Seven—Includes Clause 96 through Clause 115 and Annex 97A through Annex 115A. Clause 96 through Clause 98, Clause 104, and associated annexes, specify Physical Layers and optional features for 100 Mb/s and 1000 Mb/s operation over a single twisted pair. Clause 100 through Clause 103, as well as associated annexes, specify Physical Layers for the operation of the EPON protocol over coaxial distribution networks. Clause 105 through Clause 114 and associated annexes include general information on 25 Gb/s operation as well as 25 Gb/s Physical Layer specifications. Clause 99 specifies a MAC merge sublayer for the interspersing of express traffic. Clause 115 and its associated annex specify a Physical Layer for 1000 Mb/s operation over plastic optical fiber.

Section Eight—Includes Clause 116 through Clause 126 and Annex 119A through Annex 120E. Clause 116 through Clause 124 and associated annexes include general information on 200 Gb/s and 400 Gb/s operation as well the 200 Gb/s and 400 Gb/s Physical Layer specifications. Clause 125 and Clause 126 include general information on 2.5 Gb/s and 5 Gb/s operation as well as 2.5 Gb/s and 5 Gb/s Physical Layer specifications.

## IEEE Std 802.3cb™-2018

Amendment 1—This amendment includes changes to IEEE Std 802.3-2018 and its amendments and adds Clause 127 through Clause 130, Annex 127A, Annex 128A, Annex 128B, and Annex 130A. This amendment adds new Physical Layers for operation at 2.5 Gb/s and 5 Gb/s over electrical backplanes.

## IEEE Std 802.3bt™-2018

Amendment 2—This amendment includes changes to IEEE Std 802.3-2018 and its amendments and adds Clause 145, Annex 145A, Annex 145B, and Annex 145C. This amendment adds power delivery using all four pairs in the structured wiring plant, resulting in greater power being available to end devices. This amendment also allows for lower standby power consumption in end devices and adds a mechanism to better manage the available power budget.

## IEEE Std 802.3cd™-2018

Amendment 3—This amendment includes changes to IEEE Std 802.3-2018 and its amendments and adds Clause 131 through Clause 140 and Annex 135A through Annex 136D. This amendment adds MAC parameters, Physical Layers, and management parameters for the transfer of IEEE 802.3 format frames at 50 Gb/s, 100 Gb/s, and 200 Gb/s.

## IEEE Std 802.3cn™-2019

Amendment 4—This amendment includes changes to IEEE Std 802.3-2018 and its amendments and adds 50 Gb/s, 200 Gb/s, and 400 Gb/s Physical Layer specifications and management parameters for operation over single-mode fiber with reaches of at least 40 km.

IEEE Std 802.3cg™-2019

Amendment 5—This amendment includes changes to IEEE Std 802.3-2018 and its amendments and adds Clause 146 through Clause 148 and Annex 146A and Annex 146B. This amendment adds 10 Mb/s Physical Layer specifications and management parameters for operation on a single balanced pair of conductors.

Two companion documents exist, IEEE Std 802.3.1 and IEEE Std 802.3.2. IEEE Std 802.3.1 describes Ethernet management information base (MIB) modules for use with the Simple Network Management Protocol (SNMP). IEEE Std 802.3.2 describes YANG data models for Ethernet. IEEE Std 802.3.1 and IEEE Std 802.3.2 are updated to add management capability for enhancements to IEEE Std 802.3 after approval of those enhancements.

IEEE Std 802.3 will continue to evolve. New Ethernet capabilities are anticipated to be added within the next few years as amendments to this standard.

## Contents

|            |                                                                                                                                                          |    |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 1.         | Introduction.....                                                                                                                                        | 26 |
| 1.1        | Overview.....                                                                                                                                            | 26 |
| 1.1.3      | Architectural perspectives.....                                                                                                                          | 26 |
| 1.3        | Normative references.....                                                                                                                                | 26 |
| 1.4        | Definitions .....                                                                                                                                        | 27 |
| 1.5        | Abbreviations.....                                                                                                                                       | 29 |
| 9.         | Repeater unit for 10 Mb/s baseband networks.....                                                                                                         | 30 |
| 9.1        | Overview.....                                                                                                                                            | 30 |
| 22.        | Reconciliation Sublayer (RS) and Media Independent Interface (MII).....                                                                                  | 31 |
| 22.1       | Overview.....                                                                                                                                            | 31 |
| 22.2       | Functional specifications .....                                                                                                                          | 31 |
| 22.2.2     | MII signal functional specifications .....                                                                                                               | 31 |
| 22.2.2.4   | TXD (transmit data).....                                                                                                                                 | 31 |
| 22.2.2.5   | TX_ER (transmit coding error) .....                                                                                                                      | 32 |
| 22.2.2.8   | RXD (receive data).....                                                                                                                                  | 32 |
| 22.8       | Protocol implementation conformance statement (PICS) proforma for Clause 22,<br>Reconciliation Sublayer (RS) and Media Independent Interface (MII) ..... | 33 |
| 22.8.2     | Identification .....                                                                                                                                     | 33 |
| 22.8.2.3   | Major capabilities/options .....                                                                                                                         | 33 |
| 22.8.3     | PICS proforma tables for reconciliation sublayer and media independent interface .....                                                                   | 33 |
| 22.8.3.2   | MII signal functional specifications .....                                                                                                               | 33 |
| 30.        | Management.....                                                                                                                                          | 34 |
| 30.2       | Managed objects .....                                                                                                                                    | 34 |
| 30.2.2     | Overview of managed objects.....                                                                                                                         | 34 |
| 30.2.2.1   | Text description of managed objects .....                                                                                                                | 34 |
| 30.2.3     | Containment.....                                                                                                                                         | 35 |
| 30.2.5     | Capabilities .....                                                                                                                                       | 36 |
| 30.3       | Layer management for DTEs.....                                                                                                                           | 36 |
| 30.3.2     | PHY device managed object class .....                                                                                                                    | 36 |
| 30.3.2.1   | PHY device attributes.....                                                                                                                               | 36 |
| 30.3.2.1.2 | aPhyType .....                                                                                                                                           | 36 |
| 30.3.2.1.3 | aPhyTypeList .....                                                                                                                                       | 37 |
| 30.5       | Layer management for medium attachment units (MAUs) .....                                                                                                | 37 |
| 30.5.1     | MAU managed object class .....                                                                                                                           | 37 |
| 30.5.1.1   | MAU attributes .....                                                                                                                                     | 37 |
| 30.5.1.1.2 | aMAUType .....                                                                                                                                           | 37 |
| 30.5.1.1.4 | aMediaAvailable.....                                                                                                                                     | 37 |
| 30.6       | Management for link Auto-Negotiation .....                                                                                                               | 37 |
| 30.6.1     | Auto-Negotiation managed object class .....                                                                                                              | 37 |
| 30.6.1.1   | Auto-Negotiation attributes .....                                                                                                                        | 37 |
| 30.6.1.1.5 | aAutoNegLocalTechnologyAbility .....                                                                                                                     | 37 |
| 30.15      | Layer management for Power over Data Lines (PoDL) of Single Balanced<br>Twisted-Pair Ethernet .....                                                      | 38 |
| 30.15.1    | PoDL PSE managed object class .....                                                                                                                      | 38 |

|               |                                                               |    |
|---------------|---------------------------------------------------------------|----|
| 30.15.1.1     | PoDL PSE attributes .....                                     | 38 |
| 30.15.1.1.4   | aPoDLPSEType .....                                            | 38 |
| 30.15.1.1.5   | aPoDLPSEDetectedPDType .....                                  | 38 |
| 30.15.1.1.6   | aPoDLPSEDetectedPDPowerClass .....                            | 38 |
| 30.16         | Management for PLCA Reconciliation Sublayer .....             | 39 |
| 30.16.1       | PLCA managed object class .....                               | 39 |
| 30.16.1.1     | PLCA attributes .....                                         | 39 |
| 30.16.1.1.1   | aPLCAAdminState .....                                         | 39 |
| 30.16.1.1.2   | aPLCAStatus .....                                             | 39 |
| 30.16.1.1.3   | aPLCANodeCount .....                                          | 39 |
| 30.16.1.1.4   | aPLCALocalNodeID .....                                        | 40 |
| 30.16.1.1.5   | aPLCATransmitOpportunityTimer .....                           | 40 |
| 30.16.1.1.6   | aPLCAMaxBurstCount .....                                      | 40 |
| 30.16.1.1.7   | aPLCABurstTimer .....                                         | 40 |
| 30.16.1.2     | PLCA device actions .....                                     | 40 |
| 30.16.1.2.1   | acPLCAAdminControl .....                                      | 40 |
| 30.16.1.2.2   | acPLCAReset .....                                             | 41 |
| 45.           | Management Data Input/Output (MDIO) Interface .....           | 42 |
| 45.2          | MDIO Interface Registers .....                                | 42 |
| 45.2.1        | PMA/PMD registers .....                                       | 42 |
| 45.2.1.7      | PMA/PMD status 2 register (Register 1.8) .....                | 42 |
| 45.2.1.7.4    | Transmit fault (1.8.11) .....                                 | 42 |
| 45.2.1.7.5    | Receive fault (1.8.10) .....                                  | 42 |
| 45.2.1.16     | BASE-T1 PMA/PMD extended ability register (1.18) .....        | 43 |
| 45.2.1.185    | BASE-T1 PMA/PMD control register (Register 1.2100) .....      | 43 |
| 45.2.1.185.2  | Type selection (1.2100.3:0) .....                             | 43 |
| 45.2.1.186a   | 10BASE-T1L PMA control register (Register 1.2294) .....       | 44 |
| 45.2.1.186a.1 | PMA reset (1.2294.15) .....                                   | 44 |
| 45.2.1.186a.2 | Transmit disable (1.2294.14) .....                            | 45 |
| 45.2.1.186a.3 | Transmit voltage amplitude control (1.2294.12) .....          | 45 |
| 45.2.1.186a.4 | Low-power (1.2294.11) .....                                   | 45 |
| 45.2.1.186a.5 | EEE enable (1.2294.10) .....                                  | 45 |
| 45.2.1.186a.6 | Loopback (1.2294.0) .....                                     | 45 |
| 45.2.1.186b   | 10BASE-T1L PMA status register (Register 1.2295) .....        | 45 |
| 45.2.1.186b.1 | Loopback ability (1.2295.13) .....                            | 46 |
| 45.2.1.186b.2 | 2.4 Vpp operating mode ability (1.2295.12) .....              | 46 |
| 45.2.1.186b.3 | Low-power ability (1.2295.11) .....                           | 46 |
| 45.2.1.186b.4 | EEE ability (1.2295.10) .....                                 | 47 |
| 45.2.1.186b.5 | Receive fault ability (1.2295.9) .....                        | 47 |
| 45.2.1.186b.6 | Receive polarity (1.2295.2) .....                             | 47 |
| 45.2.1.186b.7 | Receive fault (1.2295.1) .....                                | 47 |
| 45.2.1.186b.8 | Receive link status (1.2295.0) .....                          | 47 |
| 45.2.1.186c   | 10BASE-T1L test mode control register (Register 1.2296) ..... | 47 |
| 45.2.1.186c.1 | Test mode control (1.2296.15:13) .....                        | 48 |
| 45.2.1.186d   | 10BASE-T1S PMA control register (Register 1.2297) .....       | 48 |
| 45.2.1.186d.1 | PMA reset (1.2297.15) .....                                   | 48 |
| 45.2.1.186d.2 | Transmit disable (1.2297.14) .....                            | 49 |
| 45.2.1.186d.3 | Low-power (1.2297.11) .....                                   | 49 |
| 45.2.1.186d.4 | Multidrop mode (1.2297.10) .....                              | 49 |
| 45.2.1.186d.5 | Loopback (1.2297.0) .....                                     | 49 |
| 45.2.1.186e   | 10BASE-T1S PMA status register (Register 1.2298) .....        | 49 |
| 45.2.1.186e.1 | 10BASE-T1S loopback ability (1.2298.13) .....                 | 50 |

|               |                                                                                                                                    |    |
|---------------|------------------------------------------------------------------------------------------------------------------------------------|----|
| 45.2.1.186e.2 | Low-power ability (1.2298.11).....                                                                                                 | 50 |
| 45.2.1.186e.3 | Multidrop ability (1.2298.10).....                                                                                                 | 50 |
| 45.2.1.186e.4 | Receive fault ability (1.2298.9).....                                                                                              | 50 |
| 45.2.1.186e.5 | Receive fault (1.2298.1).....                                                                                                      | 51 |
| 45.2.1.186f   | 10BASE-T1S test mode control register (Register 1.2299).....                                                                       | 51 |
| 45.2.1.186f.1 | Test mode control (1.2299.15:13).....                                                                                              | 51 |
| 45.2.3        | PCS registers.....                                                                                                                 | 51 |
| 45.2.3.68a    | 10BASE-T1L PCS control register (Register 3.2278).....                                                                             | 52 |
| 45.2.3.68a.1  | PCS reset (3.2278.15).....                                                                                                         | 52 |
| 45.2.3.68a.2  | Loopback (3.2278.14).....                                                                                                          | 53 |
| 45.2.3.68b    | 10BASE-T1L PCS status register (Register 3.2279).....                                                                              | 53 |
| 45.2.3.68b.1  | Tx LPI received (3.2279.11).....                                                                                                   | 54 |
| 45.2.3.68b.2  | Rx LPI received (3.2279.10).....                                                                                                   | 54 |
| 45.2.3.68b.3  | Tx LPI indication (3.2279.9).....                                                                                                  | 54 |
| 45.2.3.68b.4  | Rx LPI indication (3.2279.8).....                                                                                                  | 54 |
| 45.2.3.68b.5  | Fault (3.2279.7).....                                                                                                              | 54 |
| 45.2.3.68b.6  | PCS receive link status (3.2279.2).....                                                                                            | 54 |
| 45.2.3.68c    | 10BASE-T1S PCS control register (Register 3.2291).....                                                                             | 54 |
| 45.2.3.68c.1  | PCS reset (3.2291.15).....                                                                                                         | 55 |
| 45.2.3.68c.2  | Loopback (3.2291.14).....                                                                                                          | 55 |
| 45.2.3.68c.3  | Duplex mode (3.2291.8).....                                                                                                        | 55 |
| 45.2.3.68d    | 10BASE-T1S PCS status register (Register 3.2292).....                                                                              | 56 |
| 45.2.3.68d.1  | Fault (3.2292.7).....                                                                                                              | 56 |
| 45.2.3.68e    | 10BASE-T1S PCS diagnostic 1 (Register 3.2293).....                                                                                 | 56 |
| 45.2.3.68e.1  | Remote jabber count (3.2293.15:0).....                                                                                             | 56 |
| 45.2.3.68f    | 10BASE-T1S PCS diagnostic 2 (Register 3.2294).....                                                                                 | 57 |
| 45.2.3.68f.1  | CorruptedTxCnt (3.2294.15:0).....                                                                                                  | 57 |
| 45.2.7        | Auto-Negotiation registers.....                                                                                                    | 57 |
| 45.2.7.25     | 10BASE-T1 AN control register (Register 7.526).....                                                                                | 57 |
| 45.2.7.25.1   | 10BASE-T1L capability advertisement (7.526.15).....                                                                                | 58 |
| 45.2.7.25.2   | 10BASE-T1L EEE ability advertisement (7.526.14).....                                                                               | 58 |
| 45.2.7.25.3   | 10BASE-T1L increased transmit/receive level ability advertisement (7.526.13).....                                                  | 58 |
| 45.2.7.25.4   | 10BASE-T1L increased transmit level request (7.526.12)....                                                                         | 59 |
| 45.2.7.25.5   | 10BASE-T1S full duplex ability advertisement (7.526.7) ....                                                                        | 59 |
| 45.2.7.25.6   | 10BASE-T1S half duplex capability advertisement (7.526.6).....                                                                     | 59 |
| 45.2.7.26     | 10BASE-T1 AN status register (Register 7.527).....                                                                                 | 59 |
| 45.2.9        | Power Unit Registers.....                                                                                                          | 60 |
| 45.2.9.1      | PoDL PSE Control register (Register 13.0).....                                                                                     | 60 |
| 45.2.9.2      | PoDL PSE Status 1 register (Register 13.1).....                                                                                    | 61 |
| 45.2.9.2.7    | PSE Type (13.1.9:7).....                                                                                                           | 61 |
| 45.2.9.2.8    | PD Class (13.1.6:3).....                                                                                                           | 61 |
| 45.2.9.3      | PoDL PSE Status 2 register (Register 13.2).....                                                                                    | 62 |
| 45.2.9.3.1a   | PD Extended Class (13.2.10:9).....                                                                                                 | 62 |
| 45.2.9.3.2    | PD Type (13.2.2:0).....                                                                                                            | 62 |
| 45.2.9.4      | PoDL PSE Status 3 register (Register 13.3).....                                                                                    | 63 |
| 45.2.9.4.1    | PD Assigned Power (13.3.11:0).....                                                                                                 | 63 |
| 45.2.9.5      | PoDL PSE Status 4 register (Register 13.4).....                                                                                    | 63 |
| 45.2.9.5.1    | PD Requested Power (13.4.11:0).....                                                                                                | 63 |
| 45.5          | Protocol implementation conformance statement (PICS) proforma for Clause 45,<br>Management Data Input/Output (MDIO) interface..... | 64 |
| 45.5.3        | PICS proforma tables for the Management Data Input Output (MDIO) interface....                                                     | 64 |
| 45.5.3.3      | PMA/PMD management functions.....                                                                                                  | 64 |

|            |                                                                                                                                          |    |
|------------|------------------------------------------------------------------------------------------------------------------------------------------|----|
| 45.5.3.7   | PCS management functions.....                                                                                                            | 68 |
| 45.5.3.9   | Auto-Negotiation management functions.....                                                                                               | 70 |
| 78.        | Energy-Efficient Ethernet (EEE).....                                                                                                     | 71 |
| 78.1       | Overview.....                                                                                                                            | 71 |
| 78.1.4     | PHY types optionally supporting EEE.....                                                                                                 | 71 |
| 78.2       | LPI mode timing parameters description.....                                                                                              | 71 |
| 78.5       | Communication link access latency.....                                                                                                   | 71 |
| 98.        | Auto-Negotiation for single differential-pair media.....                                                                                 | 72 |
| 98.2       | Functional specifications.....                                                                                                           | 72 |
| 98.2.1     | Transmit function requirements.....                                                                                                      | 72 |
| 98.2.1.1   | DME transmission.....                                                                                                                    | 72 |
| 98.2.1.1.1 | DME page encoding.....                                                                                                                   | 72 |
| 98.2.1.1.2 | DME page timing.....                                                                                                                     | 72 |
| 98.2.1.1.3 | DME page Delimiters.....                                                                                                                 | 73 |
| 98.5       | Detailed functions and state diagrams.....                                                                                               | 74 |
| 98.5.1     | State diagram variables.....                                                                                                             | 74 |
| 98.5.2     | State diagram timers.....                                                                                                                | 74 |
| 98.5.5     | State diagrams.....                                                                                                                      | 77 |
| 98.5.6     | High-speed and low-speed Auto-Negotiation modes.....                                                                                     | 81 |
| 98.5.6.1   | Variables.....                                                                                                                           | 81 |
| 98.5.6.2   | Functions.....                                                                                                                           | 82 |
| 98.5.6.3   | Timers.....                                                                                                                              | 82 |
| 98.6       | Protocol implementation conformance statement (PICS) proforma for Clause 98,<br>Auto-Negotiation for Single Differential-Pair Media..... | 83 |
| 98.6.2a    | Major capabilities/options.....                                                                                                          | 83 |
| 98.6.3     | General.....                                                                                                                             | 83 |
| 98.6.4     | DME transmission.....                                                                                                                    | 83 |
| 98.6.8     | State diagram and variable definitions.....                                                                                              | 84 |
| 98.6.9     | High-speed and low-speed Auto-Negotiation modes.....                                                                                     | 85 |
| 104.       | Power over Data Lines (PoDL) of Single Balanced Twisted-Pair Ethernet.....                                                               | 86 |
| 104.1      | Overview.....                                                                                                                            | 86 |
| 104.1.3    | PoDL system types.....                                                                                                                   | 86 |
| 104.2      | Link segment.....                                                                                                                        | 86 |
| 104.3      | Class power requirements.....                                                                                                            | 87 |
| 104.4      | Power Sourcing Equipment (PSE).....                                                                                                      | 87 |
| 104.4.1    | PSE types.....                                                                                                                           | 87 |
| 104.4.1a   | PI pin assignments.....                                                                                                                  | 87 |
| 104.4.3    | PSE state diagram.....                                                                                                                   | 88 |
| 104.4.3.3  | Variables.....                                                                                                                           | 88 |
| 104.4.3.5  | Functions.....                                                                                                                           | 89 |
| 104.4.4    | PSE detection of a PD.....                                                                                                               | 89 |
| 104.4.4.1  | Detection probe requirements.....                                                                                                        | 89 |
| 104.4.6    | PSE output requirements.....                                                                                                             | 90 |
| 104.4.6.3  | Power feeding ripple and transients.....                                                                                                 | 91 |
| 104.5      | Powered Device (PD).....                                                                                                                 | 91 |
| 104.5.1    | PD types.....                                                                                                                            | 91 |
| 104.5.1a   | PD PI.....                                                                                                                               | 92 |
| 104.5.3    | PD state diagram.....                                                                                                                    | 92 |

|           |                                                                                                                                                             |     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 104.5.3.5 | Functions .....                                                                                                                                             | 92  |
| 104.5.6   | PD power .....                                                                                                                                              | 93  |
| 104.5.6.4 | PD ripple and transients.....                                                                                                                               | 94  |
| 104.6     | Additional electrical specifications.....                                                                                                                   | 94  |
| 104.6.2   | Fault tolerance.....                                                                                                                                        | 94  |
| 104.7     | Serial communication classification protocol (SCCP) .....                                                                                                   | 95  |
| 104.7.1   | SCCP signaling .....                                                                                                                                        | 95  |
| 104.7.1.1 | Initialization procedure—reset and presence pulses .....                                                                                                    | 95  |
| 104.7.1.2 | Write time slots.....                                                                                                                                       | 95  |
| 104.7.1.3 | Read time slots.....                                                                                                                                        | 96  |
| 104.7.1.4 | Calculations for cable resistance .....                                                                                                                     | 99  |
| 104.7.1.5 | Calculations for power allocation.....                                                                                                                      | 99  |
| 104.7.2   | Serial communication classification protocols .....                                                                                                         | 100 |
| 104.7.2.4 | Read_Scratchpad function command [0xAA].....                                                                                                                | 101 |
| 104.7.2.5 | CRC8 field.....                                                                                                                                             | 101 |
| 104.7.2.6 | Read_VOLT_INFO command [0xBB] .....                                                                                                                         | 102 |
| 104.7.2.7 | Read_POWER_INFO command [0x77] .....                                                                                                                        | 103 |
| 104.7.2.8 | Write_POWER_ASSIGN command [0x99] .....                                                                                                                     | 103 |
| 104.7.2.9 | Read_POWER_ASSIGN command [0x81] .....                                                                                                                      | 103 |
| 104.9     | Protocol implementation conformance statement (PICS) proforma for Clause 104,<br>Power over Data Lines (PoDL) of Single Balanced Twisted-Pair Ethernet..... | 104 |
| 104.9.1   | Introduction.....                                                                                                                                           | 104 |
| 104.9.2   | Identification .....                                                                                                                                        | 104 |
| 104.9.2.2 | Protocol summary.....                                                                                                                                       | 104 |
| 104.9.3   | Major capabilities/options.....                                                                                                                             | 105 |
| 104.9.4   | PICS proforma tables for Clause 104, Power over Data Lines (PoDL) of<br>Single Balanced Twisted-Pair Ethernet .....                                         | 105 |
| 104.9.4.1 | Link Segment.....                                                                                                                                           | 105 |
| 104.9.4.2 | Power Sourcing Equipment (PSE) .....                                                                                                                        | 106 |
| 104.9.4.3 | Powered Device (PD) .....                                                                                                                                   | 106 |
| 104.9.4.7 | SCCP .....                                                                                                                                                  | 106 |
| 146.      | Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer and<br>baseband medium, type 10BASE-T1L .....                                     | 108 |
| 146.1     | Overview .....                                                                                                                                              | 108 |
| 146.1.1   | Relationship of 10BASE-T1L to other standards .....                                                                                                         | 108 |
| 146.1.2   | Operation of 10BASE-T1L.....                                                                                                                                | 108 |
| 146.1.2.1 | Physical Coding Sublayer (PCS).....                                                                                                                         | 109 |
| 146.1.2.2 | Physical Medium Attachment (PMA) sublayer.....                                                                                                              | 110 |
| 146.1.2.3 | EEE capability .....                                                                                                                                        | 110 |
| 146.1.2.4 | Signaling.....                                                                                                                                              | 110 |
| 146.1.3   | Conventions in this clause .....                                                                                                                            | 111 |
| 146.1.3.1 | State diagram notation .....                                                                                                                                | 111 |
| 146.1.3.2 | State diagram timer specifications.....                                                                                                                     | 111 |
| 146.1.3.3 | Service specifications .....                                                                                                                                | 111 |
| 146.2     | Service primitives and interfaces.....                                                                                                                      | 111 |
| 146.2.1   | PMA_LINK.request.....                                                                                                                                       | 112 |
| 146.2.1.1 | Semantics of the primitive.....                                                                                                                             | 112 |
| 146.2.1.2 | When generated .....                                                                                                                                        | 113 |
| 146.2.1.3 | Effect of receipt .....                                                                                                                                     | 113 |
| 146.2.2   | PMA_LINK.indication .....                                                                                                                                   | 113 |
| 146.2.2.1 | Semantics of the primitive .....                                                                                                                            | 113 |
| 146.2.2.2 | When generated .....                                                                                                                                        | 113 |

|             |                                                 |     |
|-------------|-------------------------------------------------|-----|
| 146.2.2.3   | Effect of receipt .....                         | 113 |
| 146.2.3     | PMA_TXMODE.indication.....                      | 113 |
| 146.2.3.1   | Semantics of the primitive .....                | 113 |
| 146.2.3.2   | When generated .....                            | 114 |
| 146.2.3.3   | Effect of receipt .....                         | 114 |
| 146.2.4     | PMA_UNITDATA.indication .....                   | 114 |
| 146.2.4.1   | Semantics of the primitive .....                | 114 |
| 146.2.4.2   | When generated .....                            | 114 |
| 146.2.4.3   | Effect of receipt .....                         | 114 |
| 146.2.5     | PMA_UNITDATA.request.....                       | 114 |
| 146.2.5.1   | Semantics of the primitive .....                | 114 |
| 146.2.5.2   | When generated .....                            | 114 |
| 146.2.5.3   | Effect of receipt .....                         | 114 |
| 146.2.6     | PMA_RXSTATUS.indication .....                   | 115 |
| 146.2.6.1   | Semantics of the primitive .....                | 115 |
| 146.2.6.2   | When generated .....                            | 115 |
| 146.2.6.3   | Effect of receipt .....                         | 115 |
| 146.2.7     | PMA_REMRXSTATUS.request .....                   | 115 |
| 146.2.7.1   | Semantics of the primitive .....                | 115 |
| 146.2.7.2   | When generated .....                            | 115 |
| 146.2.7.3   | Effect of receipt .....                         | 115 |
| 146.2.8     | PMA_SCRSTATUS.request.....                      | 116 |
| 146.2.8.1   | Semantics of the primitive .....                | 116 |
| 146.2.8.2   | When generated .....                            | 116 |
| 146.2.8.3   | Effect of receipt .....                         | 116 |
| 146.2.9     | PMA_TXEN.request (tx_enable_mii) .....          | 116 |
| 146.2.9.1   | Semantics of the primitive .....                | 116 |
| 146.2.9.2   | When generated .....                            | 116 |
| 146.2.9.3   | Effect of receipt .....                         | 116 |
| 146.2.10    | PMA_RX_LPI_STATUS.request (rx_lpi_active).....  | 117 |
| 146.2.10.1  | Semantics of the primitive .....                | 117 |
| 146.2.10.2  | When generated .....                            | 117 |
| 146.2.10.3  | Effect of receipt .....                         | 117 |
| 146.2.11    | PMA_TX_LPI_STATUS.request (tx_lpi_active) ..... | 117 |
| 146.2.11.1  | Semantics of the primitive .....                | 117 |
| 146.2.11.2  | When generated .....                            | 117 |
| 146.2.11.3  | Effect of receipt .....                         | 117 |
| 146.2.12    | PMA_TX_LPI_STATUS.indication .....              | 118 |
| 146.2.12.1  | Semantics of the primitive .....                | 118 |
| 146.2.12.2  | When generated .....                            | 118 |
| 146.2.12.3  | Effect of receipt .....                         | 118 |
| 146.3       | Physical Coding Sublayer (PCS) functions .....  | 118 |
| 146.3.1     | PCS Reset function .....                        | 118 |
| 146.3.2     | PCS Data Transmission Enable .....              | 120 |
| 146.3.2.1   | Variables .....                                 | 120 |
| 146.3.3     | PCS Transmit .....                              | 121 |
| 146.3.3.1   | PCS Transmit state diagram .....                | 121 |
| 146.3.3.1.1 | Variables .....                                 | 122 |
| 146.3.3.1.2 | Functions .....                                 | 123 |
| 146.3.3.1.3 | Timers .....                                    | 124 |
| 146.3.3.1.4 | Abbreviations .....                             | 124 |
| 146.3.3.1.5 | Constants .....                                 | 124 |
| 146.3.3.1.6 | State diagram .....                             | 125 |
| 146.3.3.2   | PCS Transmit multiplexer state diagram .....    | 126 |

|             |                                                                |     |
|-------------|----------------------------------------------------------------|-----|
| 146.3.3.2.1 | Variables .....                                                | 126 |
| 146.3.3.2.2 | Timers .....                                                   | 126 |
| 146.3.3.2.3 | Abbreviations .....                                            | 126 |
| 146.3.3.2.4 | State diagram .....                                            | 127 |
| 146.3.3.3   | PCS Transmit symbol generation .....                           | 127 |
| 146.3.3.4   | Data and idle stream scrambling .....                          | 128 |
| 146.3.3.4.1 | Side-stream scrambler polynomial .....                         | 128 |
| 146.3.3.4.2 | Generation of Syn[3:0] .....                                   | 128 |
| 146.3.3.4.3 | Generation of scrambled bits Sdn[3:0] .....                    | 129 |
| 146.3.3.5   | Generation of code-groups .....                                | 129 |
| 146.3.3.5.1 | Generation of code-groups in mode SEND_N and<br>SEND_I .....   | 129 |
| 146.3.3.5.2 | Generation of code-groups in mode SEND_Z .....                 | 131 |
| 146.3.4     | PCS Receive .....                                              | 131 |
| 146.3.4.1   | PCS Receive overview .....                                     | 131 |
| 146.3.4.1.1 | Variables .....                                                | 132 |
| 146.3.4.1.2 | Functions .....                                                | 133 |
| 146.3.4.1.3 | Timers .....                                                   | 134 |
| 146.3.4.1.4 | Constants .....                                                | 134 |
| 146.3.4.1.5 | State diagrams .....                                           | 134 |
| 146.3.4.2   | PCS Receive symbol decoding .....                              | 137 |
| 146.3.4.3   | PCS Receive descrambler polynomial .....                       | 138 |
| 146.3.4.4   | PCS Receive automatic polarity detection .....                 | 138 |
| 146.3.5     | PCS loopback .....                                             | 138 |
| 146.4       | Physical Medium Attachment (PMA) sublayer .....                | 138 |
| 146.4.1     | PMA Reset function .....                                       | 140 |
| 146.4.2     | PMA Transmit function .....                                    | 140 |
| 146.4.3     | PMA Receive function .....                                     | 140 |
| 146.4.4     | PHY Control function .....                                     | 141 |
| 146.4.4.1   | Variables .....                                                | 142 |
| 146.4.4.2   | Timers .....                                                   | 143 |
| 146.4.4.3   | State diagram .....                                            | 145 |
| 146.4.5     | Link Monitor function .....                                    | 148 |
| 146.4.5.1   | Variables .....                                                | 148 |
| 146.4.5.2   | State diagram .....                                            | 148 |
| 146.4.6     | PMA clock recovery .....                                       | 148 |
| 146.4.7     | LPI quiet-refresh cycling .....                                | 148 |
| 146.4.7.1   | Variables .....                                                | 149 |
| 146.4.7.2   | Timers .....                                                   | 149 |
| 146.4.7.3   | State diagram .....                                            | 150 |
| 146.5       | PMA electrical specifications .....                            | 151 |
| 146.5.1     | EMC tests .....                                                | 151 |
| 146.5.1.1   | Immunity—DPI test .....                                        | 151 |
| 146.5.1.2   | Emission—Conducted emission test .....                         | 151 |
| 146.5.2     | Test modes .....                                               | 151 |
| 146.5.3     | Test fixture .....                                             | 152 |
| 146.5.4     | Transmitter electrical specifications .....                    | 152 |
| 146.5.4.1   | Transmitter output voltage .....                               | 152 |
| 146.5.4.2   | Transmitter output droop .....                                 | 153 |
| 146.5.4.3   | Transmitter timing jitter .....                                | 153 |
| 146.5.4.4   | Transmitter Power Spectral Density (PSD) and power level ..... | 153 |
| 146.5.4.5   | Transmit clock frequency .....                                 | 155 |
| 146.5.5     | Receiver electrical specifications .....                       | 155 |
| 146.5.5.1   | Receiver differential input signals .....                      | 155 |

|              |                                                                                                                                                                                                    |     |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 146.5.5.2    | Receiver frequency tolerance .....                                                                                                                                                                 | 155 |
| 146.5.5.3    | Alien crosstalk noise rejection.....                                                                                                                                                               | 155 |
| 146.5.6      | PMA local loopback .....                                                                                                                                                                           | 156 |
| 146.6        | Management interface.....                                                                                                                                                                          | 156 |
| 146.6.1      | Support for Auto-Negotiation .....                                                                                                                                                                 | 156 |
| 146.6.2      | MASTER-SLAVE configuration .....                                                                                                                                                                   | 156 |
| 146.6.3      | PHY initialization .....                                                                                                                                                                           | 157 |
| 146.6.4      | Increased transmit level configuration.....                                                                                                                                                        | 157 |
| 146.6.5      | EEE configuration.....                                                                                                                                                                             | 157 |
| 146.6.6      | PMA and PCS MDIO function mapping .....                                                                                                                                                            | 157 |
| 146.7        | Link segment characteristics.....                                                                                                                                                                  | 158 |
| 146.7.1      | Link transmission parameters for 10BASE-T1L .....                                                                                                                                                  | 158 |
| 146.7.1.1    | Insertion loss.....                                                                                                                                                                                | 159 |
| 146.7.1.1.1  | Insertion loss for PHYs in the 2.4 Vpp operation mode .....                                                                                                                                        | 159 |
| 146.7.1.1.2  | Insertion loss supported for PHYs in 1.0 Vpp operation mode.....                                                                                                                                   | 160 |
| 146.7.1.2    | Return loss .....                                                                                                                                                                                  | 160 |
| 146.7.1.3    | Maximum link delay.....                                                                                                                                                                            | 161 |
| 146.7.1.4    | Differential to common mode conversion.....                                                                                                                                                        | 161 |
| 146.7.1.5    | Coupling attenuation.....                                                                                                                                                                          | 161 |
| 146.7.1.6    | Electromagnetic classifications .....                                                                                                                                                              | 162 |
| 146.7.2      | Coupling parameters between 10BASE-T1L link segments .....                                                                                                                                         | 162 |
| 146.7.2.1    | Multiple disturber power sum alien near-end crosstalk (PSANEXT) loss .....                                                                                                                         | 162 |
| 146.7.2.2    | Multiple disturber power sum alien far-end crosstalk (PSAFEXT) loss .....                                                                                                                          | 163 |
| 146.8        | MDI specification .....                                                                                                                                                                            | 163 |
| 146.8.1      | MDI connectors .....                                                                                                                                                                               | 163 |
| 146.8.2      | MDI electrical specification.....                                                                                                                                                                  | 166 |
| 146.8.3      | MDI return loss.....                                                                                                                                                                               | 166 |
| 146.8.4      | MDI mode conversion loss .....                                                                                                                                                                     | 166 |
| 146.8.5      | MDI DC power voltage tolerance.....                                                                                                                                                                | 166 |
| 146.8.6      | MDI fault tolerance.....                                                                                                                                                                           | 166 |
| 146.9        | Environmental specifications.....                                                                                                                                                                  | 167 |
| 146.9.1      | General safety .....                                                                                                                                                                               | 167 |
| 146.9.2      | Network safety.....                                                                                                                                                                                | 167 |
| 146.9.2.1    | Environmental safety.....                                                                                                                                                                          | 167 |
| 146.9.2.2    | Electromagnetic compatibility.....                                                                                                                                                                 | 168 |
| 146.10       | Delay constraints.....                                                                                                                                                                             | 168 |
| 146.11       | Protocol implementation conformance statement (PICS) proforma for Clause 146, Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer and baseband medium, type 10BASE-T1L ..... | 169 |
| 146.11.1     | Introduction.....                                                                                                                                                                                  | 169 |
| 146.11.2     | Identification.....                                                                                                                                                                                | 169 |
| 146.11.2.1   | Implementation identification.....                                                                                                                                                                 | 169 |
| 146.11.2.2   | Protocol summary.....                                                                                                                                                                              | 169 |
| 146.11.3     | Major capabilities/options.....                                                                                                                                                                    | 170 |
| 146.11.4     | PICS proforma tables for Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer and baseband medium, type 10BASE-T1L .....                                                      | 170 |
| 146.11.4.1   | Physical Coding Sublayer (PCS).....                                                                                                                                                                | 170 |
| 146.11.4.1.1 | PCS Transmit.....                                                                                                                                                                                  | 170 |
| 146.11.4.1.2 | PCS Receive .....                                                                                                                                                                                  | 171 |
| 146.11.4.1.3 | PCS loopback.....                                                                                                                                                                                  | 172 |
| 146.11.4.2   | Physical Medium Attachment (PMA) .....                                                                                                                                                             | 172 |
| 146.11.4.2.1 | PMA function .....                                                                                                                                                                                 | 172 |

|              |                                                                                                                      |     |
|--------------|----------------------------------------------------------------------------------------------------------------------|-----|
| 146.11.4.2.2 | PMA electrical specification .....                                                                                   | 173 |
| 146.11.4.3   | Management interface .....                                                                                           | 175 |
| 146.11.4.4   | Link Segment characteristics .....                                                                                   | 176 |
| 146.11.4.5   | MDI specifications .....                                                                                             | 176 |
| 146.11.4.6   | Environmental specifications .....                                                                                   | 177 |
| 146.11.4.7   | Delay constraints .....                                                                                              | 177 |
| 147.         | Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer and baseband medium, type 10BASE-T1S ..... | 178 |
| 147.1        | Overview .....                                                                                                       | 178 |
| 147.1.1      | Relationship of 10BASE-T1S to other standards .....                                                                  | 178 |
| 147.1.2      | Operation of 10BASE-T1S .....                                                                                        | 178 |
| 147.1.3      | Conventions in this clause .....                                                                                     | 179 |
| 147.1.3.1    | State diagram notation .....                                                                                         | 179 |
| 147.1.3.2    | State diagram timer specifications .....                                                                             | 179 |
| 147.1.3.3    | Service specifications .....                                                                                         | 180 |
| 147.2        | Service primitives and interfaces .....                                                                              | 180 |
| 147.2.1      | PMA_UNITDATA.indication .....                                                                                        | 181 |
| 147.2.1.1    | Semantics of the primitive .....                                                                                     | 181 |
| 147.2.1.2    | When generated .....                                                                                                 | 181 |
| 147.2.1.3    | Effect of receipt .....                                                                                              | 181 |
| 147.2.2      | PMA_UNITDATA.request .....                                                                                           | 181 |
| 147.2.2.1    | Semantics of the primitive .....                                                                                     | 181 |
| 147.2.2.2    | When generated .....                                                                                                 | 181 |
| 147.2.2.3    | Effect of receipt .....                                                                                              | 181 |
| 147.2.3      | Mapping of PMA_CARRIER.indication .....                                                                              | 182 |
| 147.2.3.1    | Function .....                                                                                                       | 182 |
| 147.2.3.2    | Semantic of the service primitive .....                                                                              | 182 |
| 147.2.3.3    | When generated .....                                                                                                 | 182 |
| 147.2.4      | PMA_LINK.request .....                                                                                               | 182 |
| 147.2.4.1    | Semantics of the primitive .....                                                                                     | 182 |
| 147.2.4.2    | When generated .....                                                                                                 | 182 |
| 147.2.5      | PMA_LINK.indication .....                                                                                            | 182 |
| 147.2.5.1    | Semantics of the primitive .....                                                                                     | 182 |
| 147.2.5.2    | When generated .....                                                                                                 | 183 |
| 147.2.5.3    | Effect of receipt .....                                                                                              | 183 |
| 147.2.6      | PCS_STATUS.indication .....                                                                                          | 183 |
| 147.2.6.1    | Semantics of the primitive .....                                                                                     | 183 |
| 147.2.6.2    | When generated .....                                                                                                 | 183 |
| 147.2.6.3    | Effect of receipt .....                                                                                              | 183 |
| 147.3        | Physical Coding Sublayer (PCS) functions .....                                                                       | 183 |
| 147.3.1      | PCS Reset function .....                                                                                             | 183 |
| 147.3.2      | PCS Transmit .....                                                                                                   | 184 |
| 147.3.2.1    | PCS Transmit overview .....                                                                                          | 184 |
| 147.3.2.2    | Variables .....                                                                                                      | 185 |
| 147.3.2.3    | Constants .....                                                                                                      | 186 |
| 147.3.2.4    | Functions .....                                                                                                      | 187 |
| 147.3.2.5    | Abbreviations .....                                                                                                  | 188 |
| 147.3.2.6    | Timers .....                                                                                                         | 188 |
| 147.3.2.7    | State diagram .....                                                                                                  | 189 |
| 147.3.2.8    | Self-synchronizing scrambler .....                                                                                   | 190 |
| 147.3.2.9    | Jabber functional requirements .....                                                                                 | 191 |

|             |                                                  |     |
|-------------|--------------------------------------------------|-----|
| 147.3.3     | PCS Receive .....                                | 191 |
| 147.3.3.1   | PCS Receive overview .....                       | 191 |
| 147.3.3.2   | Variables .....                                  | 192 |
| 147.3.3.3   | Constants .....                                  | 192 |
| 147.3.3.4   | Functions .....                                  | 193 |
| 147.3.3.5   | Abbreviations.....                               | 193 |
| 147.3.3.6   | Timers.....                                      | 193 |
| 147.3.3.7   | State diagrams.....                              | 194 |
| 147.3.3.8   | Self-synchronizing descrambler .....             | 196 |
| 147.3.3.9   | Jabber diagnostics.....                          | 196 |
| 147.3.4     | PCS loopback.....                                | 196 |
| 147.3.5     | Collision detection .....                        | 196 |
| 147.3.6     | Carrier sense .....                              | 197 |
| 147.3.7     | Support for PCS status generation .....          | 197 |
| 147.3.7.1   | Heartbeat transmit overview.....                 | 197 |
| 147.3.7.1.1 | Variables .....                                  | 197 |
| 147.3.7.1.2 | Timers .....                                     | 198 |
| 147.3.7.1.3 | State diagram .....                              | 199 |
| 147.3.7.2   | Heartbeat receive overview .....                 | 200 |
| 147.3.7.2.1 | Variables .....                                  | 200 |
| 147.3.7.2.2 | Constants.....                                   | 201 |
| 147.3.7.2.3 | Timers .....                                     | 201 |
| 147.3.7.2.4 | State diagram .....                              | 201 |
| 147.4       | Physical Medium Attachment (PMA) sublayer.....   | 202 |
| 147.4.1     | PMA Reset function.....                          | 202 |
| 147.4.2     | PMA Transmit function .....                      | 202 |
| 147.4.3     | PMA Receive function.....                        | 203 |
| 147.4.4     | Link Monitor function .....                      | 204 |
| 147.4.4.1   | Link Monitor overview.....                       | 204 |
| 147.4.4.2   | Variables .....                                  | 204 |
| 147.5       | PMA electrical specifications .....              | 205 |
| 147.5.1     | EMC tests.....                                   | 205 |
| 147.5.1.1   | Immunity—DPI test .....                          | 205 |
| 147.5.1.2   | Emission—Conducted emission test .....           | 205 |
| 147.5.2     | Test modes .....                                 | 205 |
| 147.5.3     | Test fixtures .....                              | 206 |
| 147.5.4     | Transmitter electrical specification.....        | 207 |
| 147.5.4.1   | Transmitter output voltage.....                  | 207 |
| 147.5.4.2   | Transmitter output droop .....                   | 207 |
| 147.5.4.3   | Transmitter timing jitter.....                   | 207 |
| 147.5.4.4   | Transmitter Power Spectral Density (PSD).....    | 208 |
| 147.5.4.4.1 | Upper PSD .....                                  | 208 |
| 147.5.4.4.2 | PSD mask .....                                   | 208 |
| 147.5.4.5   | Transmitter high impedance mode .....            | 209 |
| 147.5.5     | Receiver electrical specifications.....          | 209 |
| 147.5.5.1   | Receiver differential input signals.....         | 209 |
| 147.5.5.2   | Alien crosstalk noise rejection.....             | 209 |
| 147.5.6     | PMA local loopback .....                         | 209 |
| 147.6       | Management interface.....                        | 210 |
| 147.6.1     | Support for Auto-Negotiation .....               | 210 |
| 147.7       | Point-to-point link segment characteristics..... | 210 |
| 147.7.1     | Insertion loss .....                             | 210 |
| 147.7.2     | Return loss .....                                | 210 |
| 147.7.3     | Mode conversion loss .....                       | 211 |

|              |                                                                                                                                                                                                         |     |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 147.7.4      | Power sum alien near-end crosstalk (PSANEXT).....                                                                                                                                                       | 211 |
| 147.7.5      | Power sum alien attenuation to crosstalk ratio far-end (PSAACRF) .....                                                                                                                                  | 211 |
| 147.8        | Mixing segment characteristics .....                                                                                                                                                                    | 211 |
| 147.8.1      | Insertion loss .....                                                                                                                                                                                    | 212 |
| 147.8.2      | Return loss .....                                                                                                                                                                                       | 212 |
| 147.8.3      | Mode conversion loss .....                                                                                                                                                                              | 212 |
| 147.9        | MDI specification .....                                                                                                                                                                                 | 212 |
| 147.9.1      | MDI connectors .....                                                                                                                                                                                    | 212 |
| 147.9.2      | MDI electrical specification.....                                                                                                                                                                       | 215 |
| 147.9.3      | MDI line powering voltage tolerance .....                                                                                                                                                               | 215 |
| 147.9.4      | MDI fault tolerance.....                                                                                                                                                                                | 215 |
| 147.10       | Environmental specifications.....                                                                                                                                                                       | 216 |
| 147.10.1     | General safety .....                                                                                                                                                                                    | 216 |
| 147.10.2     | Network safety .....                                                                                                                                                                                    | 216 |
| 147.10.2.1   | Environmental safety .....                                                                                                                                                                              | 216 |
| 147.10.2.2   | Electromagnetic compatibility.....                                                                                                                                                                      | 217 |
| 147.11       | Delay constraints.....                                                                                                                                                                                  | 217 |
| 147.12       | Protocol implementation conformance statement (PICS) proforma for Clause 147,<br>Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer<br>and baseband medium, type 10BASE-T1S..... | 218 |
| 147.12.1     | Introduction.....                                                                                                                                                                                       | 218 |
| 147.12.2     | Identification .....                                                                                                                                                                                    | 218 |
| 147.12.2.1   | Implementation identification.....                                                                                                                                                                      | 218 |
| 147.12.2.2   | Protocol summary.....                                                                                                                                                                                   | 218 |
| 147.12.3     | Major capabilities/options.....                                                                                                                                                                         | 219 |
| 147.12.4     | PICS proforma tables for Physical Medium Attachment (PMA) sublayer and<br>baseband medium, type 10BASE-T1S .....                                                                                        | 219 |
| 147.12.4.1   | PCS Transmit.....                                                                                                                                                                                       | 219 |
| 147.12.4.2   | PCS Receive .....                                                                                                                                                                                       | 220 |
| 147.12.4.3   | PCS loopback .....                                                                                                                                                                                      | 220 |
| 147.12.4.4   | Collision detection .....                                                                                                                                                                               | 221 |
| 147.12.4.5   | Support for PCS status generation.....                                                                                                                                                                  | 221 |
| 147.12.4.6   | Physical Medium Attachment (PMA) .....                                                                                                                                                                  | 221 |
| 147.12.4.6.1 | PMA function .....                                                                                                                                                                                      | 221 |
| 147.12.4.6.2 | PMA electrical specification.....                                                                                                                                                                       | 222 |
| 147.12.4.7   | Point-to-point link Segment characteristics.....                                                                                                                                                        | 224 |
| 147.12.4.8   | Mixing Segment characteristics.....                                                                                                                                                                     | 224 |
| 147.12.4.9   | MDI specification .....                                                                                                                                                                                 | 225 |
| 147.12.4.10  | Delay constraints .....                                                                                                                                                                                 | 225 |
| 148.         | PLCA Reconciliation Sublayer (RS) .....                                                                                                                                                                 | 226 |
| 148.1        | Introduction.....                                                                                                                                                                                       | 226 |
| 148.1.1      | Conventions in this clause .....                                                                                                                                                                        | 226 |
| 148.1.1.1    | State diagram notation .....                                                                                                                                                                            | 226 |
| 148.1.1.2    | State diagram timer specifications.....                                                                                                                                                                 | 226 |
| 148.1.1.3    | Service specifications .....                                                                                                                                                                            | 226 |
| 148.2        | Overview.....                                                                                                                                                                                           | 226 |
| 148.3        | Relationship with other IEEE standards .....                                                                                                                                                            | 227 |
| 148.4        | PLCA Reconciliation Sublayer operation.....                                                                                                                                                             | 228 |
| 148.4.1      | General.....                                                                                                                                                                                            | 228 |
| 148.4.2      | Mapping of MII signals to PLS service primitives and PLCA functions .....                                                                                                                               | 228 |
| 148.4.2.1    | Mapping of PLS_DATA.request .....                                                                                                                                                                       | 228 |
| 148.4.2.1.1  | Function .....                                                                                                                                                                                          | 228 |

|             |                                                                                                                          |     |
|-------------|--------------------------------------------------------------------------------------------------------------------------|-----|
| 148.4.2.1.2 | Semantic of the service primitive .....                                                                                  | 229 |
| 148.4.2.1.3 | When generated .....                                                                                                     | 229 |
| 148.4.2.2   | Mapping of PLS_DATA.indication .....                                                                                     | 229 |
| 148.4.2.3   | Mapping of PLS_CARRIER.indication .....                                                                                  | 229 |
| 148.4.2.3.1 | Function .....                                                                                                           | 229 |
| 148.4.2.3.2 | Semantic of the service primitive .....                                                                                  | 229 |
| 148.4.2.3.3 | When generated .....                                                                                                     | 229 |
| 148.4.2.4   | Mapping of PLS_SIGNAL.indication .....                                                                                   | 229 |
| 148.4.2.4.1 | Function .....                                                                                                           | 229 |
| 148.4.2.4.2 | Semantic of the service primitive .....                                                                                  | 230 |
| 148.4.2.4.3 | When generated .....                                                                                                     | 230 |
| 148.4.2.5   | Mapping of PLS_DATA_VALID.indication .....                                                                               | 230 |
| 148.4.2.6   | Generation of TX_ER .....                                                                                                | 230 |
| 148.4.2.7   | Response to RX_ER indication .....                                                                                       | 230 |
| 148.4.3     | Requirements for the PHY .....                                                                                           | 230 |
| 148.4.3.1   | PHY response to PLCA commands and notifications .....                                                                    | 230 |
| 148.4.3.1.1 | BEACON request .....                                                                                                     | 230 |
| 148.4.3.1.2 | COMMIT request .....                                                                                                     | 230 |
| 148.4.3.2   | Mapping of MII signals to PLCA variables .....                                                                           | 231 |
| 148.4.3.2.1 | BEACON indication .....                                                                                                  | 231 |
| 148.4.3.2.2 | COMMIT indication .....                                                                                                  | 231 |
| 148.4.4     | PLCA Control .....                                                                                                       | 231 |
| 148.4.4.1   | PLCA Control state diagram .....                                                                                         | 231 |
| 148.4.4.2   | PLCA Control variables .....                                                                                             | 232 |
| 148.4.4.3   | Functions .....                                                                                                          | 234 |
| 148.4.4.4   | Timers .....                                                                                                             | 234 |
| 148.4.4.5   | Abbreviations .....                                                                                                      | 235 |
| 148.4.4.6   | State diagram .....                                                                                                      | 236 |
| 148.4.5     | PLCA Data .....                                                                                                          | 238 |
| 148.4.5.1   | PLCA Data state diagram .....                                                                                            | 238 |
| 148.4.5.2   | Variables .....                                                                                                          | 239 |
| 148.4.5.3   | Functions .....                                                                                                          | 240 |
| 148.4.5.4   | Timers .....                                                                                                             | 240 |
| 148.4.5.5   | Abbreviations .....                                                                                                      | 240 |
| 148.4.5.6   | Constants .....                                                                                                          | 240 |
| 148.4.5.7   | State diagram .....                                                                                                      | 241 |
| 148.4.6     | PLCA Status .....                                                                                                        | 243 |
| 148.4.6.1   | PLCA Status state diagram .....                                                                                          | 243 |
| 148.4.6.2   | PLCA Status variables .....                                                                                              | 243 |
| 148.4.6.3   | Functions .....                                                                                                          | 243 |
| 148.4.6.4   | Timers .....                                                                                                             | 243 |
| 148.4.6.5   | State diagram .....                                                                                                      | 244 |
| 148.5       | Protocol implementation conformance statement (PICS) proforma for Clause 148,<br>PLCA Reconciliation Sublayer (RS) ..... | 245 |
| 148.5.1     | Introduction .....                                                                                                       | 245 |
| 148.5.2     | Identification .....                                                                                                     | 245 |
| 148.5.2.1   | Implementation identification .....                                                                                      | 245 |
| 148.5.2.2   | Protocol summary .....                                                                                                   | 245 |
| 148.5.3     | PICS proforma tables for PLCA Reconciliation Sublayer (RS) .....                                                         | 246 |
| 148.5.3.1   | Reconciliation Sublayer .....                                                                                            | 246 |
| 148.5.3.2   | Mapping of MII signals to PLS service primitives and PLCA<br>functions .....                                             | 246 |
| 148.5.3.3   | Specific RS and PHY specification .....                                                                                  | 247 |
| 148.5.3.4   | PLCA Control .....                                                                                                       | 247 |

|                                                                                                                            |                                                |     |
|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|-----|
| 148.5.3.5                                                                                                                  | PLCA Data .....                                | 247 |
| 148.5.3.6                                                                                                                  | PLCA Status .....                              | 247 |
| Annex A (informative) Bibliography .....                                                                                   |                                                | 248 |
| Annex 98B (normative) IEEE 802.3 Selector Base Page definition .....                                                       |                                                | 249 |
| 98B.3                                                                                                                      | Technology Ability Field bit assignments ..... | 249 |
| 98B.3.1                                                                                                                    | 10BASE-T1L-specific bit assignments .....      | 249 |
| 98B.4                                                                                                                      | Priority Resolution .....                      | 249 |
| Annex 146A (informative) Guidelines for implementation of the 10BASE-T1L PHY in an<br>intrinsically safe application ..... |                                                | 250 |
| Annex 146B (informative) Optional power distribution .....                                                                 |                                                | 253 |
| 146B.1                                                                                                                     | Overview .....                                 | 253 |
| 146B.2                                                                                                                     | Point-to-point powering topologies .....       | 253 |
| 146B.3                                                                                                                     | Powered trunk cable topologies .....           | 254 |

# IEEE Standard for Ethernet

## Amendment 5: Physical Layer Specifications and Management Parameters for 10 Mb/s Operation and Associated Power Delivery over a Single Balanced Pair of Conductors

(This amendment is based on IEEE Std 802.3™-2018 as amended by IEEE Std 802.3cb™-2018, IEEE Std 802.3bt™-2018, IEEE Std 802.3cd™-2018, and IEEE Std 802.3cn™-2019.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strike through~~ (to remove old material) and underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Deletions and insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. ***Replace*** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.

Cross references that refer to clauses, tables, equations, or figures not covered by this amendment are highlighted in green.<sup>1</sup>


<sup>1</sup> Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

## 1. Introduction

### 1.1 Overview

#### 1.1.3 Architectural perspectives

*Change Figure 1–1 as follows (see changes at the bottom of the right column and in the note):*

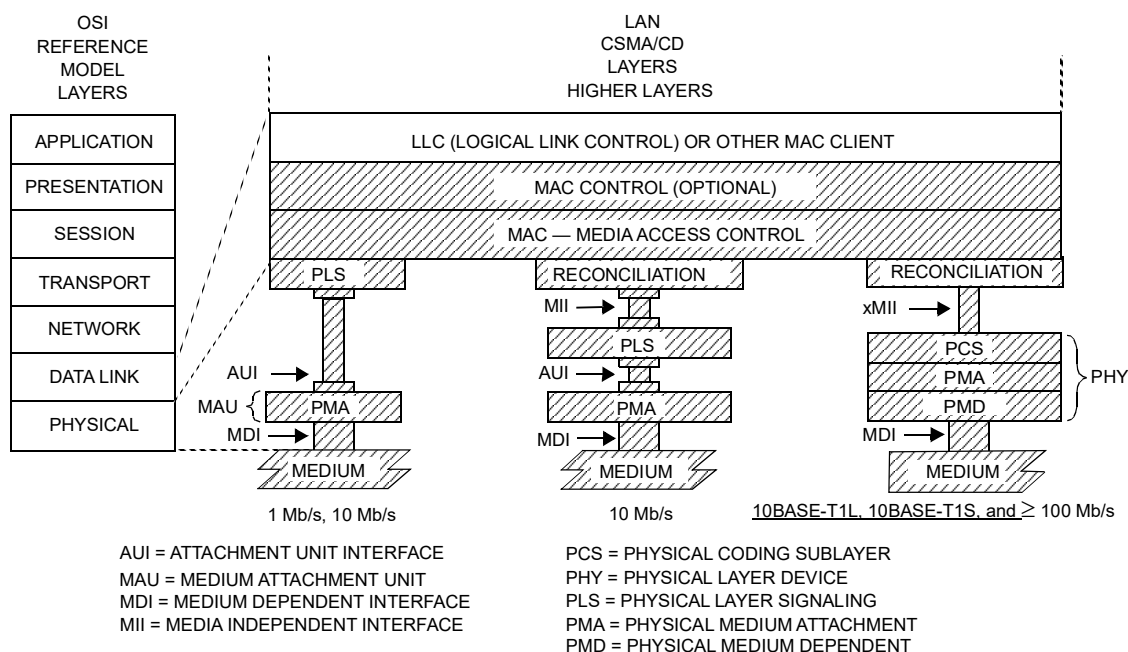

NOTE—In this figure, the xMII is used as a generic term for the Media Independent Interfaces for implementations of 10BASE-T1L, 10BASE-T1S, and 100 Mb/s and above. For example: for 100 Mb/s implementations this interface is called MII; for 1 Gb/s implementations it is called GMII; for 10 Gb/s implementations it is called XGMII; etc.

**Figure 1–1—IEEE 802.3 standard relationship to the ISO/IEC Open Systems Interconnection (OSI) reference model**

### 1.3 Normative references

*Insert the following references in alphanumeric order:*

IEC 60068-2-2:2007, Environmental testing—Part 2-2: Tests—Test B: Dry heat.<sup>2</sup>

IEC 60068-2-6:2007, Environmental testing—Part 2-6: Tests—Test Fc: Vibration (sinusoidal).

IEC 60068-2-14:2009, Environmental testing—Part 2-14: Tests—Test N: Change of temperature.

IEC 60068-2-31:2008, Environmental testing—Part 2-31: Tests—Test Ec: Rough handling shocks, primarily for equipment-type specimens.

<sup>2</sup>IEC publications are available from the International Electrotechnical Commission (<http://www.iec.ch/>). IEC publications are also available in the United States from the American National Standards Institute (<http://www.ansi.org>).

IEC 60079-0:2017, Explosive atmospheres—Part 0: Equipment—General requirements.

IEC 60079-11:2011, Explosive Atmospheres—Part 11: Equipment protection by intrinsic safety.

IEC 60529:2013, Degrees of Protection Provided by Enclosures (IP Code).

IEC 61000-4-4:2012, Electromagnetic compatibility (EMC)—Part 4-4: Testing and measurement techniques—Electrical fast transient/burst immunity test.

IEC 61000-4-5:2017, Electromagnetic compatibility (EMC)—Part 4-5: Testing and measurement techniques—Surge immunity test.

IEC 61000-4-6:2013, Electromagnetic compatibility (EMC)—Part 4-6: Testing and measurement techniques—Immunity to conducted disturbances, induced by radio-frequency fields.

IEC 61000-6-4:2018, Electromagnetic compatibility (EMC)—Part 6-4: Generic standards—Emission standard for industrial environments.

IEC 61010-1:2017, Safety requirements for electrical equipment for measurement, control, and laboratory use—Part 1: General requirements.

IEC 61326-1:2012, Electrical equipment for measurement, control and laboratory use—EMC requirements—Part 1: General requirements.

IEC 62368-1:2014, Audio/video, information and communication technology equipment—Part 1: Safety requirements.

ISO 4892:1982, Plastics—Methods of exposure to laboratory light.<sup>3</sup>

NAMUR NE 021:2017, Electromagnetic Compatibility of Equipment for Industrial Processes and Laboratory.<sup>4</sup>

## 1.4 Definitions

*Insert the following new definitions after 1.4.50 “10BASE-T”:*

**1.4.50a 10BASE-T1L:** IEEE 802.3 Physical Layer specification for a 10 Mb/s Ethernet local area network over a single balanced pair of conductors up to at least 1000 m reach. (See IEEE Std 802.3, Clause 146.)

**1.4.50b 10BASE-T1S:** IEEE 802.3 Physical Layer specification for a 10 Mb/s Ethernet local area network over a single balanced pair of conductors up to at least 15 m reach. (See IEEE Std 802.3, Clause 147.)

*Change 1.4.151 as follows:*

**1.4.151 BASE-T1:** PHYs that belong to the set of specific Ethernet PCS/PMA/PMDs that operate on a single twisted-pair copper cable, including 10BASE-T1L, 10BASE-T1S, 100BASE-T1, and 1000BASE-T1. (See IEEE Std 802.3, Clause 96, and Clause 97, Clause 146, and Clause 147.)

<sup>3</sup>ISO publications are available from the International Organization for Standardization (<http://www.iso.ch/>). ISO publications are also available in the United States from the American National Standards Institute (<http://www ansi.org/>).

<sup>4</sup>NAMUR publications are available from the User Association of Automation Technology in Process Industries (<http://www.namur.net>).

*Change 1.4.198 as follows:*

**1.4.198 code-group:** For IEEE 802.3, a set of encoded symbols representing encoded data or control information. For 100BASE-T4, a set of six ternary symbols that, when representing data, conveys an octet. For 100BASE-TX and 100BASE-FX, a set of five code-bits that, when representing data, conveys a nibble. For 100BASE-T2, a pair of PAM5×5 symbols that, when representing data, conveys a nibble. For 1000BASE-X, a set of ten bits that, when representing data, conveys an octet. For 1000BASE-T, a vector of four 8B1Q4 coded quinary symbols that, when representing data, conveys an octet. For 100BASE-T1, a set of ternary symbols that, when representing data, conveys three bits, as defined in 96.3. For 10BASE-T1L, a set of three ternary symbols that, when representing data, conveys a nibble, as defined in 146.3. (See IEEE Std 802.3, [Clause 23](#), [Clause 24](#), [Clause 32](#), [Clause 36](#), [Clause 40](#), ~~and Clause 96~~, and [Clause 146](#).)

*Change 1.4.319 as follows:*

**1.4.319 master Physical Layer (PHY):** Within IEEE 802.3, in a 100BASE-T2 ~~or 1000BASE-T~~, 10BASE-T1L, 100BASE-T1, 1000BASE-T1, or any MultiGBASE-T link containing a pair of PHYs, the PHY that uses an external clock for generating its clock signals to determine the timing of transmitter and receiver operations. It also uses the master transmit scrambler generator polynomial for side-stream scrambling. Master and slave PHY status is determined during the Auto-Negotiation process that takes place prior to establishing the transmission link, or in the case of a PHY where Auto-Negotiation is optional and not used, master and slave PHY status is determined by management or hardware configuration. See also: **slave Physical Layer (PHY).**

*Insert the following new definition after 1.4.390 “physical header subframe (PHS)”:*

**1.4.390a Physical Layer Collision Avoidance (PLCA):** A method for generating transmit opportunities for 10BASE-T1S operating on mixing segments. (See IEEE Std 802.3, Clause 148.)

*Change 1.4.456 as follows:*

**1.4.456 slave Physical Layer (PHY):** Within IEEE 802.3, in a 100BASE-T2 ~~or 1000BASE-T~~, 10BASE-T1L, 100BASE-T1, 1000BASE-T1, or any MultiGBASE-T link containing a pair of PHYs, the PHY that recovers its clock from the received signal and uses it to determine the timing of transmitter operations. It also uses the slave transmit scrambler generator polynomial for side-stream scrambling. Master and slave PHY status is determined during the Auto-Negotiation process that takes place prior to establishing the transmission link, or in the case of a PHY where Auto-Negotiation is optional and not used, master and slave PHY status is determined by management or hardware configuration. See also: **master Physical Layer (PHY).**

*Change 1.4.471 as follows:*

**1.4.471 ternary symbol:** In 10BASE-T1L, 100BASE-T4, and 100BASE-T1, a ternary data element. A ternary symbol can have one of three values: −1, 0, or +1. (See IEEE Std 802.3, [Clause 23](#) ~~and~~, [Clause 96](#), and [Clause 146](#).)

*Insert the following new definition after 1.4.495 “Type D PoDL System”:*

**1.4.495a Type E PoDL System:** A system comprising a PoDL PSE, link section, and PD that are compatible with 10BASE-T1L PHYs.

## 1.5 Abbreviations

*Insert the following new abbreviations into the list, in alphanumeric order:*

|      |                                    |
|------|------------------------------------|
| DCR  | direct current resistance          |
| FSM  | Finite State Machine               |
| PLCA | Physical Layer Collision Avoidance |

## 9. Repeater unit for 10 Mb/s baseband networks

### 9.1 Overview

*Change the first paragraph of 9.1 as follows:*

This clause specifies a repeater for use with IEEE 802.3 10 Mb/s baseband networks, with the exceptions of 10BASE-T1L (Clause 146) and 10BASE-T1S (Clause 147). A repeater for any other IEEE 802.3 network type is beyond the scope of this clause.



*Change Table 22-1 as follows (unchanged rows not shown):*

**Table 22–1—Permissible encodings of TXD<3:0>, TX\_EN, and TX\_ER**

| TX_EN    | TX_ER    | TXD<3:0>                          | Indication                 |
|----------|----------|-----------------------------------|----------------------------|
| ...      |          |                                   |                            |
| <u>0</u> | <u>1</u> | <u>0010</u>                       | <u>PLCA BEACON request</u> |
| <u>0</u> | <u>1</u> | <u>0011</u>                       | <u>PLCA COMMIT request</u> |
| 0        | 1        | <del>0010</del> 0100 through 1111 | Reserved                   |
| ...      |          |                                   |                            |

#### 22.2.2.5 TX\_ER (transmit coding error)

*Change the second paragraph in 22.2.2.5 as follows:*

Assertion of the TX\_ER signal shall not affect the transmission of data when TX\_EN is deasserted. Additionally, the assertion of TX\_ER signal shall not affect the transmission of data when a PHY is operating at 10 Mb/s, or when TX\_EN is deasserted, with the exception of 10BASE-T1L (see 146.3.3.1) and 10BASE-T1S (see 147.3.2.1, Figure 147–4).

#### 22.2.2.8 RXD (receive data)

*Insert the following new paragraph into 22.2.2.8 after the third paragraph (“For EEE capability, the PHY....”):*

When PLCA capability is supported and enabled, the PHY indicates that it is receiving a BEACON or COMMIT by asserting the RX\_ER signal and driving respectively the values 0010 or 0011 onto RXD<3:0> while RX\_DV is deasserted. See 148.4.4.1 for the definition and usage of PLCA BEACON and COMMIT.

*Change Table 22-2 as follows (unchanged rows not shown):*

**Table 22–2—Permissible encoding of RXD<3:0>, RX\_ER, and RX\_DV**

| RX_DV    | RX_ER    | RXD<3:0>                          | Indication                    |
|----------|----------|-----------------------------------|-------------------------------|
| ...      |          |                                   |                               |
| <u>0</u> | <u>1</u> | <u>0010</u>                       | <u>PLCA BEACON indication</u> |
| <u>0</u> | <u>1</u> | <u>0011</u>                       | <u>PLCA COMMIT indication</u> |
| 0        | 1        | <del>0010</del> 0100 through 1101 | Reserved                      |
| ...      |          |                                   |                               |

## 22.8 Protocol implementation conformance statement (PICS) proforma for Clause 22, Reconciliation Sublayer (RS) and Media Independent Interface (MII)<sup>5</sup>

### 22.8.2 Identification

#### 22.8.2.3 Major capabilities/options

*Insert the following new row at the end of the table in 22.8.2.3:*

| Item  | Feature                | Subclause | Status | Support | Value/Comment |
|-------|------------------------|-----------|--------|---------|---------------|
| *PLCA | Implementation of PLCA | 22.2.2.4  | O      |         |               |

### 22.8.3 PICS proforma tables for reconciliation sublayer and media independent interface

#### 22.8.3.2 MII signal functional specifications

*Change the table in 22.8.3.2 as follows (unchanged rows not shown):*

| Item | Feature                                                                                                                       | Subclause | Status       | Support | Value/Comment           |
|------|-------------------------------------------------------------------------------------------------------------------------------|-----------|--------------|---------|-------------------------|
| ...  |                                                                                                                               |           |              |         |                         |
| SF15 | <del>TXD&lt;3:0&gt; effect on PHY while TX_EN is deasserted</del>                                                             | 22.2.2.4  | <del>M</del> |         | <del>No effect</del>    |
| ...  |                                                                                                                               |           |              |         |                         |
| SF18 | TX_ER effect on PHY while operating at 10 Mb/s (with the exception of 10BASE-T1S and 10BASE-T1L), or when TX_EN is deasserted | 22.2.2.5  | M            |         | No effect on PHY        |
| ...  |                                                                                                                               |           |              |         |                         |
| SF39 | Effect on PHY while TXD<3:0> is 0010, and TX_EN is deasserted, and TX_ER is asserted                                          | 22.2.2.4  | PLCA:<br>M   |         | RS sends BEACON request |
| SF40 | Effect on PHY while TXD<3:0> is 0011, and TX_EN is deasserted, and TX_ER is asserted                                          | 22.2.2.4  | PLCA:<br>M   |         | RS sends COMMIT request |
| SF41 | Effect on PHY while TXD<3:0> is any value other than 0010 or 0011, and TX_EN is deasserted, and TX_ER is asserted             | 22.2.2.4  | PLCA:<br>M   |         | No effect               |

<sup>5</sup>Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this subclause so that it can be used for its intended purpose and may further publish the completed PICS.

## 30. Management

### 30.2 Managed objects

#### 30.2.2 Overview of managed objects

##### 30.2.2.1 Text description of managed objects

*Change the description for oPHYEntity in 30.2.2.1 as follows:*


|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>oPHYEntity</b> | If oOMPEmulation is implemented, oPHYEntity is contained within oOMPEmulation. If oMACMergeEntity is implemented, oPHYEntity is contained within oMACMergeEntity. Otherwise oPHYEntity is contained within oMACEntity. Many instances of oPHYEntity may coexist within one instance of oMACEntity or oMACMergeEntity; however, only one PHY may be active for data transfer to and from the MAC at any one time. oPHYEntity is the managed object that contains the MAU, PAF, <u>PLCA</u> , PSE, and PoDLPSE managed objects in a DTE. |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

*Insert the following description for oPLCA into 30.2.2.1 (as amended by IEEE Std 802.3bt-2018) after the description for oPAF:*

|              |                                                                                                                                                                                  |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>oPLCA</b> | If implemented, oPLCA is contained within oPHYEntity. The oPLCA managed object class provides the management controls necessary to allow an instance of a PLCA RS to be managed. |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 30.2.3 Containment

Replace Figure 30-3 with the following figure (which includes oPLCA):

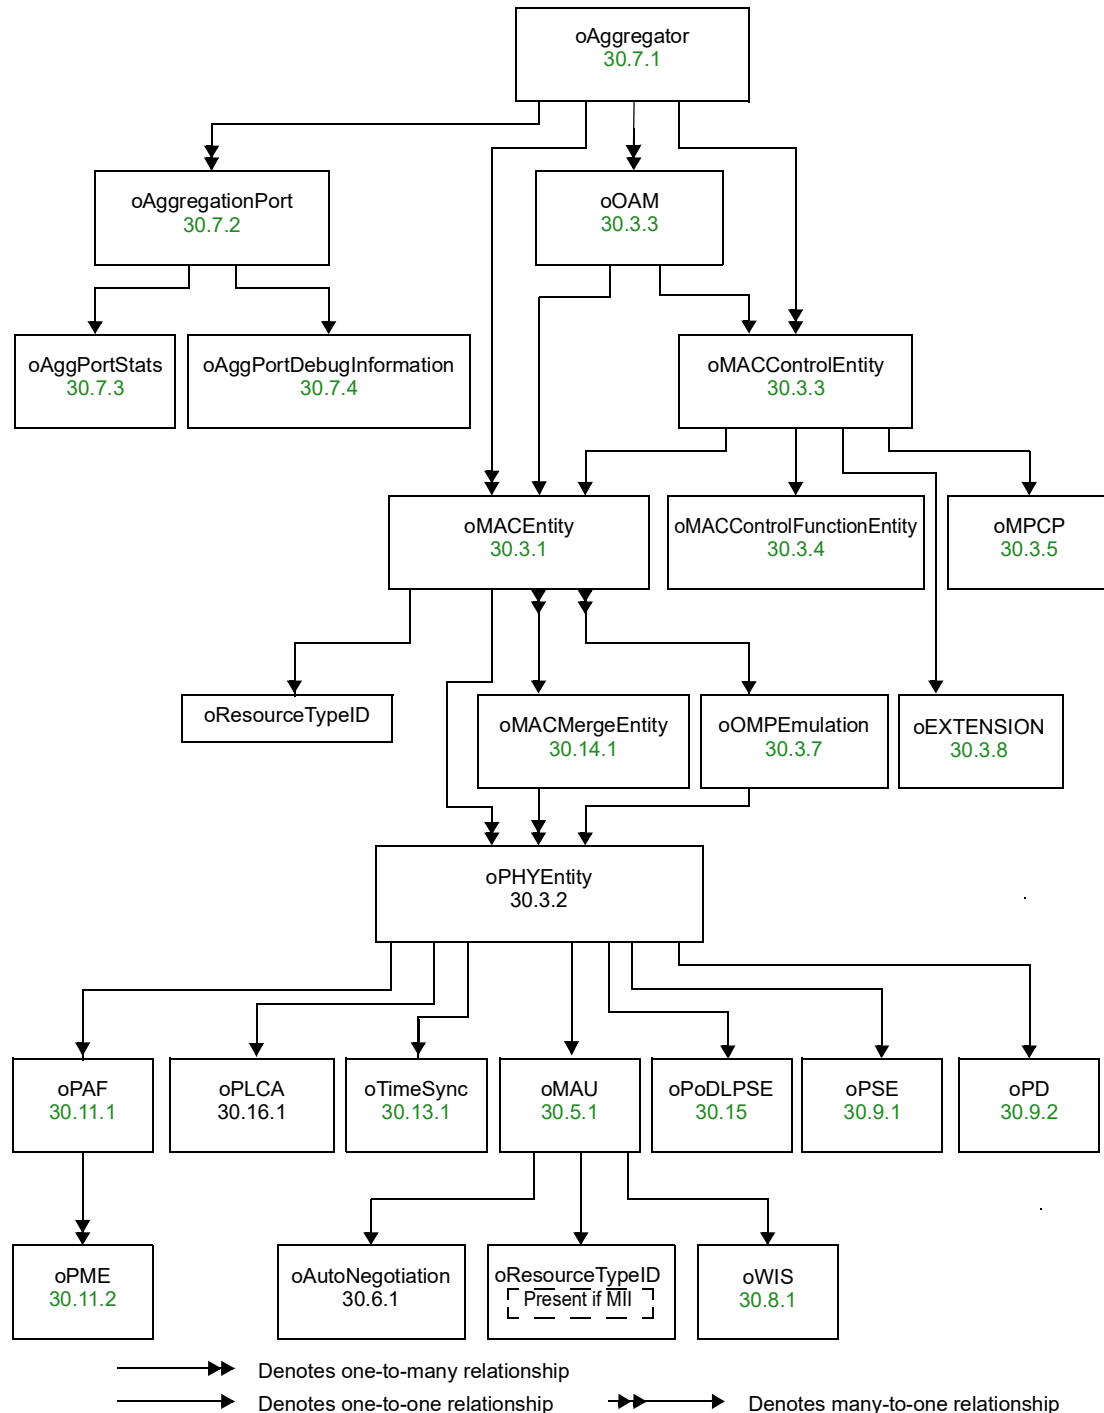

NOTE—The objects oAggregator, oAggregationPort, oAggPortStats, and oAggPortDebugInformation are deprecated by IEEE Std 802.1AX™-2008.

Figure 30-3—DTE System entity relationship diagram

### 30.2.5 Capabilities

*Change the last sentence of the first paragraph of 30.2.5 as follows:*

The capabilities and packages for IEEE 802.3 Management are specified in Table 30-1a through ~~Table 30-10~~ Table 30-11.

*Insert the following new table (Table 30-11) after Table 30-10:*

**Table 30-11—PLCA capabilities**

|                                             |           |         | PLCA capability (optional) |
|---------------------------------------------|-----------|---------|----------------------------|
| <b>oPLCA managed object class (30.16.1)</b> |           |         |                            |
| aPLCAAdminState                             | ATTRIBUTE | GET     | X                          |
| aPLCAStatus                                 | ATTRIBUTE | GET     | X                          |
| aPLCABurstTimer                             | ATTRIBUTE | GET-SET | X                          |
| aPLCALocalNodeID                            | ATTRIBUTE | GET-SET | X                          |
| aPLCAMaxBurstCount                          | ATTRIBUTE | GET-SET | X                          |
| aPLCANodeCount                              | ATTRIBUTE | GET-SET | X                          |
| aPLCATransmitOpportunityTimer               | ATTRIBUTE | GET-SET | X                          |
| acPLCAAdminControl                          | ACTION    |         | X                          |
| acPLCAReset                                 | ACTION    |         | X                          |

## 30.3 Layer management for DTEs

### 30.3.2 PHY device managed object class

#### 30.3.2.1 PHY device attributes

##### 30.3.2.1.2 aPhyType

*Insert the following new entries in the APPROPRIATE SYNTAX section of 30.3.2.1.2 after the entry for “10 Mb/s”:*

10BASE-T1L Clause 146 10 Mb/s PAM3  
 10BASE-T1S Clause 147 10 Mb/s DME

**30.3.2.1.3 aPhyTypeList**

*Insert the following new entries in the APPROPRIATE SYNTAX section of 30.3.2.1.3 after the entry for “10 Mb/s”:*

10BASE-T1L Clause 146 10 Mb/s PAM3  
10BASE-T1S Clause 147 10 Mb/s DME

**30.5 Layer management for medium attachment units (MAUs)****30.5.1 MAU managed object class****30.5.1.1 MAU attributes****30.5.1.1.2 aMAUType**

*Insert the following new entries in the APPROPRIATE SYNTAX section of 30.5.1.1.2 after the entry for “10BASE-FLFD”:*

|              |                                                                       |
|--------------|-----------------------------------------------------------------------|
| 10BASE-T1L   | Single balanced pair PHY as specified in Clause 146                   |
| 10BASE-T1SHD | Single balanced pair PHY as specified in Clause 147, half duplex mode |
| 10BASE-T1SMD | Single balanced pair PHY as specified in Clause 147, multidrop mode   |
| 10BASE-T1SFD | Single balanced pair PHY as specified in Clause 147, full duplex mode |

**30.5.1.1.4 aMediaAvailable**

*Change the fourth sentence of the third paragraph of the BEHAVIOUR DEFINED AS section of 30.5.1.1.4 as follows:*

For 10BASE-T1L and 100BASE-T1, a link\_status of OK maps to the enumeration “available”.

**30.6 Management for link Auto-Negotiation****30.6.1 Auto-Negotiation managed object class****30.6.1.1 Auto-Negotiation attributes****30.6.1.1.5 aAutoNegLocalTechnologyAbility**

*Insert the following new entries in APPROPRIATE SYNTAX section of 30.6.1.1.5 after the entry for “10BASE-T”:*

|            |                                       |
|------------|---------------------------------------|
| 10BASE-T1L | 10BASE-T1L as specified in Clause 146 |
| 10BASE-T1S | 10BASE-T1S as specified in Clause 147 |

### 30.15 Layer management for Power over Data Lines (PoDL) of Single Balanced Twisted-Pair Ethernet

#### 30.15.1 PoDL PSE managed object class

##### 30.15.1.1 PoDL PSE attributes

##### 30.15.1.1.4 aPoDLPSEType

*Insert the following new entry in the APPROPRIATE SYNTAX section of 30.15.1.1.4 after the entry for “typeD”:*

|       |                 |
|-------|-----------------|
| typeE | Type E PoDL PSE |
|-------|-----------------|

##### 30.15.1.1.5 aPoDLPSEDetectedPDType

*Insert the following new entry in the APPROPRIATE SYNTAX section of 30.15.1.1.5 after the entry for “typeD”:*

|       |                |
|-------|----------------|
| typeE | Type E PoDL PD |
|-------|----------------|

##### 30.15.1.1.6 aPoDLPSEDetectedPDPowerClass

*Insert the following new entries in the APPROPRIATE SYNTAX section of 30.15.1.1.6 after the entry for “class 9”:*

|         |                  |
|---------|------------------|
| class10 | Class 10 PoDL PD |
| class11 | Class 11 PoDL PD |
| class12 | Class 12 PoDL PD |
| class13 | Class 13 PoDL PD |
| class14 | Class 14 PoDL PD |
| class15 | Class 15 PoDL PD |

*Change text of BEHAVIOUR DEFINED AS section of 30.15.1.1.6 as shown:*

#### BEHAVIOUR DEFINED AS:

A read-only value that indicates the class of the detected PoDL PD as specified in [Table 104-1](#) and [Table 104-1a](#). This value is only valid while a PD is being powered, that is the attribute aPoDLPSEPowerDetectionStatus is reporting the enumeration “deliveringPower”.

If a Clause 45 MDIO Interface to the PoDL PSE function is present, then this attribute may be derived from the PD Class [and PD Extended Class](#) bits specified in 45.2.9.2.8 [and 45.2.9.3.1a](#);

*Insert the following new subclauses (30.16 through 30.16.1.2.2) after 30.15 (and its subclauses):*

## **30.16 Management for PLCA Reconciliation Sublayer**

### **30.16.1 PLCA managed object class**

This subclause formally defines the behaviours for the oPLCA managed object class attributes and actions.

#### **30.16.1.1 PLCA attributes**

##### **30.16.1.1.1 aPLCAAdminState**

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has the following entries:

disabled

enabled

BEHAVIOUR DEFINED AS:

A read-only value that indicates the mode of operation of the Reconciliation Sublayer for PLCA operation. When PLCA is enabled, the Reconciliation Sublayer functions in PLCA mode, whose operation is defined by Clause 148. When PLCA functions are not supported or are disabled by the management interface (plca\_en = FALSE), RS operation shall conform to the RS definition in Clause 22. By default, PLCA is disabled.;

##### **30.16.1.1.2 aPLCAStatus**

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has the following entries:

TRUE

FALSE

BEHAVIOUR DEFINED AS:

A read-only value that indicates whether PLCA Control state diagram is receiving BEACON indication or transmitting BEACON request. This parameter maps to the plca\_status variable in 148.4.6.2.;

##### **30.16.1.1.3 aPLCANodeCount**

ATTRIBUTE

APPROPRIATE SYNTAX:

INTEGER

BEHAVIOUR DEFINED AS:

This value is assigned to define the number of nodes getting a transmit opportunity before a new BEACON is generated. Valid range is 0 to 255, inclusive. The default value is 8.;

#### 30.16.1.1.4 aPLCALocalNodeID

ATTRIBUTE

APPROPRIATE SYNTAX:

INTEGER

BEHAVIOUR DEFINED AS:

This value is assigned to define the ID of the local node on the PLCA network. The default value is 255. Value range is 0 to 255, inclusive.;

#### 30.16.1.1.5 aPLCATransmitOpportunityTimer

ATTRIBUTE

APPROPRIATE SYNTAX:

INTEGER

BEHAVIOUR DEFINED AS:

This value is assigned to define the time between PLCA transmit opportunities for the node. aPLCATransmitOpportunityTimer maps to the duration of the timer to\_timer. The value of aPLCATransmitOpportunityTimer represents the duration of to\_timer in bit times. Valid range is 1 to 255, inclusive. The default value is 32. See 148.4.4.4.;

#### 30.16.1.1.6 aPLCAMaxBurstCount

ATTRIBUTE

APPROPRIATE SYNTAX:

INTEGER

BEHAVIOUR DEFINED AS:

Maximum number of additional packets the node is allowed to transmit in a single transmit opportunity as specified in 148.4.4.1 and 148.4.4.2. Valid range is 0 to 255, inclusive. The default value is 0.;

#### 30.16.1.1.7 aPLCABurstTimer

ATTRIBUTE

APPROPRIATE SYNTAX:

INTEGER

BEHAVIOUR DEFINED AS:

This value sets the maximum number of bit-times PLCA waits for the MAC to send a new packet before yielding the transmit opportunity. See definition in 148.4.4.1 and 148.4.4.2. Valid range is 0 to 255, inclusive. The default value is 128.;

### 30.16.1.2 PLCA device actions

#### 30.16.1.2.1 acPLCAAdminControl

ACTION

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has the following entries:

disabled

enabled

BEHAVIOUR DEFINED AS:

This action provides a means to alter aPLCAAdminState. Setting acPLCAAdminControl to the disabled state sets the variable plca\_en to FALSE and disables the PLCA functionality specified in Clause 148. Setting acPLCAAdminControl to the enabled state sets the variable plca\_en to TRUE in Figure 148–3, Figure 148–4, Figure 148–5, Figure 148–6, and Figure 148–7.;

**30.16.1.2.2 acPLCAReset**

ACTION

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has the following entries:

reset  
normal

BEHAVIOUR DEFINED AS:

This action provides a means to reset the PLCA Reconciliation Sublayer functions. See 148.4.4.2.;

## 45. Management Data Input/Output (MDIO) Interface

### 45.2 MDIO Interface Registers

#### 45.2.1 PMA/PMD registers

*Change Table 45–3 as follows (unchanged rows not shown):*

**Table 45–3—PMA/PMD registers**

| Register address      | Register name                | Subclause   |
|-----------------------|------------------------------|-------------|
| ...                   |                              |             |
| 1.2103 through 1.2293 | Reserved                     |             |
| 1.2294                | 10BASE-T1L PMA control       | 45.2.1.186a |
| 1.2295                | 10BASE-T1L PMA status        | 45.2.1.186b |
| 1.2296                | 10BASE-T1L test mode control | 45.2.1.186c |
| 1.2297                | 10BASE-T1S PMA control       | 45.2.1.186d |
| 1.2298                | 10BASE-T1S PMA status        | 45.2.1.186e |
| 1.2299                | 10BASE-T1S test mode control | 45.2.1.186f |
| 1.2300 through 1.2303 | Reserved                     |             |
| ...                   |                              |             |

#### 45.2.1.7 PMA/PMD status 2 register (Register 1.8)

##### 45.2.1.7.4 Transmit fault (1.8.11)

*Insert the following new row at the beginning of Table 45–9:*

**Table 45–9—Transmit fault description location**

| PMA/PMD    | Description location |
|------------|----------------------|
| 10BASE-T1L | 146.4.2              |

##### 45.2.1.7.5 Receive fault (1.8.10)

*Insert the following new row at the beginning of Table 45–10:*

**Table 45–10—Receive fault description location**

| PMA/PMD    | Description location |
|------------|----------------------|
| 10BASE-T1L | 146.4.3              |

**45.2.1.16 BASE-T1 PMA/PMD extended ability register (1.18)***Change Table 45-19 as follows (unchanged rows not shown):***Table 45-19—BASE-T1 PMA/PMD extended ability register bit definitions**

| Bit(s)     | Name               | Description                                                                                | R/W <sup>a</sup> |
|------------|--------------------|--------------------------------------------------------------------------------------------|------------------|
| 1.18.15:24 | Reserved           | Value always 0                                                                             | RO               |
| 1.18.3     | 10BASE-T1S ability | 1 = PMA/PMD is able to perform 10BASE-T1S<br>0 = PMA/PMD is not able to perform 10BASE-T1S | RO               |
| 1.18.2     | 10BASE-T1L ability | 1 = PMA/PMD is able to perform 10BASE-T1L<br>0 = PMA/PMD is not able to perform 10BASE-T1L | RO               |
| ...        |                    |                                                                                            |                  |

<sup>a</sup>RO = Read only**45.2.1.185 BASE-T1 PMA/PMD control register (Register 1.2100)***Change Table 45-149 as follows (unchanged rows not shown):***Table 45-149—BASE-T1 PMA/PMD control register bit definitions**

| Bit(s)     | Name           | Description                                                                                                                                        | R/W <sup>a</sup> |
|------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| ...        |                |                                                                                                                                                    |                  |
| 1.2100.3:0 | Type Selection | 3 2 1 0<br>1 x x x = Reserved<br>0 1 x x = Reserved<br>0 0 1 1 = 10BASE-T1S<br>0 0 1 x = Reserved<br>0 0 0 1 = 1000BASE-T1<br>0 0 0 0 = 100BASE-T1 | R/W              |

<sup>a</sup>RO = Read only, R/W = Read/Write**45.2.1.185.2 Type selection (1.2100.3:0)***Change 45.1.185.2 as follows:*

Bits 1.2100.3:0 are used to set the mode of operation when Auto-Negotiation enable bit 7.512.12 is set to zero, or if Auto-Negotiation is not implemented. When these bits are set to 0000, the mode of operation is 100BASE-T1. When these bits are set to 0001, the mode of operation is 1000BASE-T1. When these bits are set to 0010, the mode of operation is 10BASE-T1L. When these bits are set to 0011, the mode of operation is 10BASE-T1S. These bits shall be ignored when the Auto-Negotiation enable bit 7.512.12 is set to one.

*Insert the following new subclauses (45.2.1.186a through 45.2.1.186f.1, including Table 45-150a through Table 45-150f) after 45.2.1.186.1:*

#### 45.2.1.186a 10BASE-T1L PMA control register (Register 1.2294)

The assignment of bits in the 10BASE-T1L PMA control register is shown in Table 45-150a.

**Table 45-150a—10BASE-T1L PMA control register bit definitions**

| Bit(s)     | Name                               | Description                                                            | R/W <sup>a</sup> |
|------------|------------------------------------|------------------------------------------------------------------------|------------------|
| 1.2294.15  | PMA reset                          | 1 = PMA reset<br>0 = Normal operation                                  | R/W, SC          |
| 1.2294.14  | Transmit disable                   | 1 = Transmit disable<br>0 = Normal operation                           | R/W              |
| 1.2294.13  | Reserved                           | Value always zero                                                      | RO               |
| 1.2294.12  | Transmit voltage amplitude control | 1 = Enable 2.4 Vpp operating mode<br>0 = Enable 1.0 Vpp operating mode | R/W              |
| 1.2294.11  | Low-power                          | 1 = Low-power mode<br>0 = Normal operation                             | R/W              |
| 1.2294.10  | EEE enable                         | 1 = Enable EEE mode<br>0 = Disable EEE mode                            | R/W              |
| 1.2294.9:1 | Reserved                           | Value always 0                                                         | RO               |
| 1.2294.0   | Loopback                           | 1 = Enable loopback mode<br>0 = Disable loopback mode                  | R/W              |

<sup>a</sup>RO = Read only, R/W = Read/Write, SC = Self-clearing

#### 45.2.1.186a.1 PMA reset (1.2294.15)

Resetting the 10BASE-T1L PMA is accomplished by setting bit 1.2294.15 to one. This action shall set all 10BASE-T1L PMA registers to their default states. As a consequence, this action may change the internal state of the 10BASE-T1L PMA and the state of the physical link. This action may also initiate a reset in any other MMDs that are instantiated in the same package. This bit is self-clearing, and the 10BASE-T1L PMA shall return a value of one in bit 1.2294.15 when a reset is in progress; otherwise, it shall return a value of zero. The 10BASE-T1L PMA is not required to accept a write transaction to any of its registers until the reset process is completed. The control and management interface shall be restored to operation within 0.5 s from the setting of bit 1.2294.15.

During a reset, the 10BASE-T1L PMA shall respond to reads from bits 1.2294.15, 1.8.15:14, and 1.0.15. Reads for all other bits are indeterminate, and the values are invalid.

NOTE—This operation may interrupt data communication.

Bit 1.2294.15 is a copy of bit 1.0.15, and setting or clearing either bit shall set or clear the other bit. Setting either bit shall reset the 10BASE-T1L PMA.

#### **45.2.1.186a.2 Transmit disable (1.2294.14)**

When bit 1.2294.14 is set to one, the PMA shall disable output on the transmit path. When bit 1.2294.14 is set to zero, the PMA shall enable output on the transmit path.

Bit 1.2294.14 is a copy of bit 1.9.0, and setting or clearing either bit shall set or clear the other bit. Setting either bit shall disable the transmitter.

#### **45.2.1.186a.3 Transmit voltage amplitude control (1.2294.12)**

Bit 1.2294.12 is used to set the 2.4 Vpp operating mode when Auto-Negotiation enable bit 7.512.12 is set to zero or if Auto-Negotiation is not implemented. If bit 1.2294.12 is set to one, the PHY shall operate in 2.4 Vpp operating mode according to 146.5.4.1. If bit 1.2294.12 is set to zero, the PHY shall operate in 1.0 Vpp operating mode according to 146.5.4.1. The default value of bit 1.2294.12 is zero. This bit shall be ignored when the Auto-Negotiation enable bit 7.512.12 is set to one.

#### **45.2.1.186a.4 Low-power (1.2294.11)**

When the low-power ability is supported, the 10BASE-T1L PMA may be placed into a low-power mode by setting bit 1.2294.11 to one. This action may also initiate a low-power mode in any other MMDs that are instantiated in the same package. The low-power mode is exited by resetting the 10BASE-T1L PMA. The behavior of the 10BASE-T1L PMA in transition to and from the low-power mode is implementation specific, and any interface signals should not be relied upon. While in the low-power mode, the device shall, as a minimum, respond to management transactions necessary to exit the low-power mode. The default value of bit 1.2294.11 is zero.

NOTE—This operation may interrupt data communication. The data path of the 10BASE-T1L PMA, depending on implementation, may take many seconds to run at optimum error ratio after exiting from reset or low-power mode.

Bit 1.2294.11 is a copy of bit 1.0.11, and setting or clearing either bit shall set or clear the other bit. Setting either bit shall put the 10BASE-T1L PMA in low-power mode.

#### **45.2.1.186a.5 EEE enable (1.2294.10)**

Bit 1.2294.10 is used to enable EEE functionality when Auto-Negotiation enable bit 7.512.12 is set to zero or if Auto-Negotiation is not implemented. If bit 1.2294.10 is set to one, the PHY shall operate with EEE enabled. If bit 1.2294.10 is set to zero, the PHY shall operate with EEE disabled. This bit shall be ignored when the Auto-Negotiation enable bit 7.512.12 is set to one. The default value of bit 1.2294.10 is zero.

#### **45.2.1.186a.6 Loopback (1.2294.0)**

The 10BASE-T1L PMA shall be placed in near-end loopback mode of operation when bit 1.2294.0 is set to one. When in loopback mode, the 10BASE-T1L PMA shall accept data on the transmit path and return it on the receive path. The default value of bit 1.2294.0 is zero. Bit 1.2294.0 is a copy of 1.0.0, and setting or clearing either bit shall set or clear the other bit. Setting either bit shall enable loopback.

#### **45.2.1.186b 10BASE-T1L PMA status register (Register 1.2295)**

The assignment of bits in the 10BASE-T1L PMA status register is shown in Table 45–150b.

**Table 45–150b—10BASE-T1L PMA status register bit definitions**

| Bit(s)       | Name                           | Description                                                                                                                                                  | R/W <sup>a</sup> |
|--------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| 1.2295.15:14 | Reserved                       | Value always 0                                                                                                                                               | RO               |
| 1.2295.13    | Loopback ability               | 1 = PHY has loopback ability<br>0 = PHY has no loopback ability                                                                                              | RO               |
| 1.2295.12    | 2.4 Vpp operating mode ability | 1 = PHY has 2.4 Vpp operating mode ability<br>0 = PHY does not have 2.4 Vpp operating mode ability                                                           | RO               |
| 1.2295.11    | Low-power ability              | 1 = PMA has low-power ability<br>0 = PMA does not have low-power ability                                                                                     | RO               |
| 1.2295.10    | EEE ability                    | 1 = PHY has EEE ability<br>0 = PHY does not have EEE ability                                                                                                 | RO               |
| 1.2295.9     | Receive fault ability          | 1 = PMA has the ability to detect a fault condition on the receive path<br>0 = PMA does not have the ability to detect a fault condition on the receive path | RO               |
| 1.2295.8:3   | Reserved                       | Value always 0                                                                                                                                               | RO               |
| 1.2295.2     | Receive polarity               | 1 = Receive polarity is reversed<br>0 = Receive polarity is not reversed                                                                                     | RO               |
| 1.2295.1     | Receive fault                  | 1 = Fault condition detected<br>0 = Fault condition not detected                                                                                             | RO/LH            |
| 1.2295.0     | Receive link status            | 1 = PMA receive link up<br>0 = PMA receive link down                                                                                                         | RO/LL            |

<sup>a</sup>RO = Read only, LL = Latching low, LH = Latching high**45.2.1.186b.1 Loopback ability (1.2295.13)**

When read as a one, this bit indicates that the 10BASE-T1L PHY supports PMA loopback. When read as a zero, this bit indicates that the 10BASE-T1L PHY does not support PMA loopback.

**45.2.1.186b.2 2.4 Vpp operating mode ability (1.2295.12)**

When read as a one, this bit indicates that the 10BASE-T1L PHY supports a transmit level of 2.4 Vpp. When read as a zero, this bit indicates that the 10BASE-T1L PHY does not support a transmit level of 2.4 Vpp.

**45.2.1.186b.3 Low-power ability (1.2295.11)**

When read as a one, bit 1.2295.11 indicates that the 10BASE-T1L PMA supports the low-power ability. When read as a zero, bit 1.2295.11 indicates that the 10BASE-T1L PMA does not support the low-power ability. If the 10BASE-T1L PMA supports the low-power ability, then it is controlled using either bit 1.2294.11 or bit 1.0.11.