



International
Standard

ISO 13209-4

**Road vehicles — Open Test
sequence eXchange format (OTX) —**

**Part 4:
Expanded extensions interface
definition**

*Véhicules routiers — Format public d'échange de séquence-
tests (OTX) —*

Partie 4: Définition de l'interface des extensions étendues

**Second edition
2024-11**



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	xiii
Introduction	xv
1 Scope	1
2 Normative references	1
3 Terms, definitions and abbreviated terms	1
3.1 Terms and definitions	1
3.2 Abbreviated terms	2
4 Requirements	2
4.1 Basic principles for requirements definition	2
4.2 Requirement listing	2
4.2.1 Assertion requirements	2
4.2.2 BlackBox requirements	2
4.2.3 BusMonitoring requirements	3
4.2.4 ComInterface requirements	3
4.2.5 CommonDialogs requirements	3
4.2.6 DataType requirements	4
4.2.7 DiagComPlus requirements	4
4.2.8 DiagConfiguration requirements	5
4.2.9 DiagDataBrowsingPlus requirements	5
4.2.10 ECUConfiguration requirements	6
4.2.11 EcuStateChart requirements	7
4.2.12 EventPlus requirements	7
4.2.13 ExternalServiceProvider requirements	7
4.2.14 File requirements	7
4.2.15 FlashPlus requirements	8
4.2.16 Persistence requirements	8
4.2.17 Range requirements	8
4.2.18 SQL requirements	9
4.2.19 StateMachineProcedure requirements	9
4.2.20 StateVariable requirements	9
4.2.21 TestResultHandling requirements	10
4.2.22 Util requirements	10
4.2.23 VehicleInfo requirements	11
4.2.24 XML requirements	11
4.2.25 ZipHandling requirements	13
5 Extension overview	13
5.1 General	13
5.2 Dependencies	14
5.3 OTX packaging (PTX)	19
6 OTX Assertion extension	19
6.1 Assertion – General	19
6.2 Assertion – Exceptions	19
6.2.1 Exceptions overview	19
6.2.2 Exceptions syntax	19
6.2.3 Exceptions semantics	20
6.3 Assertion – Actions	20
6.3.1 Actions overview	20
6.3.2 Actions syntax	20
6.3.3 Actions general semantics	21
7 OTX BlackBox extension	21
7.1 BlackBox – General	21
7.2 BlackBox – Datatypes	21

7.2.1	Datatypes overview	21
7.2.2	Datatypes syntax	21
7.2.3	Datatypes semantics	22
7.3	BlackBox – Variable access	22
7.3.1	Variable access overview	22
7.3.2	Variable access syntax	22
7.3.3	Variable access semantics	23
7.4	BlackBox – Terms	23
7.4.1	Terms overview	23
7.4.2	Terms syntax	23
7.4.3	Terms general semantics	24
8	OTX BusMonitoring extension	25
8.1	BusMonitoring – General	25
8.2	BusMonitoring – Datatypes	25
8.2.1	Datatypes overview	25
8.2.2	Datatypes syntax	25
8.2.3	Datatypes semantics	26
8.3	BusMonitoring – Enumerations	27
8.3.1	Enumerations syntax	27
8.3.2	Enumerations semantics	27
8.4	BusMonitoring – Exceptions	27
8.4.1	Exceptions overview	27
8.4.2	Exceptions syntax	28
8.4.3	Exceptions semantics	28
8.5	BusMonitoring – Variable access	29
8.5.1	Variable access overview	29
8.5.2	Variable access syntax	29
8.5.3	Variable access semantics	29
8.6	BusMonitoring – Actions	29
8.6.1	Actions overview	29
8.6.2	Actions syntax	29
8.6.3	Actions general semantics	30
8.7	BusMonitoring – Terms	31
8.7.1	Terms overview	31
8.7.2	Terms syntax	32
8.7.3	Terms general semantics	32
9	OTX ComInterface extension	38
9.1	ComInterface – General	38
9.2	ComInterface – Datatypes	38
9.2.1	Datatypes overview	38
9.2.2	Datatypes syntax	38
9.2.3	Datatypes semantics	39
9.3	ComInterface – Enumerations	39
9.3.1	Enumerations syntax	39
9.3.2	Enumerations semantics	40
9.4	ComInterface – Exceptions	40
9.4.1	Exceptions overview	40
9.4.2	Exceptions syntax	40
9.4.3	Exceptions semantics	41
9.5	ComInterface – Variable access	42
9.5.1	Variable access overview	42
9.5.2	Variable access syntax	42
9.5.3	Variable access semantics	43
9.6	ComInterface – Actions	43
9.6.1	Actions overview	43
9.6.2	Actions syntax	43
9.6.3	Actions general semantics	44
9.7	ComInterface – Terms	48

9.7.1	Terms overview	48
9.7.2	Terms syntax	48
9.7.3	Semantics for ComInterface terms	49
9.7.4	Semantics for Enumeration terms	58
9.7.5	Terms general semantics	59
10	OTX CommonDialogs extension	59
10.1	CommonDialogs – General	59
10.2	CommonDialogs – Exceptions	60
10.2.1	Exceptions overview	60
10.2.2	Exceptions syntax	60
10.2.3	Exceptions semantics	60
10.3	CommonDialogs – Actions	60
10.3.1	Actions overview	60
10.3.2	Actions syntax	60
10.3.3	Actions general semantics	61
11	OTX DataType extension	64
11.1	DataType – General	64
11.2	DataType – Datatypes	64
11.2.1	Datatypes overview	64
11.2.2	Datatypes syntax	64
11.2.3	Datatypes semantics	65
11.3	DataType – Exceptions	68
11.3.1	Exceptions overview	68
11.3.2	Exceptions syntax	68
11.3.3	Exceptions semantics	68
11.4	DataType – Variable access	69
11.4.1	Variable access overview	69
11.4.2	Variable access syntax	69
11.4.3	Variable access semantics	69
11.5	DataType – Declaration and arguments	70
11.5.1	Declaration and arguments syntax	70
11.5.2	Declaration and arguments semantics	70
11.6	DataType – Signatures	70
11.6.1	Signatures overview	70
11.6.2	Signatures syntax	71
11.6.3	Semantics for Enumerations	71
11.6.4	Semantics for Structures	72
11.7	DataType – Terms	73
11.7.1	Terms overview	73
11.7.2	Semantics for Enumeration terms	73
11.7.3	Semantics for ResourceLocation terms	77
11.7.4	Semantics for Structure terms	81
12	OTX DiagComPlus extension	85
12.1	DiagComPlus – General	85
12.2	DiagComPlus – Datatypes	85
12.2.1	Datatypes overview	85
12.2.2	Datatypes syntax	85
12.2.3	Datatypes semantics	86
12.3	DiagComPlus – Enumerations	87
12.3.1	Enumerations syntax	87
12.3.2	Enumerations semantics	87
12.4	DiagComPlus – Exceptions	88
12.4.1	Exceptions overview	88
12.4.2	Exceptions syntax	88
12.4.3	Exceptions semantics	88
12.5	DiagComPlus – Variable access	88
12.5.1	Variable access overview	88

12.5.2	Variable access syntax.....	88
12.5.3	Variable access semantics.....	89
12.6	DiagComPlus – Actions.....	89
12.6.1	Actions overview.....	89
12.6.2	Actions syntax.....	89
12.6.3	Actions general semantics.....	90
12.7	DiagComPlus – Terms.....	93
12.7.1	Terms overview.....	93
12.7.2	Terms syntax.....	93
12.7.3	Terms general semantics.....	94
13	OTX DiagConfiguration extension.....	99
13.1	DiagConfiguration – General.....	99
13.2	DiagConfiguration – Exceptions.....	99
13.2.1	Exceptions overview.....	99
13.2.2	Exceptions syntax.....	99
13.2.3	Exceptions semantics.....	100
13.3	DiagConfiguration – Actions.....	100
13.3.1	Actions overview.....	100
13.3.2	Actions syntax.....	100
13.3.3	Actions general semantics.....	100
13.4	DiagConfiguration – Terms.....	101
13.4.1	Terms overview.....	101
13.4.2	Terms syntax.....	102
13.4.3	Terms general semantics.....	102
14	OTX DiagDataBrowsingPlus extension.....	104
14.1	DiagDataBrowsingPlus – General.....	104
14.2	DiagDataBrowsingPlus – Datatypes.....	104
14.2.1	Datatypes overview.....	104
14.2.2	Datatypes syntax.....	104
14.2.3	Datatypes semantics.....	105
14.3	DiagDataBrowsingPlus – Enumerations.....	109
14.3.1	Enumerations syntax.....	109
14.3.2	Enumerations semantics.....	110
14.4	DiagDataBrowsingPlus – Exceptions.....	113
14.4.1	Exceptions overview.....	113
14.4.2	Exceptions syntax.....	113
14.4.3	Exceptions semantics.....	114
14.5	DiagDataBrowsingPlus – Variable access.....	115
14.5.1	Variable access overview.....	115
14.5.2	Variable access syntax.....	115
14.5.3	Variable access semantics.....	115
14.6	DiagDataBrowsingPlus – Terms.....	116
14.6.1	Terms overview.....	116
14.6.2	Semantics for DbComChannel terms.....	116
14.6.3	Semantics for DbDiagService terms.....	118
14.6.4	Semantics for DbDiagTroubleCode terms.....	124
14.6.5	Semantics for DbEcuVariant terms.....	128
14.6.6	Semantics for DbEnvDataDesc terms.....	129
14.6.7	Semantics for DbFaultMemory terms.....	132
14.6.8	Semantics for DbMatchingParameter terms.....	134
14.6.9	Semantics for DbObject terms.....	135
14.6.10	Semantics for DbParameter terms.....	139
14.6.11	Semantics for DbRequest terms.....	153
14.6.12	Semantics for DbResponse terms.....	157
14.6.13	Semantics for DbSpecialDataElement terms.....	161
14.6.14	Semantics for DbSpecialDataGroup terms.....	163
14.6.15	Semantics for DbSubComponent terms.....	167
14.6.16	Semantics for DbTable terms.....	172

	14.6.17 Semantics for Interval terms.....	177
	14.6.18 Semantics for McdDataType terms.....	180
	14.6.19 Semantics for McdParameterType terms.....	181
	14.6.20 Semantics for McdResponseType terms.....	183
	14.6.21 Semantics for Parameter terms.....	185
	14.6.22 Semantics for TextTableElement terms.....	188
15	OTX EcuConfiguration extension.....	191
15.1	EcuConfiguration – General.....	191
15.2	EcuConfiguration – Datatypes.....	191
15.2.1	Datatypes overview.....	191
15.2.2	Datatypes syntax.....	192
15.2.3	Datatypes semantics.....	192
15.3	EcuConfiguration – Exceptions.....	193
15.3.1	Exceptions overview.....	193
15.3.2	Exceptions syntax.....	193
15.3.3	Exceptions semantics.....	193
15.4	EcuConfiguration – Variable access.....	194
15.4.1	Variable access overview.....	194
15.4.2	Variable access syntax.....	194
15.4.3	Variable access semantics.....	195
15.5	EcuConfiguration – Actions.....	196
15.5.1	Actions overview.....	196
15.5.2	Actions syntax.....	196
15.5.3	Semantics for ConfigurationRecord actions.....	197
15.5.4	Semantics for ConfigurationRecords actions.....	197
15.5.5	Semantics for OptionItem actions.....	200
15.6	EcuConfiguration – Terms.....	200
15.6.1	Terms overview.....	200
15.6.2	Semantics for ConfigurationRecord terms.....	200
15.6.3	Semantics for ConfigurationRecords terms.....	204
15.6.4	Semantics for DbConfigurationData terms.....	205
15.6.5	Semantics for DbConfigurationRecord terms.....	207
15.6.6	Semantics for DbDataRecord terms.....	210
15.6.7	Semantics for DbItemValue terms.....	213
15.6.8	Semantics for DbOptionItem terms.....	216
15.6.9	Semantics for OptionItem terms.....	223
16	OTX EcuStateChart extension.....	228
16.1	EcuStateChart – General.....	228
16.2	EcuStateChart – Datatypes.....	228
16.2.1	Datatypes overview.....	228
16.2.2	Datatypes syntax.....	228
16.2.3	Datatypes semantics.....	228
16.3	EcuStateChart – Exceptions.....	229
16.3.1	Exceptions overview.....	229
16.3.2	Exceptions syntax.....	229
16.3.3	Exceptions semantics.....	230
16.4	EcuStateChart – Variable access.....	230
16.4.1	Variable access overview.....	230
16.4.2	Variable access syntax.....	230
16.4.3	Variable access semantics.....	230
16.5	EcuStateChart – Terms.....	230
16.5.1	Terms overview.....	230
16.5.2	Semantics for DbEcuState terms.....	231
16.5.3	Semantics for ListTerm related terms.....	233
16.5.4	Semantics for SimpleTerm related terms.....	238
16.5.5	Terms general semantics.....	241
17	OTX EventPlus extension.....	245

17.1	EventPlus – General.....	245
17.2	EventPlus – Exceptions	246
17.2.1	Exceptions overview.....	246
17.2.2	Exceptions syntax.....	246
17.2.3	Exceptions semantics.....	246
17.3	EventPlus – Terms	247
17.3.1	Terms overview.....	247
17.3.2	Terms syntax.....	247
17.3.3	Terms general semantics	247
18	OTX ExternalServiceProvider extension.....	248
18.1	ExternalServiceProvider – General.....	248
18.2	ExternalServiceProvider – Datatypes.....	249
18.2.1	Datatypes overview.....	249
18.2.2	Datatypes syntax.....	249
18.2.3	Datatypes semantics.....	249
18.3	ExternalServiceProvider – Enumerations.....	250
18.3.1	Enumerations syntax.....	250
18.3.2	Enumerations semantics.....	251
18.4	ExternalServiceProvider – Exceptions.....	251
18.4.1	Exceptions overview.....	251
18.4.2	Exceptions syntax.....	251
18.4.3	Exceptions semantics.....	252
18.5	ExternalServiceProvider – Variable access	253
18.5.1	Variable access overview	253
18.5.2	Variable access syntax.....	253
18.5.3	Variable access semantics.....	253
18.6	ExternalServiceProvider – Declaration and arguments.....	254
18.6.1	Declaration and arguments syntax.....	254
18.6.2	Declaration and arguments semantics.....	255
18.7	ExternalServiceProvider – Signatures.....	255
18.7.1	Signatures overview	255
18.7.2	Signatures syntax.....	255
18.7.3	Signatures general semantics.....	256
18.8	ExternalServiceProvider – Actions.....	262
18.8.1	Actions overview.....	262
18.8.2	Actions syntax.....	262
18.8.3	Actions general semantics	264
18.9	ExternalServiceProvider – Terms	270
18.9.1	Terms overview.....	270
18.9.2	Terms syntax.....	270
18.9.3	Semantics for Enumeration terms.....	271
18.9.4	Semantics for External Service provider event query terms	273
18.9.5	Semantics for External service provider event source terms.....	274
18.9.6	Terms general semantics	276
19	OTX File extension	279
19.1	File – General.....	279
19.2	File – Datatypes.....	279
19.2.1	Datatypes overview.....	279
19.2.2	Datatypes syntax.....	279
19.2.3	Datatypes semantics.....	280
19.3	File – Exceptions	281
19.3.1	Exceptions overview.....	281
19.3.2	Exceptions syntax.....	281
19.3.3	Exceptions semantics.....	282
19.4	File – Variable access.....	282
19.4.1	Variable access overview	282
19.4.2	Variable access syntax.....	282
19.4.3	Variable access semantics.....	283

19.5	File – Actions	283
19.5.1	Actions overview	283
19.5.2	Actions syntax	283
19.5.3	Actions general semantics	285
19.6	File – Terms	288
19.6.1	Terms overview	288
19.6.2	Terms syntax	288
19.6.3	Terms general semantics	289
20	OTX FlashPlus extension	299
20.1	FlashPlus – General	299
20.2	FlashPlus – Exceptions	299
20.2.1	Exceptions overview	299
20.2.2	Exceptions syntax	299
20.2.3	Exceptions semantics	300
20.3	FlashPlus – Actions	300
20.3.1	Actions overview	300
20.3.2	Actions syntax	300
20.3.3	Actions general semantics	301
20.4	FlashPlus – Terms	302
20.4.1	Terms overview	302
20.4.2	Terms syntax	302
20.4.3	Terms general semantics	303
21	OTX Persistence extension	305
21.1	Persistence – General	305
21.2	Persistence – Exceptions	306
21.2.1	Exceptions overview	306
21.2.2	Exceptions syntax	306
21.2.3	Exceptions semantics	306
21.3	Persistence – Actions	307
21.3.1	Actions overview	307
21.3.2	Actions syntax	307
21.3.3	Actions general semantics	307
22	OTX Range extension	308
22.1	Range – General	308
22.2	Range – Datatypes	308
22.2.1	Datatypes overview	308
22.2.2	Datatypes syntax	309
22.2.3	Datatypes semantics	309
22.3	Range – Enumerations	314
22.3.1	Enumerations syntax	314
22.3.2	Enumerations semantics	314
22.4	Range – Exceptions	314
22.4.1	Exceptions overview	314
22.4.2	Exceptions syntax	315
22.4.3	Exceptions semantics	315
22.5	Range – Variable access	315
22.5.1	Variable access overview	315
22.5.2	Variable access syntax	315
22.5.3	Variable access semantics	316
22.6	Range – Actions	316
22.6.1	Actions overview	316
22.6.2	Actions syntax	316
22.6.3	Actions general semantics	317
22.7	Range – Terms	319
22.7.1	Terms overview	319
22.7.2	Terms syntax	319
22.7.3	Semantics for general terms	319

	22.7.4	Semantics for Interval terms.....	328
	22.7.5	Semantics for IntervalSemantic terms.....	338
	22.7.6	Semantics for Ranged terms.....	340
23		OTX SQL extension.....	346
	23.1	SQL – General.....	346
	23.2	SQL – Datatypes.....	347
	23.2.1	Datatypes overview.....	347
	23.2.2	Datatypes syntax.....	347
	23.2.3	Datatypes semantics.....	347
	23.3	SQL – Exceptions.....	348
	23.3.1	Exceptions overview.....	348
	23.3.2	Exceptions syntax.....	348
	23.3.3	Exceptions semantics.....	348
	23.4	SQL – Variable access.....	349
	23.4.1	Variable access overview.....	349
	23.4.2	Variable access syntax.....	349
	23.4.3	Variable access semantics.....	349
	23.5	SQL – Actions.....	349
	23.5.1	Actions overview.....	349
	23.5.2	Actions syntax.....	350
	23.5.3	Actions general semantics.....	350
	23.6	SQL – Terms.....	352
	23.6.1	Terms overview.....	352
	23.6.2	Terms syntax.....	352
	23.6.3	Terms general semantics.....	353
24		OTX StateMachineProcedure extension.....	359
	24.1	StateMachineProcedure – General.....	359
	24.2	StateMachineProcedure – Datatypes.....	361
	24.2.1	Datatypes overview.....	361
	24.2.2	Datatypes syntax.....	361
	24.2.3	Datatypes semantics.....	362
	24.3	StateMachineProcedure – Procedures.....	364
	24.3.1	Procedures overview.....	364
	24.3.2	Procedures syntax.....	364
	24.3.3	Procedures general semantics.....	365
25		OTX StateVariable extension.....	368
	25.1	StateVariable – General.....	368
	25.2	StateVariable – Declaration and arguments.....	368
	25.2.1	Declaration and arguments syntax.....	368
	25.2.2	Declaration and arguments semantics.....	369
26		OTX TestResultHandling extension.....	369
	26.1	TestResultHandling – General.....	369
	26.2	TestResultHandling – Datatypes.....	370
	26.2.1	Datatypes overview.....	370
	26.2.2	Datatypes syntax.....	370
	26.2.3	Datatypes semantics.....	371
	26.3	TestResultHandling – Enumerations.....	373
	26.3.1	Enumerations syntax.....	373
	26.3.2	Enumerations semantics.....	374
	26.4	TestResultHandling – Exceptions.....	375
	26.4.1	Exceptions overview.....	375
	26.4.2	Exceptions syntax.....	375
	26.4.3	Exceptions semantics.....	375
	26.5	TestResultHandling – Variable access.....	376
	26.5.1	Variable access overview.....	376
	26.5.2	Variable access syntax.....	376
	26.5.3	Variable access semantics.....	377

26.6	TestResultHandling – Declaration and arguments	377
26.6.1	Declaration and arguments syntax	377
26.6.2	Declaration and arguments semantics	378
26.7	TestResultHandling – Actions	378
26.7.1	Actions overview	378
26.7.2	Actions syntax	378
26.7.3	Actions general semantics	380
26.8	TestResultHandling – Terms	388
26.8.1	Terms overview	388
26.8.2	Terms syntax	388
26.8.3	Semantics for Enumeration terms	389
26.8.4	Terms general semantics	392
27	OTX Util extension	395
27.1	Util – General	395
27.2	Util – Exceptions	395
27.2.1	Exceptions overview	395
27.2.2	Exceptions syntax	395
27.2.3	Exceptions semantics	396
27.3	Util – Terms	396
27.3.1	Terms overview	396
27.3.2	Terms syntax	397
27.3.3	Semantics for Util terms	398
28	OTX VehicleInfo extension	405
28.1	VehicleInfo – General	405
28.2	VehicleInfo – Datatypes	405
28.2.1	Datatypes overview	405
28.2.2	Datatypes syntax	405
28.2.3	Datatypes semantics	405
28.3	VehicleInfo – Enumerations	406
28.3.1	Enumerations syntax	406
28.3.2	Enumerations semantics	406
28.4	VehicleInfo – Exceptions	406
28.4.1	Exceptions overview	406
28.4.2	Exceptions syntax	406
28.4.3	Exceptions semantics	407
28.5	VehicleInfo – Variable access	407
28.5.1	Variable access overview	407
28.5.2	Variable access syntax	408
28.5.3	Variable access semantics	408
28.6	VehicleInfo – Terms	408
28.6.1	Terms overview	408
28.6.2	Terms syntax	408
28.6.3	Terms general semantics	409
29	OTX XML extension	411
29.1	XML – General	411
29.2	XML – Datatypes	412
29.2.1	Datatypes overview	412
29.2.2	Datatypes syntax	412
29.2.3	Datatypes semantics	412
29.3	XML – Exceptions	412
29.3.1	Exceptions overview	412
29.3.2	Exceptions syntax	413
29.3.3	Exceptions semantics	413
29.4	XML – Variable access	414
29.4.1	Variable access overview	414
29.4.2	Variable access syntax	414
29.4.3	Variable access semantics	414

29.5	XML – Actions	414
29.5.1	Actions overview	414
29.5.2	Actions syntax	414
29.5.3	Actions general semantics	415
29.6	XML – Terms	421
29.6.1	Terms overview	421
29.6.2	Terms syntax	421
29.6.3	Terms general semantics	423
30	OTX ZipHandling extension	429
30.1	ZipHandling – General	429
30.2	ZipHandling – Exceptions	429
30.2.1	Exceptions overview	429
30.2.2	Exceptions syntax	429
30.2.3	Exceptions semantics	430
30.3	ZipHandling – Actions	431
30.3.1	Actions overview	431
30.3.2	Actions syntax	431
30.3.3	Actions general semantics	432
Annex A (normative) Comprehensive checker rule listing		437
Annex B (normative) PTX file		447
Annex C (informative) diagValidationGroups		456
Bibliography		457

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, Road vehicles, Subcommittee SC 31, Data communication.

This second edition cancels and replaces the first edition (ISO 13209-4:2021), which has been technically revised.

The main changes are as follows:

- **ComInterface** extension: added ability to select interfaces and control security access for DoIP, harmonized order of the **ConnectionStates** enumeration;
- **DataType** extension: added initialization of Structures, StructureLiterals and addition of MIME types for Resource Locations;
- **DiagComPlus** extension: added terms to access timestamps for Requests and Responses, and support of Inline-Mapping outside of diagnostic services. Harmonized order of the **ComChannelState** enumeration;
- **DiagDataBrowsingPlus** extension: **IsDiagTroubleCodeParameter** term added;
- **EcuConfiguration** extension: completely re-designed for a more generic approach to accessing configuration data;
- **FlashPlus** extension: new action **TransferSegment** added;
- **Util** extension: new term **EscapeToRegularExpression** added;
- **StateVariable** extension: state variables modified from Write-only to No-reading across documents. The whole extension is DEPRECATED!
- **XML** extension: New Action **ValidateXMLFromByteField** added;
- Correction and clarification of the documentation text in all extensions.

ISO 13209-4:2024(en)

This edition is not backward compatible with the previous one, because terms are deleted and term parameters are modified.

The incompatible changes are as follows:

- **ExternalServiceProvider** extension: parameter **providerType** added to **GetServiceProviderFromEvent**, to ensure type safety.

Additionally the following new extensions are introduced:

- **Range;**
- **EcuStateChart.**

A list of all parts in the ISO 13209 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Diagnostic test sequences are utilized whenever automotive components or functions with diagnostic abilities are being diagnosed, tested, reprogrammed or initialized by off-board test equipment. Test sequences define the succession of interactions between the user (i.e. workshop or assembly line staff), the diagnostic application (the test equipment) and the vehicle communication interface as well as any calculations and decisions that have to be carried out. Test sequences provide a means to define interactive, guided diagnostics or similar test logic.

Today, the automotive industry mainly relies on paper documentation and/or proprietary authoring environments to document and to implement such test sequences for a specific test application. An author who is setting up engineering, assembly line or service diagnostic test applications implements the required test sequences manually, supported by non-uniform test sequence documentation, most likely using different authoring applications and formats for each specific test application. This redundant effort can be greatly reduced if processes and tools support the OTX concept.

The ISO 13209 series proposes an open and standardized format for the human- and machine-readable description of diagnostic test sequences. The format supports the requirements of transferring diagnostic test sequence logic uniformly between electronic system suppliers, vehicle manufacturers and service dealerships/repair shops.

This document extends the core of the ISO 13209 series with a set of additional, generally usable OTX extensions which are not part of ISO 13209-3, using the extension mechanism rules described in ISO 13209-2.

[Figure 1](#) gives an overview of the additional extensions (marked in black) related to the existing extensions in ISO 13209-3 (marked in white).

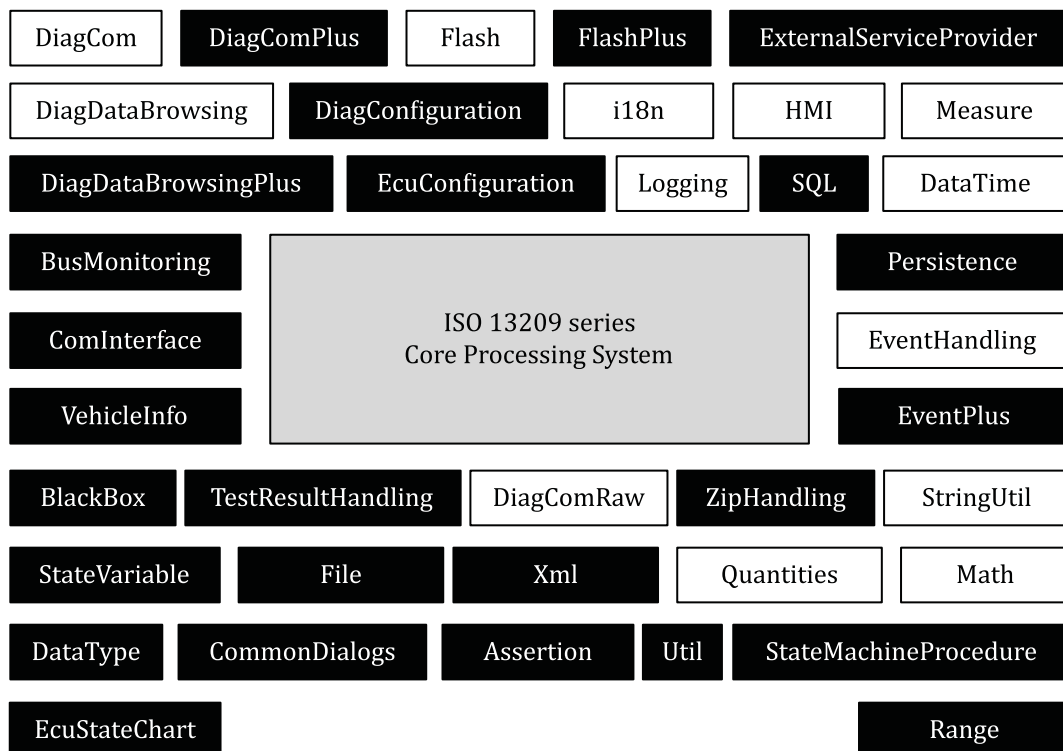


Figure 1 — OTX extensions overview

The main goals are:

- enlargement of the field of application,
- ensuring exchangeability between different tools and suppliers,

- improvement of OTX code quality,
- improvement of standard acceptance.

The following common requirements are covered:

- general read-write access to files,
- XML processing,
- declare data, whose internal properties are unknown,
- deep change monitoring in lists or maps,
- store arbitrary information on the current runtime,
- handling of user-defined data types: structure and enumeration,
- ensure correct implementation of OTX test sequences,
- support of DoIP,
- configuration tasks,
- browsing of ODX database,
- extend OTX to functionality that is encapsulated in external services, part of a system, a device, a database or a simple library,
- functional access to ECUs,
- capturing, evaluating and persisting results of test sequences,
- transport status information from inside a sequence to the environment,
- advanced convenience functionality,
- collection of communication data at runtime,
- select and modify project and vehicle information's for MVCI systems,
- support of variant coding,
- enable late bound flashing of ECUs,
- access to SQL databases,
- evaluating test sequence results in a structured way,
- access to information about vehicle network architecture,
- state machine,
- compressed data exchange.

Road vehicles — Open Test sequence eXchange format (OTX) —

Part 4: Expanded extensions interface definition

1 Scope

This document defines the Open Test sequence eXchange (OTX) additional extension requirements and data model specifications.

The requirements are derived from the use cases described in ISO 13209-1. They are listed in [Clause 4](#).

The data model specification aims at an exhaustive definition of all features of the OTX extensions which have been implemented to satisfy the requirements. This document establishes rules for the syntactical entities of each extension. Each of these syntactical entities is accompanied by semantic rules which determine how OTX documents containing extension features are interpreted. The syntax rules are provided by UML^[2] class diagrams and XML schemas, whereas the semantics are given by UML activity diagrams and prose definitions.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13209-1, *Road vehicles — Open Test sequence eXchange format (OTX) — Part 1: General information and use cases*

ISO 13209-2:2022, *Road vehicles — Open Test sequence eXchange format (OTX) — Part 2: Core data model specification and requirements*

ISO 13209-3:2022, *Road vehicles — Open Test sequence eXchange format (OTX) — Part 3: Standard extensions and requirements*

ISO 22900-3:2012, *Road vehicles — Modular vehicle communication interface (MVCI) — Part 3: Diagnostic server application programming interface (D-Server API)*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13209-1 and ISO 13209-2 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.2 Abbreviated terms

API	Application Programmers Interface
ECU	Electronic Control Unit
MVCI	Modular Vehicle Communication Interface
ODX	Open diagnostic data exchange
OTX	Open Test sequence eXchange
PDU	Protocol Data Unit
URI	Uniform Resource Identifier
XSD	XML-Schema Definition
XML	Extensible Markup Language

4 Requirements

4.1 Basic principles for requirements definition

Some basic principles have been established as a guideline to define the OTX requirements.

- a) OTX requirements specify the conditions that the OTX data model and format shall satisfy.
- b) All stakeholders (system suppliers, OEMs, tool suppliers), which offer test procedures are expected to implement and follow the requirements of this document.

The content of OTX documents and the quality of the information is the responsibility of the originator.

4.2 Requirement listing

4.2.1 Assertion requirements

4.2.1.1 A01 – Add assertions to OTX procedures to verify correctness

Rationale: It shall be possible to include actions which verify that preconditions and/or postconditions are true.

Description: During development time, a failing assertion indicates that a programming mistake has been made.

4.2.2 BlackBox requirements

4.2.2.1 BB01 – Transport unknown data types

Rationale: It shall be possible to transport values of special data types which are unknown in OTX.

Description: It can be necessary to transport values of unknown data types in OTX. For example a user-specific extension needs to handle such values or a method of an external service provider that has properties of unknown complex data types.

4.2.3 BusMonitoring requirements

4.2.3.1 BM01 – Bus monitoring

Rationale: It shall be possible to monitor a bus system like CAN.

Description: Frames on a connected bus shall be accessible for using signal data on the monitored bus.

4.2.3.2 BM02 – Bus tracing

Rationale: It shall be possible to trace a bus system like CAN.

Description: Frames on a connected bus shall be traceable for saving traces in test context and analyse them after a test.

4.2.4 ComInterface requirements

4.2.4.1 CI01 – Get communication interfaces and their resources at runtime and use them

Rationale: It shall be possible to get communication interfaces at runtime and use them for example to get a new **diag:ComChannel** on this interface.

Description: Functionality is required to get available communication interfaces and their resources at runtime and use them for diagnostics.

4.2.4.2 CI02 – Using of communication interfaces methods

Rationale: It shall be possible to use communication interfaces and their methods (e.g. get the current battery voltage or ignition state).

Description: Functionality is required to use communication interface methods.

4.2.4.3 CI03 – Activate and deactivate Ethernet

Rationale: It shall be possible to activate and deactivate the Ethernet on a VCI.

Description: Functionality is required to activate and deactivate Ethernet on a VCI.

4.2.5 CommonDialogs requirements

4.2.5.1 CD01 – It shall be possible to select a file system resource for the purposes of loading or saving file(s)

Rationale: There are occasions during the execution of an OTX sequence when a file system resource shall be selected, either to read or write information. The runtime system should provide a standard mechanism to request such resource(s).

Description: Dialogs are required to satisfy certain use cases (such as file system resource selection). Access to these resources and how information is returned is standardized to ensure exchangeability is preserved.

4.2.6 Data Type requirements

4.2.6.1 DT01 – Efficient access to named collections (enumeration)

- Rationale:** It shall be possible to support well known and often used enumerations.
- Description:** An enumeration provides an efficient way to define a set of named integral constants that may be assigned to a variable.

4.2.6.2 DT02 – Support of structures

- Rationale:** It shall be possible to support well known and often used structures.
- Description:** A structure is a value type that is typically used to encapsulate small groups of related variables, such as the coordinates of a rectangle or the characteristics of an item in an inventory.

4.2.7 DiagComPlus requirements

4.2.7.1 DCP01 – Creating diag:ComChannel without starting communication

- Rationale:** It shall be possible to create a **diag:ComChannel** without starting communication.
- Description:** A functionality that creates a **diag:ComChannel** without starting communication is required.

4.2.7.2 DCP02 – Getting the state of an initialized diag:ComChannel

- Rationale:** It shall be possible to get the current state of a **diag:ComChannel**.
- Description:** A functionality that gets the current state of a **diag:ComChannel** is required.

4.2.7.3 DCP03 – Getting all ComParameters as otx:List

- Rationale:** It shall be possible to get all ComParameters of a **diag:ComChannel** in an **otx:List** of **otx:String**.
- Description:** A functionality that gets all ComParameters of a **diag:ComChannel** in an **otx:List** of **otx:String** is required.

4.2.7.4 DCP04 – Executing a functional hex service and getting responses of each ECU that responded

- Rationale:** It shall be possible to execute a functional hexadecimal diagnostic service and get all available responses.
- Description:** A functionality that executes a functional hexadecimal diagnostic service and ensures that all responses of this service can be retrieved is required.

4.2.7.5 DCP05 – Start and stop communication

- Rationale:** It shall be possible to explicitly execute a start communication and stop communication on a **diag:ComChannel**.
- Description:** Functionality is required with which an execution of a start communication and a stop communication on a **diag:ComChannel** is enabled.

4.2.8 DiagConfiguration requirements

4.2.8.1 DC01 – Selecting the diagnostic project that contains the diagnostic database

Rationale: It shall be possible to select and change the active diagnostic project that contains the diagnostic database while executing an OTX test sequence.

Description: In some cases there is a requirement to change the active database project.

4.2.8.2 DC02 – Selecting the vehicle information that contains the settings of the diagnostic database

Rationale: It shall be possible to select and change the active vehicle information that contains the diagnostic database while executing an OTX test sequence.

Description: If a change of the active database project is needed, the vehicle information shall be changeable as well.

4.2.9 DiagDataBrowsingPlus requirements

4.2.9.1 DDBP01 – Reading static information for MCDDbParameter

Rationale: It shall be possible to read static information for MCDDbParameter from the underlying ODX database.

Description: Detailed information of MCDDbParameters specified in the ODX database shall be read.

4.2.9.2 DDBP02 – Reading static information for MCDDbTable

Rationale: It shall be possible to read static information for MCDDbTable from the underlying ODX database.

Description: Detailed information of MCDDbTables specified in the ODX database shall be read.

4.2.9.3 DDBP03 – Reading static information for MCDDbEnvDataDesc

Rationale: It shall be possible to read static information for MCDDbEnvDataDesc from the underlying ODX database.

Description: Detailed information of MCDDbEnvDataDescs specified in the ODX database shall be read.

4.2.9.4 DDBP04 – Reading static information for MCDDbDiagTroubleCode

Rationale: It shall be possible to read static information for MCDDbDiagTroubleCode from the underlying ODX database.

Description: Detailed information of MCDDbDiagTroubleCodes specified in the ODX database shall be read.

4.2.9.5 DDBP05 – Reading static information for MCDDbFaultMemory

Rationale: It shall be possible to read static information for MCDDbFaultMemory from the underlying ODX database.

Description: Detailed information of MCDDbFaultMemories specified in the ODX database shall be read.

4.2.9.6 DDBP06 – Reading static information for MCDDbMatchingParameter

- Rationale:** It shall be possible to read static information for MCDDbMatchingParameter from the underlying ODX database.
- Description:** Detailed information of MCDDbMatchingParameters specified in the ODX database shall be read.

4.2.9.7 DDBP07 – Reading static information for MCDDbSpecialDataElement

- Rationale:** It shall be possible to read static information for MCDDbSpecialDataElement from the underlying ODX database.
- Description:** Detailed information of MCDDbSpecialDataElements specified in the ODX database shall be read.

4.2.9.8 DDBP08 – Reading static information for MCDDbSpecialDataGroup

- Rationale:** It shall be possible to read static information for MCDDbSpecialDataGroup from the underlying ODX database.
- Description:** Detailed information of MCDDbSpecialDataGroups specified in the ODX database shall be read.

4.2.9.9 DDBP09 – Reading static information for MCDDbTextTableElement

- Rationale:** It shall be possible to read static information for MCDDbTextTableElement from the underlying ODX database.
- Description:** Detailed information of MCDDbTextTableElements specified in the ODX database shall be read.

4.2.9.10 DDBP10 – Reading static information for MCDInterval

- Rationale:** It shall be possible to read static information for MCDInterval from the underlying ODX database.
- Description:** Detailed information of MCDIntervals specified in the ODX database shall be read.

4.2.9.11 DDBP11 – Reading static information for MCDDbSubComponent

- Rationale:** It shall be possible to read static information for MCDDbSubComponent from the underlying ODX database.
- Description:** Detailed information of MCDDbSubComponents specified in the ODX database shall be read.

4.2.10 ECUConfiguration requirements

4.2.10.1 EC01 – Configuration of an ECU by using a database (ODX-E file)

- Rationale:** In some cases ODX-E files are used to configure an ECU. Therefore configuration by using such files shall be enabled.
- Description:** OTX actions and terms are required to enable ECU configuration via a database.

4.2.11 EcuStateChart requirements

4.2.11.1 ESC01 – Support of ODX STATE-CHARTs

Rationale: It shall be possible to get STATE-CHART information.

Description: ODX covers the concept of diagnostic states which are related to diagnostic services and communication channels and map it to a state machine.

4.2.12 EventPlus requirements

4.2.12.1 EP01 – Monitor changes on variables of complex types

Rationale: The OTX Core **EventHandling** extension shall be extended by a mechanism to monitor complex types.

Description: It shall be possible to react to changes deep inside the value of a variable which has a complex type, e.g. a List or Map variable.

4.2.13 ExternalServiceProvider requirements

4.2.13.1 ESP01 – Add method calls of encapsulated libraries into OTX test sequences

Rationale: Authors are able to add supplied functionality into OTX.

Description: Existing functionality of a third party company that is encapsulated in a library shall be added into an OTX test sequence (e.g. seed/key).

4.2.13.2 ESP02 – Add a proprietary test sequence into an OTX test sequence

Rationale: The author has the possibility to add small and simple pieces of OTX code into an already running proprietary test sequence. A step by step migration of existing proprietary test logic into OTX code is also possible.

Description: With the possibility to call a proprietary test sequence out of OTX, the author is able to exchange existing parts of proprietary test sequence into OTX (step by step migration). The author is also able to add new functionality written in OTX into proprietary test sequences. Accordingly the introduction of OTX test sequences is not complex and scalable.

4.2.13.3 ESP03 – Add any external functionality to an OTX test sequence

Rationale: Add any external functionality to an OTX test sequence.

Description: With the ExternalServiceProvider the author is able to connect custom specific systems to OTX test sequences.

4.2.14 File requirements

4.2.14.1 F01 – Read and write textual files

Rationale: It shall be possible to read and write textual files in the local file system.

Description: An OTX extension is required which allows access to textual files.

4.2.14.2 F02 – Read and write binary files

Rationale: It shall be possible to read and write binary files in the local file system.

Description: An OTX extension is required which allows access to binary files.

4.2.15 FlashPlus requirements

4.2.15.1 FP01 – Enable latebound flashing (select binary file while execution of a test)

Rationale: It shall be possible to get, set and change binary flash files for **flash:FlashSession** at runtime.

Description: In some cases there is a requirement to set a binary flash file while executing a script.

4.2.16 Persistence requirements

4.2.16.1 P01 – It shall be possible to save and load the value of all SimpleTypes and ByteField using persistent storage

Rationale: Authors should not be burdened with details of the conversion to file format – the storage format and location should be the responsibility of the runtime system.

Description: Simple types and ByteFields are literal data that can successfully be saved between sessions. These types are the building blocks of more complex structured data.

4.2.16.2 P02 – It shall be possible to save and load collection types (list and map) using persistent storage if the contents of the collections can also be persisted

Rationale: If the contents of lists and maps can be persisted, then lists and maps of these types can also be persisted.

Description: Extending persistence to collection types gives authors a powerful tool for saving and loading structured data with single actions.

4.2.16.3 P03 – It shall be possible for OTX Extensions to define additional data types that can persist

Rationale: There may be other data types defined by OTX extensions that need to persist.

Description: See the relevant extensions for details.

4.2.17 Range requirements

4.2.17.1 Range01 – Support of ranges

Rationale: It shall be possible to pass a value together with range information in a single parameter.

Description: Using ranges can reduce the number of procedure parameters and make OTX cleaner and more readable.

4.2.17.2 Range02 – Range checking

Rationale: It shall be possible to check, whether the value is inside the range.

Description: Range information can be used to give the application information about the valid range of certain in- or output parameters of a procedure.

4.2.17.3 Range03 – Getting range information

Rationale: It shall be possible to get information about the range.

Description: Range information can be obtained for use in dependent test logic.

4.2.18 SQL requirements

4.2.18.1 SQL01 – Establishing database connections

Rationale: It shall be possible to create a database connection.

Description: A certain database connection can be established by the runtime system.

4.2.18.2 SQL02 – Executing of database commands

Rationale: It shall be possible to execute commands at a database connection.

Description: Depending of the database system, a command can be, e.g. an OTX SQL extension command.

4.2.18.3 SQL03 – Retrieving results of a database command

Rationale: It shall be possible to retrieve results from an executed command.

Description: The values of the result can be in an arbitrary structure.

4.2.18.4 SQL04 – Retrieving results shall be possible synchronously and asynchronously

Rationale: It shall be possible to retrieve results synchronously and asynchronously.

Description: If the data records read asynchronously the sequence shall not have to wait to retrieve a large amount of data.

4.2.19 StateMachineProcedure requirements

4.2.19.1 SMP01 – Description of state based workflows

Rationale: It shall be possible to describe state-based workflows.

Description: A state machine consists of 1 to n states and state transitions for the state change which will be realised by the occurrence of conditions supervised by triggers. The extension shall not contain layout information for the runtime system.

4.2.20 StateVariable requirements

4.2.20.1 SV01 – Support for state variables, which are the counterpart of context variables

Rationale: It shall be possible to easily transport status information from inside a sequence to the environment.

Description: State variables can only be evaluated by setting outcomes of the test application, e.g. to display the current execution progress.

4.2.21 TestResultHandling requirements

4.2.21.1 RH01 – Capturing of test result data

- Rationale:** Functionality shall be provided to capture test result data.
- Description:** Test result data (e.g. measured values) shall be captured in a structured way in relation to the environment (e.g. test object, test identifier, date/time). For the test result structure a data model shall be used.

4.2.21.2 RH02 – Evaluation of test result data

- Rationale:** It shall be possible to evaluate captured test result data.
- Description:** For each test result, it shall be possible to define individual conditions to evaluate if the test result is OK or NOT OK.

4.2.21.3 RH03 – Summarising of test results in groups

- Rationale:** It shall be possible to summarise test results in groups.
- Description:** According to the test result data model, test results can be summarised in groups. It shall be possible to evaluate if the test result group is OK or NOT OK.

4.2.21.4 RH04 – Defining different test result levels

- Rationale:** It shall be possible to define different test result levels.
- Description:** It is necessary to have different test result levels according to the development process of OTX sequences, e.g. test results exclusively for debugging tasks.

4.2.21.5 RH05 – Multiple test instances

- Rationale:** Simultaneous operation with multiple test instances shall be possible.
- Description:** It shall be possible to capture and evaluate test result data of different test instances (e.g. several vehicles) at the same time.

4.2.22 Util requirements

4.2.22.1 U01 – Copying otx:ByteFields

- Rationale:** It shall be possible to copy an **otx:ByteField** to simplify assigning a value and not a reference to another **otx:ByteField**.
- Description:** **otx:ByteField** shall be copyable because it is needed to assign **otx:Bytefield** value of **otx:Bytefield** variable to another **otx:Bytefield** variable.

4.2.22.2 U02 – Comparing values of complex types

- Rationale:** It shall be possible to compare the values of complex types (not their references like **otx:IsEqual** does) in a simple way.
- Description:** An easy way to compare complex type values is needed (e.g. comparing of two hexadecimal responses as **otx:ByteField** Variable of an ECU).

4.2.22.3 U03 – Getting a random number

Rationale: It shall be possible to get a random number for special test cases.

Description: Some test sequences need to use a random numbers. Therefore, an easy way to generate a random number is needed.

4.2.22.4 U04 – Checking a variable's status

Rationale: It shall be possible to check whether a variable of a complex type is already initialized or not.

Description: In some cases it is important to check whether a complex variable is initialized or not. Therefore, an easy way to check the status of a complex variable is needed.

4.2.22.5 U05 – Simplify analysing the content of a list

Rationale: It shall be possible to simply analyse the content of `otx:List` instances.

Description: Analysis of an **otx:List** shall be simplified, because in some test sequences its analysis is necessary.

4.2.22.6 U06 – More possibilities to format a string

Rationale: It shall be possible to simply format an **otx:String**.

Description: In some cases strings have to be formatted in a special way.

4.2.23 VehicleInfo requirements

4.2.23.1 VI01 – Getting the gateway mode of an ECU

Rationale: It shall be possible to get the gateway mode of an ECU.

Description: An OTX term that gets the gateway mode of an ECU is required.

4.2.23.2 VI02 – Getting names of gateways that accesses an ECU

Rationale: It shall be possible to get the names of gateways that access an ECU.

Description: An OTX term that gets the names of gateways that access an ECU is required.

4.2.23.3 VI03 – Checking if ECU is accessed via gateways

Rationale: It shall be possible to check if an ECU is accessed by a gateway.

Description: An OTX term that checks if an ECU is accessed via one or more gateways is required.

4.2.24 XML requirements

4.2.24.1 X01 – The user shall be able to set XML processing Instructions

Rationale: The functionality shall be provided to store processing instructions.

Description: Processing instructions at document level define additional information outside the XML root tag. Therefore, an extra functionality is needed to add this information to the XML document.

4.2.24.2 X02 – The user shall be able to edit attributes, nodes and node text values

- Rationale:** The functionality shall be provided to modify tag attributes, nodes and containing text values.
- Description:** To create a complete XML structure, the functionality to edit attributes, nodes and the text value between the start tag and end tag is mandatory.

4.2.24.3 X03 – The user shall be able to add comments to an XML document

- Rationale:** The functionality shall be provided to add comments to an XML document.
- Description:** There shall be an OTX extension, which allows the appending of comment tags to a document root node.

4.2.24.4 X04 – The user shall be able to remove attributes and nodes

- Rationale:** The functionality shall be provided to remove attribute entries as well as complete nodes.
- Description:** There shall be an OTX extension, which allows deleting an attribute of an XML node. It should be possible to delete a node containing all children as well.

4.2.24.5 X05 – Validation of an XML document

- Rationale:** The functionality shall be provided to validate an XML document.
- Description:** There shall be an OTX extension, which allows validation of an XML document against a referenced schema.

4.2.24.6 X06 – The user shall be able to define the document encoding and version

- Rationale:** The functionality shall be provided to define the document encoding and version.
- Description:** There shall be an OTX extension, which allows the addition of the encoding and version as process instructions at the head of the XML document.

4.2.24.7 X07 – The user shall be able to parse XML content from file or ByteField

- Rationale:** The functionality shall be provided to parse an XML document tree from an addressed file or in-memory ByteField.
- Description:** An extension to parse an XML document from a file which is addressed by a URI should be provided. An in-memory ByteField as input shall be supported as well.

4.2.24.8 X08 – The user shall be able to query XML elements by XPath

- Rationale:** The functionality shall be provided to address an XML element using an XPath query.
- Description:** An extension to collect all matching XML elements starting from the document node shall be provided.

4.2.25 ZipHandling requirements

4.2.25.1 Z01 – Functionality shall be provided to extract a zip file

Rationale: The user shall be able to extract a zip file.

Description: An extension for zip file handling shall provide the possibility to extract a zip file to a target directory.

4.2.25.2 Z02 – Filter functionality for the file compress and decompress process shall be provided

Rationale: To reduce the amount of files, a wildcard filter for the file consistent extension shall be used.

Description: A wildcard filter reduces the amount of extracted or compressed files by applying a filter on the file consistent extension.

4.2.25.3 Z03 – The user shall decide whether existing files should be overwritten by the decompress process.

Rationale: The decompress functionality shall control whether existing files should be overwritten.

Description: The target directory of the extraction process can contain files already. The overwrite action of conflicting files shall be configured by the user.

4.2.25.4 Z04 – The user shall decide whether the target zip file should be overwritten by the compress process

Rationale: The compress functionality shall control how to handle an existing target zip file.

Description: If the addressed target zip file already exists, files can be added to the existing container or it will be overwritten. The functionality has to be configured by the user.

4.2.25.5 Z05 – The zip file shall be a URI

Rationale: The addressing of the zip file shall be performed using the URI definition.

Description: The URI path defines the address of the zip file resource.

5 Extension overview

5.1 General

OTX (Open Test sequence Exchange) is a platform and tester-independent exchange format for formal description of executable test sequences published in the ISO 13209 series. OTX is a standard for the reliable storage of test knowledge within vehicle diagnostics and vehicle test automation. The XML-based flow language provides the opportunity to share test sequences across departmental, tool and process boundaries. The expertise stored in these flows is not lost, but can be used even after many years. OTX is targeted primarily at the automotive industry, although the core features of the standard are applicable in any industry. Such test sequences are used in development, production and after sales and can be exchanged between vehicle manufacturers, tier 1 suppliers and tool providers.

OTX is the logical evolution of standardization in vehicle diagnostics. [Figure 2](#) shows the relation of OTX to other diagnostic standards.

ISO 13209-4:2024(en)

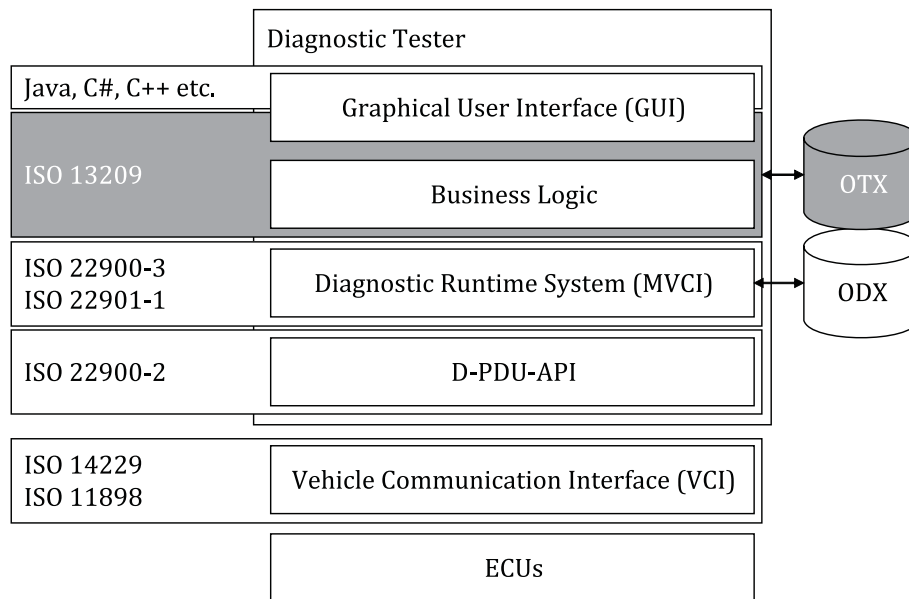


Figure 2 — Relation of OTX to standards in vehicle diagnostics

The ISO 13209 series consists of a core and an extension concept, which allows the integration of arbitrary interfaces. For example, extensions for diagnostic communication, flashing, event handling and logging are standardized in ISO standards. Based on these extensions the usage of an MVCI-Server (ISO 22900-3 also known as ASAM MCD-3 D Server API) is simplified, because many implementation steps are hidden.

OTX is not restricted to diagnostic sequences. It can be also seen as a strategic migration platform for different, currently separated standards, e.g. ASAM GDI^[8], ASAM XIL^[9], ASAM AE MCD-3 MC^[10].

This document represents the specification of the OTX standard extensions for data model version "1.0.0".

For the convenience of the user the schema definition files (xsd) are published alongside this document, available at <https://standards.iso.org/iso/13209/-4/ed-2/en/>.

For the convenience of the user the schema definition files (xsd) for a possible, not normative test result data model are published alongside this document, available at <https://standards.iso.org/iso/13209/-4/ed-2/en/>.

[Annex A](#) contains a comprehensive listing of all checker rules and shall be followed. The rules are needed because some constraints existing on OTX documents cannot be ensured by XSD validation alone. These constraints need to be checked by additional checker applications.

[Annex C](#) describes a data model for the informative usage of DiagValidationGroups. This allows the usage of variant independent test logic.

5.2 Dependencies

[Figure 3](#) and [Figure 4](#) shows UML package diagrams describing the full set of OTX extensions (together with the OTX Core) and the import dependencies in between them. OTX extensions use or extend types defined in the OTX Core. Therefore, all of the extensions are (directly or indirectly) based on the OTX Core data model, as specified by ISO 13209-2.

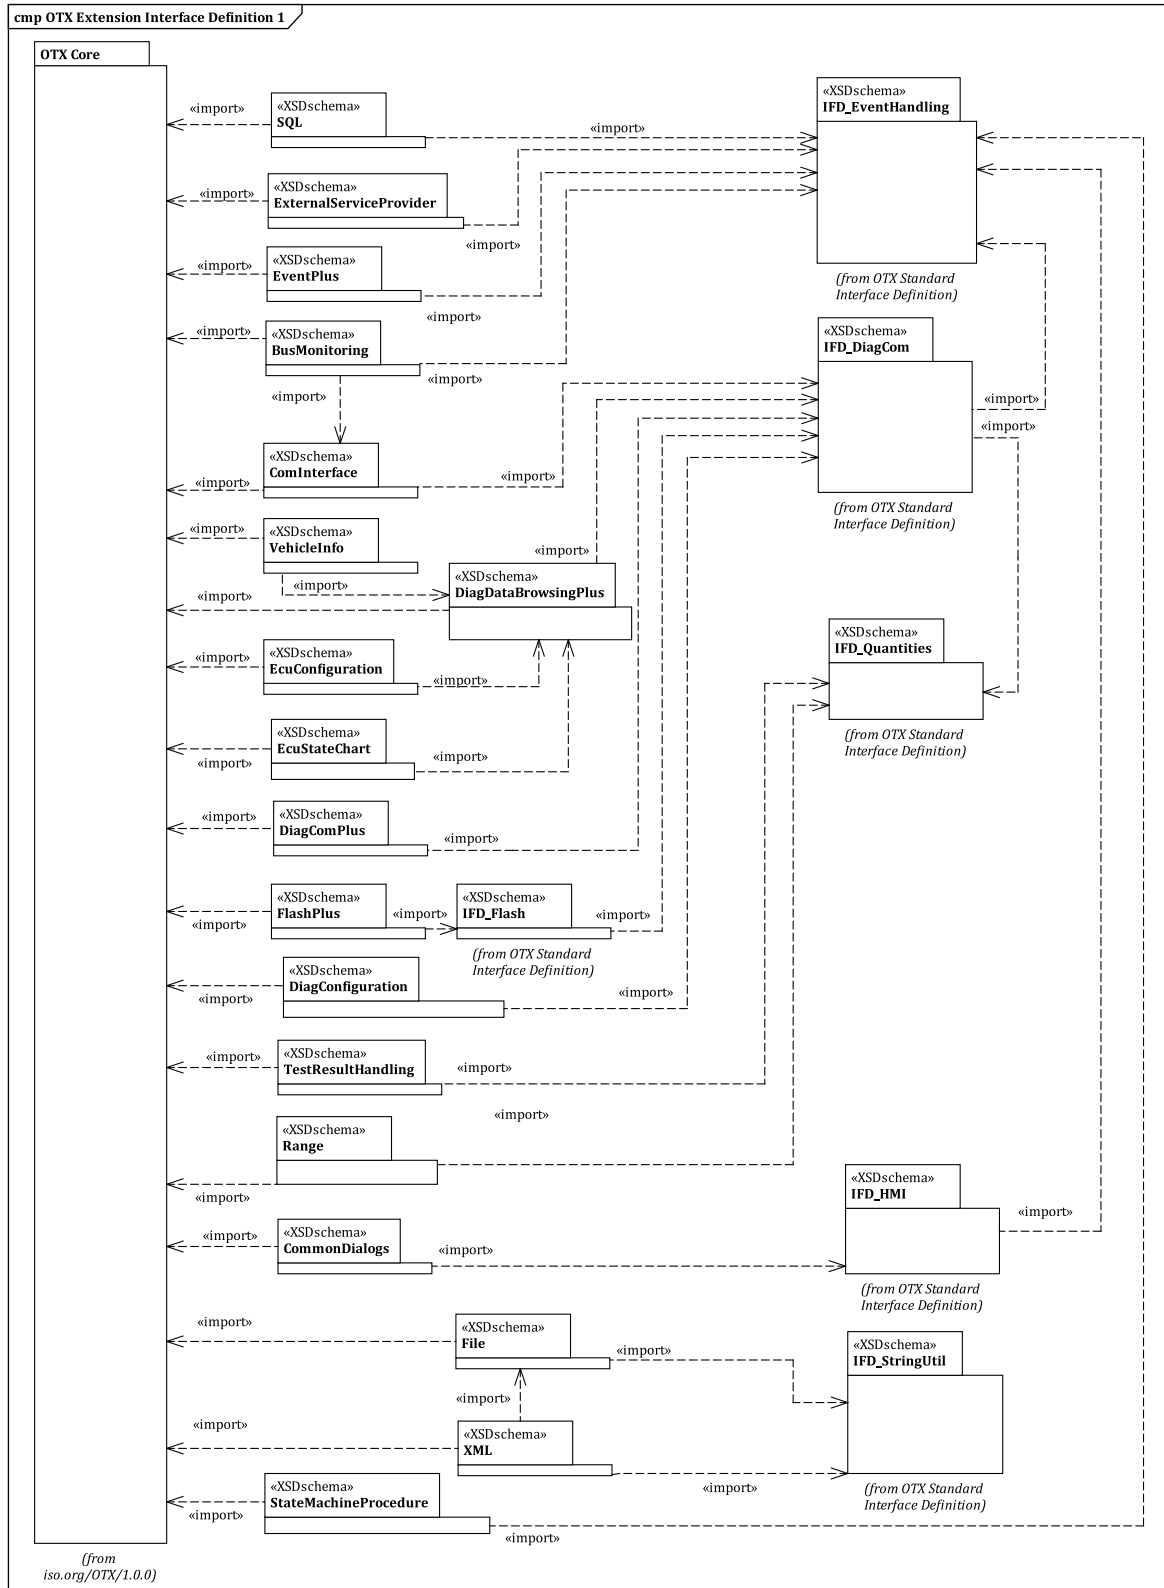


Figure 3 — Overview OTX schema dependencies 1

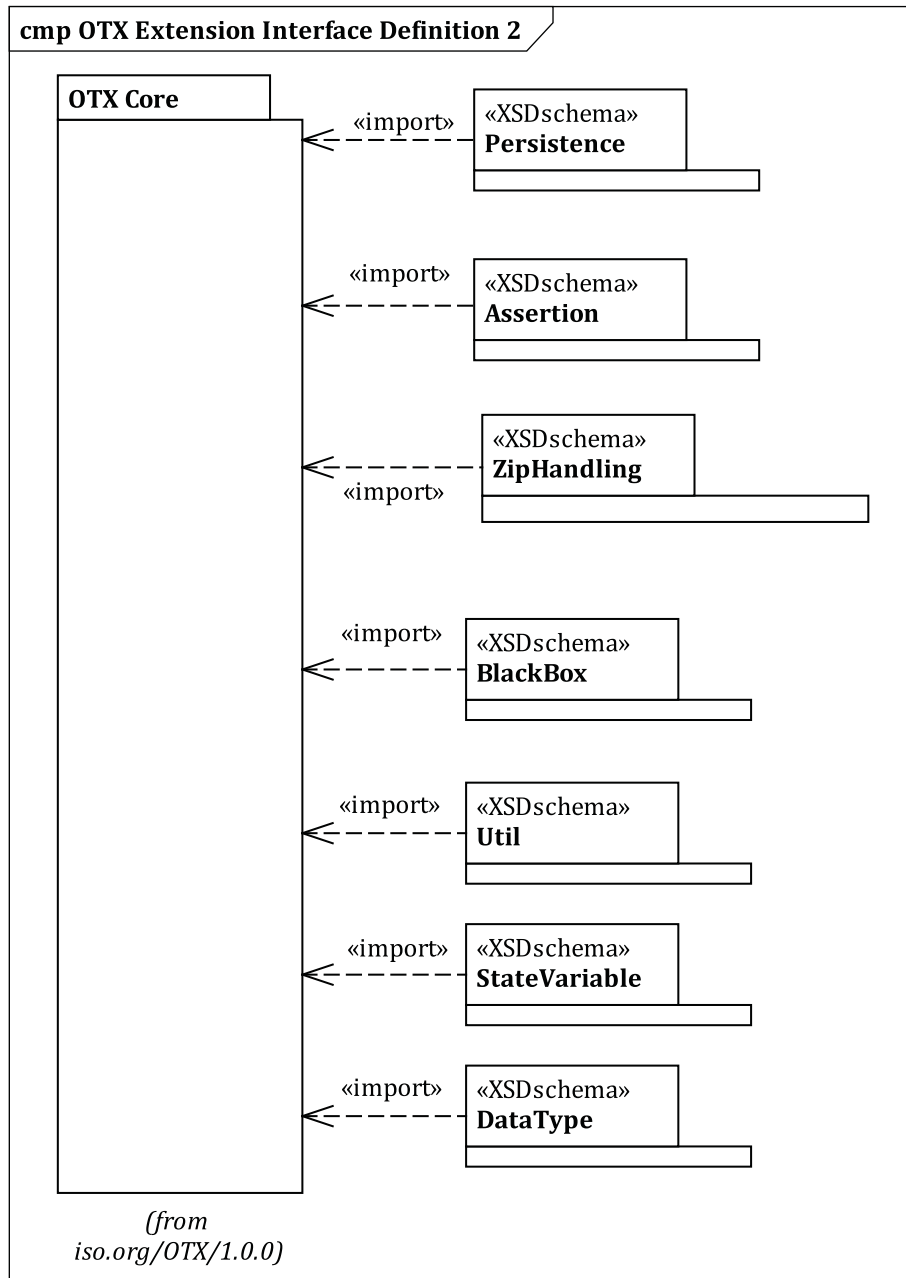


Figure 4 — Overview OTX schema dependencies 2

[Table 1](#) provides an overview of additional OTX extensions and their basic characteristics.

The OTX Core is a prerequisite for any OTX application and shall always be fully supported. By contrast, OTX applications are not required to support all of the extensions specified in this document. The set of supported extensions may vary depending on the field of application. However, an OTX application supporting an extension which imports other extensions shall support these extensions also. This guarantees that the set of supported extensions is consistent with regard to the dependencies.

Table 1 — OTX extension characteristics

Extension (schema file)	Summary	Dependencies
Assertion (otxIFD_Assertion.xsd)	Ensuring OTX sequence quality	Core
BlackBox (otxIFD_BlackBox.xsd)	Transport of customer specific data types	Core
BusMonitoring (otxIFD_BusMonitoring.xsd)	Collection of communication data at runtime	Core ComInterface EventHandling
ComInterface (otxIFD_ComInterface.xsd)	Handling of communication interfaces and diagnostic over IP	Core DiagCom
CommonDialogs (otxIFD_CommonDialogs.xsd)	Dialogs for common use cases	Core HMI
DataType (otxIFD_DataType.xsd)	Definition of user defined structure and enumeration data types	Core
DiagComPlus (otxIFD_DiagComPlus.xsd)	Support of different ECU responses for hex service and com channel controlling	Core DiagCom
DiagConfiguration (otxIFD_DiagConfiguration.xsd)	Configuration of project and vehicle information	Core DiagCom
DiagDataBrowsingPlus (otxIFD_DiagDataBrowsingPlus.xsd)	Browsing of ODX database properties	Core DiagCom
ECUConfiguration (otxIFD_ECUConfiguration.xsd)	ECU variant coding	Core DiagDataBrowsing-Plus
EcuStateChart (otxIFD_EcuStateChart.xsd)	State machine of diag services	Core DiagDataBrowsing-Plus
EventPlus (otxIFD_EventPlus.xsd)	Support for deep change monitoring in a List or Map	Core EventHandling
ExternalServiceProvider (otxIFD_ExternalService Provider.xsd)	Provides actions, terms, events and data types for an access to external services	Core EventHandling
File (otxIFD_File.xsd)	General read write access to files	Core StringUtil
FlashPlus (otxIFD_FashPlus.xsd)	Enable late binding of flash files	Core Flash DiagCom
Persistence (otxIFD_Persistence.xsd)	Store runtime information of an equal runtime system	Core
Range (otxIFD_Range.xsd)	Data types to represent values alongside intervals	Core Quantities
SQL (otxIFD_SQL.xsd)	Read and write access to a SQL database	Core EventHandling
StateMachineProcedure (otxIFD_StateMachine Procedure.xsd)	Description of a behaviour model with states, transactions and actions	Core EventHandling
StateVariable (otxIFD_StateVariable.xsd)	Mechanism to transport status information from inside a sequence to the environment	Core

Table 1 (continued)

Extension (schema file)	Summary	Dependencies
TestResultHandling (otxIFD_TestResultHandling.xsd)	Evaluated and structured storage of result Information (e.g. for statistics) from test sequences	Core Quantities
Util (otxIFD_Util.xsd)	Advanced convenience functionality	Core
VehicleInfo (otxIFD_VehicleInfo.xsd)	Access to information about the vehicle network architecture	Core DiagDataBrowsing-Plus
Xml (otxIFD_Xml.xsd)	Read and interpret XML documents, modification of existing and creation of new documents	Core File StringUtil
ZipHandling (otxIFD_ZipHandling.xsd)	Compressed data exchange	Core

Table 2 shows the XSD namespace associations of additional OTX extensions. Each namespace has a prefix assigned to it. In the remainder of this document, the prefixes defined here are used to mark types which belong to extensions other than the one which is currently described. In contrast, the types defined by the currently described extension are not prefixed.

Table 2 — OTX extension namespace associations

Extension	Namespace	Prefix
Assertion	http://iso.org/OTX/1.0.0/Assertion	assert:
BlackBox	http://iso.org/OTX/1.0.0/BlackBox	blackBox:
BusMonitoring	http://iso.org/OTX/1.0.0/BusMonitoring	busMon:
ComInterface	http://iso.org/OTX/1.0.0/ComInterface	comIf:
CommonDialogs	http://iso.org/OTX/1.0.0/CommonDialogs	commDlg:
DataType	http://iso.org/OTX/1.0.0/DataType	dataType:
DiagComPlus	http://iso.org/OTX/1.0.0/DiagComPlus	diagComPlus:
DiagConfiguration	http://iso.org/OTX/1.0.0/DiagConfiguration	diagConf:
DiagDataBrowsingPlus	http://iso.org/OTX/1.0.0/DiagDataBrowsingPlus	diagDataPlus:
ECUConfiguration	http://iso.org/OTX/1.0.0/ECUConfiguration	ecuConf:
EcuStateChart	http://iso.org/OTX/1.0.0/EcuStateChart	ecuState:
EventPlus	http://iso.org/OTX/1.0.0/EventPlus	eventPlus:
ExternalServiceProvider	http://iso.org/OTX/1.0.0/ExternalServiceProvider	esp:
File	http://iso.org/OTX/1.0.0/File	file:
FlashPlus	http://iso.org/OTX/1.0.0/FlashPlus	flashPlus:
Persistence	http://iso.org/OTX/1.0.0/Persistence	persist:
Range	http://iso.org/OTX/1.0.0/Range	range:
SQL	http://iso.org/OTX/1.0.0/SQL	sql:
StateMachineProcedure	http://iso.org/OTX/1.0.0/StateMachineProcedure	smp:
StateVariable	http://iso.org/OTX/1.0.0/StateVariable	stateVar:
TestResultHandling	http://iso.org/OTX/1.0.0/TestResultHandling	testResult:
Util	http://iso.org/OTX/1.0.0/Util	util:
VehicleInfo	http://iso.org/OTX/1.0.0/VehicleInfo	vehInf:
Xml	http://iso.org/OTX/1.0.0/XML	otxXml:
ZipHandling	http://iso.org/OTX/1.0.0/ZipHandling	zip:

5.3 OTX packaging (PTX)

The exchange of a whole OTX project can be realized with a file container called "PTX package". All files of an OTX project are packaged in one PTX container. A PTX container can handle OTX-files with the file extension *.otx as well as arbitrary files of any format that are necessary for the project. The file container format is described in [Annex B](#) and shall be followed.

6 OTX Assertion extension

6.1 Assertion – General

Assertions are used to ensure the correct implementation of OTX test sequences. An assertion claims that a certain condition holds during OTX execution. It does not contribute to the test logic that is implemented in OTX.

Assertions are usually evaluated during testing of the OTX test sequence itself. A failing assertion always indicates that the OTX test sequence contains a programming error and shall be changed.

In a production environment it may be desirable to skip assertions to maximize performance. Runtime systems should offer a configuration to enable or disable the evaluation of assertions. If the runtime system is configured not to evaluate assertion statements, it shall suppress any impact of assertions; it shall not evaluate their boolean conditions or error messages.

6.2 Assertion – Exceptions

6.2.1 Exceptions overview

All exceptions introduced by this extension are derived from the **otx:Exception** type. They represent the full set of exceptions added by the OTX Assertion extension.

6.2.2 Exceptions syntax

The syntax of all OTX Assertion extension exception type declarations is shown in [Figure 5](#).

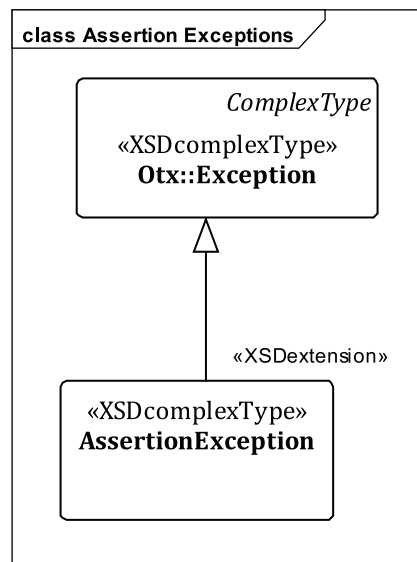


Figure 5 — Assertion – Exceptions

6.2.3 Exceptions semantics

6.2.3.1 General

Since all OTX Assertion extension exception types are implicit exceptions without initialization parts, they cannot be declared constant.

6.2.3.2 AssertionException

IMPORTANT — All terms and action realisations in this extension may potentially throw this exception.

6.3 Assertion – Actions

6.3.1 Actions overview

All actions introduced by this extension extend the **otx:ActionRealisation** extension interface.

6.3.2 Actions syntax

[Figure 6](#) shows the syntax of all actions in the OTX Assertion extension.

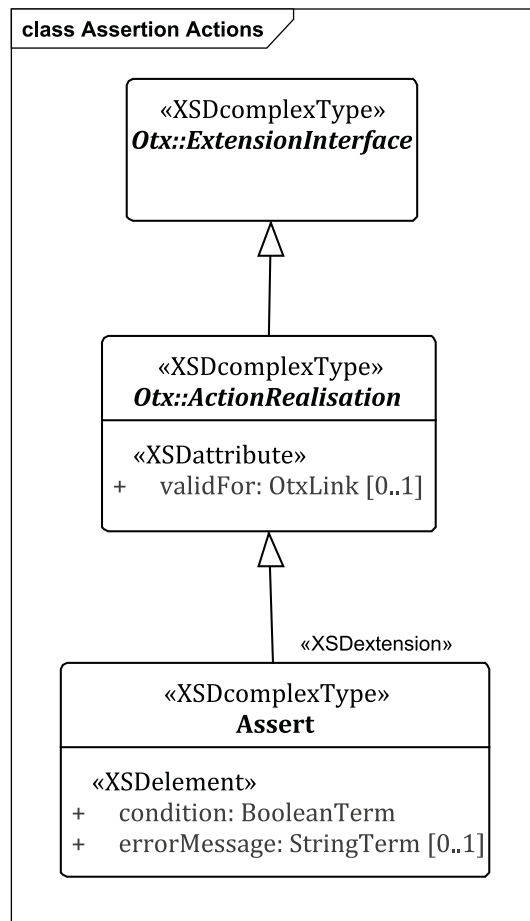


Figure 6 — Assertion – Actions

6.3.3 Actions general semantics

6.3.3.1 Assert

Semantic:

If the runtime is configured to evaluate assertions, it evaluates the given boolean expression.

If the expression evaluates to true, nothing happens.

If the expression evaluates to false, the execution of OTX procedure should be stopped (the exact runtime behaviour is unspecified), and the failed assertion is reported to the runtime system itself (out of OTX scope).

The `<errorMessage>` term, if present, shall only be evaluated when the assertion failed. In particular, the `<errorMessage>` term cannot throw any exceptions unless the assertion failed.

If the runtime is configured not to evaluate assertions, the **Assert** action does nothing. In particular, the `<condition>` and `<errorMessage>` terms will not be evaluated, and thus cannot throw any exceptions.

Parameters:

- **<condition> : otx:BooleanTerm [1..1]**

The expression to evaluate.

- **<errorMessage> : otx:StringTerm [0..1]**

An error message which may be included in the report to the runtime system, if the assertion fails.

Exceptions:

- None

7 OTX BlackBox extension

7.1 BlackBox – General

The **BlackBox** data type can be used as a transport or container data type. A **BlackBox** data type can contain a value of a user-specific data type which is unknown to OTX.

For example, the main procedure may have an in parameter of type **BlackBox**. When the main procedure is called, the runtime system uses this parameter to pass in a value of a proprietary (non-OTX) data type. The OTX procedures do not interact with the contents of this **BlackBox** data type. They pass it on to an **otx>ActionRealisation** of a proprietary OTX extension. This proprietary extension is able to handle the value contained in the **BlackBox** data type. In other words, the user can transport data through code layers (code is embedded in between test system specific runtime code) even if its type is unknown to OTX (not defined in core or standardized extensions). This extension provides no way of initializing **BlackBoxValue**.

Terms and actions can be added in new, proprietary extensions to interact with the **BlackBox** data type.

7.2 BlackBox – Datatypes

7.2.1 Datatypes overview

All data types introduced by this extension are derived from **otx:ComplexType**.

7.2.2 Datatypes syntax

The syntax of the data type declarations of the OTX BlackBox extension is shown in [Figure 7](#).

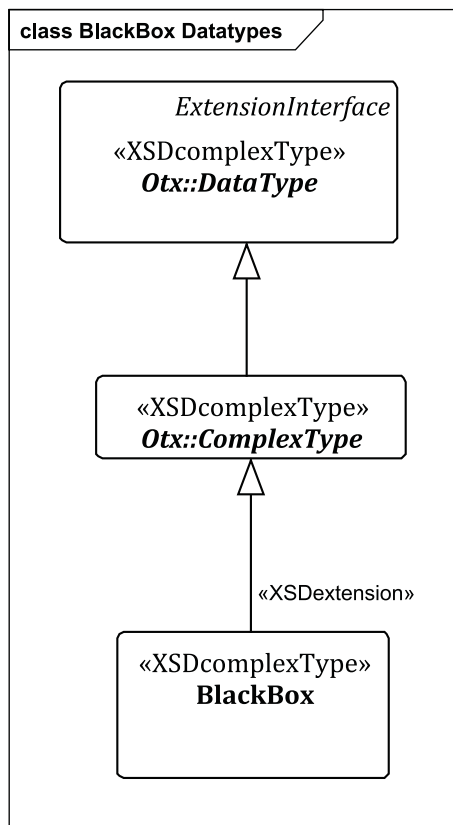


Figure 7 — BlackBox – Datatypes

7.2.3 Datatypes semantics

7.2.3.1 BlackBox

BlackBox is an **otx:ComplexType**.

This type can be used as a transport or container datatype. It can contain a value of a user-specific data type which is unknown to OTX. If OTX code is embedded in between test system specific runtime code, OTX unknown types should be able to be passed through the code layers. This extension provides no way of initializing **BlackBoxValue**.

7.3 BlackBox – Variable access

7.3.1 Variable access overview

As specified in ISO 13209-2, OTX extensions shall define a variable access type for each data type they define (exception types inclusively). All variable access types introduced by this extension are derived from the OTX core variable extension interface.

7.3.2 Variable access syntax

The syntax of the OTX BlackBox extension's variable access types is shown in [Figure 8](#).

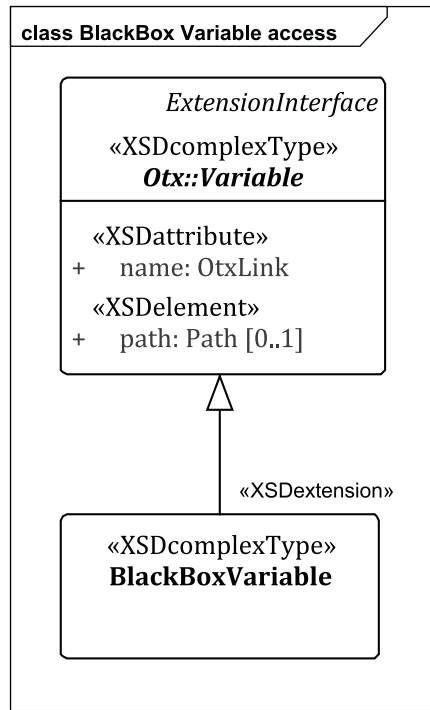


Figure 8 — BlackBox – Variable access

7.3.3 Variable access semantics

The general semantics for all variable access types shall apply. Please refer to ISO 13209-2 for details.

7.4 BlackBox – Terms

7.4.1 Terms overview

All terms introduced by this extension extend the **otx:Term** extension interface. Information about the specific super class of a term is provided in the individual term description clauses.

7.4.2 Terms syntax

[Figure 9](#) shows the syntax of the OTX BlackBox extension related terms.

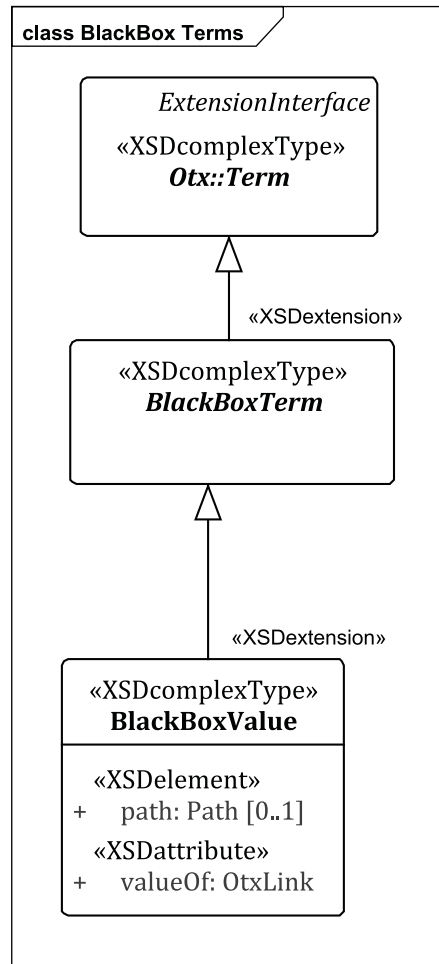


Figure 9 — BlackBox – Terms

7.4.3 Terms general semantics

7.4.3.1 BlackBoxTerm

Semantic:

The abstract type **BlackBoxTerm** is an **otx:Term**. It serves as a base for all concrete terms which return a **BlackBoxValue**. It has no special members.

7.4.3.2 BlackBoxValue

Semantic:

Returns the **BlackBoxValue** stored in a Blackbox variable.

Return type:

blackBox:BlackBoxTerm

Parameters:

— **<path> : otx:Path [0..1]**

This element addresses parts of complex structures. For more information please refer to ISO 13209-2.

Exceptions:

otx:OutOfBoundsException

- Occurs only if a <path> is set and the <path> points to a location, which does not exist (like a list index exceeding list length, or a map key which is not part of the map).

8 OTX BusMonitoring extension

8.1 BusMonitoring – General

The OTX BusMonitoring extension is introduced to enable asynchronous collection of communication data (monitoring) at runtime and analysis of monitored data (frames).

IMPORTANT — The bus monitoring of the underlying system (e.g MVCI-Server) is not specified. The start of bus monitoring can throw an exception because the system does not support it. Also it is not guaranteed that the terms of the extension return any data because the underlying runtime system cannot get it. In such cases an exception is thrown as well. The Extension is created to facilitate using bus monitoring.

NOTE The extension is closely related to an ODX/MVCI based system, as defined in ISO 22901-1, ISO 22900-1, ISO 22900-2 and ISO 22900-3.

In case of an ODX/MVCI based system it is recommended that the result of `MCDMonitorLink::fetchMonitoringFrames` is formatted as given in ISO 22900-3:2012, Annex F. This is related to the terms **GetBusFrameAsString**, **GetBusFrameTimestamp**, **GetBusFrameAddress**, **GetBusFrameData** and **GetBusFrameType**.

8.2 BusMonitoring – Datatypes

8.2.1 Datatypes overview

All data types introduced by this extension are derived from **otx:ComplexType** or **otx:SimpleType**.

8.2.2 Datatypes syntax

The syntax of the data type declarations of the OTX BusMonitoring extension is shown in [Figure 10](#).

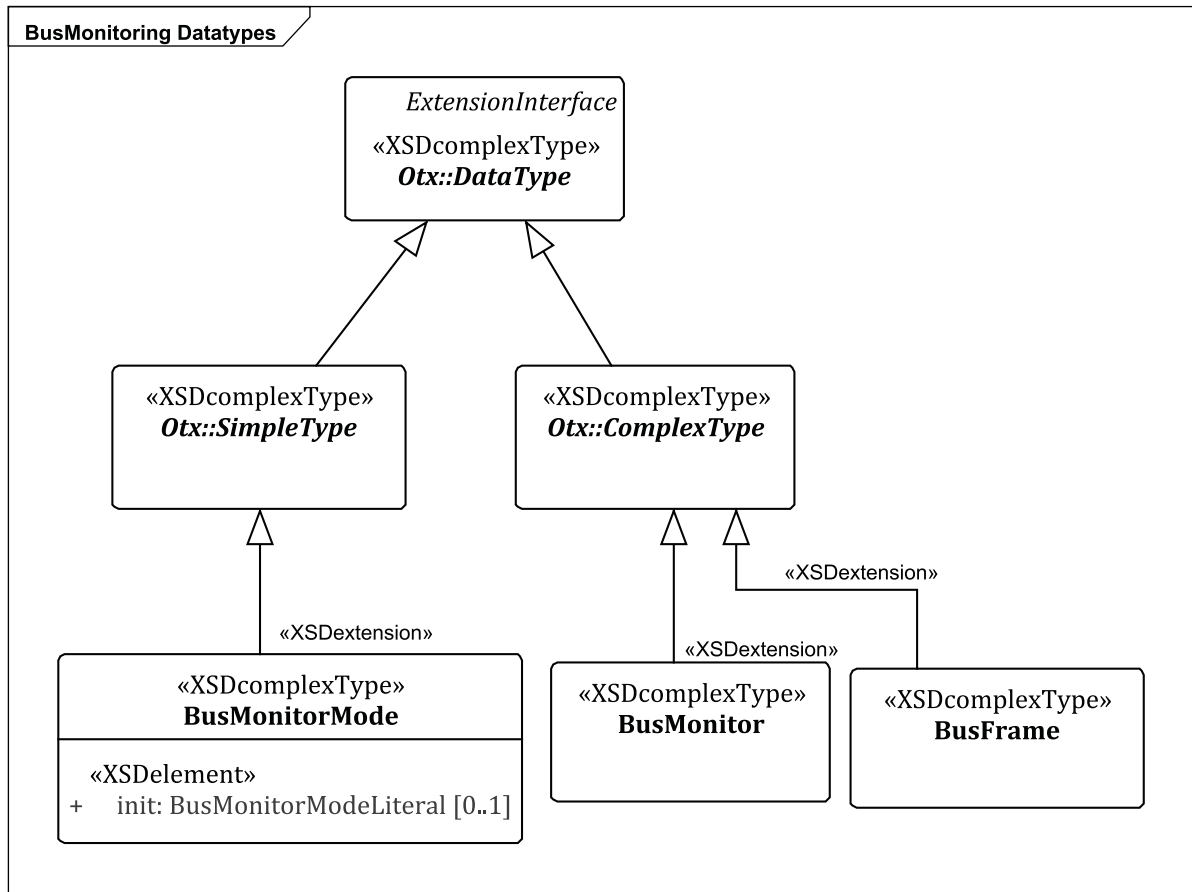


Figure 10 — BusMonitoring - Datatypes

8.2.3 Datatypes semantics

8.2.3.1 BusFrame

BusFrame is an **otx:ComplexType**.

Represents a handle of a bus frame that contains information about one frame, e.g. a message and a timestamp.

IMPORTANT — The **otx:ToString** conversion term shall return an **otx:String** that represents the whole frame delivered by the runtime system.

8.2.3.2 BusMonitor

BusMonitor is an **otx:ComplexType**.

A **BusMonitor** can be used to monitor a communications bus resource available at an interface (VCI module).

NOTE The related MVCI system class is **MCDMonitoringLink**.

IMPORTANT — In case of an ODX/MVCI based system the **otx:ToString** conversion shall return the **SHORT-NAME** of the related **MCDMonitoringLink**.

8.2.3.3 BusMonitorMode

BusMonitorMode is an **otx:SimpleType**.

BusMonitorMode is an enumeration type describing the modes of the monitor.

IMPORTANT — The `otx:ToString` conversion shall return the name of the enumeration value and the `otx:ToInteger` conversion shall return the index of the value in the enumeration (smallest index is 0).

Its members have the following semantics:

— **<init> : busMon:BusMonitorModeLiteral[0..1]**

This optional element stands for the hard-coded initialization value of the identifier at declaration time.

IMPORTANT — If `BusMonitorMode` declaration is not explicitly initialized, the default value shall be `MONITORING`.

8.3 BusMonitoring – Enumerations

8.3.1 Enumerations syntax

The syntax of the enumeration declarations of the OTX BusMonitoring extension is shown in [Figure 11](#).

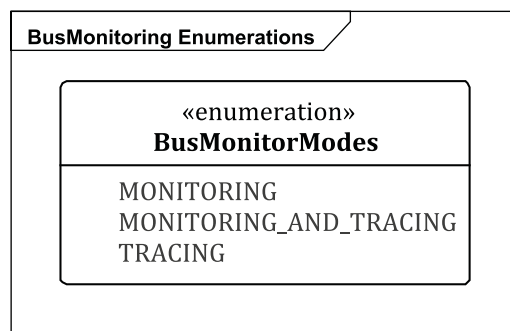


Figure 11 — BusMonitoring – Enumerations

8.3.2 Enumerations semantics

8.3.2.1 BusMonitorModes

BusMonitorModes is an enumeration type describing the mode of monitoring.

BusMonitorModes has the following enumeration values:

- **MONITORING**
Received frames will be stored into an internal buffer and NOT written into a trace resource.
- **MONITORING_AND_TRACING**
Received frames will be stored into an internal buffer and written into a trace resource.
- **TRACING**
Received frames will be written into a trace resource and NOT stored into an internal buffer.

8.4 BusMonitoring – Exceptions

8.4.1 Exceptions overview

All exceptions introduced by this extension are derived from the **otx:Exception** type. They represent the full set of exceptions added by the OTX BusMonitoring extension.

8.4.2 Exceptions syntax

The syntax of all OTX BusMonitoring extension exception type declarations is shown in [Figure 12](#).

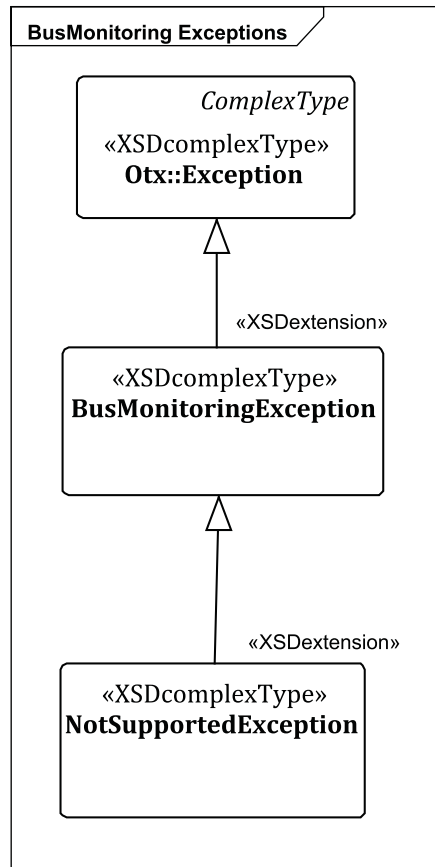


Figure 12 — BusMonitoring – Exceptions

8.4.3 Exceptions semantics

8.4.3.1 General

Since all OTX BusMonitoring extension exception types are implicit exceptions without initialization parts, they cannot be declared constant.

8.4.3.2 BusMonitoringException

The **BusMonitoringException** is the super class for all exceptions in the OTX BusMonitoring extension. A **BusMonitoringException** shall be used in case the more specific exception types described in the remainder of this section do not apply to the problem at hand.

IMPORTANT — All terms and action realisations in this extension may potentially throw this exception.

8.4.3.3 NotSupportedException

This is thrown if the underlying runtime system (MVCI-Server) does not support this operation.

8.5 BusMonitoring – Variable access

8.5.1 Variable access overview

As specified in ISO 13209-2, OTX extensions shall define a variable access type for each data type they define (exception types inclusively). All variable access types introduced by this extension are derived from the OTX core variable extension interface.

8.5.2 Variable access syntax

The syntax of the OTX BusMonitoring extension's variable access types is shown in [Figure 13](#).

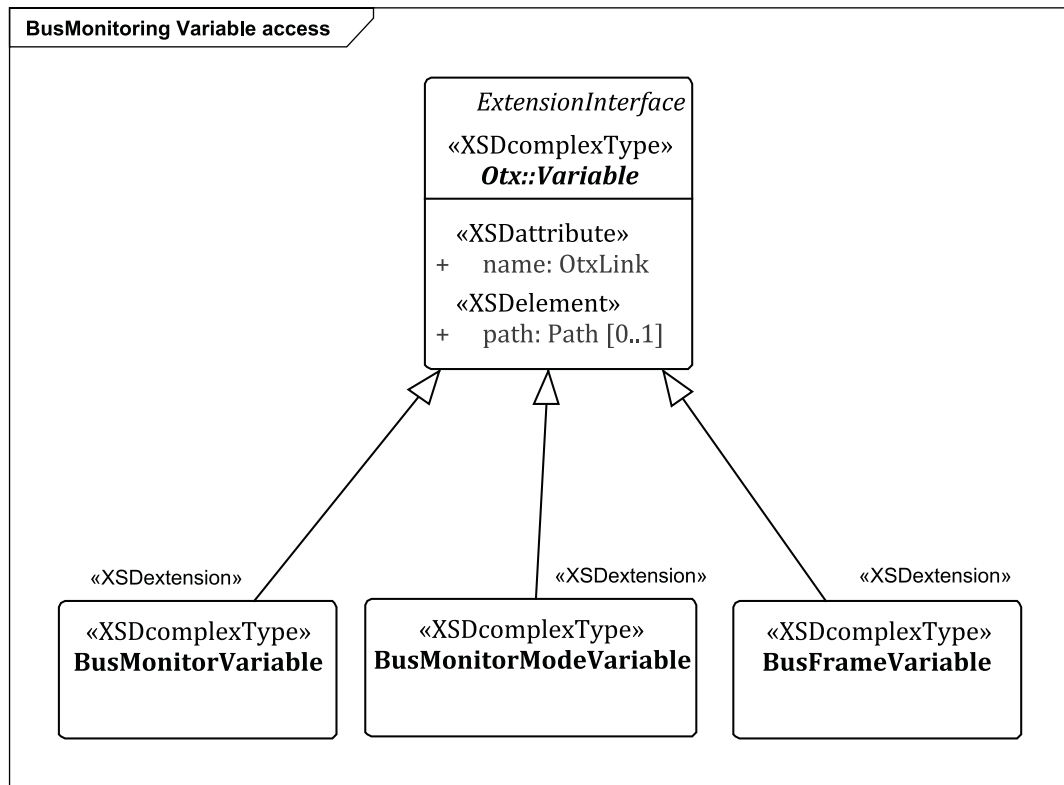


Figure 13 — BusMonitoring – Variable access

8.5.3 Variable access semantics

The general semantics for all variable access types shall apply. Please refer to ISO 13209-2 for details.

8.6 BusMonitoring – Actions

8.6.1 Actions overview

All actions introduced by this extension extend the **otx:ActionRealisation** extension interface.

8.6.2 Actions syntax

[Figure 14](#) shows the syntax of all actions in the OTX BusMonitoring extension.

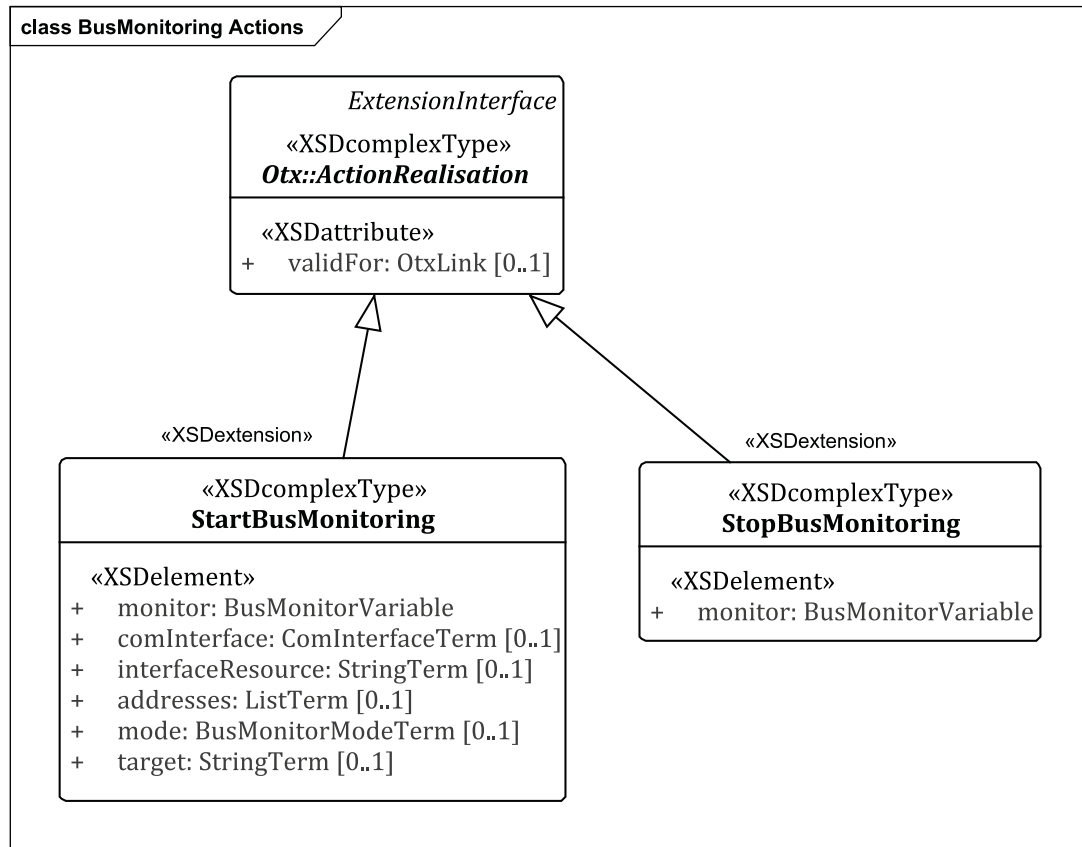


Figure 14 — BusMonitoring – Actions

8.6.3 Actions general semantics

8.6.3.1 StartBusMonitoring

Semantic:

Starts the monitoring and optional tracing on a physical link. Use **FetchBusMonitorBusFrames** to retrieve frames on a **BusMonitor**.

NOTE The related MVCI system methods are **MCDProject::createMonitoringLink(MCDInterfaceResource mCDInterfaceResource); MCDMonitorLink::getMessageFilters(); MCDMessageFilters::addByFilterType(int messageFilterType); MCDMessageFilter::enableMessageFilter(true); MCDMonitoringLink::start()**.

Associated checker rules:

- BusMonitoring_Chk001 – correct element types for addresses list in StartBusMonitoring (see [A.2.1.1](#))

Parameters:

- **<monitor> : busMon:BusMonitorVariable [1..1]**

This element represents the variable that refers to the handle for the monitor started by this action. This can be used later to fetch the frames of the monitor (**FetchBusMonitorBusFrames**) or stop the monitor explicitly (**StopBusMonitoring**).

- **<comInterface> : comIf:ComInterfaceTerm [0..1]**

Represents a handle for the communication interface on which the monitoring should be started. If no **comIf:ComInterface** is given the default communication interface shall be used (the interface that is needed for **diag:GetComChannel**, see OTX ComInterface extension).

— **<interfaceResource> : otx:StringTerm [0..1]**

Represents the name of the physical link, e.g. "CAN1". If no interface resource is given the default interface resource shall be used (interface that is needed for **diag:GetComChannel**, see OTX ComInterface extension).

— **<addresses> : otx:ListTerm [0..1]**

Represents an optional list of integer numbers, defining the addresses to be monitored (e.g. on a CAN bus the CAN IDs of signals or ECUs). If no list or an empty list is given all data shall be monitored.

NOTE In case an MVCI system is used pass filters are applied to CAN ID filtering.

— **<mode> : busMon:BusMonitorModeTerm [0..1]**

Represents an optional mode to specify how the monitored frames shall be processed, see **BusMonitorModes**.

— **<target> : otx:StringTerm [0..1]**

This optional element shall be used for locating the resource to which the trace shall be written. The target should be defined by a URI (see ISO 13209-2:2022, Annex F). Other resource-location mechanisms may also be used.

Exceptions:

NotSupportedException

- In case a system without any addresses (e.g. DoIP or K-Line) is used and addresses are supplied by the addresses property, a **NotSupportedException** shall be thrown.

8.6.3.2 StopBusMonitoring

Semantic:

Stops the monitoring and the optional tracing on the **BusMonitor** that was started before by the **StartBusMonitoring** action.

Closing an uninitialized or already closed **BusMonitor** shall perform no operation and report no errors. It shall be for all effects a NOP.

NOTE The appropriate MVCI system operation is **MCDMonitoringLink::stop()**.

Parameters:

— **<monitor> : busMon:BusMonitorVariable [1..1]**

This element represents the **BusMonitor** that shall be stopped. After stopping a bus monitor the variable is no longer initialized.

Exceptions:

- None

8.7 BusMonitoring – Terms

8.7.1 Terms overview

All terms introduced by this extension extend the **otx:Term** extension interface. Information about the specific super class of a term is provided in the individual term description clauses.

busMon:BusFrameTerm

Parameters:

- **<path> : otx:Path [0..1]**

This element addresses parts of complex structures. For more information please refer to ISO 13209-2.

Exceptions:

otx:InvalidReferenceException

- This exception is thrown if the **BusFrame** variable is not valid (no value was assigned to the variable before).

otx:OutOfBoundsException

- Occurs only if a <path> is set and the <path> points to a location that does not exist (like a list index exceeding list length, or a map key which is not part of the map).

8.7.3.3 BusMonitorEventSource

Semantic:

The **BusMonitorEventSource** term accepts a **BusMonitor** object that is to be made an event source. This term enables an OTX sequence to use a **BusMonitor** as a source for events in the context of the OTX EventHandling extension. A **BusMonitor** shall trigger an event every time the number of frames in the buffer reaches the number in the numberOfFrames property.

NOTE 1 The related MSCI system methods are **MCDMonitoringLink::setNoOfSampleToFireEvent** and **MCDEventHandler::onMonitoringFramesReady**.

NOTE 2 In case of **BusMonitoringMode == TRACING**, **BusMonitorEventSource** will never fire an event.

Return type:

event:EventSourceTerm

Parameters:

- **<monitor> : busMon:BusMonitorVariable [1..1]**

Represents the **BusMonitorVariable** which can cause the event.

- **<numberOfFrames> : otx:IntegerTerm [0..1]**

Represents a number of frames which have to be collected in the buffer to fire an event. If the internal buffer is less than the number of frames, the event is fired, when the buffer is filled. Default value is 1.

Exceptions:

otx:InvalidReferenceException

- This exception is thrown if the variable is uninitialized.

otx:TypeMismatchException

- This exception is thrown if the specified event has not been raised by a **BusMonitorEventSource**.

8.7.3.4 BusMonitorModeLiteral

Semantic:

This term shall return a **BusMonitorMode** value from a hard-coded literal.

Return type:

busMon:BusMonitorModeTerm

Parameters:

— **value : busMon:BusMonitorModes [1..1]**

This attribute contains one of the values defined in the **BusMonitorModes** enumeration.

Exceptions:

— None

8.7.3.5 BusMonitorModeTerm

Semantic:

The abstract type **BusMonitorModeTerm** is an **otx:Term**. It serves as a base for all concrete terms that return a **BusMonitorMode** value. It has no special members.

8.7.3.6 BusMonitorModeValue

Semantic:

Returns the **BusMonitorMode** stored in a **BusMonitorMode** variable.

Return type:

busMon:BusMonitorModeTerm

Parameters:

— **<path> : otx:Path [0..1]**

This element addresses parts of complex structures. For more information please refer to ISO 13209-2.

Exceptions:

otx:OutOfBoundsException

— Occurs only if a <path> is set and the <path> points to a location, which does not exist (like a list index exceeding list length, or a map key which is not part of the map).

8.7.3.7 BusMonitorTerm

Semantic:

The abstract type **BusMonitorTerm** serves as a base for all concrete terms which returns a **BusMonitor** (e.g. CAN for monitoring). It has no special members.

8.7.3.8 BusMonitorValue

Semantic:

Represents a **BusMonitor** value.

Return type:

busMon:BusMonitorTerm