
**Ergonomic requirements for work with
visual displays based on flat panels —**

**Part 2:
Ergonomic requirements for flat panel
displays**

*Exigences ergonomiques pour travail sur écrans de visualisation
à panneau plat —*

Partie 2: Exigences ergonomiques des écrans à panneau plat



Reference number
ISO 13406-2:2001(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

Page

Foreword.....	v
Introduction	vi
1 Scope	1
2 Normative references	2
3 Definitions	2
3.1 Photometry.....	2
3.2 Colorimetry.....	4
3.3 Geometry	7
3.4 Display technology.....	10
3.5 Alphanumeric symbols	15
4 Symbols	17
5 Guiding principles	22
6 Performance requirements	23
7 Design requirements and recommendations	23
7.1 Design viewing distance	23
7.2 Design viewing direction	24
7.3 Design screen illuminance	28
7.4 Gaze and head-tilt angles	28
7.5 Chromaticity uniformity difference (See Figure 15).....	28
7.6 Character height	29
7.7 Stroke width	30
7.8 Character width-to-height ratio	30
7.9 Fill factor.....	30
7.10 Character format.....	31
7.11 Between-character spacing.....	31
7.12 Between-word spacing.....	31
7.13 Between-line spacing	31
7.14 Display luminance	32
7.15 Contrast (See Figure 19).....	33
7.16 Luminance balance	34
7.17 Reflections (See Figure 21)	34
7.18 Image polarity	37
7.19 Luminance uniformity (See Figure 24 and Table 14).....	37
7.20 Pixel faults	38
7.21 Image formation time	38
7.22 Absolute luminance coding.....	39
7.23 Blink coding	39
7.24 Temporal instability (flicker).....	39
7.25 Default colour set	39
7.26 Multicolour object size	39
7.27 Colour differences	40
7.28 Spectrally extreme colours.....	40
7.29 Number of colours	41
8 Measurements.....	41
8.1 Introduction	41
8.2 Supplier requirements.....	42
8.3 Test laboratory requirements	45
8.4 Test geometry	56

8.5 Combined measurement for character design analysis.....65

8.6 Combined measurement for luminance, contrast and diffuse illumination 66

8.7 Requirement evaluations 69

9 Compliance.....109

Annex A (informative) Colour difference calculation 111

Annex B (informative) Flicker determination.....114

Annex C (informative) Bidirectional Reflectance Distribution Function (BRDF).....123

Bibliography 140

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 13406 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 13406-2 was prepared by Technical Committee ISO/TC 159, *Ergonomics*, Subcommittee SC 4, *Ergonomics of human-system interaction*.

ISO 13406 consists of the following parts, under the general title *Ergonomic requirements for work with visual displays based on flat panels*:

- *Part 1: Introduction*
- *Part 2: Ergonomic requirements for flat panel displays*

Annexes A, B and C of this part of ISO 13406 are for information only.

Introduction

ISO 13406 extends its companion standard ISO 9241 to account for the significant differences in ergonomic trade offs present when flat panels are used.

The rationale for this part of ISO 13406 is presented in ISO 13406-1.

This part of ISO 13406 presents the requirements for visual display units (VDUs) based on flat panels as defined in ISO 13406-1. It is intended for evaluators and users of this technology. Some document users will find part of the material complex. Notes, figures and examples are provided to lessen the problem. The legibility of flat panels is a principal concern. The requirements are primarily based on the visual ergonomic research used in ISO 9241-3 and on new research referenced in this part of ISO 13406. Here, as in ISO 9241-3, some requirements are based on visual comfort, muscular comfort and user acceptability. This part of ISO 13406 includes requirements and recommendations that are based on legibility, comfort and acceptability that arise when multicolour displays are used, based on the visual ergonomic research described in ISO 9241-8, but modified and extended to consider the unique trade offs of flat panels. Legibility in the presence of ambient room light and the acceptability of unwanted reflected images are addressed covering the flat panel aspects covered in ISO 9241-7 for cathode ray tube (CRT) technology.

Clause 3 Definitions presents or recalls those terms needed to specify requirements and measurements. Where possible, definitions taken from other publications are quoted verbatim. If some change has been made, the definition is followed by a note stating "Adopted from ISO xxxx:date,x.x". Since this part of ISO 13406 often relies on mathematical models and physical measurements to ensure the fitness of purpose of flat panel VDUs, a clause 8 (Symbols) is presented as a convenient reference.

Guiding principles and performance requirements' clauses modelled on ISO 9241-3 are presented to remind document users of the foundations of the work.

Design requirements and recommendations present the physical attributes that are to be strictly followed to conform (indicated by the word: shall) or preferred but not necessarily required (indicated by the word: should). The topics of design viewing distance, design viewing direction and design screen illumination depart somewhat from the precedents of ISO 9241-3. Two reasons exist:

- a) an important type of flat panel has viewing characteristics that require more careful control and consideration of viewing direction than considered in ISO 9241-3;
- b) there is no basis to assume that a flat panel VDU is tabletop mounted. These topics are presented as ergonomically constrained, supplier-specifications. This is not unprecedented, viewing distance was handled this way in ISO 9241-3. Once specified, these requirements become the conditions under which all other attributes are to be measured or decided.

A departure from ISO 9241-3 is the use of area-luminance. For CRT technology, the addressed locations are generally close together so that a *high-low-high-low-high-low*-pixel pattern will exhibit less contrast than a sparse pattern. Since the flat-panel pixel area is less than 100 % optically modulated (the fill factor is less than 1), the difference between sparse and dense pattern contrast is minor. The luminance determination has to be complicated by the need for viewing direction precision. The use of area-luminance simplification offsets that somewhat.

Some requirements are presented in categories. For example, some flat panels exhibit long image-formation times. For static images, such panels are ergonomically acceptable without reservation. Not all modern applications rely solely on such static images. Requirement categories are therefore established. If the supplied equipment has such a limitation, the supplier/evaluator is required to identify it. The system integrator, purchaser or user then can consider whether the category is consistent with intended applications.

Clause 8 covering measurements is intended for evaluators of flat panel VDUs. The panel surface is sampled for evaluation. Three evaluation sites are chosen and measured, and compliance decisions can be made from these measurements. Panels with large requirement margins do not require precision-evaluation equipment but panels with small margins can.

Clause 9 covering compliance is closely modelled on ISO 9241-3. The alternative test (Visual performance and comfort test) prepared as a normative annex in an amendment to ISO 9241-3, is cited as an alternative compliance route.

Annex A provides additional information on colour difference. Annex B extends the analytic flicker determination method of ISO 9241-3 to luminance-time modulation that is not CRT-like. Annex C informs the users of this International Standard of new work on an alternate modelling method for screens with reflection properties that cannot be adequately modelled with a simple combination of luminance coefficient (diffuse reflection) and luminance factor (specular or regular reflection) and standardized assumptions about the environment. This method develops the bidirectional reflection distribution function. When this work progresses further, it can possibly become a normative method and replace the method in clause 8. The bibliography cites references.

Ergonomic requirements for work with visual displays based on flat panels —

Part 2: Ergonomic requirements for flat panel displays

1 Scope

This part of ISO 13406

- establishes ergonomic image-quality requirements for the design and evaluation of flat panel displays,
- defines terms needed to address image quality on flat panel displays,
- specifies methods of determining image quality on flat panel displays, and
- establishes ergonomic principles for guiding these requirements.

This part of ISO 13406 is applicable to

- flat panel display screens when used to perform office tasks,
- flat panel display screens that consist of a regular array of picture elements arranged in evenly spaced rows without built-in gaps,
- the presentation of fonts based on Latin-, Cyrillic- and Greek-origin alphabetic characters and Arabic numerals on flat panel display screens,
- the presentation of Asian characters, and
- flat panel display screens that are large enough to display at least 40 Latin-origin characters.

This part of ISO 13406 is not applicable to

- flat panel technology applied to a display that uses optics to form an image that is not the same size as the electro-optical transducer (projection applications of flat panel displays), or
- flat panel technology applied to a display limited to fixed-messages or segmented alphanumerics. [See 2.13 IEC SC 47C (Central Office) 3:1992].

NOTE Some of the measurement methods (e.g. contrast and luminance) in this part of ISO 13406 are not applicable for reflective flat panels. When technology has developed, appropriate measurement methods will be added to this part of ISO 13406.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 13406. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 13406 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

CIE Publication No. 15.2:1986, *Colorimetry*. (Central Bureau of the Commission International d'Éclairage CIE), Vienna, Austria.

ISO 9241-3:1992, *Ergonomic requirements for office work with visual display terminals (VDTs) — Part 3: Visual display requirements*.

ISO 9241-6, *Ergonomic requirements for office work with visual display terminals (VDTs) — Part 6: Guidance on the work environment*.

ISO 9241-7, *Ergonomic requirements for office work with visual display terminals (VDTs) — Part 7: Requirements for display with reflections*.

ISO 9241-8:1997, *Ergonomic requirements for office work with visual display terminals (VDTs) — Part 8: Requirements for displayed colours*.

3 Definitions

For the purposes of this part of ISO 13406, the following definitions apply.

NOTE The symbols used in certain definitions are explained in clause 4.

3.1 Photometry

3.1.1

area-luminance

luminance of an area of the screen that has a diameter of at least 10 pixels, such that the state of an individual pixel has less than 2 % effect

NOTE Area-luminance is expressed in candelas per square metre (cd/m^2).

3.1.2

background luminance

luminance of an area of the screen with no graphic images present

NOTE Background luminance is expressed in candelas per square metre (cd/m^2).

3.1.3

contrast

(in a perceptual sense) assessment of the difference in appearance of two or more parts of a field seen simultaneously or successively (hence: brightness contrast, lightness contrast, colour contrast, etc.)

NOTE Adapted from IEC 60050 (845-02-47):1987.

3.1.4

EUT

Equipment Under Test

3.1.5**Lambert's (cosine) law**

for a surface element whose radiance or luminance is the same in all directions of the hemisphere above the surface:

$$I(\theta) = I_n \cos(\theta) \quad (1)$$

Where $I(\theta)$ and I_n are the radiant or luminous intensities of the surface element in a direction at an angle θ from the normal to the surface and in the direction of that normal, respectively

[IEC 60050 (845-04-56):1987]

3.1.6**Lambertian surface**

ideal surface for which the radiation coming from that surface is distributed angularly according to Lambert's cosine law

[IEC 60050 (845-04-57):1987]

For an ideal diffuse reflectance standard:

$$\rho_{\text{STD}} = \pi \cdot q_{\text{STD}} \quad (2)$$

3.1.7**luminance contrast**

ratio between the higher, L_H and lower, L_L , luminances that define the feature to be detected, measured by contrast modulation (C_m) defined as:

$$C_m = \frac{L_H - L_L}{L_H + L_L} \quad (3)$$

or contrast ratio (CR), defined as:

$$\text{CR} = \frac{L_H}{L_L} \quad (4)$$

NOTE 1 For flat panels, area-luminance targets can be used to approximate the luminances that define the feature to be detected because pixels are discrete.

NOTE 2 Adapted from ISO 9241-3:1992, 2.22.

3.1.8**luminance coefficient (at a surface element, in a given direction, under specified conditions of illumination)**

q_v , q

quotient of the luminance of the surface element in the given direction by the illuminance of the medium

NOTE 1 The luminance coefficient is expressed in reciprocal steradians.

NOTE 2 Adapted from IEC 60050 (845-04-71):1987.

$$q = \frac{L}{E} \quad (5)$$

3.1.9

luminance factor (at a surface element of a non-self-radiating medium, in a given direction, under specified conditions of illumination)

β_v, β

ratio of the luminance of the surface element in the given direction to that of a perfect reflecting or transmitting diffuser identically illuminated

$$\beta = \frac{L_{\text{sample}}}{L_{\text{perfect diffuser}}} \quad (6)$$

NOTE 1 The luminance factor is expressed as unit: 1

NOTE 2 Adapted from IEC 60050 (845-04-69):1987.

3.1.10

optically anisotropic surface

optical surface for which the radiation deviates from that of a Lambertian surface by more than 10 % at any inclination angle, $\theta < 45^\circ$

3.2 Colorimetry

3.2.1

CIE 1976 $L^*u^*v^*$ colour space

CIELUV colour space

three-dimensional, approximately uniform colour space produced by plotting in rectangular coordinates L^*, u^*, v^* quantities defined by the three equations:

$$\left. \begin{aligned} L^* &= 116 (Y/Y_n)^{\frac{1}{3}} - 16, \text{ when } Y/Y_n > 0,008\,856 \\ L^* &= 903,3(Y/Y_n), \text{ when } Y/Y_n \leq 0,008\,856 \\ u^* &= 13L^*(u' - u'_n) \\ v^* &= 13L^*(v' - v'_n) \end{aligned} \right\} \quad (7)$$

Y, u', v' describe the colour stimulus considered and Y_n, u'_n, v'_n describe a specified white achromatic stimulus.

NOTE Approximate correlates of lightness, saturation, chroma and hue may be calculated as follows:

$$\text{CIE 1976 } u, v \text{ saturation } s_{uv} = 13 \left[(u' - u'_n)^2 + (v' - v'_n)^2 \right]^{\frac{1}{2}} \quad (8)$$

$$\text{CIE 1976 } u, v \text{ chroma } C_{uv}^* = \left[u^{*2} + v^{*2} \right]^{\frac{1}{2}} = L^* s_{uv} \quad (9)$$

$$h_{uv} = \arctan \left(\frac{v' - v'_n}{u' - u'_n} \right) = \arctan \left(\frac{v^*}{u^*} \right), \text{ such that}$$

$$\begin{aligned} 0^\circ \leq h_{uv} < 90^\circ, & \text{ if } v^* \geq 0 \text{ and } u^* \geq 0 \\ 90^\circ \leq h_{uv} < 180^\circ, & \text{ if } v^* \geq 0 \text{ and } u^* < 0 \\ 180^\circ \leq h_{uv} < 270^\circ, & \text{ if } v^* < 0 \text{ and } u^* < 0 \\ 270^\circ \leq h_{uv} < 360^\circ, & \text{ if } v^* < 0 \text{ and } u^* \geq 0 \end{aligned} \quad (10)$$

[IEC 60050 (845-03-54)]

3.2.2


CIE 1976 uniform-chromaticity scale diagram

CIE 1976 UCS diagram

uniform-chromaticity-scale diagram produced by plotting in rectangular coordinates v' against u' , quantities defined by the equations (11):

$$\begin{aligned} u' &= \frac{4X}{X+15Y+3Z} = \frac{4x}{-2x+12y+3} \\ v' &= \frac{9Y}{X+15Y+3Z} = \frac{9y}{-2x+12y+3} \end{aligned} \quad (11)$$

See Figure 1 and IEC 60050 (845-03-53).

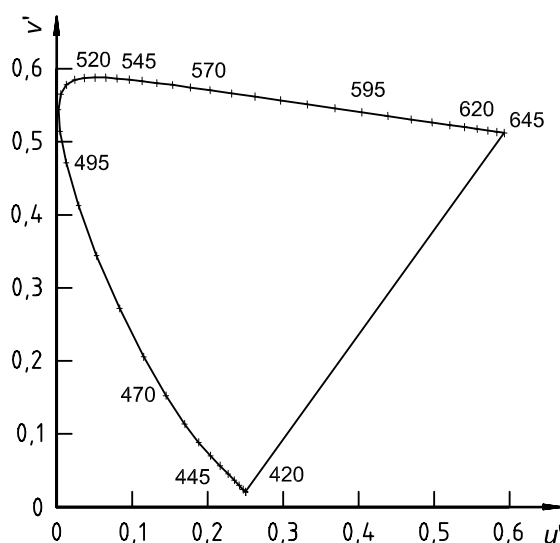

NOTE The curve annotations are wavelengths in nanometers.

Figure 1 — CIE 1976 UCS Diagram

3.2.3

CIE 1976 $L^*u^*v^*$ colour difference

CIELUV colour difference

difference between two colour stimuli, defined as the Euclidean distance between the points representing them in the $L^*u^*v^*$ space and calculated as equation:

$$\Delta E_{uv}^* = \left[(\Delta L^*)^2 + (\Delta u^*)^2 + (\Delta v^*)^2 \right]^{\frac{1}{2}} \quad (12)$$

The set $X_n Y_n Z_n$ and corresponding $u'_n v'_n$ define the colour of the nominally white object-colour stimulus.

(See CIE Publication No. 15.2.)

[IEC 60050 (845-03-55)]

3.2.4

chromaticity uniformity difference

distance on the CIE 1976 UCS diagram

$$\Delta u'v' = \sqrt{(u'_1 - u'_2)^2 + (v'_1 - v'_2)^2} \quad (13)$$

where

u'_1, v'_1 and u'_2, v'_2 are the coordinates of the same colour displayed at sites 1 and 2.

NOTE This is the appropriate measure of colour uniformity if luminance is not uniform or if the objects are not adjacent. (See 3.2.2.)

3.2.5

dominant wavelength of a colour stimulus, λ_d

wavelength of the monochromatic stimulus that, when additively mixed in suitable proportions with the specified achromatic stimulus, matches the colour stimulus considered

NOTE In the case of purple stimuli, the dominant wavelength is replaced by the complementary wavelength. See IEC 60050 (845-03-44).

3.2.6

same dominant wavelength


two colours have the same dominant wavelength if the difference between the hue angles of each colour is small

3.2.7

spectrally extreme colours

spectrally extreme colours are extreme blue and extreme red

NOTE Extreme blue is any colour with $v' < 0,2$. Extreme red is any colour with $u' > 0,4$. The extreme regions are illustrated in Figure 2.

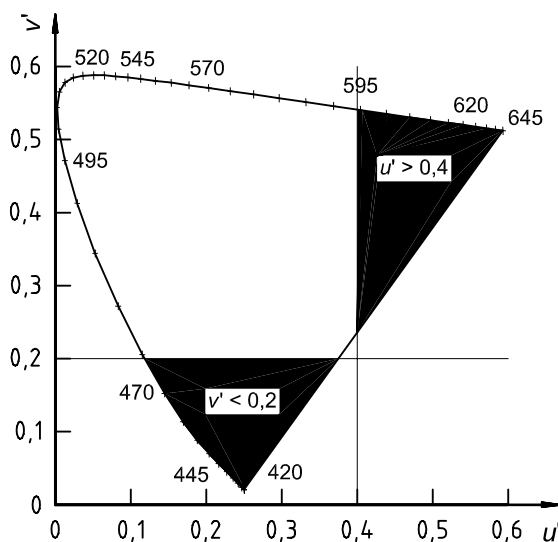

NOTE The curve annotations are wavelengths in nanometers.

Figure 2 — Extreme red and extreme blue

3.2.8**uniform colour space**

colour space in which equal distances are intended to represent a threshold or suprathreshold perceived colour differences of equal size

[IEC 60050 (845-03-51):1987]

3.2.9**uniform-chromaticity-scale diagram**

UCS diagram

two-dimensional diagram in which the coordinates are defined with the intention of making equal distances represent as nearly as possible equal steps of colour discrimination for colour stimuli of the same luminance throughout the diagram

[IEC 60050 (845-03-52):1987]

3.3 Geometry**3.3.1****active area**

part of a display screen area delimited by picture elements [2.1, IEC SC 47C(Central Office) 3]

3.3.2**angular subtence**

size of a visual target at a specified viewing distance, e.g. at the design viewing distance

$$\text{Angular subtence in degrees} = 2 \arctan \left(\frac{\text{target height}}{2 \times \text{viewing distance}} \right) \quad (14)$$

$$\begin{aligned} \text{Angular subtence in minutes of arc} &= 60 \times 2 \arctan \left(\frac{\text{target height}}{2 \times \text{viewing distance}} \right) \\ &\approx \frac{3\,438 \times \text{target height}}{\text{viewing distance}} \end{aligned} \quad (15)$$

NOTE The dimension for angular subtence is degrees (°), which is further divided into minutes of arc (') and seconds of arc (").


3.3.3**anisotropic display**

display (usually a liquid crystal display) with emitted luminance and/or luminance coefficient that meets the criterion in 3.1.10

3.3.4**coordinate system**

a normal spherical coordinate system (r, θ, ϕ)

See Figure 3.

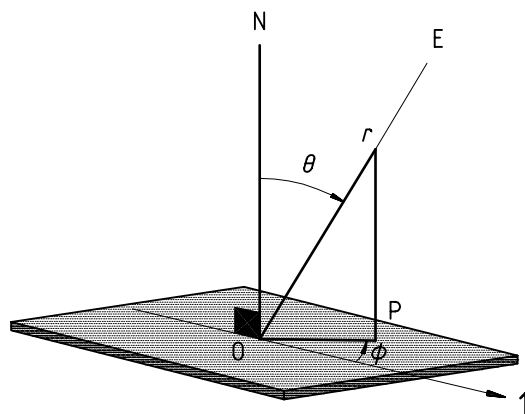**Key**

E Position of the entrance pupil of the luminance meter

OE = r Working distance

1 $\phi = 0^\circ$ (3 o'clock)

NOTE 1 In some literature, the azimuth is specified by clock positions. 3 o'clock is defined as $\phi = 0^\circ$.

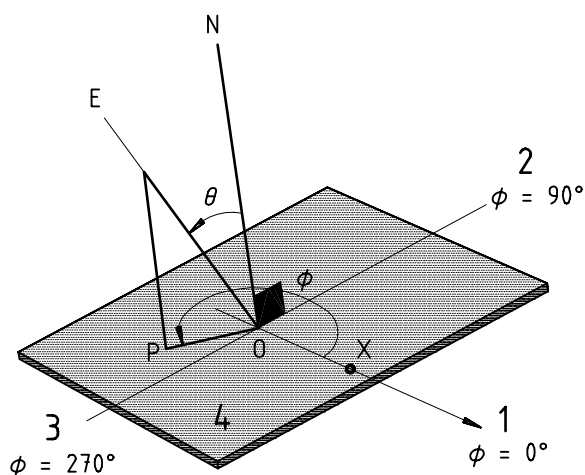
NOTE 2 Normally only positive values for θ are used. $(-\theta, \phi)$ is identical to the direction $(+\theta, \phi \pm 180^\circ)$.

Figure 3 — Coordinate system

NOTE 1 The following is a detailed definition of the coordinate system. See Figure 4.

Let a point (pixel or centre of a visual target) be labelled O. Construct a line, from O to the entrance pupil of the measuring instrument, OE, and a line, ON normal to the image plane of the display. The angle from ON to OE in the ON - OE plane is the inclination angle, θ . The distance OE is the radius r .

Let P be any point on the line that is formed by the projection of OE on the image plane. Construct a line, OX in that plane to the right of and parallel to the line that bisects the active area horizontally. This is the X axis. The azimuth angle, ϕ , is the counterclockwise angle between OX and OP.

**Key**

1 3 o'clock; right edge of the screen as seen from the user

2 12 o'clock; top edge of the screen as seen from the user

3 6 o'clock; bottom edge of the screen as seen from the user

4 Image surface of the screen

Figure 4 — Coordinate system - definition


NOTE 2 For more information on coordinates and viewing angles, see VESA Flat Panel Display Measurements Standards (1998), chapter 300-2.

3.3.5

Frankfort plane

is an imaginary plane through the head established by the lateral extensions of a line between the tracion and the lowest point of the orbit

See Figure 5.



Key

- 1 Tracion
- 2 Frankfort plane
- 3 Inferior ridge of the orbit

Orbit is the cavity in the skull that contains the eye. Tracion (or tragus) is the projection of cartilage in the pinna of the outer ear that extends back over the opening of the external auditory meatus.


Figure 5 — Frankfort plane

3.3.6

gaze angle

angle from the Frankfort plane to the plane formed by the pupils and the visual target

See Figure 6.

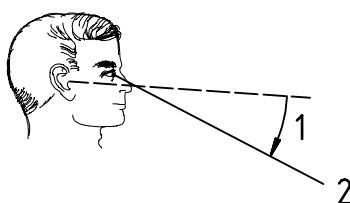

Key

- 1 Gaze angle
- 2 Line of sight

Figure 6 — Gaze angle

NOTE The comfortable range is about 0° to about 45°.


3.3.7

head tilt angle

angle from the Frankfort plane to the horizontal plane and due to tilt of the head

NOTE When the head is erect, the head tilt angle is about 4°

See Figure 7.

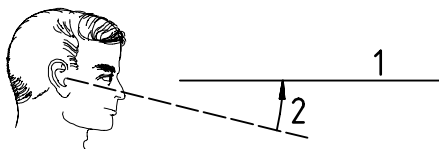

Key

- 1 Horizontal plane
- 2 Head tilt angle

Figure 7 — Head tilt angle

NOTE The comfortable range is about 0° to about 20°.

3.3.8

viewing angle range

conical space originating at a pixel that includes all viewing directions for which specifications are satisfied

[IEC SC 47C (Central Office) 3]

3.4 Display technology

3.4.1

fill factor

fraction (of the total area geometrically available to a pixel) that can be altered to display information

[ISO 9241-3:1992, 2.15]

3.4.2

emissive display

display that contains its own source(s) of light

NOTE 1 This light can be produced by the transducer itself or provided by one or more internal light source(s) modulated by the transducer.

NOTE 2 Adapted from 2.4, IEC/SC 47C (Central Office) 3.

3.4.3

gray scale

a display is said to have gray scale if it can display images demanding more than two luminance levels

[2.4, IEC/SC 47C (Central Office) 3]

3.4.4

image formation time

time for the relative luminance of a visual object to change from 0,1 to 0,9

NOTE 1 The relative luminance is


$$(L - L_{\text{MAX}})/(L_{\text{MAX}} - L_{\text{MIN}});$$

where

L_{MAX} and L_{MIN} are the time averaged highest and lowest luminance states, respectively;

L is the instantaneous luminance.

NOTE 2 The relative luminance is filtered to eliminate temporal variations that are not visually detectable. Image formation time is resolved to the ranges shown in Table 1 and is expressed in milliseconds.

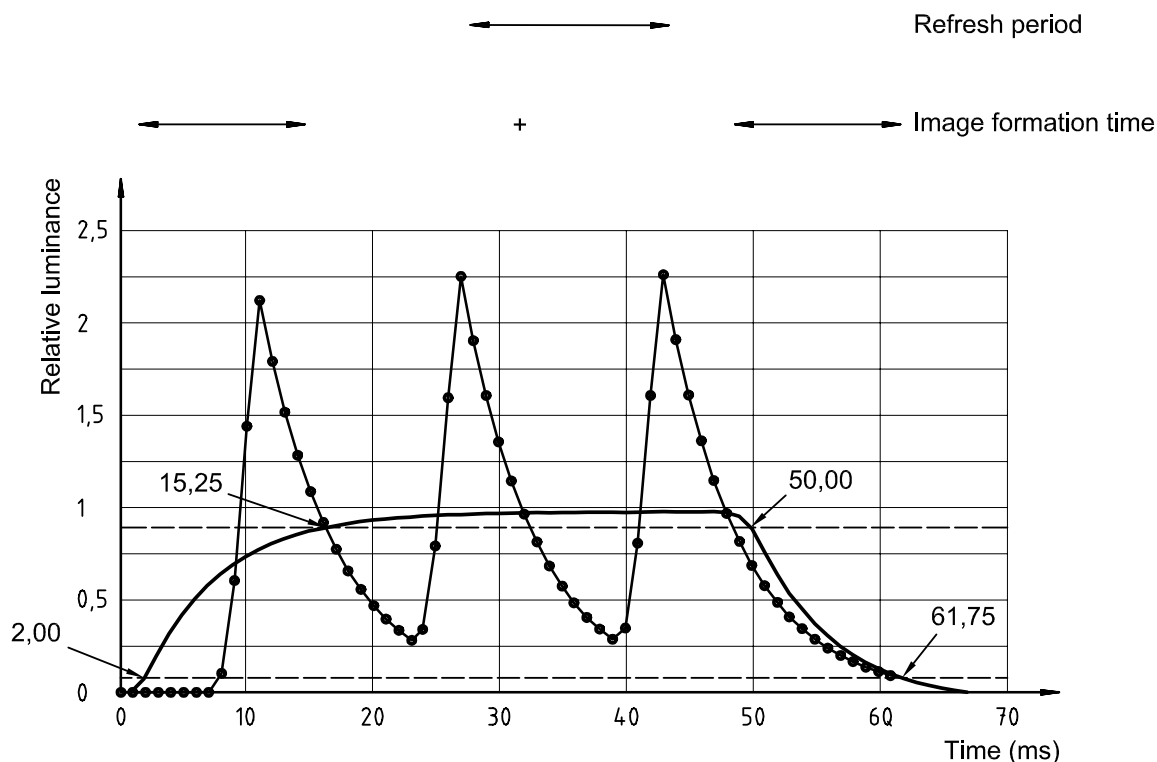

NOTE 1 This illustrates a typical case.

NOTE 2 A constant-luminance back light is assumed (after prefiltering for 4kS/s sampling).

NOTE 3 Figure 8 illustrates the image formation time. The trace with the marks represents the unfiltered luminance time, normalized to a range of 1,0. The bold trace is the first trace filtered to include those frequencies that are psychophysically significant. The image formation time is judged on this trace. In this example, $t_1 = 2,00$ ms is the time recorded at 0,1 of the maximum luminance with the luminance increasing; $t_2 = 15,25$ ms is the time recorded at 0,9 of the maximum luminance with the contrast increasing; $t_3 = 50,00$ ms is the time recorded at 0,9 of the maximum luminance with the luminance decreasing; and, $t_4 = 61,75$ ms is the time recorded at 0,1 of the maximum luminance with the luminance decreasing. Image formation time is $t_2 - t_1 + (t_4 - t_3) = 25$ ms. The luminance time is sampled at 4 kS/s, so the precision is $\pm 0,5$ ms.

NOTE 4 For flat panel displays with very fast electro-optic physics, the refresh period is the image formation time.

Figure 8 — Image formation time

Table 1 — Image formation time in milliseconds

Time range	Significance
$t \leq 10$	Motion artefacts become undetectable at image formation times less than 3 ms.
$10 < t \leq 55$	Contrast is stable for most applications. Motion artefacts can be distracting.
$55 < t \leq 200$	Applications using scrolling, animation and pointing devices lose detectable contrast. Blink coding from 0,33 Hz to 5 Hz is operable.
$t > 200$	Noticeable loss of contrast observed during key entry, scrolling, animation, and blink coding. Pointing devices with rapid cursor positioning can be used only with special techniques.

3.4.5

absolute luminance coding

information presented where the only dimension that is used for visual differentiation is difference in image luminances

3.4.6

relative luminance coding

information presented where either the coded images are touching or the luminance difference is secondary to a primary differentiation such as shape or colour

3.4.7

pixel

smallest element that is capable of generating the full functionality of the display

3.4.8

pixel pitch

the distance between corresponding points on adjacent pixels, both horizontally (H_{pitch}) and vertically (V_{pitch})

NOTE Pixel pitch is expressed in millimetres.

3.4.9

reflective display

display device that modulates light from an external source by reflection

[2.12, IEC 47 CO 2]

3.4.10


screen tilt angle

α

angle formed by the intersection of the plane tangent to the centre of the display and the horizontal plane

NOTE Screen tilt angle is expressed in degrees.

See Figure 9.

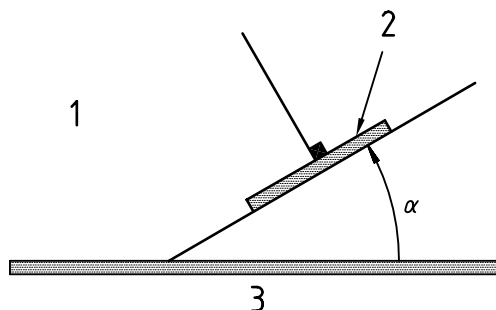

Key

- 1 Viewing side
- 2 Display
- 3 Horizontal surface (e.g. a table)

Figure 9 — Screen tilt angle, α


NOTE α is identical to the angle, A in 6.1.2 of ISO 9241-3:1992.

3.4.11

small-size panel

a flat panel with a viewing area with the smallest dimension in the range of $1,6^\circ$ to $4,8^\circ$ at the design viewing distance and with the largest dimension of at least $4,8^\circ$ at the design viewing distance

See Figure 10.

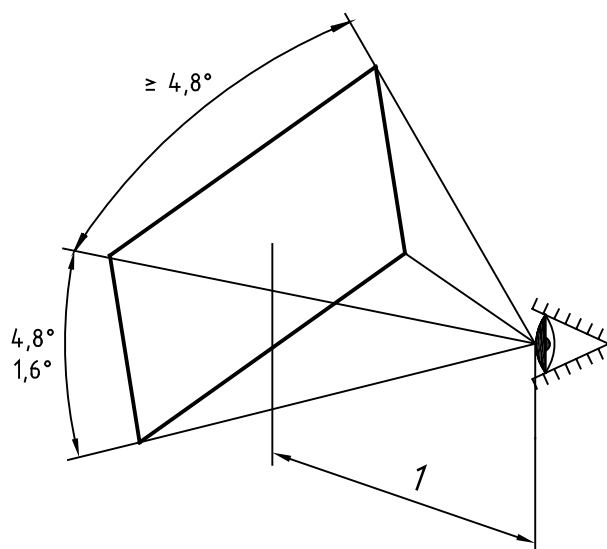**Key**

1 Design viewing distance

Figure 10 — Small-size panel

NOTE 1 Smaller panels will not hold more than 40 complying Latin characters and are outside the scope of the standard. The definition is used in screening and selecting measurement locations only. See 8.4.2 Standard measurement locations.

NOTE 2 For a viewing distance of 500 mm, $1,6^\circ = 14$ mm; $4,8^\circ = 42$ mm.

3.4.12**subpixel**

a separately addressed internal structure in a pixel that extends the pixel function

NOTE Examples include primary colour subpixels used in some multicolour flat panels and multiple-size subpixels, used to create half-tone-like gray scale effects. Microstructure within primary subpixels is sometimes used to minimize anisotropy or to minimize fault visibility by adding redundancy in flat panels. Such microstructures are still called subpixels in this part of ISO 13406. Display engineering literature often uses the term “dot” which is not used in this part of ISO 13406.

3.4.13**pixel faults**

local defects of types 1, 2 or 3

See Tables 2 and 3.

Table 2 — Pixel faults

Fault type	Description
Type 1 fault	Pixel in stuck high state (when system command = minimum luminance) ($L > 0,75 L_X + 0,25 L_N$)
Type 2 fault	Pixel in stuck low state (when system command = maximum luminance) ($L < 0,75 L_N + 0,25 L_X$)
Type 3 fault	Pixel or subpixel is abnormal, but not of type 1 or 2. For example, a stuck subpixel or intermittent fault.
Fault cluster	Two or more pixels or subpixels with faults within a 5×5 block of pixels.
L is the measured luminance of the pixel. L_X is the average pixel response to a maximum luminance command (e.g. white). L_N is the average pixel response to a minimum luminance command (e.g. black).	

Table 3 — Definition of fault classes, Class_{pixel}

Maximum number of faults per type per million pixels					
Class	Type 1	Type 2	Type 3	Cluster with more than one type 1 or type 2 faults	Cluster of type 3 faults
I	0,000	0,000	0,000	0,000	0,000
II	2,000	2,000	5,000	0,000	2,000
III	5,000	15,00	50,00	0,000	5,000
IV	50,00	150,0	500,0	5,000	50,00

3.4.14**transflective display**

display device that modulates light from an external source by reflection and from another source by transmission through a semitransmissive reflector

[2.15, IEC/SC 47C (Central Office) 3]

3.4.15**transmissive display**

display that modulates light from an external source by transmission

NOTE If the display has a built-in light source, this part of ISO 13406 treats the display as emissive, not transflective, and not transmissive.

[2.16, IEC SC 47C (Central Office) 3]

3.4.16**viewing area**

active area plus any contiguous areas that display permanent visual information or display background

[2.18, IEC SC 47C (Central Office) 3]

3.5 Alphanumeric symbols

NOTE In keeping with the guiding principle that this part of ISO 13406 values consistency with ISO 9241-3, where appropriate, these definitions are identical to those contained in ISO 9241-3. If there is a departure from the original definition, the definition is followed by a note stating "Adapted from ISO 9241-3...". Departures are based on the use of whole pixel spaces to judge object sizes. It is now common to have the capability to display more than one character font design. This change results in an acceptably small error, but allows many fonts to be evaluated without complex laboratory work.

3.5.1

anti-aliased font

alphanumeric characters in which a technique has been utilized to smooth character edges

[ISO 9241-3:1992, 2.2]

3.5.2

between-character space

distance between horizontally adjacent characters at their nearest points in whole pixel spaces

NOTE 1 Between-character space is expressed in pixels.

NOTE 2 Adapted from ISO 9241-3:1992, 2.3.

3.5.3

between-line spacing

distance between vertically adjacent characters at their nearest points in whole pixel spaces

NOTE 1 Between-line spacing is expressed in pixels.

NOTE 2 Adapted from ISO 9241-3:1992, 2.4.

3.5.4

between-word spacing

horizontal distance between adjacent words at their nearest points in whole pixel spaces

NOTE 1 Between-word spacing is expressed in pixels.

NOTE 2 Adapted from ISO 9241-3:1992, 2.5.

3.5.5

character format

number of horizontal and vertical elements (pixels) in the matrix used to form a single character

NOTE 1 Character format is expressed in pixels.

NOTE 2 Adapted from ISO 9241-3:1992, 2.7.

3.5.6

character height

ψ
distance, as the subtended angle, of the spaces in whole pixel between the top and bottom edges of a non-accented capital letter H

NOTE 1 Character height is expressed in degrees.

NOTE 2 Adapted from ISO 9241-3:1992, 2.8.

$$\psi = \frac{180 \times 60 \times V_{\text{pitch}} \times N_{\text{H,Height}}}{\pi \times D_{\text{view}}} \quad (16)$$

$$\approx \frac{3\,438 \times V_{\text{pitch}} \times N_{\text{H,Height}}}{D_{\text{view}}} \quad (17)$$

NOTE 3 The unit in equations (16) and (17) is ' (minutes of arc). Minutes of arc is converted to degrees of arc by the factor (1°/60'). Degrees of arc is converted to radians by the factor ($\pi/180^\circ$).

3.5.7

character width

horizontal distance between the edges at the widest part of an unaccented capital letter H (excluding serifs), measured in whole pixel spaces

NOTE 1 Character width is expressed in pixels.

NOTE 2 Adapted from ISO 9241-3:1992, 2.10.

3.5.8

character width-to-height ratio

ratio of character width to character height

NOTE Character width-to-height ratio is expressed in pixels.

[ISO 9241-3:1992, 2.11]

3.5.9

stroke width

average dimension of the horizontal and vertical edge-to-edge distance of a character stroke, judged by the number of whole, average pixel spaces in each

NOTE Stroke width is compressed in pixels.

3.5.10

legibility

ability for unambiguous identification of single characters or symbols that may be presented in a non-contextual format

3.5.11

readability

characteristics of a text presentation on a display that effect performance when groups of characters are to be easily discriminated, recognized and interpreted

3.5.12

character height number

$N_{\text{H,Height}}$

number of pixels in the height of an unaccented, uppercase character H

NOTE Character height number is expressed in pixels.

4 Symbols

Table 4 — Main symbols and units

See Tables 5 and 6 for more variable conventions.

Symbol	Name/Description	Units
AMP_n	$\frac{2 \times C_n }{C_0}$	1
c_0	Time-averaged dark-room luminance	cd/m ²
$Class_{Pixel}$	Pixel fault class, see 7.20 <i>Pixel faults</i>	
$Class_{Reflection}$	Reflection class, see 7.17 <i>Reflections</i>	
$Class_{Viewing}$	Viewing direction range class, see 7.2 <i>Design viewing direction</i>	
C_m	Contrast modulation	1
c_n	The n th complex Fourier coefficient (at a multiple of the fundamental frequency)	cd/m ²
CR	Contrast ratio	1
D_{active}	The diagonal of the active area of the screen	mm
$D_{design\ view}$	Design viewing distance (specified)	mm
D_{view}	The distance between the entrance pupil of the measurement instrument and the centre of the considered object on the screen. The distance between the bridge of the nose of the viewer and the centre of the screen	mm
E	Illuminance	lx
E_a	Screen illuminance from ambient lighting at a workplace	lx
E_{obs}	Observed retinal illuminance	td
E_{pred}	Retinal illuminance where flicker occurs (at a specific frequency)	td
E_s	Design screen illuminance	lx
FFT(v)	The Fast Fourier Transform of a vector of readings	1
f_n	$n \times$ the fundamental frequency	Hz
H_{pitch}	The horizontal pixel pitch	mm
h_{uv}	hue-angle	°
H_{view}	the height of the active area	mm
L^*	Lightness	1
L_1	First luminance [$L_{dark,HS(CL-0)}$]	cd/m ²
L_2	Second luminance [$L_{dark,LS(CL-0)}$]	cd/m ²
$L_{Ea,task\ area(TA-n)}$	Area luminance of a task area (numbered n), with ambient lighting of the workplace	cd/m ²

Table 4 (continued)

Symbol	Name/Description	Units
$L_{FPA(t)}$	Frame-period averaged luminance-time response function	
$L_{level,max}$	The biggest luminance value of any test location in any test direction at the luminance code level	cd/m ²
$L_{level,min}$	The smallest luminance value of any test location in any test direction at the luminance code level	cd/m ²
L_{max}	The biggest of a series of luminance values	cd/m ²
L_{min}	The smallest of a series of luminance values	cd/m ²
$L_{REFEXT-I}$	Evaluation luminance level for extended specular source, class I and II	cd/m ²
$L_{REFEXT-III}$	Evaluation luminance level for extended specular source, class III	cd/m ²
$L_{REFSML-I}$	Evaluation luminance level for small specular source, class I and II	cd/m ²
$L_{REFSML-III}$	Evaluation luminance level for small specular source, class III	cd/m ²
N_H	The number of columns of pixels on the screen	1
$N_{H, Width}$	The number of pixels in the <i>width</i> of an unaccented uppercase character H	pixels
$N_{H, Height}$	The number of pixels in the <i>height</i> of an unaccented uppercase character H	pixels
N_{H,hz_stroke}	The number of pixels in the <i>horizontal stroke</i> of an unaccented uppercase character H	pixels
N_{H,vt_stroke}	The number of pixels in the <i>vertical stroke</i> of an unaccented uppercase character H	pixels
N_V	The number of rows of pixels on the screen	1
q	Luminance coefficient	sr ⁻¹
r	The radius of the exit port of the specular light source	mm
$S_{Es,Es}(\lambda)$	The spectral distribution of the design screen illumination, E_s	1
T	Refresh period	ms
t_1	Time at $L_1 - 0,1(L_1 - L_2)$, state 1 → 2	ms
t_2	Time at $L_1 - 0,9(L_1 - L_2)$	ms
t_3	Time at $L_1 - 0,1(L_1 - L_2)$, state 2 → 1	ms
t_4	Time at $L_1 - 0,9(L_1 - L_2)$	ms
Tol	Tolerance	1

Table 4 (continued)

Symbol	Name/Description	Units
u', v' u'_n, v'_n $u'_{Es,Es}, v'_{Es,Es}$	CIE 1976 UCS values, subscript n indicates "specified white achromatic stimulus" and Es,Es indicates design screen illumination	1
V_{pitch}	The vertical pixel pitch	mm
W_{view}	The width of the active area	mm
X, Y, Z X_n, Y_n, Z_n $X_{Es,Es}, Y_{Es,Es}, Z_{Es,Es}$	Tristimulus values of a colour stimulus subscript n indicates "specified white achromatic stimulus" and Es,Es indicates design screen illumination	cd/m ²
x, y, z x_n, y_n, z_n $x_{Es,Es}, y_{Es,Es}, z_{Es,Es}$	Chromaticity coordinates: The ratio of each of the tristimulus values to their sum, subscript n indicates "specified white achromatic stimulus" and Es,Es indicates design screen illumination	1
Y, Y_n	2°, 1931 tristimulus value, subscript n indicates "specified white achromatic stimulus"	cd/m ²
z	The distance from the exit port of the light source to the diffuse reflectance standard it is illuminating	mm
ΔE_{uv}^*	1976 CIE $L^*u^*v^*$ colour difference, CIELUV, 1 to 4 targets	—
$\Delta u'v'$	Colour uniformity difference between 2 targets. Widely separated 1° targets with luminance variation allowed	1
α	Screen tilt angle	°
β	The luminance factor (for regular reflection) NOTE Regular = specular, mirror-like	1
β_{STD}	Luminance factor of the specular reflectance standard of the test laboratory	1
ϕ	Azimuth angle	°
ϕ_D	Design azimuth angle (either 90° or 270°)	°
ψ	The height of an unaccented upper case character H	°
ϕ_C	Critical azimuth angle	°
ρ_{STD}	Diffuse reflection factor of the diffuse reflectance standard of the test laboratory	1
θ	Inclination angle	°
θ_D	Design inclination angle	°
θ_{range}	Inclination-angle range	°
$\theta_{rangemax}$	The maximum inclination angle range	°
$\theta_{rangemin}$	The minimum inclination-angle range	°

Table 4 (continued)

Symbol	Name/Description	Units
' (as a size)	The angular subtense of a visual target at a (specified) viewing distance See 3.3.2, <i>angular substence</i>	'
° (as a size)	The angular subtense of a visual target at a (specified) viewing distance See 3.3.2, <i>angular substence</i>	°

Table 5 — Arbitrary symbol: $A_{B,C(D)}(E)$

Position	Explanation	Example	Explanation for the example
A	Physical quantity	Y	Luminance
B	Illumination condition	S-SML	Illuminated with the small specular source condition
C	Measured object	HS	Measuring the high state of the flat panel
D	Measurement location	CL-2	In the centre location, at measurement angle 2
E	Tristimulus curve or spectral wavelength	410	Wavelength $\lambda = 410$ nm
NOTE If the position E is omitted, then it is not applicable, or refers to the $V(\lambda)$ -corrected value (=Y)			

Table 6 — List of symbols and subscripts

Position	Symbol	Explanation
A	Y	Intermediate luminance values
A	L	Final luminance values
A	R	Reflectometer value (See ISO 9241-7 for details)
A	S	Spectral value
A	q	Luminance coefficient
A	u'	Chromaticity coordinate in the CIE 1976 UCS diagram
A	v'	Chromaticity coordinate in the CIE 1976 UCS diagram
A	$\Delta u'v'$	Chromaticity uniformity difference in the CIE 1976 UCS diagram
A	β	Luminance factor
B	DIFF	Illumination with the diffuse light source of the test laboratory
B	S-SML	Illumination with the small specular light source of the test laboratory
B	S-EXT	Illumination with the extended specular light source of the test laboratory
B	dark	Dark-room conditions
B	E_s	Converted to design screen illumination E_s condition

Table 6 (continued)

Position	Symbol	Explanation
B	E_a	Screen illumination E_s at a workplace
B	REFEXT-I	Converted to large-glare source condition, class I and II
B	REFSML-I	Converted to small-glare source condition, class I and II
B	E_s +REFEXT-I	Converted to simulation of design screen illumination and large-glare source, class I and II
B	E_s +REFSML-I	Converted to simulation of design screen illumination and small-glare source, class I and II
B	REFSML-III	Converted to large-glare source condition, class III
B	REFEXT-III	Converted to small-glare source condition, class III
B	E_s +REFEXT-III	Converted to simulation of design screen illumination and large-glare source, class III
B	E_s +REFSML-III	Converted to simulation of design screen illumination and small-glare source, class III
B	E_a +AMBLUM	The combined light from ambient illuminance and the specular light sources at an actual workplace
C	HS	Flat panel in high state, photometer focus on the flat panel. In text presentation, HS and LS are the two colours used in the text, i.e. HS and LS can be colours other than black and white.
C	LS	Flat panel in low state, photometer focus on the flat panel. In text presentation, HS and LS are the two colours used in the text, i.e. HS and LS can be colours other than black and white.
C	HS-F_EXT	Flat panel in high state, photometer focus on the exit port of the extended light source
C	LS-F_EXT	Flat panel in low state, photometer focus on the exit port of the extended light source
C	HS-F_SML	Flat panel in high state, photometer focus on the exit port of the small light source
C	LS-F_SML	Flat panel in low state, photometer focus on the exit port of the small light source
C	HS-OFF	Flat panel in high state, backlight switched off. Only applicable to certain types of displays
C	LS-OFF	Flat panel in low state, backlight switched off. Only applicable to certain types of displays
C	OFF	Flat panel switched off
C	level	Flat panel in a specific absolute luminance coding level, numbered 1...n
C	level-OFF	Flat panel in specific absolute luminance coding level, backlight switched off. Only applicable to certain types of displays.
C	DIFF	The diffuse light source of the test laboratory
C	S-SML	The small specular light source of the test laboratory
C	S-EXT	The extended specular light source of the test laboratory
C	HS-MIN	The required minimum luminance for the high luminance state

Table 6 (continued)

Position	Symbol	Explanation
C	Task area	A task area that is frequently viewed in sequence while using the display (document, covers, etc.)
C	dSTD	The diffuse reflectance standard of the test laboratory
C	sSTD	The specular reflectance standard of the test laboratory
C	aSTD	The alignment check standard of the test laboratory
C	colour- n	The flat panel in the colour n
C	Colour- n -OFF	Flat panel in specific colour n , backlight switched off. Only applicable to certain types of displays.
C	E_s	Used with position A = X, Y or Z. Indicates that X, Y and Z stand for the tristimulus values of the design screen illumination.
D	HL- n	High measurement location, $n = 0 \dots 7$
D	LL- n	Low measurement location $n = 0 \dots 7$
D	CL- n	Centre measurement location, $n = 0 \dots 7$
D	CL- n S	Centre measurement location, $n = 0 \dots 6$ used in specular reflection measurements
D	CL- n D	Centre measurement location, $n = 0 \dots 6$, used in diffuse reflection measurements
D	dSTD- n Sm	Location for calibration measurement of the diffuse reflectance standard, $n = 0 \dots 6$, $m = 15, 30, 45$
D	L_g	Location for measuring the luminance of the specular light sources.
D	TA- n	Task area location, $n = \text{min, max}$
D	T- n	Tolerance measurement location, $n = 1 \dots 4$
D	PL- n	Potential measurement locations, $n = 11, 19, 91, 22, 33, 44, 55, 66, 77, 88, 99$
D	m, n	Combination of two locations, used in uniformity calculations (e.g. CL1, CL2)
E	X	Weighted using the weighting function for CIE 1931 tristimulus coordinate X. Used in tristimulus analysis.
E	Y	Weighted using the weighting function for CIE 1931 tristimulus coordinate Y. This is equal to the weighting function for $V(\lambda)$.
E		If position E is omitted, then the weighting function $V(\lambda)$ is assumed
E	Z	Weighted using the weighting function for CIE 1931 tristimulus coordinate Z. Used in tristimulus analysis.
E	400, 410, ... 700	The value at wavelength 400, 410, ..., 700. Used in spectral analysis.

5 Guiding principles

The visual display work system is an integrated whole, which includes the flat panel display and other hardware (keyboards, pointing devices, etc.), environment, task structure, and other factors. The characteristics of a flat panel must be considered in relation to the other elements of the work system and not as a collection of isolated visual requirements.

Design elements often interact such that optimizing one degrades another. For example, in multicolour flat panel displays there are tradeoffs between the palette of available colours and the constancy of colour rendition with viewing direction. Tradeoffs should be made to achieve an acceptable balance.

For viewing efficiency in flat panel display environments, the image quality should be significantly above the threshold values for the individual stimuli. The recommendations of this part of ISO 13406 take this into account.

While many recommendations are based on performance data from the viewpoint of the above paragraph, some recommendations and requirements are based on user comfort.

Application elements, generally embodied in software, and the hardware elements cannot be judged separately. Coding and character formation require hardware capability and consistent application of that capability.

6 Performance requirements

The objective of this part of ISO 13406 is that the images presented on flat-panel-based VDUs be legible, readable and comfortable in use. See clause 9 for compliance with this part of ISO 13406 and clause 3 for definitions.

NOTE The terms **legibility** and **readability** are used as defined in ISO 9241-3. Some research uses the same terms for other purposes.

7 Design requirements and recommendations

7.1 Design viewing distance

Design viewing distance, $D_{\text{design view}}$ shall be not less than 400 mm, however, for certain applications (e.g., soft key labels of touch screens) the design viewing distance may be reduced to 300 mm.

For office work in the context of ISO 9241-3, the recommendations of 5.1 Design viewing distance, of ISO 9241-3:1992 should be followed.

Workstation requirements are the subject of ISO 9241-5. However, in the work place, the design should allow the display to be used with the design viewing distance. If the task requires a significant amount of reading, the design, the application and the work place should be consistent with display viewing at a distance where the character height, ψ , of the character set meets the recommendations of 7.6: *character height*, 20' to 22' (30' to 35' for Asian characters). This relationship is shown in Figure 11.



Figure 11 — Viewing distance — character size relationship

7.2 Design viewing direction

The display shall conform to all optical requirements over a relevant range of viewing directions. The supplier shall specify a design viewing direction (θ_D , ϕ_D) and an inclination angle range, θ_{range} .

The inclination angle range, θ_{range} , shall exceed a value consistent with the design viewing distance, $D_{\text{design view}}$ and a character height of $\psi = 22'$. The design inclination angle, θ_D shall be larger than 0° (the case of a symmetric viewing cone) and shall be smaller than $40^\circ - \theta_{\text{range}}/2$ (to avoid measurements at angles outside the 80° viewing cone). See Figure 12.

NOTE 1 According to the definition of θ_D , θ_D can only be in the range 0° - 90° . Viewing cone = θ_{range} is in the range 0° - 180° .

The design azimuth angle, ϕ_D , is 90° , when the supplier intends that the top of the screen be closer to the users' eyes than the bottom, and 270° when the bottom is intended to be closer to the users' eyes and the top of the screen. See Figure 13.


Six directions are used for measurement. See 8.4.1 Test directions.¹⁾

1) At the time this part of ISO 13406 was written, the number of test directions was limited to six in order to make it economically possible to perform a test with the test equipment technology available at that time. Limiting the test to only six directions might not describe the entire performance of a flat panel. From an ergonomics point of view, it might be useful to extend flat panel evaluation to more than six test directions when subclauses 7.14 Display luminance, 7.15 Contrast, 7.17 Reflections, 7.19 Luminance uniformity, 7.25 Default colour set and 7.27 Colour differences are evaluated. The relevant azimuth angle range and inclination angle range to analyze depend on, for example, the task, the viewing distance, the screen size and the number of simultaneous users.

For ease of understanding, four performance classes for viewing direction range (Class_{Viewing}) are defined and referred to in the other requirements:

Table 7 — Viewing direction range classes, Class_{Viewing}

Class _{Viewing}	Description
I	Allows multiple users to view the whole area of the display at the design viewing distance from any viewing direction within an 80° viewing cone without reduced visual performance. Provides uniformity over the whole screen. Allows movement of the head. Not suitable for tasks where a narrow viewing cone is needed (e.g. privacy, low power consumption).
II	Allows a single user to view the whole area of the display at the design viewing distance from any location in front of the screen. Provides uniformity over the whole screen. Allows movement of the head. Not very well suited for tasks where a narrow viewing cone is needed (e.g. privacy, low power consumption).
III	Allows a single user to view the whole area of the display at the design viewing distance from one fixed location (the design viewing distance, design viewing direction in front of the centre of the screen). Provides uniformity over the whole screen. Does not allow movement of the head. Suitable for tasks where a narrow viewing cone is needed (e.g. privacy, low power consumption).
IV	Allows a single user to view the centre of the screen at the design viewing distance from one fixed location (the design viewing distance, design viewing direction in front of the centre of the screen). Requires user to tilt and rotate the display for uniform image appearance. Does not allow movement of the head. Very well suited for tasks where a narrow viewing cone is needed (e.g. privacy, low power consumption).
For some tasks, a narrow viewing direction range is desired. For example, if it is not wanted that co-travellers in a public transport vehicle can see the information on the screen. The selection of Class_{Viewing} is usually an ergonomics task design trade-off decision.	

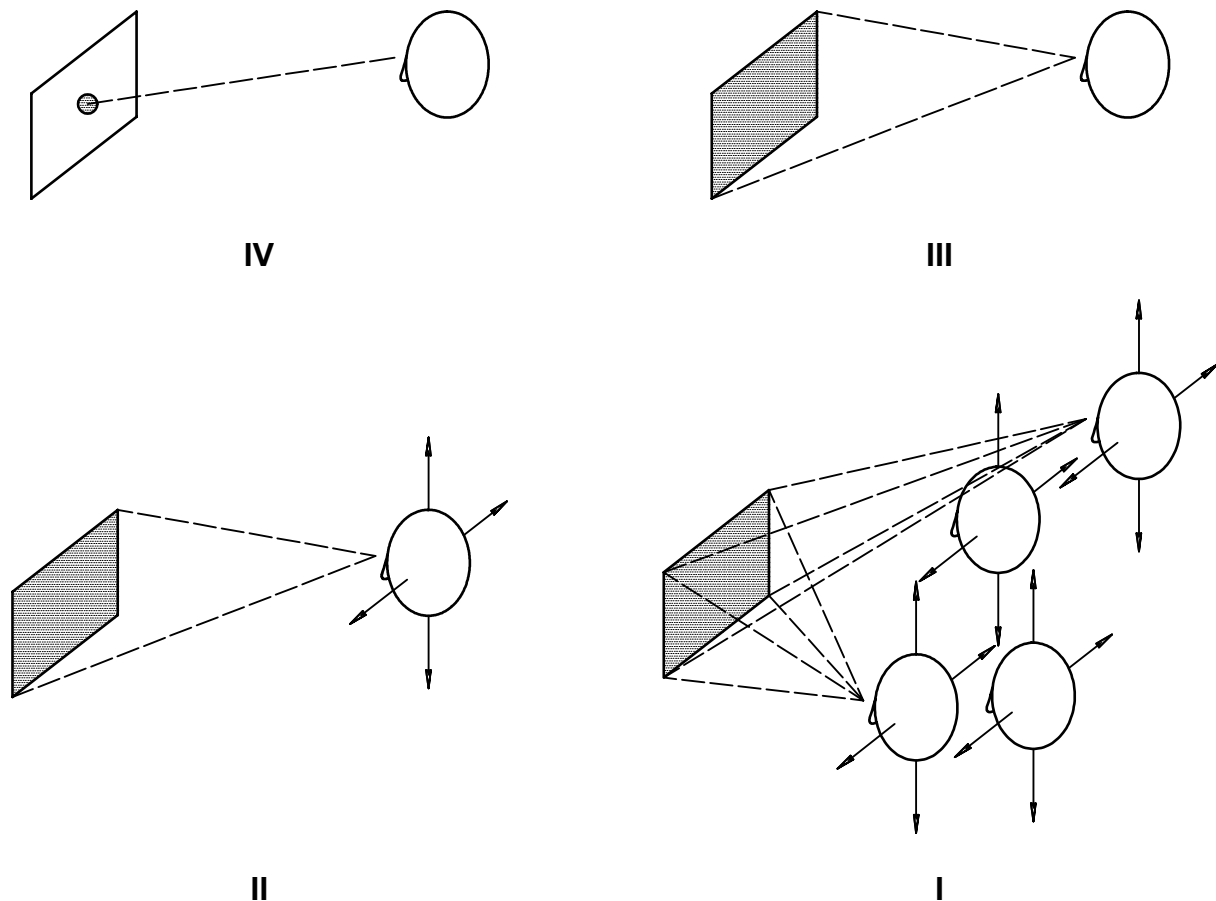


The arrows in the picture indicate the possibility of moving the head.

Four classes, $Class_{Viewing}$, are defined, I-IV. The relevant range of viewing directions depends on the task design, i.e. the size of the viewing area, the viewing distance and how much the user needs to move his head and still maintain acceptable legibility and viewing performance. This part of ISO 13406 defines different viewing-direction criteria for different parameters, such as contrast and chromaticity uniformity difference.

To enable ergonomic task design, the manufacturer shall report $Class_{Viewing}$ of the display in the user's manual or in an equivalent way.


Figure 12 — Viewing direction range

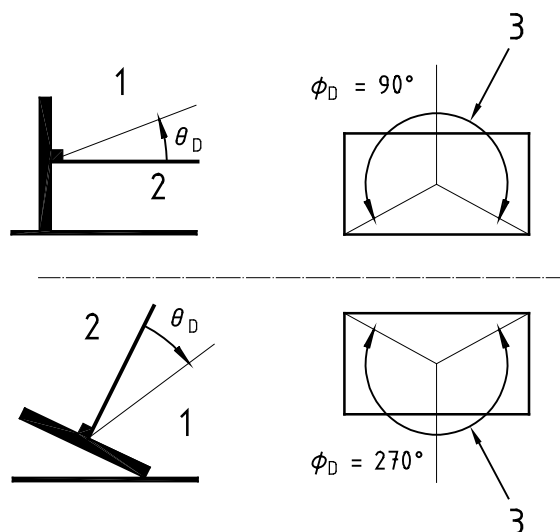**Key**

- 1 Line of sight
- 2 Normal
- 3 Relevant azimuth range

Figure 13 — Relevant azimuth range

Figure 14 is an illustration of test directions. The data used for the examples in Figure 14, Figure 30 and Tables 33 to 35 are identical.

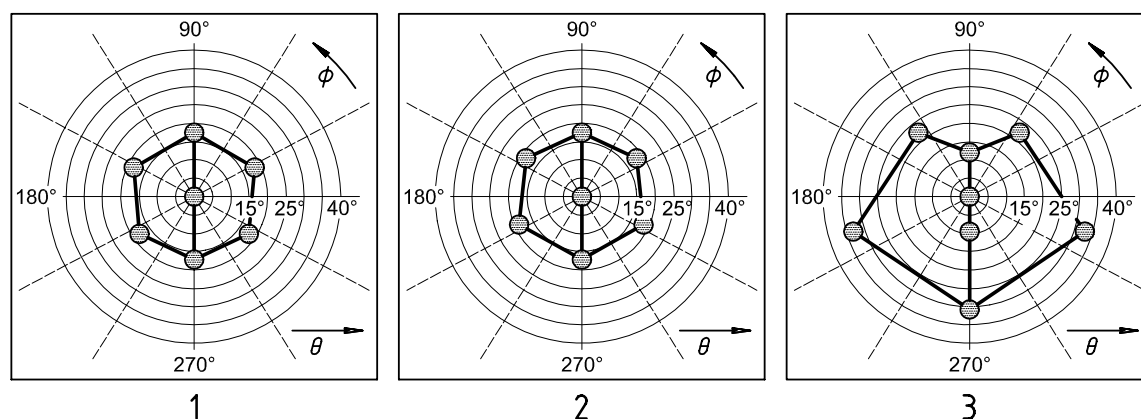**Key**

- 1 Landscape oriented, $\phi_D = 90^\circ$, $\theta_D = 0^\circ$ and $\phi_C = 63,4^\circ$ (Table 33)
- 2 Landscape oriented, $\phi_D = 270^\circ$, $\theta_D = 0^\circ$ and $\phi_C = 63,4^\circ$ (Table 34)
- 3 Portrait oriented, $\phi_D = 270^\circ$, $\theta_D = 10^\circ$ and $\phi_C = 71,6^\circ$ (Table 35)

Figure 14 — Examples of test directions

NOTE 2 The key factors affecting the user preference for design azimuth, ϕ_D , are glare, brightness and contrast. For isotropic emissive displays ϕ_D is usually 270° (because users try to avoid reflected glare caused by luminaires). For isotropic reflective displays ϕ_D is usually 90° (because users try to maximize the brightness). For anisotropic displays ϕ_D is an angle where contrast and brightness are sufficiently high but reflective glare is sufficiently low (thus ϕ_D depends highly on the display technology and the luminous environment).

NOTE 3 For single-viewer legibility, a value of θ_{range} greater than 80° will not add value. For all displays and printed material, as the inclination angle increases, the characters appear geometrically shorter. At 40° , a character appears about 25 % shorter.

For example, a 16' character, viewed at an inclination angle of 40°, is shortened to only 12'. It is unnecessary to require isotropy for larger inclination angles since even printed matter suffers from more severe off-angle viewing. Independence of parameters with viewing direction outside this 80° viewing cone may be useful when multiple viewers use a single display and character distortion is not a problem, but this situation is not addressed in this part of ISO 13406.

NOTE 4 The inclination angle range, θ_{range} was selected to allow acceptable display use without requiring head movement due to anisotropy. The minimum inclination angle range is based on reading comfort and depends on the size of the panel and the viewing distance. The maximum inclination angle range depends on legibility for a single viewer.

7.3 Design screen illuminance

The supplier shall specify the design screen illuminance, E_S . For emissive displays, E_S shall be from 250 lx to 750 lx. For transreflective and reflective displays, the supplier shall indicate the minimum illuminance under which the display will meet the luminance requirements in 7.14 *Display luminance*.

If a flat panel VDU is designed for use in an erect posture by a sitting user, the default screen illuminance, from ISO 9241-3, $E = [250 + (250 \cos \alpha)]$ lx, may be used where α is the screen tilt angle. (See 3.4.10 for the definition of screen tilt angle.)

If the application is using, or if the flat panel is designed to be used with, a default colour set, then the chromaticity coordinates u'_s , v'_s of the design screen illumination need to be defined in order to perform colour difference calculations.

NOTE 1 See 8.3.3.4 *Luminance sources* for the spectro-radiometric distribution requirements needed for repeatable measurements.


NOTE 2 Transflective or reflective displays with a minimum illuminance that exceeds 750 lx sometimes require a task light for office operation.

7.4 Gaze and head-tilt angles

The work place and flat panel VDU design should permit the user to view the screen in the design viewing direction (θ_D , ϕ_D) with a gaze angle from 0° to 45° and a head tilt angle from 0° to 20°.

7.5 Chromaticity uniformity difference (See Figure 15)

This requirement does not apply to monochrome displays.

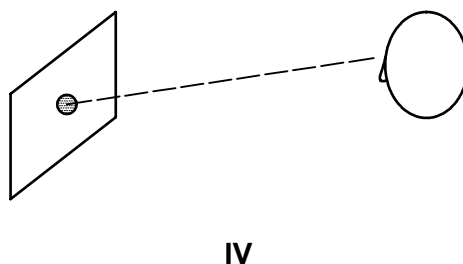

Any non-uniformity of the colour shall not create competing information content when evaluated at three locations on the screen for viewing direction range class, $\text{Class}_{\text{Viewing}}$ IV according to 7.2 *Design viewing direction*. Depending on the task, $\text{Class}_{\text{Viewing}}$ I, II or III should be required.

Figure 15 — Chromaticity uniformity difference

The maximum chromaticity difference shall conform to the values in Table 8. The values required for the default colour set case in 7.25 are recommended for appearance in all applications.

Table 8 — Maximum chromaticity difference

$\frac{D_{\text{active}}^a}{D_{\text{design view}}}$	$\Delta u'v'$	
	Applications using colour per 7.25 Default colour set	Any primary colour ^b
< 0,75	0,02	0,02
≥ 0,75	0,03	0,03
^a D_{active} is the diagonal of the active area of the screen, $D_{\text{design view}}$ is the design viewing distance. ^b The primary colours are the unmixed colours from the flat panel, usually red, green and blue.		


7.6 Character height

Flat panel displays shall be capable of presenting characters with a character height, Ψ according to Table 9. Character height is the number of pixels in an unaccented upper-case H, $N_{\text{H,Height}}$ times the vertical pitch, V_{pitch} . See Figure 16 for an example.

Table 9 — Character heights, Ψ

	Minimum for legibility	Preferred range for legibility
Latin origin	16'	20' to 22'
Asian	25'	30' to 35'

For applications where legibility is incidental to the task, smaller characters may be used (e.g., for footnotes, superscripts, subscripts). The character height should exceed 10' unless loss of legibility is acceptable (e.g., page layout appearance).

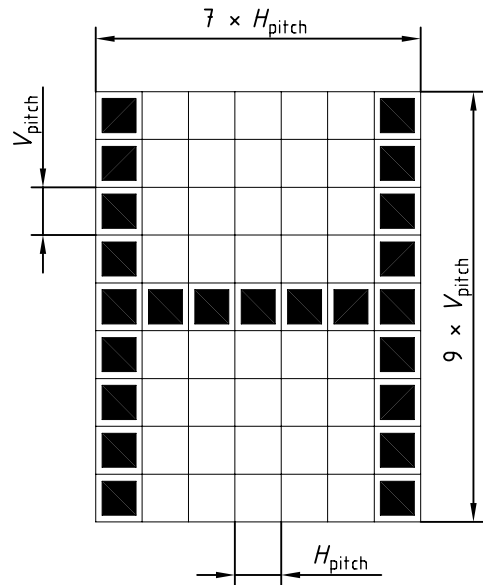

Character width = $7 \times H_{pitch}$, character height $\psi = N_{H,Height} \times V_{pitch}$ and $N_{H,Height} = 9$.

Figure 16 — Example of character height

7.7 Stroke width

For a Latin-origin character, the number of pixels in a stroke shall be from 8 % to 20 % of $N_{H,Height}$.

NOTE Figure 16 illustrates a case of 9 pixels in an H, and a correct design of the stroke width. (1 pixel equals 11 %.)

7.8 Character width-to-height ratio

Table 10 — Character width-to-height ratio

	Required range	Preferred range for optimum legibility
Latin origin	0,5:1 to 1:1	0,6:1 to 0,9:1
Asian	0,8:1 to 1,2:1	
For Latin-origin characters, the ratio shall be judged on an unaccented upper-case character, H. See Figure 16.		

7.9 Fill factor

For flat panel displays having a pixel density of less than 30 pixels per degree at the design viewing distance, the fill factor shall exceed 0,3.

NOTE When displays are used in marginal illumination environments (uncontrollable glare or loss of contrast), user performance continues to improve for fill factors of up to 0,5.

7.10 Character format

Table 11 — Character format requirement for Latin, Cyrillic and Greek origin alphabetic characters and Arabic numerals.

Character matrix (width to height)		Remark
Minimum used for numeric and upper-case-only presentations	Minimum for reading for context or if legibility is important	
5 × 7	7 × 9	See below for restrictions and exceptions

The character matrix shall be increased upward by at least two pixels if diacritics are used. If lower case is used, the character matrix shall be increased downward by at least two pixels, to accommodate the descenders of the lower-case letters. Mixed-case alphabetics are more legible than upper-case-only alphabetics.

For higher density character matrices, the number of pixels used for diacritics should follow conventional designs for printed text. A 4 × 5 (width to height) character matrix shall be the minimum used for subscripts and superscripts, and for numerators and denominators of fractions displayed in a single character position. The 4 × 5 matrix may also be used for alphanumeric information not related to the operator's task, such as copyright information. (See ISO 9241-3:1992, 5.8)

Characters such as W can be wider than H. Characters such as l, j, I are narrower.

The matrix judgement is made on an unaccented upper-case H.

Table 12 — Character format requirement for Asian characters.

Character matrix (width to height)		Remark
Minimum used font size	Preferred font size	
15 × 16	24 × 24	Fixed sized font

7.11 Between-character spacing

For character fonts without serifs, the number of between-character pixels shall be a minimum of the stroke width count or one pixel. If characters have serifs, the between-character spacing shall be a minimum of one pixel between the serifs of adjacent characters. (ISO 9241-3:1992, 5.10)


7.12 Between-word spacing

The minimum number of pixels between words shall be the number of pixels in the width of an unaccented upper-case H unless the character font is designed as a representation of designed print fonts or proportional spacing is used. When simulating a print font, the spacing used in the font design may be used. The number of pixels in the width of the character N is recommended as between-word spacing for proportionally spaced fonts.

7.13 Between-line spacing

A minimum of one pixel shall be used for spacing between lines of text. This area may not contain parts of characters or diacritics, but may contain underscores. (ISO 9241-3:1992, 5.12)

7.14 Display luminance

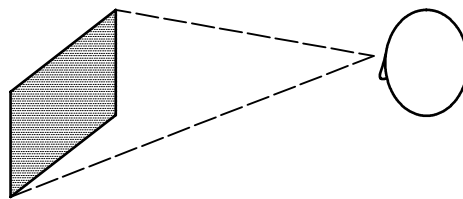

III

In ambient illumination, the luminance shall exceed the minimum value required for visual acuity when evaluated at three locations on the screen for viewing direction range class, $Class_{Viewing}$ III according to 7.2 *Design viewing direction*. Depending on the task, $Class_{Viewing}$ II or I should be required.

Figure 17 — Display luminance

The luminance of information (either foreground or background) shall satisfy the following inequality, over all viewing directions according to 7.2 *Design viewing direction*.

$$L_{HS} + L_D \geq 20 \text{ cd/m}^2 \quad (18)$$

where


L_{HS} is the emitted luminance component in the high state;

L_D is the luminance component reflected from diffuse illumination.

Expanded

$$L_{ES,HS(n)} \geq 20 \text{ cd/m}^2, n = CL - 1..CL - 7, HL - 1..HL - 7, LL - 1..LL - 7 \quad (19)$$

The luminance requirement is related to contrast [see 7.15 *Contrast*, equation (22)]. In most cases the contrast requirement will mean that a higher luminance, e.g., 35 cd/m^2 is required. When the luminance is lower than 35 cd/m^2 , contrast modulation will need to be higher than 0,5. Figure 18 is a graphical representation of equation (22).

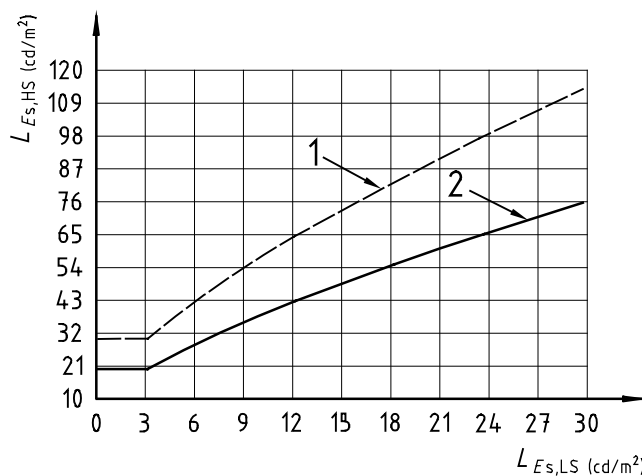


Key

- 1 Flat panels with absolute luminance coding, the higher luminance level.
- 2 All flat panels. This includes panels with no absolute luminance coding.

Figure 18 — Graphical presentation of equation (22)

NOTE Users often prefer higher display luminance levels (e.g. 100 cd/m²), particularly in conditions of high ambient illuminance.

7.15 Contrast (See Figure 19)

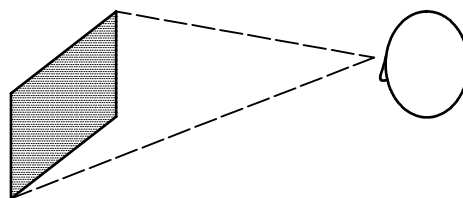

III

In ambient illumination, the contrast shall exceed the minimum value required for good visual performance when evaluated at three locations on the screen for viewing direction range class, Class_{Viewing} III according to 7.2 *Design viewing direction*. Depending on the task, Class_{Viewing} II or I should be required.

Figure 19 — Contrast

The contrast of information shall satisfy the following inequality, over all viewing directions according to 7.2 *Design viewing direction*.

$$\frac{L_{HS} + L_D}{L_{LS} + L_D} \geq 1 + 10 \times (L_{LS} + L_D)^{-0,55} \quad (20)$$

where

L_{HS} is the emitted luminance component in the high state;

L_{LS} is the emitted luminance component in the low state;

L_D is the luminance component reflected from diffuse illumination.


Expanded

$$C_m = \frac{L_{Es,HS(n)} - L_{Es,LS(n)}}{L_{Es,HS(n)} + L_{Es,LS(n)}} \geq \frac{5 \times L_{Es,LS(n)}^{-0,55}}{1 + 5 \times L_{Es,LS(n)}^{-0,55}}, \quad n = \text{CL-1..CL-7, HL-1..HL-7, LL-1..LL-7} \quad (21)$$

Or the equivalent contrast ratio inequality:

$$CR = \frac{L_{Es,HS(n)}}{L_{Es,LS(n)}} \geq 1 + 10 L_{Es,LS(n)}^{-0,55}, \quad n = \text{CL-1..CL-7, HL-1..HL-7, LL-1..LL-7} \quad (22)$$


Figure 20 is a graphical representation of equation (21).

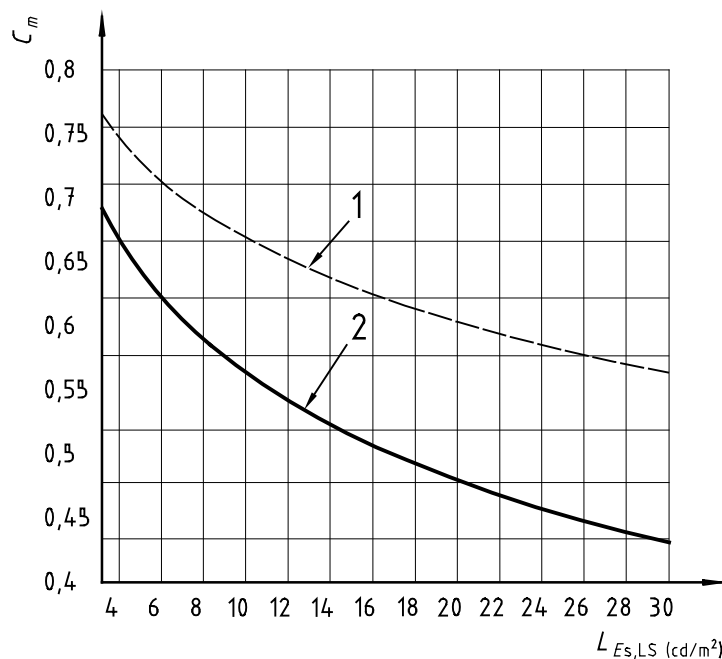**Key**

- 1 Flat panels with absolute luminance coding, the higher luminance level.
- 2 All flat panels. This includes panels with no absolute luminance coding.

Figure 20 — Graphical presentation of equation (21)**7.16 Luminance balance**

The area-luminance of task areas that are frequently viewed in sequence while using the display (document, covers, etc.) should be between $0,1 L_{Ea,HS(HL-7)}$ and $10 L_{Ea,HS(HL-7)}$, where $L_{Ea,HS(HL-7)}$ is the area-luminance of the highest luminance state used on the display in the application in the design viewing direction.

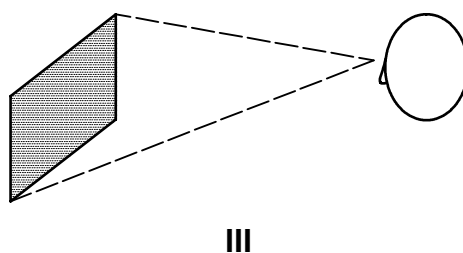7.17 Reflections (See Figure 21)

In ambient illumination, the contrast of text shall, in the presence of reflections, exceed the minimum value required for good visual performance and the contrast of unwanted reflections shall not exceed the threshold for comfort; when evaluated at three locations on the screen for viewing-direction range class, $Class_{Viewing}$ III according to 7.2 *Design viewing direction*. Depending on the task, viewing-direction range $Class_{Viewing}$ II or I should be required.

Figure 21 — Reflections

The supplier shall specify $Class_{Reflection}$ from Table 13 under which the flat panel display meets 7.17.1 *Contrast in the presence of reflections* and 7.17.2 *Contrast of unwanted reflections*.

The requirements in this subclause are based on the research done during the development of ISO 9241-7.

Table 13 — Reference luminances for reflection classes, $Class_{Reflection}$

$Class_{Reflection}$	Luminance of the sources of specular reflection, cd/m^2	Environment ^a
I	Both $L_{REFEXT-I} = 200$ and $L_{REFSML-I} = 2\,000$	Suitable for general office use
II	Either $L_{REFEXT-II} = 200$ or $L_{REFSML-II} = 2\,000$	Suitable for most, but not all, office environments
III	Either $L_{REFEXT-III} = 125$ or $L_{REFSML-III} = 200$	Requiring a specially controlled luminous environment
NOTE 1 In $Class_{Reflection}$ II or III, either the 15° aperture or the 1° aperture source is evaluated, but not both. In $Class_{Reflection}$ I, both sources are evaluated.		
NOTE 2 The reflection requirements and test methods are the same as in ISO 9241-7 except for the consideration of azimuth angles and display state. ISO 9241-7 tests at only one azimuth angle and one state, which is enough for proper characterization of CRT display performance. This part of ISO 13406 tests at six azimuth angles and two display states in order to give a proper characterization of the flat panel performance.		
^a For more information on environmental classification, see ISO 9241-7.		

7.17.1 Contrast in the presence of reflections (See Figure 22)

To achieve good enough contrast, the following inequality shall be satisfied over all azimuth angles according to 7.2 Design viewing direction:

$$\frac{(L_{HS} + L_D + L_S)}{(L_{LS} + L_D + L_S)} \geq 1 + 10 \times (L_{LS} + L_D + L_S)^{-0,55} \quad (23)$$

where

L_{HS} is the emitted luminance component in the high state;

L_{LS} is the emitted luminance component in the low state;

L_D is the luminance component reflected from diffuse illumination;

L_S is the luminance component reflected from specular illumination.



The objective is to maintain legibility in the presence of reflections. Contrast is used as a metric of legibility. The reflection class creates a relation between flat panel performance requirements and the lighting requirements of the work environment, defined in ISO 9241-6.

Figure 22 — Contrast in the presence of reflections

NOTE The contrast in this subclause is not precisely the same as the contrast in 7.15 *Contrast* because measurement details differ (the reflectance component L_s and the measurement geometry).

7.17.2 Contrast of unwanted reflections

The contrast of unwanted reflected images shall satisfy one or both of the following inequalities, as defined by the flat panel manufacturer (see 7.18 *Image polarity*), over all azimuth angles according to 7.2 *Design viewing direction*.

For positive polarity screens or applications

$$\frac{L_{HS} + L_D + L_S}{L_{HS} + L_D} \leq 1,25 \quad (24)$$

For negative polarity screens or applications

$$\frac{L_{LS} + L_D + L_S}{L_{LS} + L_D} \leq 1,2 + \frac{1}{15} \times \frac{L_{HS} + L_D}{L_{LS} + L_D} \quad (25)$$

where


L_{HS} is the emitted luminance component in the high state;

L_{LS} is the emitted luminance component in the low state;

L_D is the luminance component reflected from diffuse illumination;

L_S is the luminance component reflected from specular illumination.

NOTE The concept is not complex. The left-hand side of each inequality is the contrast ratio of the specular image (for example, the face in Figure 23) against the background. For positive polarity, the acceptability of an unwanted reflected image is independent of the contrast of the wanted information (hence the right-hand side is simply a number). In the case of a negative polarity screen, the contrast of the wanted negative image competes with the unwanted image (hence the luminance ratio on the right-hand side).

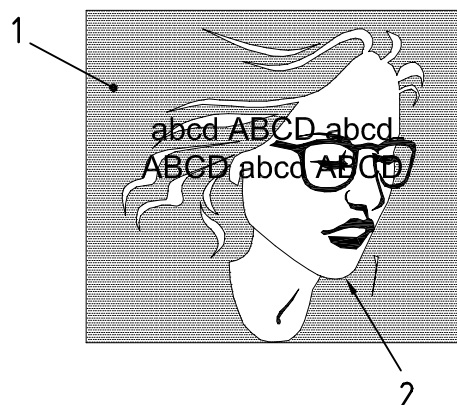

Key

- 1 Background
- 2 Unwanted image (Specular reflection)

The display shows a text with two lines. The face of the user is unintentionally reflected in the display, creating an image that competes with the text. The objective is to keep the contrast of the reflected image low enough not to compete with the information on the display.

NOTE There are concerns for both large luminance sources, like the cheek, and small ones, like reflected edges, such as from the eyeglasses.

Figure 23 — Example of unwanted image from specular reflection


7.18 Image polarity

Either image polarity, dark characters on a brighter background (positive image polarity), or bright characters on a darker background (negative image polarity) is acceptable, *per se*, provided the flat panel VDU meets the requirements of this part of ISO 13406. Users vary in their preferences for image polarity. If a display provides both image polarities, it shall meet the requirements of this part of ISO 13406 in each image polarity.

NOTE There are advantages for each image polarity. For example,

- with positive polarity, specular reflections are less perceptible, edges appear sharper, and luminance balance is easier to obtain. Positive polarity is preferred for ordinary office tasks;
- with negative polarity, flicker is less perceptible, legibility is superior for individuals with anomalously low visual acuity, and characters can sometimes be perceived as larger than they are.

7.19 Luminance uniformity (See Figure 24 and Table 14)

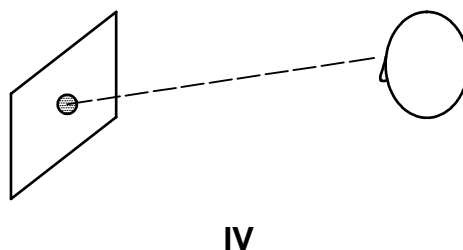

For an intended uniform luminance, the luminance non-uniformity shall in ambient illumination, not exceed the threshold for reduced visual performance when evaluated at three locations on the screen for viewing-direction range class, Class_{Viewing} IV according to 7.2 *Design viewing direction*. Depending on the task, Class_{Viewing} III, II or I should be required.

Figure 24 — Luminance uniformity

Table 14 — Luminance uniformity

Test object separation at the design viewing distance, perpendicular to the screen	Requirement Maximum luminance ratio
$7^\circ \leq \text{angular separation}$	1,7
$5^\circ \leq \text{angular separation} < 7^\circ$	1,6
$4^\circ \leq \text{angular separation} < 5^\circ$	1,5
$2^\circ \leq \text{angular separation} < 4^\circ$	1,4
$1,1^\circ \leq \text{angular separation} < 2^\circ$	1,3
Depending on the angular separation of the targets, the non-uniformity ratio should not exceed the value in this table.	

NOTE The test procedure defined in 8.7.19 *Luminance uniformity* intentionally does not measure all locations of the screen, but only three locations. The test procedure still covers the whole screen because 8.4.2.4 *Additional locations* provides sufficient additional requirements on the selection of the three locations to cover the whole screen.

There should be no unintended luminance variation with image content. In the example shown in Figure 25, a white block is displayed as shown. The circles represent considered object locations, not an intended image. Ideally, the luminances at locations 91 and 55 are at one level and at 11, 19 and 99 at another level. On some panels, location 11 will exhibit a higher luminance than 19 or 99. The dark/bright areas can be reversed and similar problems can sometimes be seen. There are many variations of this problem. This is simply one example.

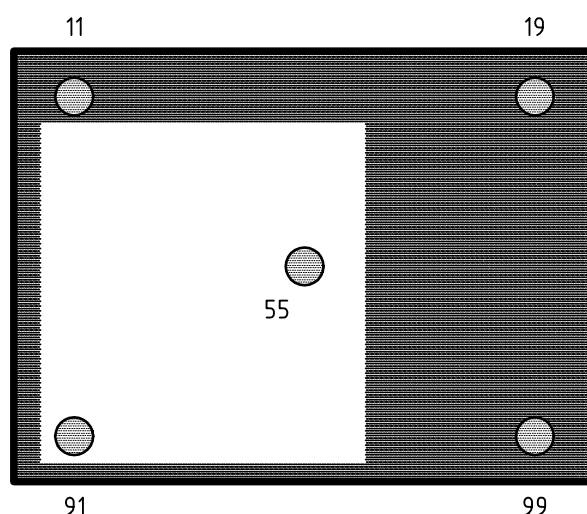


Figure 25 — Example of a pattern that can exhibit image-dependent luminance variation in some technologies

7.20 Pixel faults

Flat panel displays should be in fault class, $\text{Class}_{\text{Pixel}}$ I (refer to 3.4.13 *pixels faults*). If not, the supplier shall specify $\text{Class}_{\text{Pixel}}$ of the display.

7.21 Image formation time


To avoid contrast loss during rapid image changes, flat panel display systems should provide a formation time of less than 55 ms, refer to 3.4.4 (*image formation time*). If not, the supplier shall specify the image-formation-time range of the display.

NOTE Certain LCDs exhibit long image formation times. The image may be electrically refreshed every 16 ms or less, but the formation of the optical effect (luminance, colour or reflectivity) can take more than 200 ms to form fully. These displays offer many desirable features, but contrast loss in applications that require motion effects including blinking or rapid cursor movements, so these must be specially managed. If not so managed, an application may be unusable.

7.22 Absolute luminance coding

This requirement applies only to applications employing absolute luminance coding only, as defined in 3.4.5 (*absolute luminance coding*).

In ambient illumination the contrast between different levels of luminance coding shall exceed the threshold for good visual performance for viewing-direction range class, Class_{Viewing} IV according to 7.2 Design viewing direction. (See Figure 26). Depending on task Class_{Viewing} III, II or I should be required.

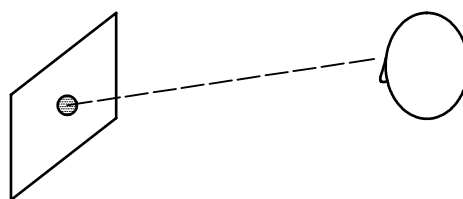

IV

Figure 26 — Absolute luminance coding

The higher-to-lower ratio between area luminances, including reflected ambient light, of adjacent levels shall exceed 1,5.

7.23 Blink coding

Where blink coding is used solely to attract attention, a single blink frequency of 1 Hz to 5 Hz, with a duty cycle of 50 %, is recommended. Where readability is required during blinking, a single blink rate of 1/3 Hz to 1 Hz, with a duty cycle of 70 %, is recommended. It should be possible to switch off the blinking of the cursor. (ISO 9241-3:1992, 5.22).

If blink coding is used, flat panel displays shall provide an image formation time of less than 55 ms, refer to 3.4.4 (*image formation time*).

7.24 Temporal instability (flicker)

The image shall be free of flicker to at least 90 % of the user population. (ISO 9241-3:1992, 5.23).

For a decision method that is useful for flat panels see annex B.

NOTE The method of annex B will be informative only until further research is published.

7.25 Default colour set

When an application requires the user to discriminate or identify colours, it shall offer a default set of colours that meets the requirements of this part of ISO 13406. If colours can be altered by the user, the default set of colours shall be retrievable or restorable.

7.26 Multicolour object size

For characters and other small objects where legibility is the primary concern, see 7.15 *Contrast*.