



International
Standard

ISO 16733-1

**Fire safety engineering —
Selection of design fire scenarios
and design fires —**

**Part 1:
Selection of design fire scenarios**

*Ingénierie de la sécurité incendie — Sélection de scénarios
d'incendie et de feux de dimensionnement —*

Partie 1: Sélection de scénarios d'incendie de dimensionnement

**Second edition
2024-10**

Reference number
ISO 16733-1:2024(en)

Full document details: [ISO 16733-1-2024](#)

© ISO 2024  **Documents**
Document Sharing Hub



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Fire safety engineering applications	2
4.1 Fire safety engineering process	2
4.1.1 Establish project scope	4
4.1.2 Identify fire safety objectives	4
4.1.3 Determine functional requirements	4
4.1.4 Select risk analysis approach	4
4.1.5 Identify performance criteria	4
4.1.6 Fire safety design plan	5
4.1.7 Determine design scenarios	5
4.1.8 Select engineering methods	5
4.1.9 Evaluate design	5
4.1.10 Document in final report	5
4.1.11 Implement fire-safety design plan	5
4.1.12 Execute fire-safety management	5
4.2 The role of design fire scenarios in fire-safety design	6
4.3 The role of design fires in fire-safety design	6
5 Design fire scenarios	7
5.1 Characteristics of fire scenarios	7
5.2 Identification of fire scenarios	8
5.2.1 General	8
5.2.2 Step 1 — Specific safety challenges	9
5.2.3 Step 2 — Location of fire	10
5.2.4 Step 3 — Type of fire	11
5.2.5 Step 4 — Potential complicating hazards leading to other fire scenarios	12
5.2.6 Step 5 — Systems and features impacting on fire	13
5.2.7 Step 6 — Occupant actions impacting on fire	13
5.3 Step 7 — Design fire scenarios	14
5.3.1 General	14
5.3.2 Combining scenarios into scenario clusters	14
5.3.3 Caution on exclusion of scenarios believed to have negligible risk	14
5.3.4 Demonstrating that the scenario structure is complete	14
5.3.5 Scenario selection procedure based on level of analysis	15
5.3.6 Selection of design fire scenarios for deterministic analysis	15
5.4 Step 8 — Scenario selection based on system availability and reliability	16
5.5 Step 9 — Final selection and documentation	17
Annex A (informative) Data for development of design fire scenarios	18
Annex B (informative) Example of a set of explicit fire scenarios	21
Bibliography	23

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 92, *Fire safety*, Subcommittee SC 4, *Fire safety engineering*.

This second edition cancels and replaces the first edition (ISO 16733-1:2015), which has been technically revised.

The main changes are as follows:

- Annex C has been removed as the content is now included in ISO/TS 16733-2;
- revised to reference updated content in ISO 23932-1.

A list of all parts in the ISO 16733 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Selection of the fire scenarios requiring analysis is critical in fire-safety engineering. The number of possible fire scenarios in any built environment (a building or other structure) can be very large and it is not always possible to quantify them all. In order for these fire scenarios to be made amenable to analysis, they are reduced from this large set of possibilities to a small set of design fire scenarios.

The characterization of a fire scenario comprises a description of fire initiation, the growth phase, the fully-developed phase, decay and extinction, together with the likely smoke and fire spread routes. This includes a description of the interaction with the proposed fire protection features for the built environment. The possible consequences of each fire scenario should be considered.

This document introduces a methodology for the selection of design fire scenarios that is tailored to the fire-safety design objectives. Several fire-safety objectives can be addressed, including safety of life (for occupants and rescue personnel), conservation of property, protection of the environment and preservation of heritage. A different set of design fire scenarios can be required to assess the adequacy of a proposed design for each objective.

Following selection of the design fire scenarios, a description of the assumed characteristics of the fire on which the scenario quantification is based is needed. These assumed fire characteristics are referred to as “the design fire”. The design fire should be appropriate to the objectives of the fire-safety engineering analysis and result in a design solution that is commensurate with credible worst case scenarios.

Users of this document should be appropriately qualified and competent in the fields of fire-safety engineering and risk assessment. Users need to understand the parameters within which specific methodologies can be used.

ISO 23932-1 provides a performance-based methodology for engineers to assess the level of fire safety for new or existing built environments. Fire safety is evaluated through an engineered approach which is based on the quantification of the behaviour of fire and on knowledge of the consequences of such behaviour on life, property, heritage and the environment. ISO 23932-1 provides the process (necessary steps) and essential elements to design a robust, performance-based fire-safety programme.

ISO 23932-1 is supported by a set of fire-safety engineering standards on the methods and data needed for the steps in a fire-safety engineering design. It is summarized in ISO 23932-1:2018, Clause 4 and shown in [Figure 1](#).

The following International Standards on fire-safety engineering are tied to the steps in the fire safety engineering design process outlined in ISO 23932-1: ISO 16730-1, ISO 16732-1, ISO 20414, ISO 20710-1, ISO 24678-1, ISO 24678-2, ISO 24678-3, ISO 24678-4, ISO 24678-5, ISO 24678-6, ISO 24678-7, ISO 24678-9 and ISO 24679-1.

Fire safety engineering — Selection of design fire scenarios and design fires —

Part 1: Selection of design fire scenarios

1 Scope

This document describes a methodology for the selection of design fire scenarios for use in fire-safety engineering analyses of any built environment, including

- buildings,
- structures, and
- transportation systems.

This document specifies procedures for selecting a manageable number of design fire scenarios using a qualitative or semi-quantitative approach.

NOTE See ISO 16732-1 for a full quantitative approach using risk assessment.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13943, *Fire safety — Vocabulary*

ISO 16730-1, *Fire safety engineering — Procedures and requirements for verification and validation of calculation methods — Part 1: General*

ISO 16732-1, *Fire safety engineering — Fire risk assessment — Part 1: General*

ISO 23932-1, *Fire safety engineering — General principles — Part 1: General*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13943 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1 design fire

quantitative description of assumed fire characteristics within the *design fire scenario* (3.2)

Note 1 to entry: A design fire is, typically, an idealized description of the variation with time of important fire variables such as the heat release rate, flame spread rate, smoke production rate, toxic gas yields and temperature.

3.2

design fire scenario

specific *fire scenario* (3.4) on which an analysis will be conducted

3.3

exposed

3.3.1

exposed person

person intended to be protected either from the effects of fire and fire effluents (e.g. smoke and corrosive gas) or from fire suppression effluents, or both

3.3.2

exposed object

object intended to be protected either from the effects of fire and fire effluents (e.g. smoke and corrosive gas) or from fire suppression effluents, or both

3.3.3

exposed environment

environment intended to be protected either from the effects of fire and fire effluents (e.g. smoke and corrosive gas) or from fire suppression effluents, or both

3.4

fire scenario

qualitative description of the course of a fire with respect to time, identifying key events that characterize the studied fire and differentiate it from other possible fires

Note 1 to entry: See *fire scenario cluster* (3.6) and *representative fire scenario* (3.5).

Note 2 to entry: It typically defines the ignition and fire growth processes, the fully developed fire stage, the fire decay stage, and the environment and systems that will impact on the course of the fire.

Note 3 to entry: Unlike deterministic fire analysis, where fire scenarios are individually selected and used as *design fire scenarios* (3.2), in *fire risk assessment*, fire scenarios are used as representative fire scenarios within fire scenario clusters.

3.5

representative fire scenario

specific *fire scenario* (3.4) selected from a *fire scenario cluster* (3.6) from which the consequence can be used as a reasonable estimate of the average consequence of scenarios in the *fire scenario cluster*

3.6

fire scenario cluster

subset of *fire scenarios* (3.4) usually defined as part of a complete partitioning of the universe of possible fire scenarios


Note 1 to entry: This subset is usually defined so that the calculation of fire risk as the sum over all fire scenario clusters of fire scenario cluster frequency multiplied by *representative fire scenario* (3.5) consequence does not impose an undue calculation burden.

4 Fire safety engineering applications

4.1 Fire safety engineering process

ISO 23932-1 provides a performance-based methodology for engineers to assess the level of fire safety for new or existing built environments. Fire safety is evaluated through an engineered approach based on the quantification of the behaviour of fire and based on knowledge of the consequences of such behaviour on life, property, heritage and the environment.

ISO 23932-1 specifies the process, including the necessary steps and essential elements, to design a robust, performance-based fire-safety programme. This document specifies how to develop design fire scenarios in accordance with ISO 23932-1:2018, Clause 11. This step in the fire-safety engineering process is shown as a shaded box in [Figure 1](#).

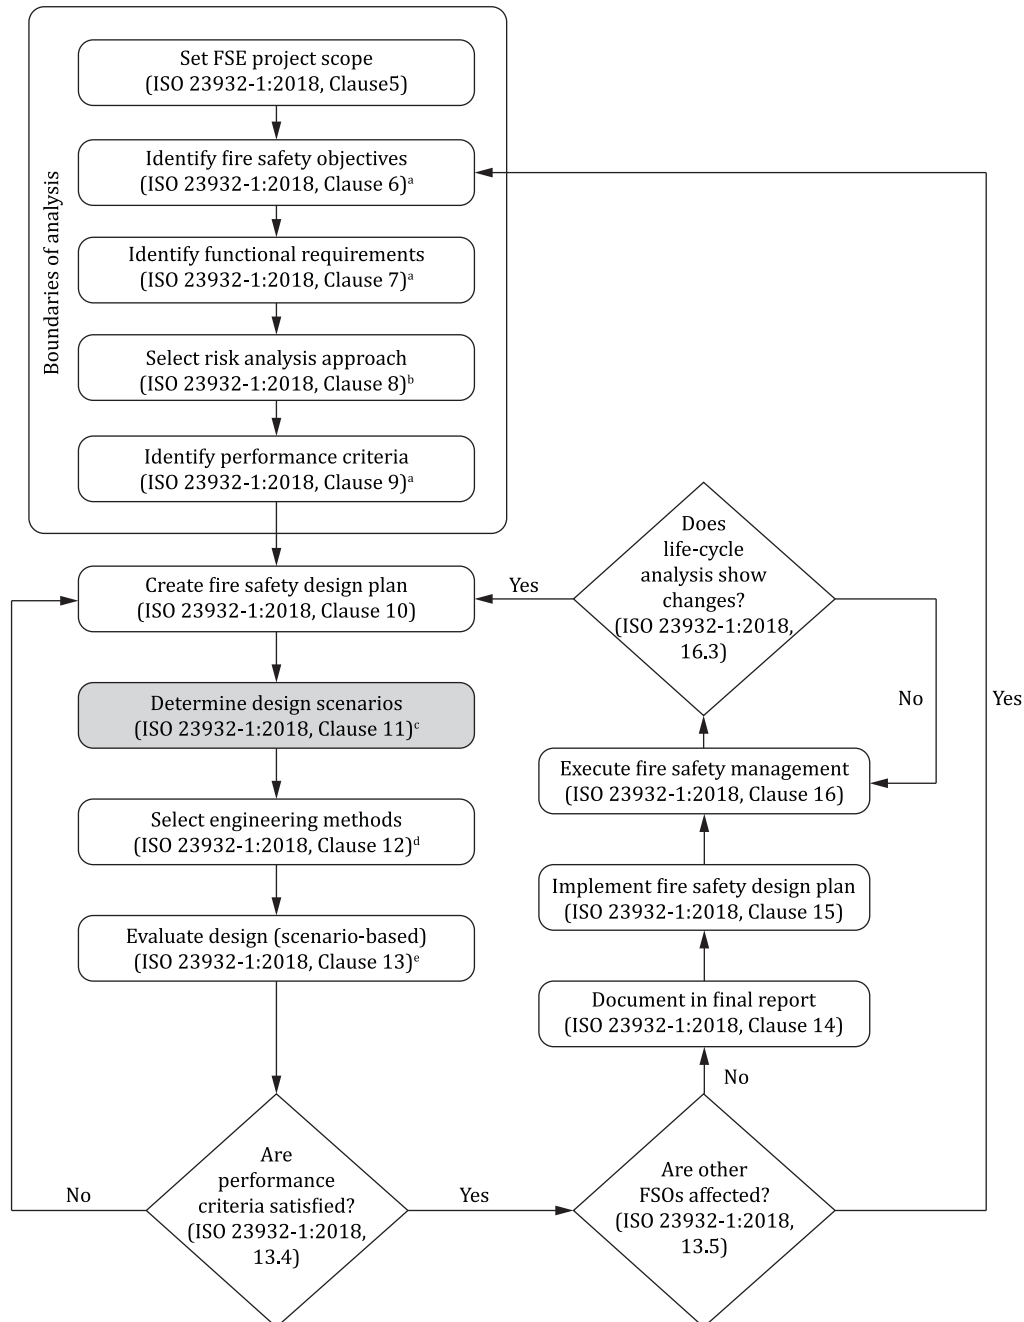

^a Refer to ISO/TR 16576 for examples.

^b Refer to ISO 16732-1, ISO 16733-1 (this document), ISO/TS 16733-2, ISO/TS 29761.

^c Refer to ISO 16732-1, ISO 16733-1, ISO/TS 16733-2, ISO/TS 29761.

^d Refer to ISO/TS 13447, ISO 16730-1, ISO/TR 16730-2 to ISO/TR 16730-5 for examples, ISO/TR 16738, ISO 24678-1, ISO 24678-2, ISO 24678-3, ISO 24678-4, ISO 24678-5, ISO 24678-6, ISO 24678-7 and ISO 24678-9.

^e Refer to ISO/TR 16738 and ISO/TS 16733-2.

NOTE Figure 1 adapted from ISO 23932-1:2018.

Figure 1 — Fire-safety engineering process

4.1.1 Establish project scope

The project scope shall describe the purpose and function of each part of the design, as well as the fixtures, furnishings, decorations, equipment and combustible products that are to be installed, stored or used in the built environment. Where this information is not available, assumptions shall be made. The validity of each assumption shall be checked and confirmed both during and after the project. The scope of the design work shall be defined, including the extent to which an FSE approach will be applied.

ISO 23932-1:2018, Clause 5 shall be followed.

4.1.2 Identify fire safety objectives

There can be several fire-safety objectives which shall be taken into account when they apply.

- Safety of life (for occupants and rescue personnel).
- Conservation of property.
- Protection of the environment.
- Preservation of heritage.

It shall be taken into account that a different set of design fire scenarios can be required to assess the adequacy of the proposed design for each objective.

ISO 23932-1:2018, Clause 6 shall be followed.

4.1.3 Determine functional requirements

A functional requirement is a statement of a condition necessary to achieve the fire-safety objective, e.g. spaces used for evacuation shall be free from harmful fire effects. All functional requirements shall be identified, so that the potential of any possible fire scenarios to threaten the fulfilment of the functional requirement can be assessed. If a fire scenario does not threaten the achievement of a functional requirement, then it is not relevant. An example of a functional requirement for life safety can be: “ensure that the structure does not fail and protect the paths of egress from harmful fire effects until evacuation is completed”.

ISO 23932-1:2018, Clause 7 shall be followed.

4.1.4 Select risk analysis approach

The choice of which risk analysis approach to take depends on the level of treatment of uncertainty required in the analysis. The relevant risk analysis approach enables a comparison between estimated and tolerable risk using some form of risk measure or performance criteria.

The risk analysis approach can be qualitative, deterministic, or probabilistic analysis. In general, it is not necessary and is often either impractical or cost-prohibitive or both, to conduct a full, quantitative fire risk assessment on an entire built environment. The complexity of the relevant method determines the level of effort required and it should reflect the level of detail necessary for informed decision making.

ISO 23932-1:2018, Clause 8 shall be followed.

4.1.5 Identify performance criteria

The type of analysis (deterministic, probabilistic) and the performance criteria used shall be selected. Performance criteria are the engineering metrics that are expressed in deterministic or probabilistic (e.g. measures of fire risk) form to determine if each functional requirement has been satisfied by the fire-safety design. Performance criteria shall be developed for a life safety functional requirement. For example, setting the maximum concentration or dose of carbon monoxide that an occupant can be exposed to.

ISO 23932-1:2018, Clause 9 shall be followed.