



International
Standard

ISO 17396

**Synchronous belt drives — Metric
pitch — Tooth profiles T and AT
endless and open ended belts
and pulleys**

*Transmissions synchrones par courroies — Pas métrique —
Poulies et courroies dentées sans fin ou à bout libre à dents de
profil T ou AT*

**Third edition
2024-09**

Reference number
ISO 17396:2024(en)

Full document details: ISO 17396-2024

© ISO 2024  **Documents**
Document Sharing Hub



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	2
5 Belt profile systems	2
6 Belt nomenclature	2
7 Pulley profile systems	3
8 Pulley nomenclature	3
9 Belt profile systems T and AT	4
9.1 Belt profile systems T and AT — General	4
9.2 Profile system T — Belt tooth dimensions and tolerances	5
9.3 Profile system AT — Belt tooth dimensions and tolerances	5
10 Belt widths and tolerances	6
11 Pitch length measurement	6
11.1 Endless belts manufactured in circular moulds	6
11.2 For very long endless belts and open belts	7
11.3 Total measuring forces	8
11.4 Procedures	8
11.4.1 For endless belts manufactured in circular moulds	8
11.4.2 For very long endless belts and open belts	9
11.5 Belt length tolerances	9
12 Pulleys	10
12.1 General profile system T	10
12.1.1 General	10
12.1.2 Profile system T — Pulley groove dimensions and tolerances	10
12.1.3 Profile system T — Pulley groove profile	11
12.1.4 Profile system T — Pulley diameters	11
12.1.5 Profile system T — Pulley width	12
12.2 General profile system AT	13
12.2.1 General	13
12.2.2 Profile system AT — Pulley groove profile dimensions and tolerances	13
12.2.3 Profile system AT — Pulley groove profile	14
12.2.4 Profile system AT — Pulley diameters	14
12.2.5 Pulley system AT — Pulley width	15
Annex A (normative) Pulley tolerances	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 41, *Pulleys and belts (including veebelts)*, Subcommittee SC 4, *Synchronous belt drives*.

This third edition cancels and replaces the second edition (ISO 17396:2017), of which it constitutes a minor revision.

The change is as follows:

— Clause 4 has been added.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Synchronous belt drives — Metric pitch — Tooth profiles T and AT endless and open ended belts and pulleys

1 Scope

This document specifies the principal characteristics of synchronous endless and open belts and pulleys of the profile systems T and AT for use in synchronous belt drives for mechanical power transmission and where positive indexing or synchronization can be required.

NOTE Synchronous belt drives have been known by various titles in the past, for example: timing belt drives, positive belt drives, and gear belt drives.

The principal belt and pulley characteristics include:

- a) nominal belt tooth dimensions;
- b) belt tooth pitch spacing;
- c) belt length and width dimensions;
- d) belt length measurement specifications;
- e) pulley groove dimensions and tolerances;
- f) pulley diameter and width dimensions and tolerances;
- g) pulley quality specification.

The belts of the profile systems T and AT are made of polyurethane with high-tension fine steel cord tension members in most cases. As far as certain forces are given in this document, these values are only valid for these kinds of belts. For polyurethane belts with different tensile cords, i.e. aramid or rubber belts reinforced with glass fibre, the values can be different. It is intended that the user and the manufacturer agree about suitable values. Open belts made of thermoplastic polyurethane can be spliced to work as endless belts in conveyor applications. In this case, the tolerances are not valid for the splicing area of the endless spliced belt.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 254, *Belt drives — Pulleys — Quality, finish and balance*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Symbols

Symbol	Description	Units
2β	tooth angle	
2ϕ	groove angle	
a	pitch line differential	mm
b_f	minimum pulley width – flanged pulley	mm
b'_f	minimum pulley width – unflanged pulley	mm
b_r	width at groove crest	mm
b_w	width at groove root	mm
C	centre distance	mm
d	pitch diameter	mm
d_o	outside diameter	mm
d_R	diameter at root	mm
h_d	height of a double-sided belt	mm
h_g	groove depth	mm
h_s	height of a single-sided belt	mm
h_t	tooth height	mm
P_b	pitch of the teeth of the belt and pulleys	mm
r_a	radius at tooth tip	mm
r_b	radius at the groove root	mm
r_r	radius at tooth root	mm
r_t	radius at the groove crest	mm
S_h	width at tooth head	mm
S_r	width at tooth root	mm

5 Belt profile systems

Eight belt profiles for synchronous drives are standardized.

Profile system T:

- profile T2,5
- profile T5
- profile T10
- profile T20

Profile system AT:

- profile AT3
- profile AT5
- profile AT10
- profile AT20

6 Belt nomenclature

A belt is designated by a combination of numbers and letters as follows:

- a) the width, in millimetres;
- b) the profile system;
- c) the pitch, in millimetres;
- d) the belt pitch length, in millimetres (and add the number of teeth in brackets, if required);

- e) double-sided belts are designated by adding D_G or D_T before the profile system letter: D_G if the tooth position is opposite gap; D_T if the tooth position is opposite tooth;
- f) open belts are designated by adding the letter “M” behind the length; for spliced belts, use the letter “V.”

EXAMPLE 1 A metric synchronous belt of 10 mm pitch, profile system T, 50 mm wide, and 1 400 mm in pitch length is designated as follows:

- for a single-sided belt: **50 - T10 - 1 400**;
- for a double-sided belt: **50 - D_G - T10 - 1 400** or **50 - D_T - T10 - 1 400**.

EXAMPLE 2 A metric synchronous belt of 5 mm pitch, profile system AT, 25 mm wide, and 500 mm in pitch length (number of teeth = 100) is designated as follows:

- for a single-sided belt: **25 - AT5 - 500 (100 t)**;
- for double-sided belt: **25 - D_G - AT5 - 500 (100 t)** or **25 - D_T - AT5 - 500 (100 t)**.

EXAMPLE 3 An open metric synchronous belt of 5 mm pitch, profile system AT, 25 mm wide, and 50 000 mm in pitch length is designated as:

25 - AT5 - 50 000 - M.

7 Pulley profile systems

Eight pulley profiles for synchronous drives are standardized.

Profile system T:	Profile system AT:
— profile T2,5	— profile AT3
— profile T5	— profile AT5
— profile T10	— profile AT10
— profile T20	— profile AT20

8 Pulley nomenclature

A pulley for a synchronous drive is identified by the number of grooves, the groove pitch and profile, and the width. It is designated, as is the belt, by a combination of numbers and letters as follows:


- a) the letter “P”, which indicates a pulley;
- b) the number of grooves;
- c) the profile system;
- d) the groove pitch, in millimetres;
- e) the width, in millimetres.

EXAMPLE A pulley for a metric toothed belt which has 20 mm pitch and 30 grooves with a nominal width of 50 mm is identified as follows:


- for T-profile system pulley: **P30 - T20 - 50**;
- for AT-profile system pulley: **P30 - AT20 - 50**.

9 Belt profile systems T and AT

9.1 Belt profile systems T and AT — General

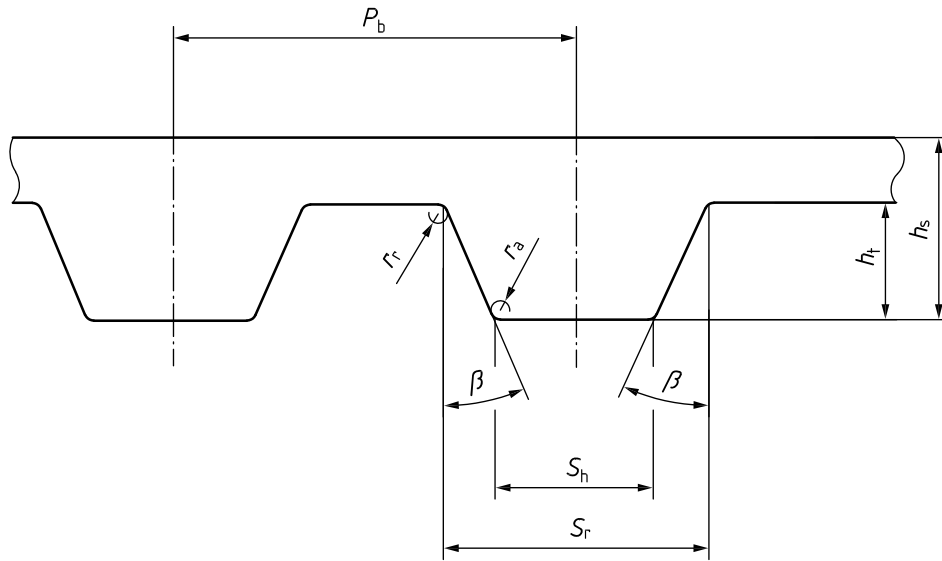

(1)

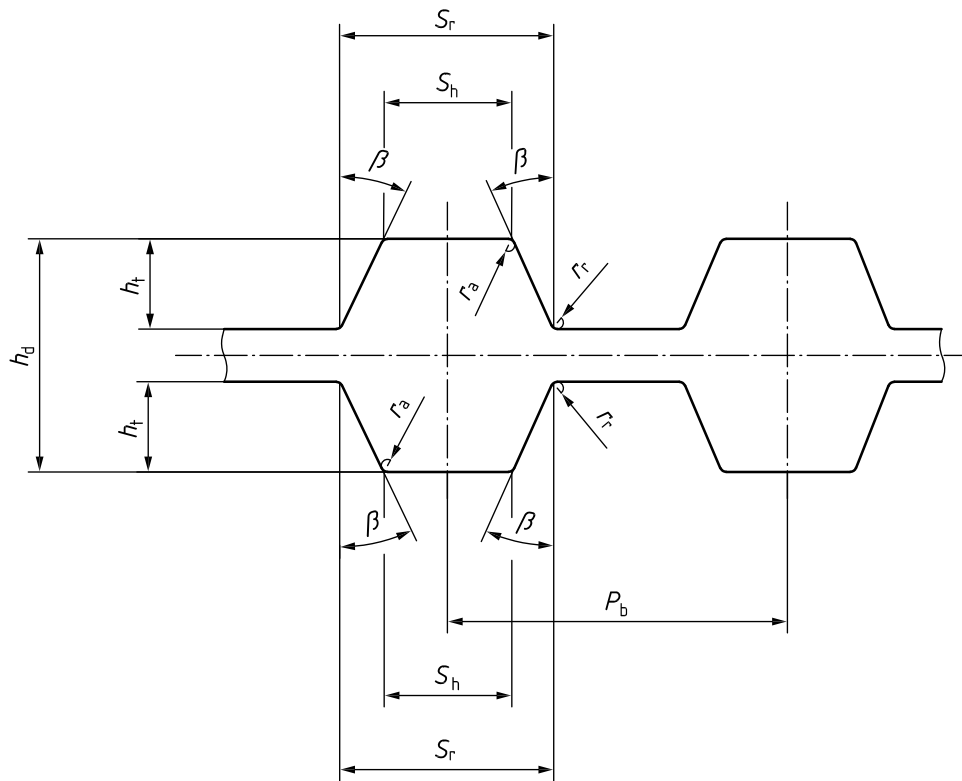

(2)